



NEW OPTICAL TOUCH SWITCH

SW-100 SERIES



Conforming to
EMC Directive



Listing


Conforming to
OSHA / ANSI

Gentle start-up switches
in accordance with ergonomics

Touch lightly



Grip lightly

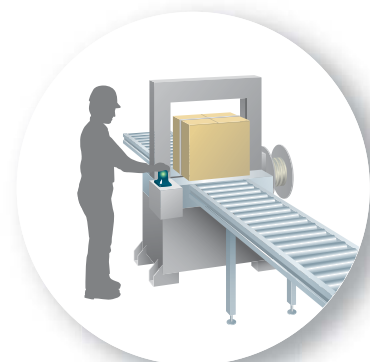

Greater convenience with less stress on the hands. Inventive start-up switches in accordance with ergonomics.


Optical Touch Switch

SW-101



Operate the switch simply by touching it

This is an optical-type switch (two beam axes) which allows you to start equipment simply by touching the sensing surface to interrupt the light beams.



Reduces load on hands and fingers

Provides a zero force, low impact, machine control solution.

Prevents medical issues

The switch reduces the possibility of medical problems that are associated with high impact push buttons, such as tendonitis or carpal tunnel syndrome.

Equipped with external input indicators

Two sets of external input indicators (two colors) are provided, so that they can be used as operation indicators for a variety of purposes.

Application example

SW-101: Turns off
Setting object


SW-101: Lights green
Starting preparation complete

SW-101: Lights orange
Processing

Prevents false operation caused by dirt


The shape of the switch body is curved so that it will not collect dust or dirt which could otherwise cause false operation. In addition, if the light is continuously interrupted for more than 10 sec. by dust, etc., the switch is disabled and the fault indicator (yellow) illuminates.

- Dust will not accumulate.
- Objects cannot be placed on it.
- Equipped with a warning indicator.

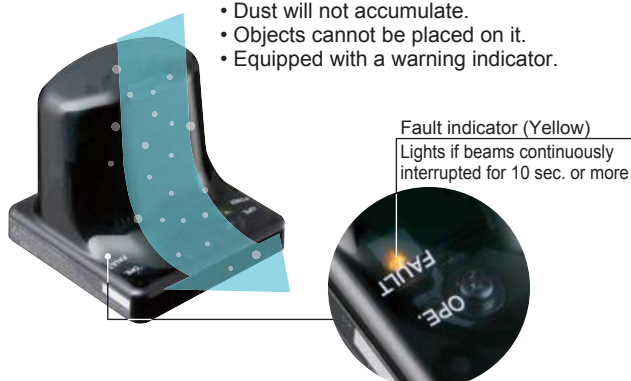

Reduction in false operation from dropped objects

The response time is set for a slight delay so that the switch will not respond a falling object, such as a dropped tool. The switch is designed so that it will operate when touched by hand, but false operation will rarely occur when something is dropped onto it.

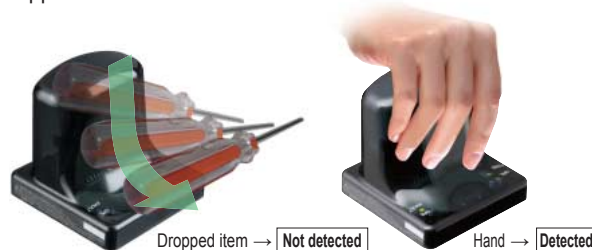

Uses a long-life Photo-MOS relay

Because a Photo-MOS relay is used for the output, a single unit can be configured without a specific output polarity. In addition, there is no need for periodic replacement of parts such as contact-type relays.

A switch that pursues the prevention requirement for malfunctioning as required by ISO 13851 (JIS B 9712) two-hand control devices

Optical Touch Switch
with Safeguard
SW-111



Safeguard prevents false operation

SW-111 saves the hassle of making an additional safeguard. In addition, with its ISO 13851 complying shape, even a knock on the elbow will not cause a false operation (light interruption).

No false operation by wrist




No false operation by elbow



No false operation by plastic sheet



■Experimental cone (ISO 13851)
SW-111 does not produce false operation on the experimental cone specified by ISO 13851.



Intended startup is possible


SW-111's detection does not operate when a hand is just placed onto the unit. With a design that only detects when fingers are bent in and lightly grip onto the unit, an intended startup is possible.



Detection does not operate when a hand is only placed onto the unit.



Detection only operates when fingers are bent in and lightly grip onto the unit.

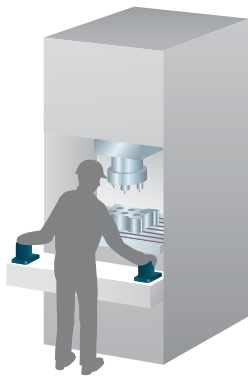


Application example

When used as two-hand control devices

Equipped with external input indicators

Two sets of external input indicators (two colors) are provided, so that they can be used as operation indicators for a variety of purposes.

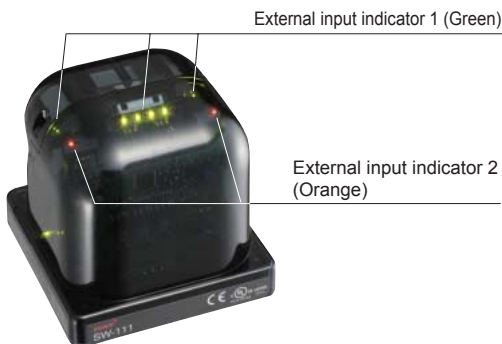

Prevents false operation caused by dirt

If the light is continuously interrupted for more than 10 sec. by dust, etc., the switch is disabled and the fault indicator (yellow) illuminates.



Fault indicator (Yellow)

Lights if beam continuously interrupted for 10 sec. or more

Uses a long-life Photo-MOS relay

Because a Photo-MOS relay is used for the output, a single unit can be configured without a specific output polarity. In addition, there is no need for periodic replacement of parts such as contact-type relays.

SPECIFICATIONS

Designation		Optical touch switch	
		With safeguard	
Item	Model No.	SW-101	SW-111
Sensing method		Thru-beam type photoelectric sensor (2 beam axes)	
Applicable standards		CSA 22.2 No.14, CSA 22.2 No.0.8, ANSI / NFPA 79, UL 508, EN 60947-5-2 (EMC only)	
Power supply		12 to 24 V DC ±10 % Ripple P-P 10 % or less	
Current consumption		100 mA or less (excluding external connection load)	
Outputs		Semiconductor Photo-MOS relay output × 3	
		• Maximum load current: 100 mA	
		• Applied voltage: 30 V DC or less (between output and +V)	
		• Residual voltage: 1.5 V or less (at 100 mA of load current)	
Output operation		Output 1 : When an object is detected (beam is interrupted): OFF / When an object is not detected (beam is received): ON Output 2, 3 : When an object is detected (beam is interrupted): ON / When an object is not detected (beam is received): OFF	
Short-circuit protection		Incorporated	
Response time		100 ms or less when an object is detected, 50 ms or less when an object is not detected	
Time-out function		Switchable either effective or ineffective by short-circuiting terminals (disabled when short-circuited)	
External input		0 to +1 V or +10 V to +V: Valid (External input indicator lights up) +4 to +6 V or Open: Invalid (External input indicator lights off)	
Indicators	Power indicator (POWER)	Green LED (lights up when the power is ON)	
	Operation indicator (OPE.)	Green LED (lights up when an object is detected)	
	External input indicator 1	Green LED (lights up when external input 1 is valid)	
	External input indicator 2	Orange LED (lights up when external input 2 is valid)	
	Fault indicator (FAULT)	Yellow LED (blinks or lights up when fault occurs)	
Environmental resistance	Protection	IP65 (IEC), TYPE1 (UL 50) (excluding terminal part)	
	Ambient temperature	-25 to +50 °C -13 to +122 °F (No dew condensation or icing allowed) Storage: -30 to +70 °C -22 to +158 °F	
	Ambient humidity	30 to 85 % RH, Storage: 30 to 85 % RH	
	Ambient illuminance	Incandescent light: 3,000 lx at the light-receiving face	
	Voltage withstandability	1,000 V AC for one min. between all supply terminals connected together and enclosure	
	Insulation resistance	20 MΩ, or more, with 500 V DC megger between all supply terminals connected together and enclosure	
	Vibration resistance	10 to 500 Hz frequency, 3 mm 0.118 in amplitude in X, Y and Z directions for two hours each	10 to 150 Hz frequency, 0.75 mm 0.030 in amplitude in X, Y and Z directions for two hours each
	Shock resistance	500 m/s ² acceleration (50 G approx.) in X, Y and Z directions for three times each	
Removable-type terminals		Connector	3.5 mm 0.138 in pitch, 2-level socket: 12 pins
		Terminal part	3.5 mm 0.138 in pitch spring gauge terminals: 6 pins × 2 (FMC1,5 / 6-ST-3,5 manufactured by Phoenix Contact)
Cable		0.2 to 1.5 mm ² [including single wire or ferrule (sleeve)]	
Maximum cable length		Up to 20 m 65.617 ft (for cable from 0.2 to 0.3 mm ²) Up to 100 m 328.084 ft (for cable from 0.3 to 1.5 mm ²)	
Material		Enclosure: Polycarbonate, Polyester, Mounting nut: PBT O-ring: Silicone rubber	
Weight		Net weight: 130 g approx. Gross weight: 200 g approx.	Net weight: 150 g approx. Gross weight: 220 g approx.


Note: Where measurement conditions have not been specified precisely, the conditions used were an ambient temperature of +23 °C **+73.4 °F**.

OPTIONS

Designation	Model No.	Description
Mounting tool	SW-MT1	Tool for tightening mounting nuts with a commercially-available wrench.
Sensing surface protective sheet for SW-101	SW-PS1	A transparent stick-on sheet that protects the sensing surface of SW-101 from dirt and scratches. [5 sheets per set]

I/O CIRCUIT AND WIRING DIAGRAMS

If case of connecting output to Minus common

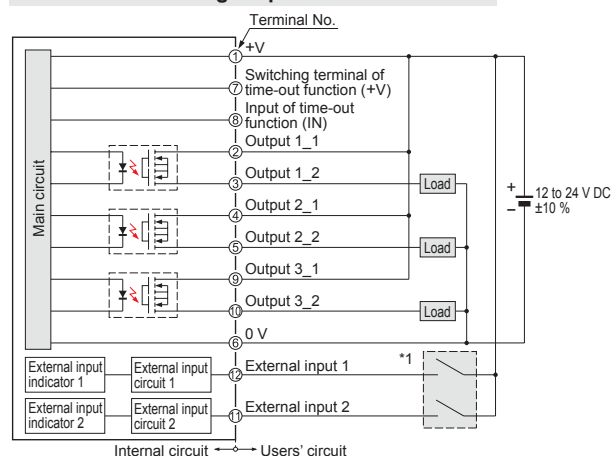


***1**

Non-voltage contact or PNP open-collector transistor

Contact "closed" or transistor "ON": Valid (External input indicator lights up)
Contact "open" or transistor "OFF": Invalid (External input indicator lights off)

If case of connecting output to Plus common

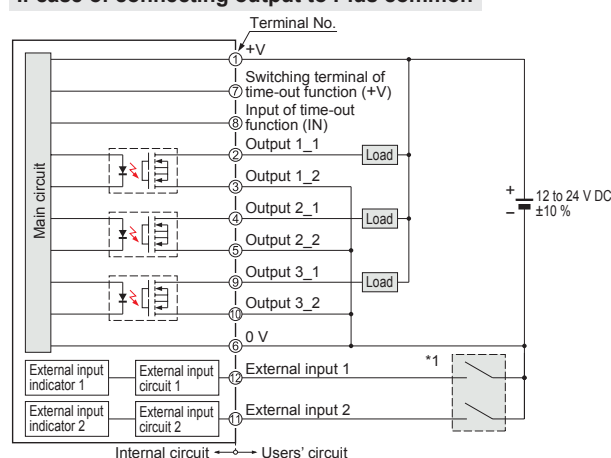


***1**

Non-voltage contact or NPN open-collector transistor

Contact "closed" or transistor "ON": Valid (External input indicator lights up)
Contact "open" or transistor "OFF": Invalid (External input indicator lights off)

Terminal arrangement diagram



PRECAUTIONS FOR PROPER USE




- Never use this product in a device for personnel protection.
- In case of using devices for personnel protection, use products which meet laws and standards, such as OSHA, ANSI or IEC etc., for personnel protection applicable in each region or country.
- Do not use this product as a device for emergency stop.
- This product is used to start up the machinery. Securing safety for the start-up of machinery should be performed separately.
- When using the products for two-hand control, comply with the following contents.
 - Select a model of a control device for two-hand control, based on results of risk assessment.
 - Make sure to use a controller for two-hand control which complies with ISO 13851 (EN 574, JIS B 9712)
 - For another requirements such as mounting of this product, or prevention of accidental actuation and of defeat etc., comply with ISO 13851 (EN 574, JIS B 9712) and ANSI B11.1, B11.9. Furthermore, comply with the regulations established by national or regional security committees (Occupational Safety and Health Administration: OSHA, the European Standardization Committee, etc.)

Mounting


- Fasten a mounting nut (accessory) from the reverse side of the mounting plate. (Note 1)
The tightening torque should be 2 to 3 N·m.

Notes: 1) A mounting tool (**SW-MT1**) for fastening the mounting nut is available separately. The shape of fastening part of **SW-MT1** is M10 nut.
2) Make sure to use the attached mounting packing, or waterproof property will be invalid.



Time-out function

- Unintended beam interrupted status caused by dirt on the sensing surface, etc. can be monitored.
When beam interrupted status (sensing status) continues for 10 sec. or more, output 1 turns ON and output 2 and 3 turn OFF (output status is the same as non-sensing status.)
This function can be invalid by short-circuiting "between switching terminals of time-out function (terminal No. 7 and No. 8)" as described below.
- Note: When time-out function is operated, the fault indicator (yellow) lights up. In this case, once beam is received, the fault indicator lights off and the sensor returns to normal operation.

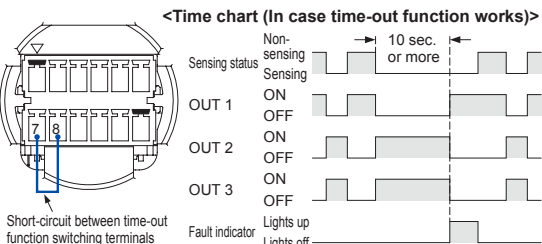


Others

- When the power of the thru-beam type photoelectric sensor inside the main body turns on in beam interrupted status, output 1 turns ON and output 2 and 3 turn OFF, then the fault indicator (yellow) lights up. In this case, once beam is received, the fault indicator lights off and the sensor returns to normal operation.
- Use a power supply unit conforming to the EMC Directive and the Low Voltage Directive. (Only for use in Europe)
- Use a power supply unit conforming to Class 2. (Only for use in the North America)
- Use a power supply unit with an output holding time of 20 ms or more.
- Do not use during the initial transient time (300 ms approx.) after the power supply is switched on.

DIMENSIONS (Unit: mm in) The CAD data in the dimensions can be downloaded from the SUNX website: <http://www.sunx.com>


SW-101

Optical touch switch

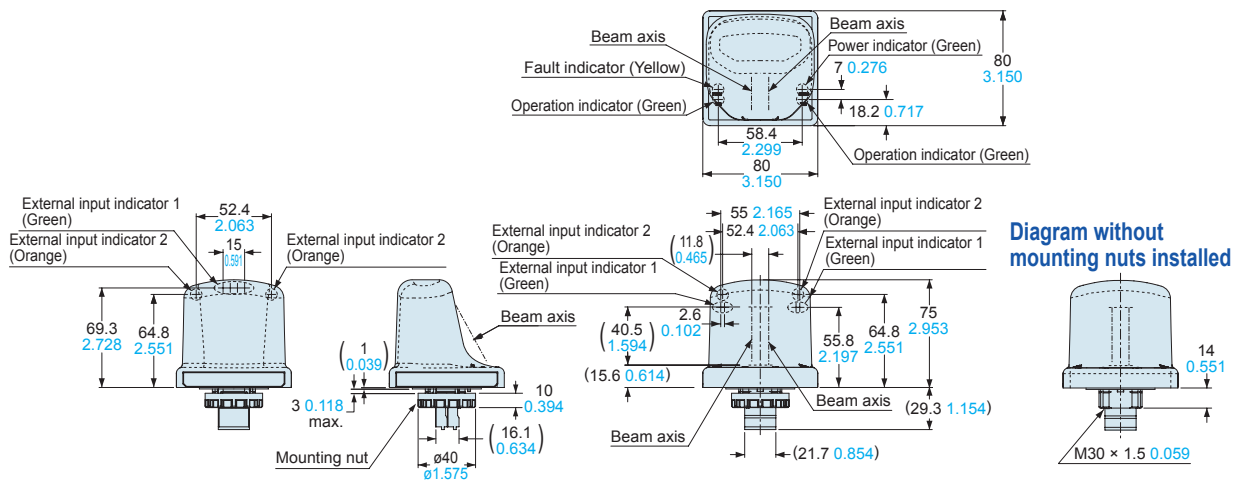


Panel cut-out dimensions

<When mounting with a resin plate>



<When mounting with a metal plate>




Note: The panel thickness should be 3 mm 0.118 in or less.



Optical touch switch



<When mounting with a metal plate>



All information is subject to change without prior notice.



Printed on recycled paper PRINTED IN JAPAN
No.CE-SW100-5 August, 2008