

Order code	Manufacturer code	Description
85-1706	n/a	TRIPLE OUT 0-30V 5V 12V 10A LCD PSU RC

	Page 1 of 3
The enclosed information is believed to be correct, Information may change without notice due to product improvement. Users should ensure that the product is suitable for their use. E. & O. E.	Revision A 20/02/2007



Rapid Electronics Ltd

Severalls Lane, Colchester, Essex CO4 5JS
Telephone: 01206 751166 Fax: 01206 751188
e-mail: sales@rapidelec.co.uk
Website: www.rapidelectronics.co.uk

30V 10A Power Supply 85-1706 USER'S MANUAL


I. GENERAL

The DC Regulated Power Supply is completely solid state, compact, well-regulated, constant voltage power supply suitable for service field, hobby & telecommunication equipment use. It provide three different voltages output for different usage.

II. FEATURES

1. Overload and Short Circuit Protection: Prevent the unit from overload and short circuit. In case of overload or short circuit, the output current will be limited.
2. Independent 5V, 12V Easy Snap-On output terminals to make it easy to use for TTL and CMOS circuit testing. The grounding of the output terminals is independent that the output can be connected in series to make a higher output voltage.

III. FRONT AND REAR PANELS

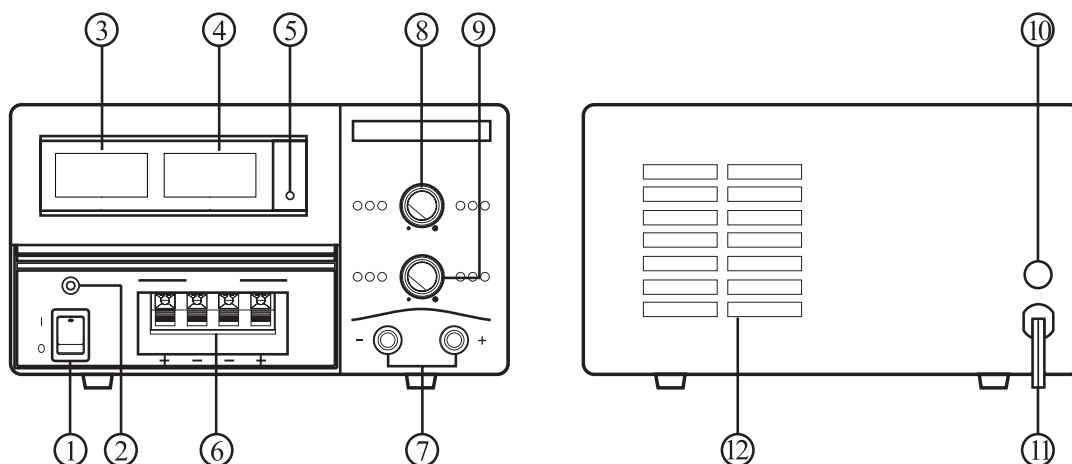

1. ON/OFF Switch
2. Power Indicator
3. LCD Voltmeter Display
4. LCD Ammeter Display
5. Current Limited Indicator
6. Easy Snap-On Output Terminals

7. Screw-On Output Terminal
8. Voltage Adjustment Knob
9. Current Adjustment Knob
10. Fuse Holder
11. Power Cord
12. Cooling Fan Air Outlet

IV. OPERATION

A. Installation:

1. Place the unit in a location where allows free air circulation.
2. **DO NOT** places the unit in high humid, dusty and/or sunshiny places.
3. The input power source must be $\pm 5\%$ of the rated input voltage.

Note: The power supply is for indoor use only.

B. Caution:

1. **DO NOT** use the unit for equipment that requires higher current ratings than the unit is designed for, otherwise it will damage the unit.
2. **DO NOT** replace the fuse before ceasing the problems and **DO** replace with the same type of fuse.
3. If the external flexible cable or cord of this damage, it shall be replaced by the manufacturer or his service agent or a similar qualified person in order to avoid a hazard.
4. The installation of the supply cord and plug shall be installed and protected in accordance with national wiring rules.

C. Safety Precautions:

The following precautions **MUST** be read carefully to prevent from electric shock.

1. **NEVER** remove the metal cover of the power supply while power source is connecting.
2. **NEVER** touch the power supply when your hand is wet.
3. **NEVER** operate the power supply if foreign materials such as metallic objects, water or other debris have fallen inside. Contact your dealer for check and repair.
4. **NEVER** operate the unit that was being damaged. As the voltage regulation circuitry may have been disabled, the resulting high DC voltage could cause damage to your equipment.
5. **NEVER** allow foreign objects to touch the output terminals.
6. **NEVER** repair the unit or inspect the interior part by yourself if it is damaged or working abnormally. Contact your dealer for check of repair.
7. **NEVER** block the cooling fan air outlet.

D. Connection and Operation:

1. Turn ON the unit and adjust the unit to suitable output voltage.
2. Turn OFF the unit and make sure the equipment is OFF.
3. Connect the equipment to the unit. Positive polarity to red (+) and negative polarity to Black (-).
4. Turn ON the unit first and then turn ON the equipment.
5. When an operation is finished, turn OFF the equipment first and then turn OFF the unit.

V. SPECIFICATIONS

	85-1706
OUTPUT VOLTAGE:	0-30Vdc
OUTPUT CURRENT:	10A
FIXED OUTPUT:	5V/0.5A and 12V/0.5A
RIPPLE & NOISE:	5mV _{r.m.s.}
LINE REGULATION:	5mV
LOAD REGULATION:	20mV
POWER SOURCE:	240Vac/50Hz~
METERS TYPE:	Digital LCD
DIMENSION (WxHxD):	205 x 115 x 280 (mm)
CE APPROVAL	EN 61010 , EN 55011
WEIGHT:	Approx. 6.5Kg