

# GX-F/H SERIES

- FIBER SENSORS
- LASER SENSORS
- PHOTOELECTRIC SENSORS
- MICRO PHOTOELECTRIC SENSORS
- AREA SENSORS
- SAFETY COMPONENTS
- PRESSURE SENSORS
- INDUCTIVE PROXIMITY SENSORS**
- PARTICULAR USE SENSORS
- SENSOR OPTIONS
- WIRE-SAVING SYSTEMS
- MEASUREMENT SENSORS
- STATIC CONTROL DEVICES
- LASER MARKERS

|                     |                                      |   |
|---------------------|--------------------------------------|---|
| Related Information | General terms and conditions.....P.1 | Sensor selection guide.....P.11~ / P.647~ |
|                     | Glossary of terms..... P.1009~       | General precautions..... P.1012~          |




Industry No. 1\* in stable sensing

\* Based on research conducted by SUNX as of August 2007 among equivalent rectangular inductive sensors.

## Can be installed with ample space


This sensor has the longest stable sensing range among the same level of rectangular inductive proximity sensors in the industry. It is easy to install the sensor.

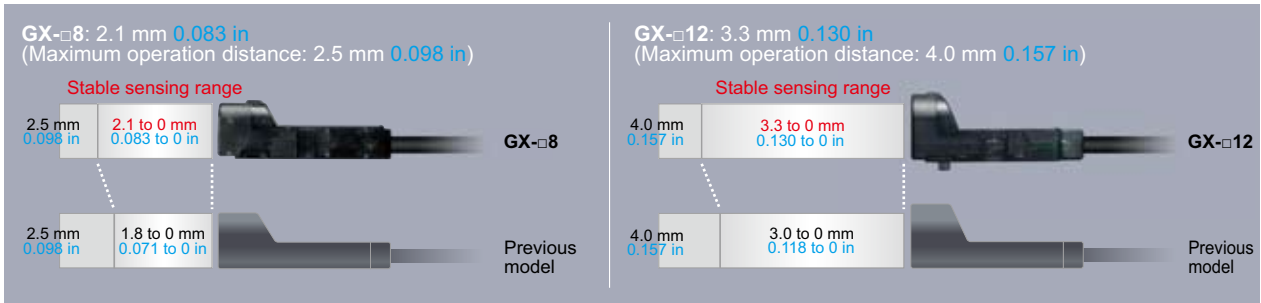

## Variation at the maximum operation distance is within ±8%

Thorough adjustment and control of sensing sensitivity greatly reduces individual sensor differences and variations.


The work of adjusting sensor positions when using multiple sensors and when sensors have been replaced is much easier.

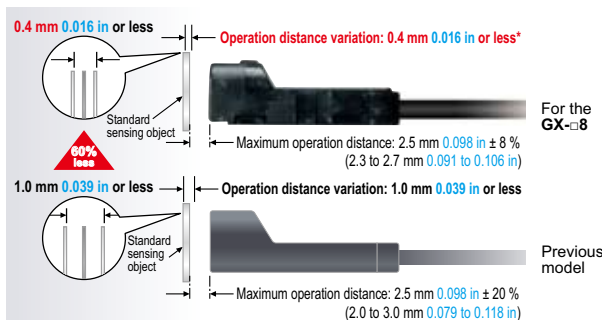

\* Not including temperature characteristics.  
GX-12 has a variation of 0.64 mm (0.025 in) or less for a maximum operation distance of 4 mm (0.158 in)

## Temperature characteristics vary within ±8%

Components such as the sensor coil and core and product design have been totally revised to provide excellent temperature characteristics. Stable sensing can be obtained regardless of the time of day or the yearly season.

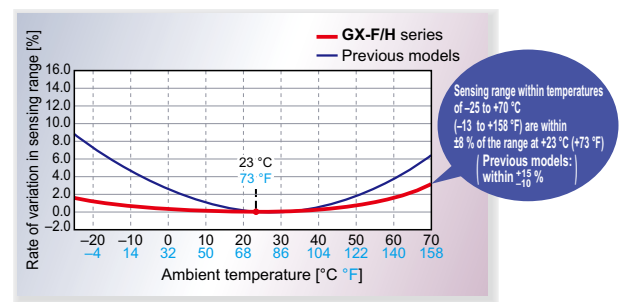


\* Typical

|   |                          |                               |                                  |                                     |                     |
|---|--------------------------|-------------------------------|----------------------------------|-------------------------------------|---------------------|
|  ORDER GUIDE<br>P.651 | SPECIFICATIONS<br>P.652~ | I/O CIRCUIT DIAGRAMS<br>P.654 | SENSING CHARACTERISTICS<br>P.654 | PRECAUTIONS FOR PROPER USE<br>P.655 | DIMENSIONS<br>P.656 |
|---|--------------------------|-------------------------------|----------------------------------|-------------------------------------|---------------------|

## APPLICATIONS


Muting control of light curtains

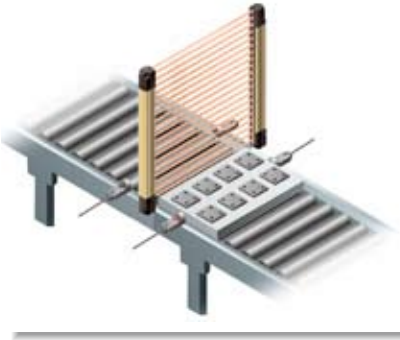

Positioning processing equipment



Positioning metal pallets

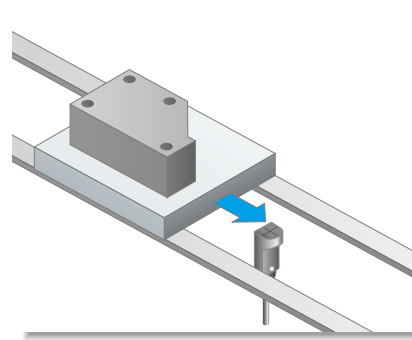

FIBER SENSORS

LASER SENSORS

PHOTOELECTRIC SENSORS

MICRO PHOTOELECTRIC SENSORS

AREA SENSORS

SAFETY COMPONENTS

PRESSURE SENSORS

INDUCTIVE PROXIMITY SENSORS

PARTICULAR USE SENSORS

SENSOR OPTIONS

WIRE-SAVING SYSTEMS

MEASUREMENT SENSORS

STATIC CONTROL DEVICES


LASER MARKERS

## ENVIRONMENTAL RESISTANCE

10 times the durability! (Compared to previous models)


The new integrated construction method used provides shock resistance of 10,000 m/s<sup>2</sup> (approx. 1,000 G in X, Y and Z directions for three times each), and vibration resistance clears durability tests of between 10 and 500 Hz (3mm 0.118 in amplitude in X, Y and Z directions for 2 hours each). In addition, resistance to impulse noise is approx. three times greater than for previous models.

Checking up / down operation of compact molding equipment

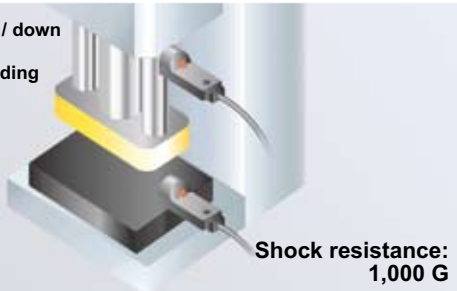

Shock resistance: 1,000 G

Sensing presence of metallic objects on a part feeder

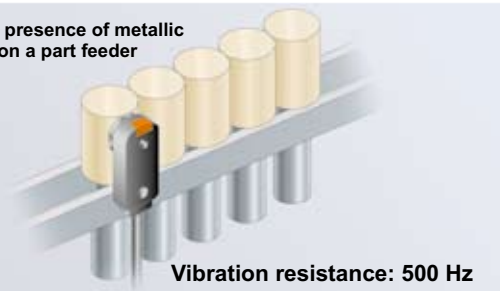

Vibration resistance: 500 Hz

Highly resistant to water or oil!  
IP68g\* protective construction

The new integrated construction method used improves environmental resistance performance. The IP68g prevents damage to the sensor by stopping water and oil getting inside.

\* For details, refer to the "Specifications" (p.652~)



## FUNCTIONS

Indicators are easy to see over a wide field of view

A prism with a wide field of view has been developed. This has greatly improved the visibility of the operation indicators.

GX-H□



GX-F□



Selection Guide

Amplifier Built-in

GX-F/H

GXL

GL

GX-U / GX-FU / GX-N

GX

Amplifier-separated

GA-311 / GH

Other

Products


## MOUNTING

Tightening strength increased with no damage!

A metal sleeve has been inserted. It is possible to tighten up to 0.7 N·m\*.

\* Maximum tightening torque for M3 screw.

Tightening torque: 0.7 N·m

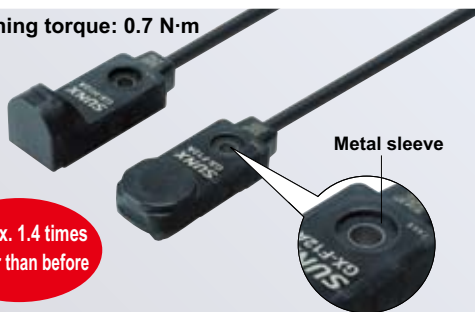


Approx. 1.4 times greater than before

Metal sleeve

Conductor thickness doubled to make wiring much easier! (GX- 8 only)

The conductor's thickness was doubled for the GX- 8. This makes it easier to handle and perform crimping work on the cables. In addition, the tensile strength of the crimping area has become higher.

0.08mm<sup>2</sup>  
Previous model



0.15mm<sup>2</sup>  
GX-□8



Conductor thickness approx. 2 times greater

**ORDER GUIDE**

**GX-8 type**

| Type       | Appearance (mm in) | Sensing range (Note 1) | Model No. (Note 2)            | Output                        | Output operation |
|------------|--------------------|------------------------|-------------------------------|-------------------------------|------------------|
| NPN output | Front sensing<br>  |                        | GX-F8A                        | NPN open-collector transistor | Normally open    |
|            |                    |                        | GX-F8AI                       |                               | Normally closed  |
|            |                    |                        | GX-F8B                        |                               | Normally open    |
|            | GX-F8BI            |                        | Normally closed               |                               |                  |
|            | GX-H8A             |                        | Normally open                 |                               |                  |
|            | GX-H8AI            |                        | Normally closed               |                               |                  |
| PNP output | Top sensing<br>    | GX-F8A-P               | PNP open-collector transistor | Normally open                 |                  |
|            |                    | GX-F8AI-P              |                               | Normally closed               |                  |
|            |                    | GX-F8B-P               |                               | Normally open                 |                  |
|            | GX-F8BI-P          | Normally closed        |                               |                               |                  |
|            | GX-H8A-P           | Normally open          |                               |                               |                  |
|            | GX-H8AI-P          | Normally closed        |                               |                               |                  |

Notes: 1) The maximum operation distance stands for the maximum distance for which the sensor can detect the standard sensing object. The stable sensing range stands for the sensing range for which the sensor can stably detect the standard sensing object even if there is an ambient temperature drift and/or supply voltage fluctuation.  
 2) "1" in the model No. indicates a different frequency type.

**GX-12 type**

| Type       | Appearance (mm in) | Sensing range (Note 1) | Model No. (Note 2)            | Output                        | Output operation |
|------------|--------------------|------------------------|-------------------------------|-------------------------------|------------------|
| NPN output | Front sensing<br>  |                        | GX-F12A                       | NPN open-collector transistor | Normally open    |
|            |                    |                        | GX-F12AI                      |                               | Normally closed  |
|            |                    |                        | GX-F12B                       |                               | Normally open    |
|            | GX-F12BI           |                        | Normally closed               |                               |                  |
|            | GX-H12A            |                        | Normally open                 |                               |                  |
|            | GX-H12AI           |                        | Normally closed               |                               |                  |
| PNP output | Top sensing<br>    | GX-F12A-P              | PNP open-collector transistor | Normally open                 |                  |
|            |                    | GX-F12AI-P             |                               | Normally closed               |                  |
|            |                    | GX-F12B-P              |                               | Normally open                 |                  |
|            | GX-F12BI-P         | Normally closed        |                               |                               |                  |
|            | GX-H12A-P          | Normally open          |                               |                               |                  |
|            | GX-H12AI-P         | Normally closed        |                               |                               |                  |


Notes: 1) The maximum operation distance stands for the maximum distance for which the sensor can detect the standard sensing object. The stable sensing range stands for the sensing range for which the sensor can stably detect the standard sensing object even if there is an ambient temperature drift and/or supply voltage fluctuation.  
 2) "1" in the model No. indicates a different frequency type.

## OPTIONS

| Designation             | Model No. | Description                    |
|-------------------------|-----------|--------------------------------|
| Sensor mounting bracket | MS-GXL8-4 | Mounting bracket for GX-8 type |

## Sensor mounting bracket

MS-GXL8-4



1 pc. each of M3 (length: 12 mm 0.472 in) truss head screw, nut, spring washer and plain washer is attached.

## SPECIFICATIONS

## GX-8 type

| Item                             | Model No. (Note 2)   | Type  | NPN output      |  | PNP output      |             |
|----------------------------------|--|---|-----------------|--|-----------------|-------------|
|                                  |  | Front sensing   | GX-F8A(I)       | GX-F8B(I)  | GX-F8A(I)-P     | GX-F8B(I)-P |
|                                  |  | Top sensing   | GX-H8A(I)       | GX-H8B(I)  | GX-H8A(I)-P     | GX-H8B(I)-P |
| Max. operation distance (Note 3) |  | 2.5 mm 0.098 in ± 8 %   |                 |  |                 |             |
| Stable sensing range (Note 3)    |  | 0 to 2.1 mm 0 to 0.083 in   |                 |  |                 |             |
| Standard sensing object          |  | Iron sheet 15 × 15 × t 1 mm 0.591 × 0.591 × t 0.039 in  |                 |  |                 |             |
| Hysteresis                       |  | 20 % or less of operation distance (with standard sensing object)   |                 |  |                 |             |
| Repeatability                    |  | Along sensing axis, perpendicular to sensing axis: 0.04 mm 0.002 in or less   |                 |  |                 |             |
| Supply voltage                   |  | 12 to 24 V DC <sup>+10</sup> <sub>-15</sub> % Ripple P-P 10 % or less   |                 |  |                 |             |
| Current consumption              |  | 15 mA or less   |                 |  |                 |             |
| Output                           |  | NPN open-collector transistor <ul style="list-style-type: none"> <li>• Maximum sink current: 100 mA</li> <li>• Applied voltage: 30 V DC or less (between output and 0 V)</li> <li>• Residual voltage: 1 V or less (at 100 mA sink current) 0.4 V or less (at 16 mA sink current)</li> </ul> |                 | PNP open-collector transistor <ul style="list-style-type: none"> <li>• Maximum source current: 100 mA</li> <li>• Applied voltage: 30 V DC or less (between output and +V)</li> <li>• Residual voltage: 1 V or less (at 100 mA source current) 0.4 V or less (at 16 mA source current)</li> </ul> |                 |             |
| Utilization category             |  | DC-12 or DC-13  |                 |  |                 |             |
| Output operation                 |  | Normally open   | Normally closed | Normally open  | Normally closed |             |
| Max. response frequency          |  | 500 Hz  |                 |  |                 |             |
| Operation indicator              |  | Orange LED (lights up when the output is ON)  |                 |  |                 |             |
| Environmental resistance         | Pollution degree   | 3 (Industrial environment)  |                 |  |                 |             |
|                                  | Protection   | IP68 (IEC), IP68g (JEM) (Refer to p.1010 for details of standards.) (Note 4, 5)   |                 |  |                 |             |
|                                  | Ambient temperature  | -25 to +70 °C -13 to +158 °F, Storage: -40 to +85 °C -40 to +185 °F   |                 |  |                 |             |
|                                  | Ambient humidity   | 45 to 85 % RH, Storage: 35 to 95 % RH   |                 |  |                 |             |
|                                  | EMC  | EN 60947-5-2  |                 |  |                 |             |
|                                  | Voltage withstandability   | 1,000 V AC for one min. between all supply terminals connected together and enclosure   |                 |  |                 |             |
|                                  | Insulation resistance  | 50 MΩ, or more, with 500 V DC megger between all supply terminals connected together and enclosure  |                 |  |                 |             |
|                                  | Vibration resistance   | 10 to 500 Hz frequency, 3 mm 0.118 in amplitude in X, Y and Z directions for two hours each   |                 |  |                 |             |
| Shock resistance                 | 10,000 m/s <sup>2</sup> acceleration (1,000 G approx.) in X, Y and Z directions for three times each |   |                 |  |                 |             |
| Sensing range variation          | Temperature characteristics  | Over ambient temperature range -25 to +70 °C -13 to +158 °F: Within ± 8 % of sensing range at +23 °C +73 °F   |                 |  |                 |             |
|                                  | Voltage characteristics  | Within ± 2 % for <sup>+10</sup> <sub>-15</sub> % fluctuation of the supply voltage  |                 |  |                 |             |
| Material                         |  | Enclosure: PBT, Indicator part: Polyester   |                 |  |                 |             |
| Cable                            |  | 0.15 mm <sup>2</sup> 3-core oil, heat and cold resistant cabtyre cable, 1 m 3.281 ft long   |                 |  |                 |             |
| Cable extension                  |  | Extension up to total 100 m 328.084 ft is possible with 0.3 mm <sup>2</sup> , or more, cable.   |                 |  |                 |             |
| Net weight                       |  | Front sensing type: 15 g approx., Top sensing type: 20 g approx..   |                 |  |                 |             |

Notes: 1) Where measurement conditions have not been specified precisely, the conditions used were an ambient temperature of +23 °C +73.4 °F.

2) "I" in the model No. indicates a different frequency type.

3) The maximum operation distance stands for the maximum distance for which the sensor can detect the standard sensing object.

The stable sensing range stands for the sensing range for which the sensor can stably detect the standard sensing object even if there is an ambient temperature drift and/or supply voltage fluctuation.

4) SUNX's IP68 test method

① Immerse at 0 m below 0 °C +32 °F water surface and leave for 30 min. Then, immerse at 0 m below +70 °C +158 °F water surface and leave for 30 min.

② Regard the heat shock test in ④ one cycle and perform 20 cycles.

③ Leave in water at a depth of 1 m 3.281 ft in water for 500 hours.

④ After tests ① to ③ insulation resistance, voltage withstandability, current consumption, and sensing ranges must meet the standard values.

5) If using the sensor in an environment where cutting oil droplets splatter, the sensor may deteriorate due to added substances in the oil.

FIBER SENSORS

LASER SENSORS

PHOTO-ELECTRIC SENSORS

MICRO PHOTO-ELECTRIC SENSORS

AREA SENSORS

SAFETY COMPONENTS

PRESSURE SENSORS

INDUCTIVE PROXIMITY SENSORS

PARTICULAR USE SENSORS

SENSOR OPTIONS

WIRE-SAVING SYSTEMS

MEASUREMENT SENSORS

STATIC CONTROL DEVICES

LASER MARKERS

Selection Guide

Amplifier Built-in

GX-F/H

GXL

GL

GX-U / GX-FU / GX-N

GX

Amplifier-separated

GA-311 / GH

Other Products

## SPECIFICATIONS

## GX-12 type

| Item                             | Model No.<br>(Note 2)   | Type   | NPN output   |               | PNP output      |                 |
|----------------------------------|---|--|--|---------------|-----------------|-----------------|
|                                  |   | Front sensing  | GX-F12A(I)   | GX-F12B(I)    | GX-F12A(I)-P    | GX-F12B(I)-P    |
|                                  |   | Top sensing  | GX-H12A(I)   | GX-H12B(I)    | GX-H12A(I)-P    | GX-H12B(I)-P    |
| Max. operation distance (Note 3) |   | 4.0 mm <b>0.158 in</b> ± 8 %   |  |               |                 |                 |
| Stable sensing range (Note 3)    |   | 0 to 3.3 mm <b>0 to 0.130 in</b>   |  |               |                 |                 |
| Standard sensing object          |   | Iron sheet 20 × 20 × t 1 mm <b>0.787 × 0.787 × t 0.039 in</b>  |  |               |                 |                 |
| Hysteresis                       |   | 20 % or less of operation distance (with standard sensing object)                                    |  |               |                 |                 |
| Repeatability                    |   | Along sensing axis, perpendicular to sensing axis: 0.04 mm <b>0.002 in</b> or less                   |  |               |                 |                 |
| Supply voltage                   |   | 12 to 24 V DC $\pm 10\%$ Ripple P-P 10 % or less   |  |               |                 |                 |
| Current consumption              |   | 15 mA or less  |  |               |                 |                 |
| Output                           | NPN open-collector transistor   |  | PNP open-collector transistor  |               |                 |                 |
|                                  | <ul style="list-style-type: none"> <li>• Maximum sink current: 100 mA</li> <li>• Applied voltage: 30 V DC or less (between output and 0 V)</li> <li>• Residual voltage: 1 V or less (at 100 mA sink current)<br/>0.4 V or less (at 16 mA sink current)</li> </ul> |  | <ul style="list-style-type: none"> <li>• Maximum source current: 100 mA</li> <li>• Applied voltage: 30 V DC or less (between output and +V)</li> <li>• Residual voltage: 1 V or less (at 100 mA source current)<br/>0.4 V or less (at 16 mA source current)</li> </ul> |               |                 |                 |
| Utilization category             |   | DC-12 or DC-13   |  |               |                 |                 |
| Output operation                 |   | Normally open  | Normally closed  | Normally open | Normally closed | Normally closed |
| Max. response frequency          |   | 500 Hz   |  |               |                 |                 |
| Operation indicator              |   | Orange LED (lights up when the output is ON)   |  |               |                 |                 |
| Environmental resistance         | Pollution degree  |  | 3 (Industrial environment)   |               |                 |                 |
|                                  | Protection  |  | IP68 (IEC), IP68g (JEM) (Refer to p.1010 for details of standards.) (Note 4, 5)  |               |                 |                 |
|                                  | Ambient temperature   |  | -25 to +70 °C <b>-13 to +158 °F</b> , Storage: -40 to +85 °C <b>-40 to +185 °F</b>   |               |                 |                 |
|                                  | Ambient humidity  |  | 45 to 85 % RH, Storage: 35 to 95 % RH  |               |                 |                 |
|                                  | EMC   |  | EN 60947-5-2   |               |                 |                 |
|                                  | Voltage withstandability  |  | 1,000 V AC for one min. between all supply terminals connected together and enclosure  |               |                 |                 |
|                                  | Insulation resistance   |  | 50 MΩ, or more, with 500 V DC megger between all supply terminals connected together and enclosure   |               |                 |                 |
|                                  | Vibration resistance  |  | 10 to 500 Hz frequency, 3 mm <b>0.118 in</b> amplitude in X, Y and Z directions for two hours each   |               |                 |                 |
| Shock resistance                 |   | 10,000 m/s <sup>2</sup> acceleration (1,000 G approx.) in X, Y and Z directions for three times each |  |               |                 |                 |
| Sensing range variation          | Temperature characteristics   |  | Over ambient temperature range -25 to +70 °C <b>-13 to +158 °F</b> : Within ±8 % of sensing range at +23 °C <b>+73 °F</b>  |               |                 |                 |
|                                  | Voltage characteristics   |  | Within ±2 % for $\pm 10\%$ fluctuation of the supply voltage   |               |                 |                 |
| Material                         |   | Enclosure: PBT, Indicator part: Polyester  |  |               |                 |                 |
| Cable                            |   | 0.15 mm <sup>2</sup> 3-core oil, heat and cold resistant cabtyre cable, 1 m <b>3.281 ft</b> long     |  |               |                 |                 |
| Cable extension                  |   | Extension up to total 100 m <b>328.084 ft</b> is possible with 0.3 mm <sup>2</sup> , or more, cable. |  |               |                 |                 |
| Net weight                       |   | Front sensing type: 20 g approx., Top sensing type: 20 g approx..                                    |  |               |                 |                 |

Notes: 1) Where measurement conditions have not been specified precisely, the conditions used were an ambient temperature of +23 °C **+73.4 °F**.

2) "1" in the model No. indicates a different frequency type.

3) The maximum operation distance stands for the maximum distance for which the sensor can detect the standard sensing object.

The stable sensing range stands for the sensing range for which the sensor can stably detect the standard sensing object even if there is an ambient temperature drift and/or supply voltage fluctuation.

4) SUNX's IP68 test method

① Immerse at 0 m below 0 °C **+32 °F** water surface and leave for 30 min. Then, immerse at 0 m below +70 °C **+158 °F** water surface and leave for 30 min.

② Regard the heat shock test in ④ one cycle and perform 20 cycles.


③ Leave in water at a depth of 1 m **3.281 ft** in water for 500 hours.

④ After tests ① to ③ insulation resistance, voltage withstandability, current consumption, and sensing ranges must meet the standard values.

5) If using the sensor in an environment where cutting oil droplets splatter, the sensor may deteriorate due to added substances in the oil.

I/O CIRCUIT DIAGRAMS


GX-**F** NPN output type

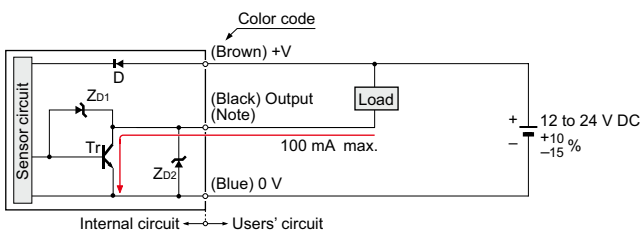

Note: The output does not incorporate a short-circuit protection circuit. Do not connect it directly to a power supply or a capacitive load.

Symbols ... D : Reverse supply polarity protection diode  
 ZD1, ZD2: Surge absorption zener diode  
 Tr : NPN output transistor

GX-**P** PNP output type

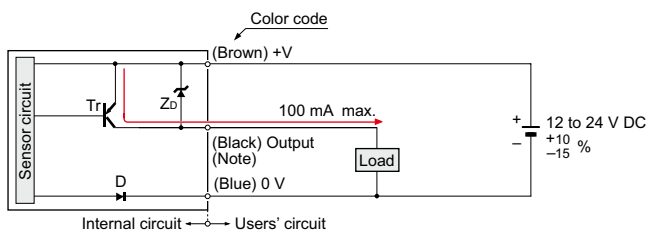


Note: The output does not incorporate a short-circuit protection circuit. Do not connect it directly to a power supply or a capacitive load.

Symbols ... D : Reverse supply polarity protection diode  
 ZD: Surge absorption zener diode  
 Tr : PNP output transistor


SENSING CHARACTERISTICS (TYPICAL)

GX-8 type

Sensing field




Correlation between sensing object size and sensing range




As the sensing object size becomes smaller than the standard size (iron sheet 15 x 15 x t 1 mm 0.591 x 0.591 x t 0.039 in), the sensing range shortens as shown in the left figures.

GX-12 type

Sensing field



Correlation between sensing object size and sensing range



As the sensing object size becomes smaller than the standard size (iron sheet 20 x 20 x t 1 mm 0.787 x 0.787 x t 0.039 in), the sensing range shortens as shown in the left figure.

FIBER SENSORS

LASER SENSORS

PHOTO-ELECTRIC SENSORS

MICRO PHOTO-ELECTRIC SENSORS

AREA SENSORS

SAFETY COMPONENTS

PRESSURE SENSORS

INDUCTIVE PROXIMITY SENSORS

PARTICULAR USE SENSORS

SENSOR OPTIONS

WIRE- SAVING SYSTEMS

MEASURE- MENT SENSORS

STATIC CONTROL DEVICES

LASER MARKERS

Selection Guide

Amplifier Built-in

GX-F/H

GXL

GL

GX-U / GX-FU / GX-N

GX

Amplifier-separated

GA-311 / GH

Other Products

**PRECAUTIONS FOR PROPER USE**

Refer to p.1012~ for general precautions.




- Never use this product as a sensing device for personnel protection.
- In case of using sensing devices for personnel protection, use products which meet laws and standards, such as OSHA, ANSI or IEC etc., for personnel protection applicable in each region or country.

**Mounting**


**GX-8 type**

- Make sure to use a M3 (length: 12 mm 0.472 in or more) truss head screw. The tightening torque should be 0.7 N·m or less. (Do not use a flat head screw or a pan head screw.)



**GX-12 type**


- The tightening torque should be 0.7 N·m or less.
- To mount the sensor with a nut, the mounting hole diameter should be ø3.4 mm ø0.134 in. Further, the hole in which the boss is inserted should be ø2.5 mm ø0.098 in and 3 mm 0.118 in, or more, deep.



**Influence of surrounding metal**


- When there is a metal near the sensor, keep the minimum separation distance specified below.

**Front sensing type**



|   | GX-F8           | GX-F12          |
|---|-----------------|-----------------|
| A | 7.4 mm 0.291 in | 7.1 mm 0.280 in |
| B | 8 mm 0.315 in   | 20 mm 0.787 in  |
| C | 3 mm 0.118 in   | 7 mm 0.276 in   |

**Top sensing type**




|   | GX-H8          | GX-H12         |
|---|----------------|----------------|
| D | 4 mm 0.157 in  | 7 mm 0.276 in  |
| E | 10 mm 0.394 in | 20 mm 0.787 in |
| F | 3 mm 0.118 in  | 3 mm 0.118 in  |
| G | 3 mm 0.118 in  | 3 mm 0.118 in  |

**Mutual interference prevention**


- When two or more sensors are installed in parallel or face to face, keep the minimum separation distance specified below to avoid mutual interference.

|        |  | H                      | J              |
|--------|--|------------------------|----------------|
| GX-F8  | Between "I" type and non "I" type          | 0 mm (Note 2) 0.591 in | 15 mm          |
|        | Between two "I" types or two non "I" types | 20 mm 0.787 in         | 35 mm 1.378 in |
| GX-H8  | Between "I" type and non "I" type          | 0 mm (Note 2) 0.591 in | 15 mm          |
|        | Between two "I" types or two non "I" types | 20 mm 0.787 in         | 35 mm 1.378 in |
| GX-F12 | Between "I" type and non "I" type          | 0 mm (Note 2) 0.984 in | 25 mm          |
|        | Between two "I" types or two non "I" types | 25 mm 0.984 in         | 50 mm 1.969 in |

**Front sensing**



**Top sensing**



- Notes:
- "I" in the model No. specifies the different frequency type.
  - Close mounting is possible for up to two sensors. When mounting three sensors or more at an equal spacing, align the model with "I" and the model without "I" alternately. The minimum value of dimension "H" should be as given below.  
GX-8 type: 6mm 0.236 in  
GX-12 type: 6.5mm 0.256 in

**Sensing range**

- The sensing range is specified for the standard sensing object. With a non-ferrous metal, the sensing range is obtained by multiplying with the correction coefficient specified below. Further, the sensing range also changes if the sensing object is smaller than the standard sensing object or if the sensing object is plated.

**Correction coefficient**

| Model No.                | GX-8 type    | GX-12 type   |
|--------------------------|--------------|--------------|
| <b>Metal</b>             |              |              |
| Iron                     | 1            | 1            |
| Stainless steel (SUS304) | 0.76 approx. | 0.79 approx. |
| Brass                    | 0.50 approx. | 0.56 approx. |
| Aluminum                 | 0.48 approx. | 0.53 approx. |

**Others**


- The output does not incorporate a short-circuit protection circuit. Do not connect it directly to a power supply or a capacitive load.
- Do not use during the initial transient time (50 ms) after the power supply is switched on.

**DIMENSIONS (Unit: mm in)**

The CAD data in the dimensions can be downloaded from the SUNX website: <http://www.sunx.com>


**GX-F8**

Sensor

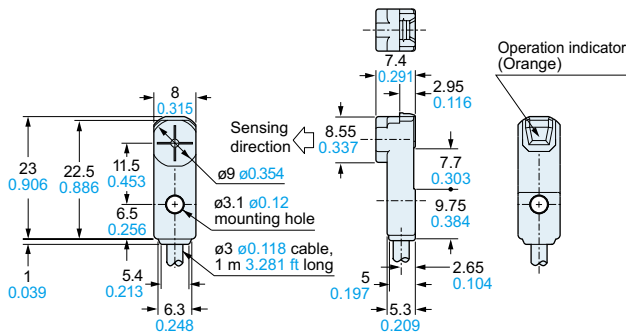


**GX-H8**

Sensor

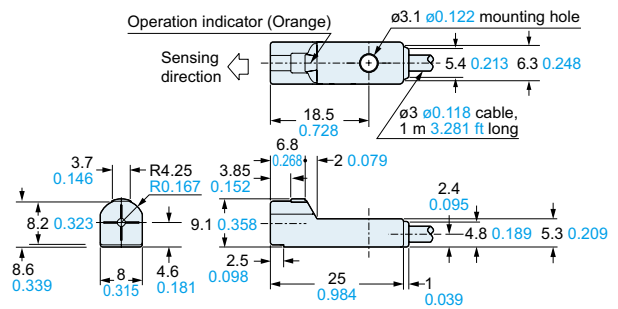


**GX-F12**

Sensor

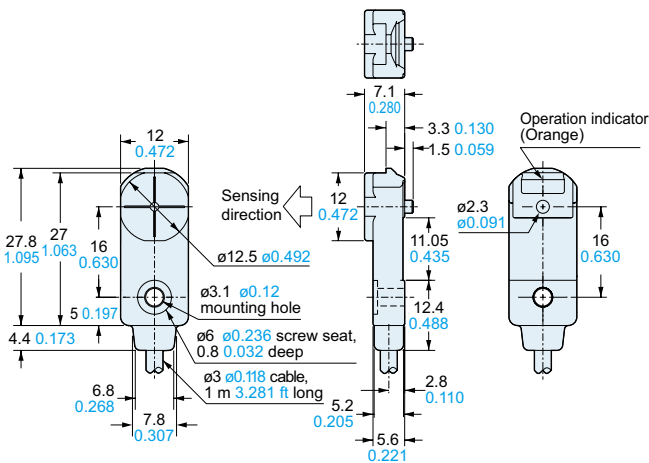


**GX-H12**

Sensor

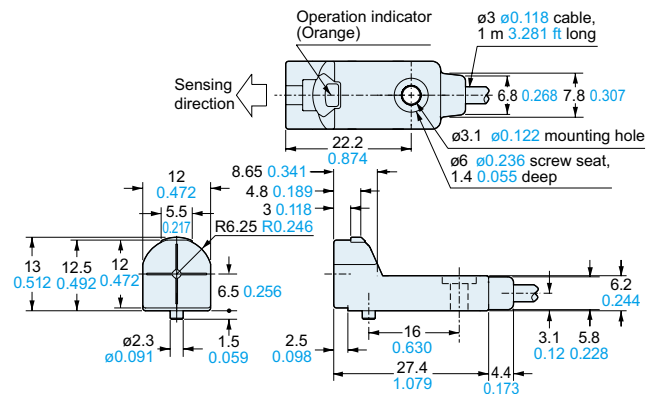


**MS-GXL8-4**

Sensor mounting bracket for GX-8 type (optional)

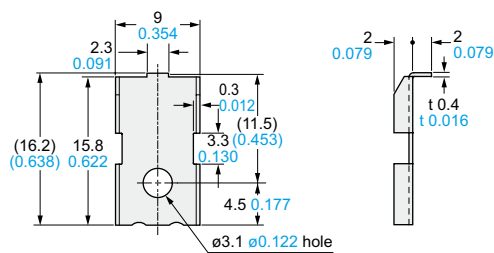

**Mounting hole dimensions**



Material: Stainless steel (SUS304)

1 pc. each of M3 (length 12 mm 0.472 in) truss head screw, nut, spring washer and plain washer are attached.

FIBER SENSORS

LASER SENSORS

PHOTO-ELECTRIC SENSORS

MICRO PHOTO-ELECTRIC SENSORS

AREA SENSORS

SAFETY COMPONENTS

PRESSURE SENSORS

INDUCTIVE PROXIMITY SENSORS

PARTICULAR USE SENSORS

SENSOR OPTIONS

WIRE- SAVING SYSTEMS

MEASUREMENT SENSORS

STATIC CONTROL DEVICES

LASER MARKERS

Selection Guide

Amplifier Built-in

GX-F/H

GXL

GL

GX-U / GX-FU / GX-N

GX

Amplifier-separated

GA-311 / GH

Other Products