

# Products 2012


Sensitivity

Accuracy

Quality

Simplicity

**HAMEG**<sup>®</sup>  
Instruments  
A Rohde & Schwarz Company



# Great Value in Test & Measurement


## HAMEG Instruments – committed to medium sized companies

HAMEG Instruments GmbH prides itself on over 50 years of a successful company history. Since the company's foundation in 1957, the name HAMEG stands for innovation, user friendliness, longevity, high quality of workmanship, and especially an excellent price/performance ratio. An independent company, a member of the Rohde & Schwarz Group since April 2005, HAMEG is located at Mainhausen near Frankfurt, Germany and develops and distributes its electronic measuring instruments via a global network of competent service and sales partners in more than 60 countries.

HAMEG customers come from industry, small businesses, science, schools and universities, service and last but not least, due to the good price/performance ratio, from the ambitious hobbyists. Numerous generations of professional engineers, technicians and craftsmen used HAMEG Instruments during their basic training and also in advanced applications of measurement technology.

The enduring success of the HAMEG Instruments is based upon the principles of Sensitivity, Accuracy, Quality and, finally, Simplicity. The company's philosophy is to design electronic measuring instruments which not only guarantee excellent performance and reliability but also offer the greatest possible flexibility, which is of equal importance in every day laboratory, test and production applications. HAMEG measuring instruments concentrate on the essentials. The operation of the instruments is intentionally kept as simple as possible while retaining important functions.

All HAMEG Instruments conform to a standard width, so stacks of several instruments are possible. Due to this feature and the compact sizes they require little space in the working area.

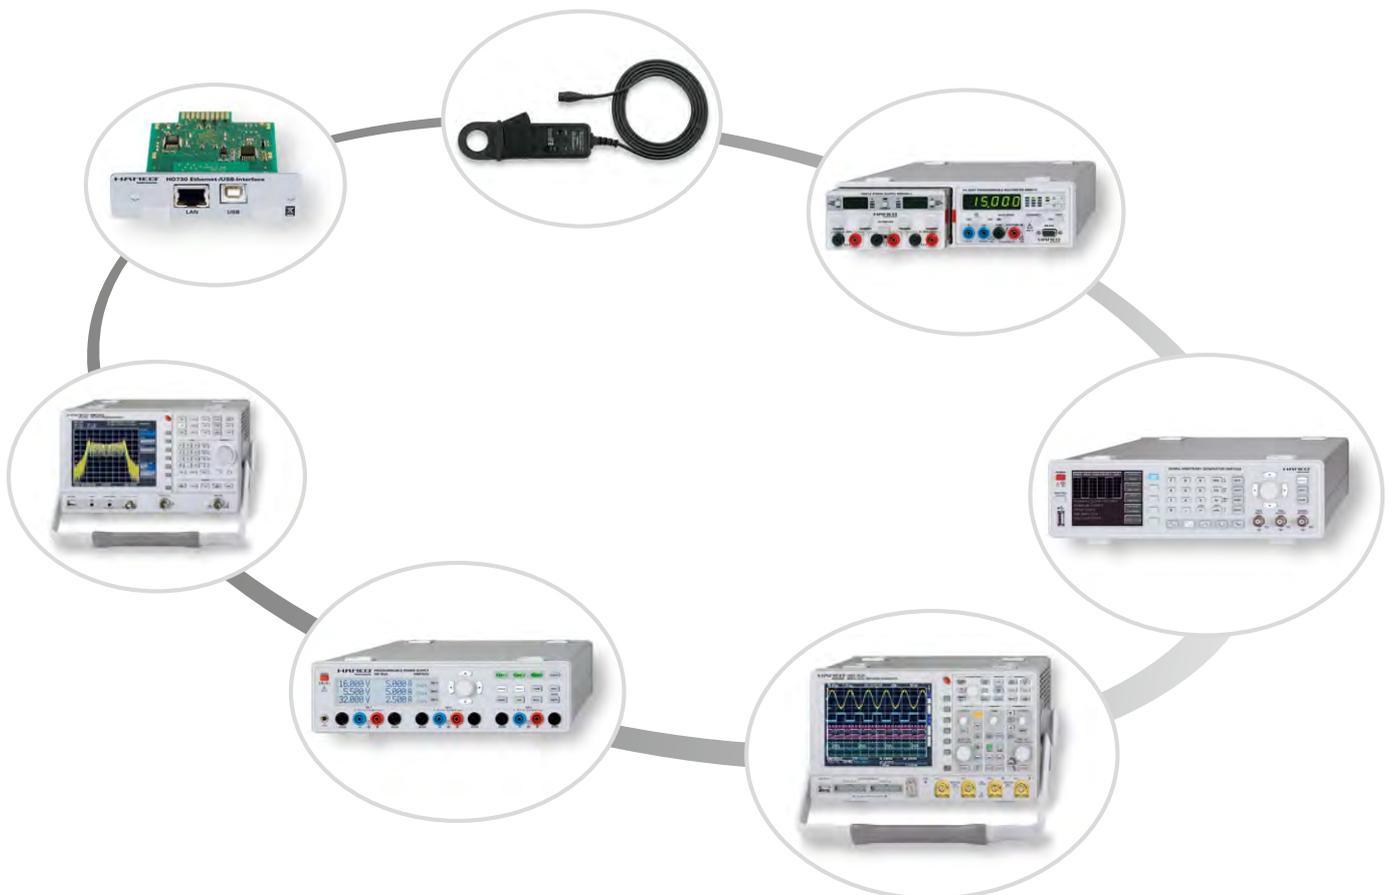

<b>Oscilloscopes</b>		<b>4</b>
HMO3524	350MHz 4 Channel Digital Oscilloscope	6
HMO3522	350MHz 2 Channel Digital Oscilloscope	6
HMO2524	250MHz 4 Channel Digital Oscilloscope	7
HMO2024	200MHz 4 Channel Digital Oscilloscope	8
HMO2022	200MHz 2 Channel Digital Oscilloscope	8
HMO1524	150MHz 4 Channel Digital Oscilloscope	8
HMO1522	150MHz 2 Channel Digital Oscilloscope	8
HMO1024	100MHz 4 Channel Digital Oscilloscope	9
HMO1022	100MHz 2 Channel Digital Oscilloscope	9
HM0724	70MHz 4 Channel Digital Oscilloscope	9
HM0722	70MHz 2 Channel Digital Oscilloscope	9
HOO11	Serial Bus (Analog Channel)	10
HOO10	Serial Bus (Analog & Digital Channel)	10
HM400	40MHz Analog Oscilloscope	11
<b>Spectrum Analysis</b>		<b>12</b>
HMS3010	3GHz Spectrum Analyzer with Tracking-Generator	14
HMS3000	3GHz Spectrum Analyzer	14
HMS1010	1GHz Spectrum Analyzer with Tracking-Generator	14
HMS1000	1GHz Spectrum Analyzer	14
HMS1000E	1GHz Spectrum Analyzer	15
HM6050-2	Line Impedance Stabilization Network	17
HZ540/HZ550	EMV Near-Field Probe Set up to 3GHz	18
HZ530	EMV Near-Field Probe Set up to 1GHz	19
<b>Power Supplies</b>		<b>20</b>
HMP4040	Programmable 4 Channel High-Performance Power Supply	22
HMP4030	Programmable 3 Channel High-Performance Power Supply	22
HMP2030	Programmable 3 Channel High-Performance Power Supply	23
HMP2020	Programmable 2 Channel High-Performance Power Supply	23
HM7042-5	Triple Power Supply 2 x 0...32V/0...2A and 1 x 0...5.5V/0...5A	24
HM8143	Arbitrary Power Supply 2 x 0...30V/0...2A and 1 x 5V/0...2A	25
<b>Programmable Measuring Instruments Series 8100</b>		<b>26</b>
HMF2550	50MHz Arbitrary Function Generator	28
HMF2525	25MHz Arbitrary Function Generator	28
HM8112-3	6½-Digit Precision Multimeter	29
HM8115-2	8kW Power Meter	30
HM8118	200kHz LCR-Bridge	31
HM8123	3GHz Programmable Counter	32
HM8134-3	1.2GHz RF-Synthesizer	33
HM8135	3GHz RF-Synthesizer	34
HM8150	12.5MHz Arbitrary Function Generator	35

<b>Modular System Series 8000</b>		<b>36</b>
HM8001-2	Mainframe	38
HM8012	4¾-Digit Programmable Multimeter	39
HM8018	25 kHz LCR-Meter	39
HM8021-4	1.6GHz Universal Counter	40
HM8030-6	10MHz Function Generator	40
HM8040-3	Triple Power Supply (Module) 2 x 0...20V/0.5A and 1 x 5V/1A	41
HM800	Blank Module	41

<b>Options</b>		<b>42</b>
HO118	Binning Interface	43
HO3508	Logic Probe	43
HO3011	Preamplifier	44
HOO10	Serial Bus (Analog & Digital Channel)	44
HOO11	Serial Bus (Analog Channel)	44
HO730	Dual Ethernet/USB Interface	45
HO740	IEEE-488 (GPIB) Interface	45
HO880	IEEE-488 (GPIB) Interface	45

<b>Accessories</b>		<b>46</b>
Test Cables		47
Test Cables/Adapter		48
Adapter/Interfaces/Cables		49
Probes		50
Converter/Sensors/Test fixtures		55
HM8118/Test Adapter		56
Spectrum Analyzer		57
Rackmount Kits		58
Rackmount Kits/Carrying Cases		59

<b>Specifications</b>		<b>60</b>
Oscilloscopes		61
Spectrum Analyzers		72
Power Supplies		74
Programmable Measuring Instruments Series 8100		76
Modular System Series 8000		84
HOO10/HOO11		89
HOO12 CAN/LIN		90

<b>Index</b>	<b>93</b>
--------------	-----------

<b>Contact</b>	<b>93</b>
----------------	-----------

## Oscilloscopes



[Spectrum Analysis](#)

[Power Supplies](#)

[Programmable Measuring  
Instruments Series 8100](#)

[Modular System Series 8000](#)

[Options](#)

[Accessories](#)

[Specifications](#)

# HAMEG Oscilloscopes

## Innovation right from the start

Without doubt, the oscilloscope is the most important measuring instrument for the characterization of signals in the time domain. HAMEG Instruments offers the most comprehensive portfolio for the diverse areas of application in industry, handcraft, science, education, training, and service as well as the private sector. In addition to our innovative DSO's (Digital Storage Oscilloscopes) and MSO's (Mixed Signal Oscilloscopes) the purely Analog Oscilloscope HM400 with the classical CRT (Cathode Ray Tube) are for the customers choice.


The demand for purely analog instruments has been diminishing for some time because DSO's offer a host of advantages such as documentation, the ability to extensively analyze data, a compact package etc. MSO's (Mixed-Signal Oscilloscopes) additionally allow the simultaneous display of analog and digital signals on several channels.

Modern electronic gear, as a rule, contains micro-processors, FPGA's, serial interfaces such as I<sup>2</sup>C, SPI or UART. The HMO series oscilloscopes, with the available options, feature triggering and decoding of these bus protocols in real time, which is very helpful and time-saving for debugging during the design phase. Modern semiconductor technologies generate signals with rise times of a few ns and thus demand higher bandwidths and sampling rates in order to minimize the measurement errors. The high sampling rate requires a deeper memory in order to acquire a given time window. HAMEG Instruments always offers a well balanced set of these three specifications in order to display a correct measurement result even in critical cases. Last but not least our experience of 50 plus years in oscilloscope technology stands for first-class trigger performance, extraordinary sensitivity, low-noise A/D converters, unexcelled longevity, and an excellent price/performance ratio.



# 350MHz 2[4] Channel Digital Oscilloscope HM03522 [HM03524]

# HM03524

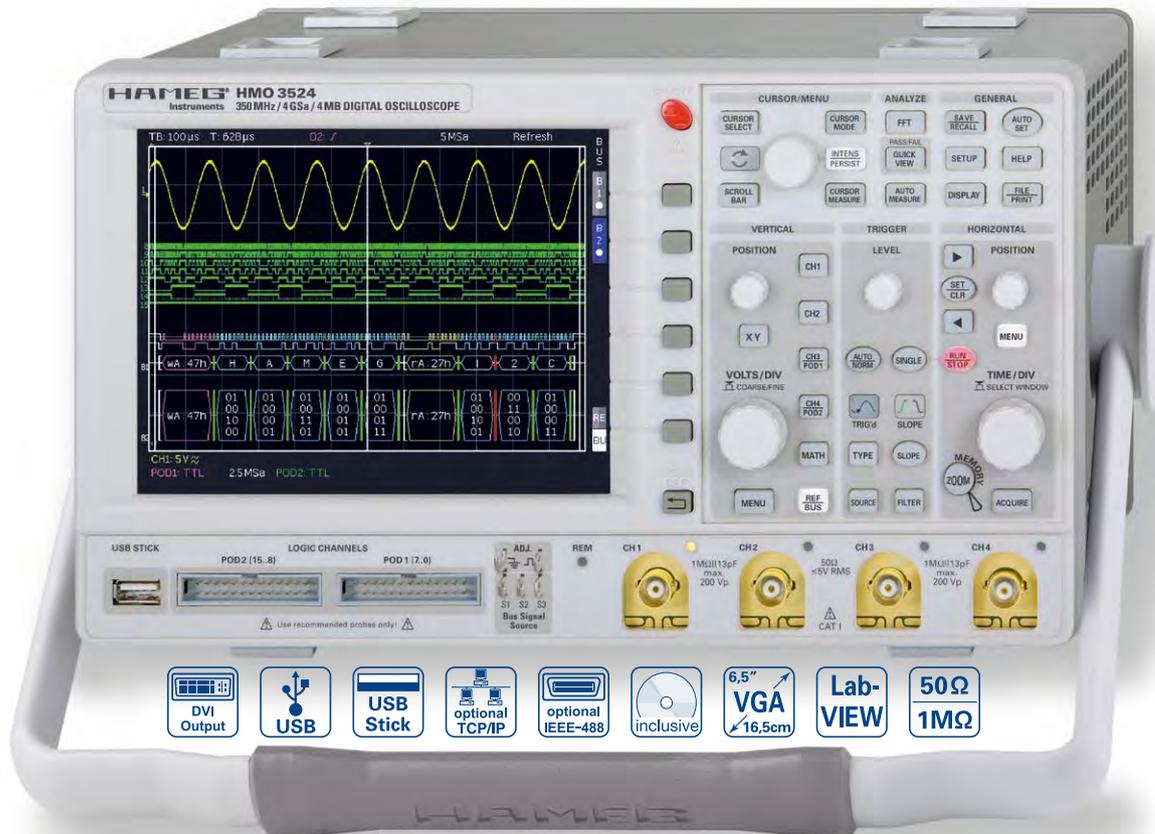

8 Channel Logic Probe  
H03508



Carrying Case HZ99




Active Probe HZ030



- ✓ 4GSa/s Real Time, 50GSa/s Random Sampling, Low Noise Flash A/D Converter (Reference Class)
- ✓ 4MPts Memory, Memory **Z**oom up to 100,000:1
- ✓ MSO (Mixed Signal Opt. H03508 [H03516]) with 8 [16] Logic Channels
- ✓ Serial Bus Trigger and Hardware accelerated Decode, I<sup>2</sup>C, SPI, UART/RS-232 (Opt. H0010, H0011), CAN/LIN (Opt. H0012)
- ✓ 8 User definable Markers for easy Navigation
- ✓ Pass/Fail Test based on Masks
- ✓ Vertical Sensitivity 1mV/div., Offset Control  $\pm 0.2... \pm 20V$
- ✓ 12div. x-Axis Display Range, 20div. y-Axis Display Range (VirtualScreen)
- ✓ Trigger Modes: Slope, Video, Pulswidth, Logic, Delayed, Event
- ✓ 6 Digit Counter, Automeasurement, Formula Editor, Ratiocursor, FFT for Spectral Analysis
- ✓ Crisp 16.5cm (6.5") TFT VGA Display, DVI Output
- ✓ Lowest Noise Fan
- ✓ 3 x USB for Mass Storage, Printer and Remote Control optional IEEE-488 (GPIB) or Ethernet/USB

See page 70 for technical specifications or [www.hameg.com/HM03522](http://www.hameg.com/HM03522) [[www.hameg.com/HM03524](http://www.hameg.com/HM03524)]

# 250MHz 4 Channel Digital Oscilloscope HM02524

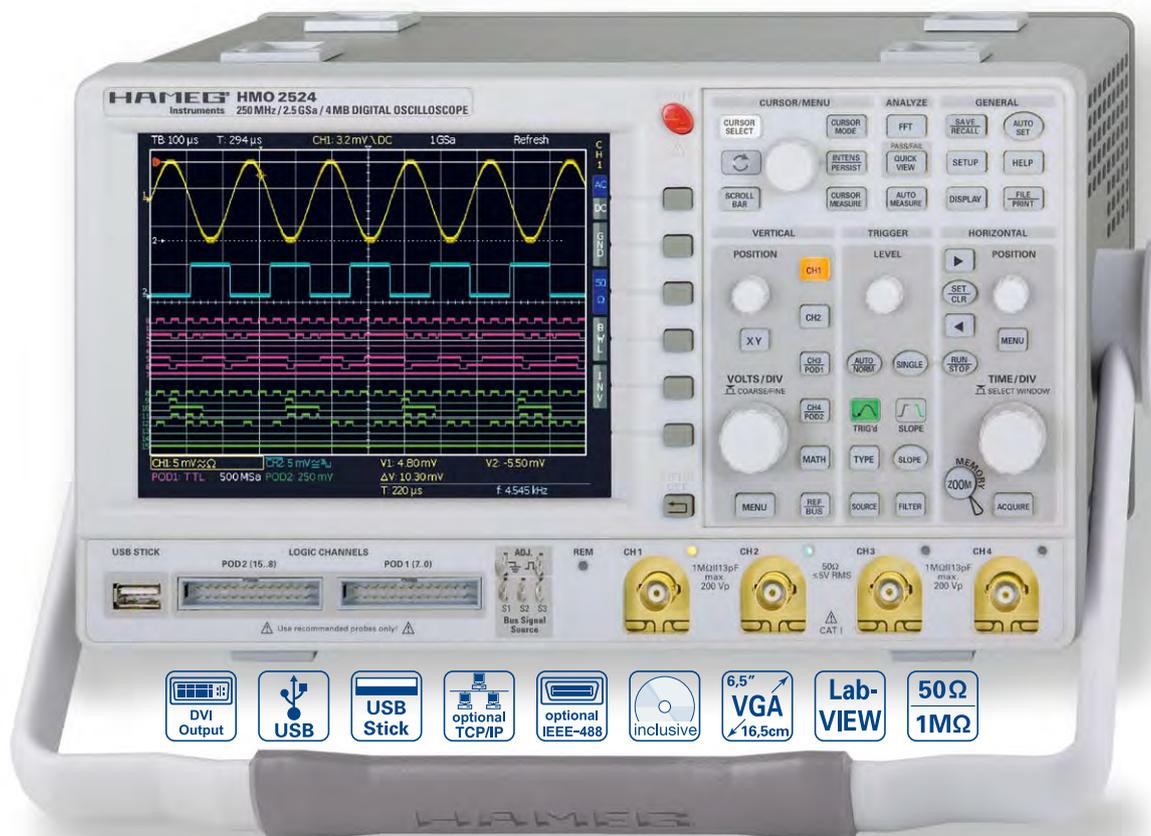


# HM02524

- ✓ 2.5GSa/s Real Time, 25GSa/s Random Sampling, Low Noise Flash A/D Converter (Reference Class)
- ✓ 4MPts Memory, Memory  Zoom up to 100,000:1
- ✓ MS0 (Mixed Signal Opt. H03508 [H03516]) with 8 [16] Logic Channels
- ✓ Serial Bus Trigger and Hardware accelerated Decode, I<sup>2</sup>C, SPI, UART/RS-232 (Opt. H0010, H0011), CAN/LIN (Opt. H0012)
- ✓ 8 User definable Markers for easy Navigation
- ✓ Pass/Fail Test based on Masks
- ✓ Vertical Sensitivity 1mV/div., Offset Control  $\pm 0.2... \pm 20V$
- ✓ 12div. x-Axis Display Range, 20div. y-Axis Display Range (VirtualScreen)
- ✓ Trigger Modes: Slope, Video, Pulswidth, Logic, Delayed, Event
- ✓ 6 Digit Counter, Automeasurement, Formula Editor, Ratiocursor, FFT for Spectral Analysis
- ✓ Crisp 16.5cm (6.5") TFT VGA Display, DVI Output
- ✓ Lowest Noise Fan
- ✓ 3 x USB for Mass Storage, Printer and Remote Control optional IEEE-488 (GPIB) or Ethernet/USB

See page 69 for technical specifications or [www.hameg.com/HM02524](http://www.hameg.com/HM02524)

Mask Test



Passive Probe 1000:1  
HZ020




AC/DC Current Probe  
100/1000A HZ051



# 150MHz/200MHz 2[4] Channel Digital Oscilloscope HMO1522 [HMO1524]/HMO2022 [HMO2024]

HMO2024

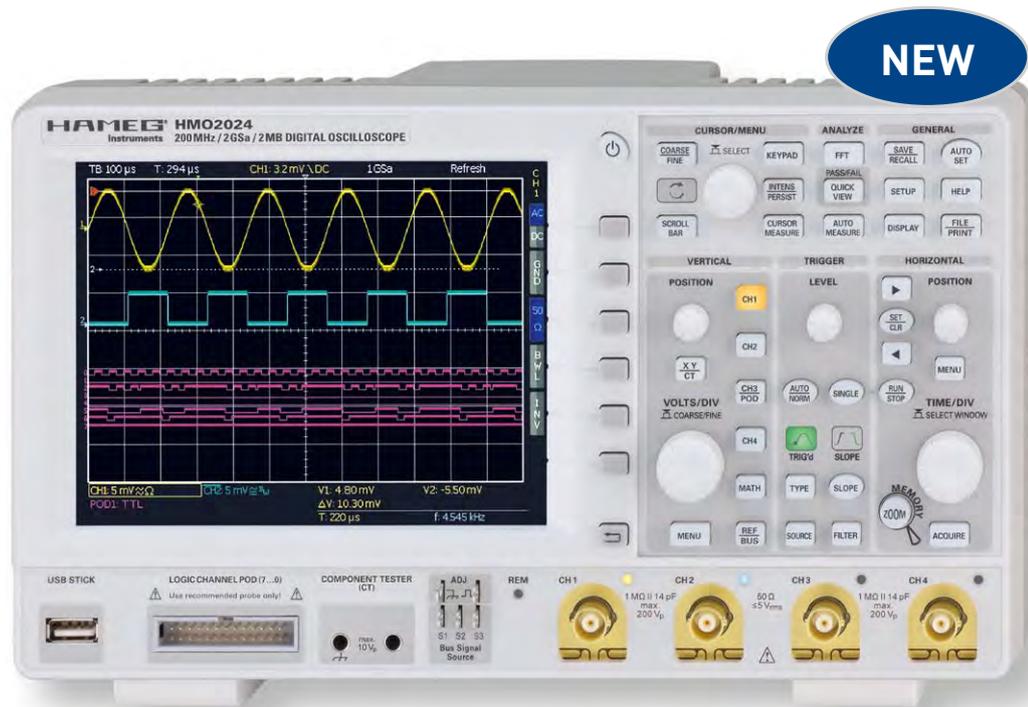

2 Channel Version  
HMO2022



Side view




8 Channel Logic Probe  
H03508



- ✓ 2GSa/s Real Time, Low Noise Flash A/D Converter (Reference Class)
- ✓ 2MPts Memory, Memory **Z**oom up to 50,000:1
- ✓ MSO (Mixed Signal Opt. H03508) with 8 Logic Channels
- ✓ Serial Bus Trigger and Hardware accelerated Decode, I<sup>2</sup>C, SPI, UART/RS-232 (Opt. H0010, H0011), CAN/LIN (Opt. H0012)
- ✓ 8 User definable Markers for easy Navigation
- ✓ Pass/Fail Test based on Masks
- ✓ Vertical Sensitivity 1mV/div., Offset Control  $\pm 0.2... \pm 20V$
- ✓ 12div. x-Axis Display Range, 20div. y-Axis Display Range (VirtualScreen)
- ✓ Trigger Modes: Slope, Video, Pulswidth, Logic, Delayed, Event
- ✓ Component Tester, 6 Digit Counter, Automeasurement, Formula Editor, Ratiocursor, FFT for Spectral Analysis
- ✓ Crisp 16.5cm (6.5") TFT VGA Display, DVI Output
- ✓ Lowest Noise Fan
- ✓ 3 x USB for Mass Storage, Printer and Remote Control optional IEEE-488 (GPIB) or Ethernet/USB

See page 65 for technical specifications or [www.hameg.com/HMO1522](http://www.hameg.com/HMO1522) [[www.hameg.com/HMO1524](http://www.hameg.com/HMO1524)]  
See page 67 for technical specifications or [www.hameg.com/HMO2022](http://www.hameg.com/HMO2022) [[www.hameg.com/HMO2024](http://www.hameg.com/HMO2024)]

# 70MHz/100MHz 2[4] Channel Digital Oscilloscope HM0722 [HM0724]/HM01022 [HM01024]

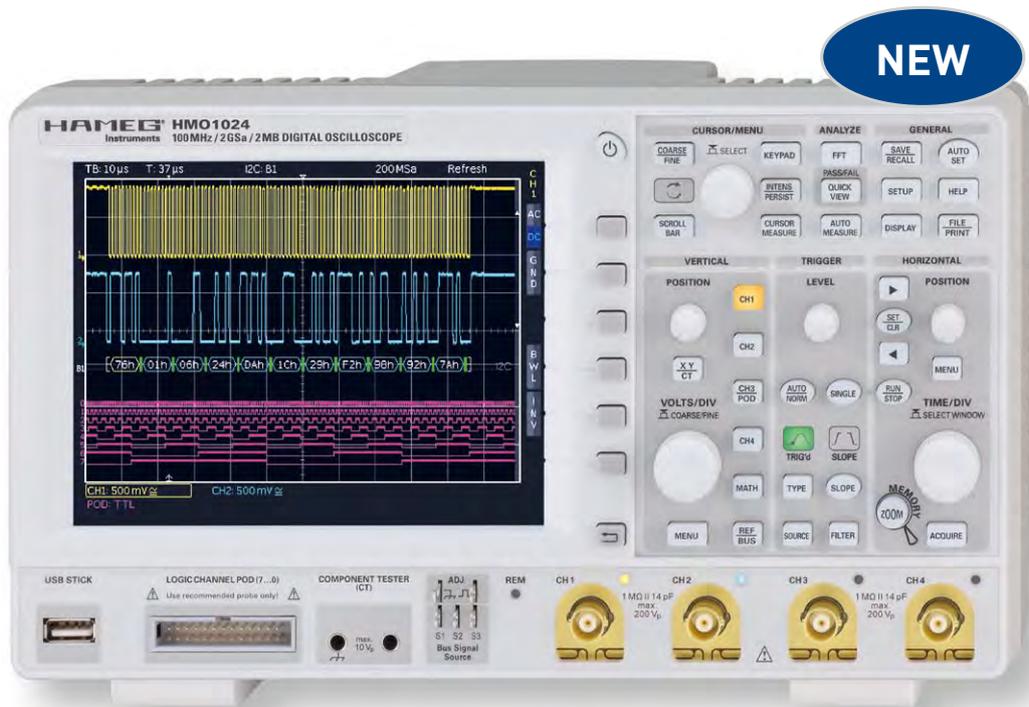

# HM01024




- ✓ 2GSa/s Real Time, Low Noise Flash A/D Converter (Reference Class)
- ✓ 2MPts Memory, Memory **Z**oom up to 50,000:1
- ✓ MS0 (Mixed Signal Opt. H03508) with 8 Logic Channels
- ✓ Serial Bus Trigger and Hardware accelerated Decode, I<sup>2</sup>C, SPI, UART/RS-232 (Opt. H0010, H0011), CAN/LIN (Opt. H0012)
- ✓ 8 User definable Markers for easy Navigation
- ✓ Pass/Fail Test based on Masks
- ✓ Vertical Sensitivity 1mV/div.
- ✓ 12div. x-Axis Display Range, 20div. y-Axis Display Range (VirtualScreen)
- ✓ Trigger Modes: Slope, Video, Pulswidth, Logic, Delayed, Event
- ✓ Component Tester, 6 Digit Counter, Automeasurement, Formula Editor, Ratiocursor, FFT for Spectral Analysis
- ✓ Crisp 16.5cm (6.5") TFT VGA Display, DVI Output
- ✓ Lowest Noise Fan
- ✓ 3 x USB for Mass Storage, Printer and Remote Control optional IEEE-488 (GPIB) or Ethernet/USB

See page 62 for technical specifications or [www.hameg.com/HM0722](http://www.hameg.com/HM0722) [[www.hameg.com/HM0724](http://www.hameg.com/HM0724)]  
See page 64 for technical specifications or [www.hameg.com/HM01022](http://www.hameg.com/HM01022) [[www.hameg.com/HM01024](http://www.hameg.com/HM01024)]

Carrying Case HZ090



Component Tester/Bus Signal Source

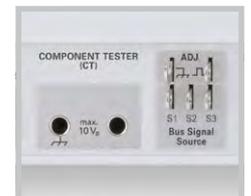


Ethernet/USB-Interface H0730 (Option)




## H0010/H0011 Serial Bus



for all Oscilloscopes of the HMO Series

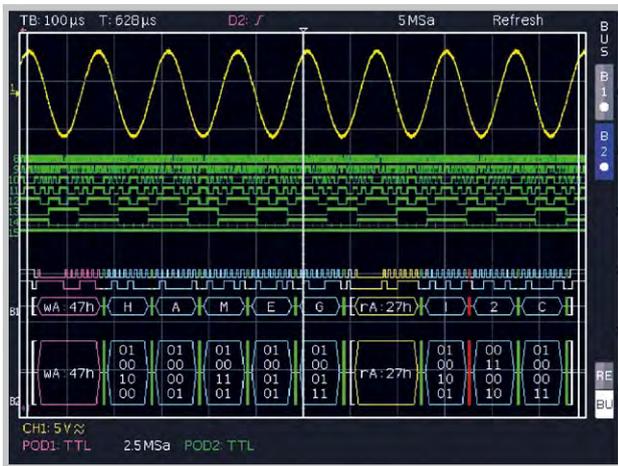

Mixed Signal and Bus Display

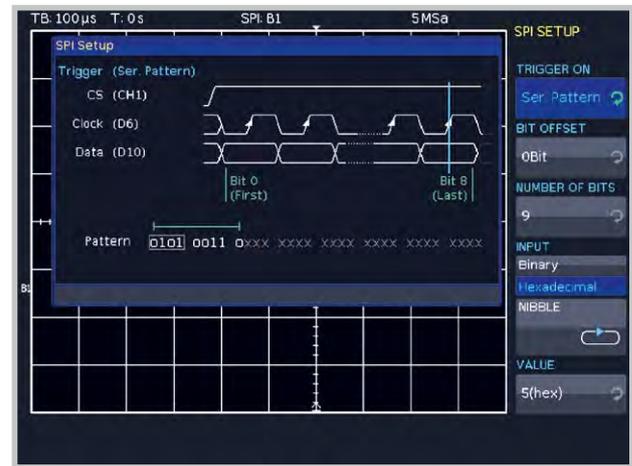

SPI Bus Trigger Setup

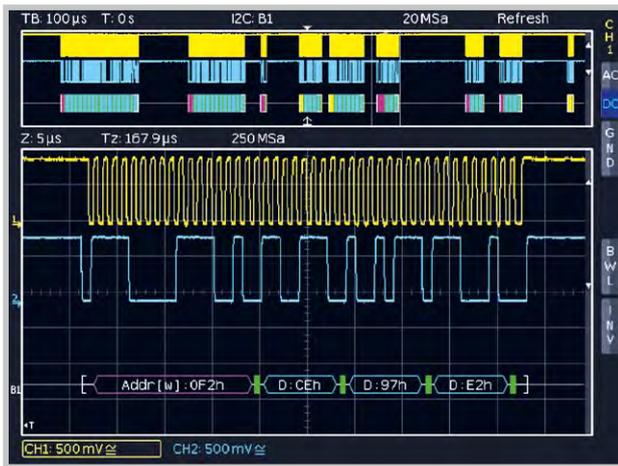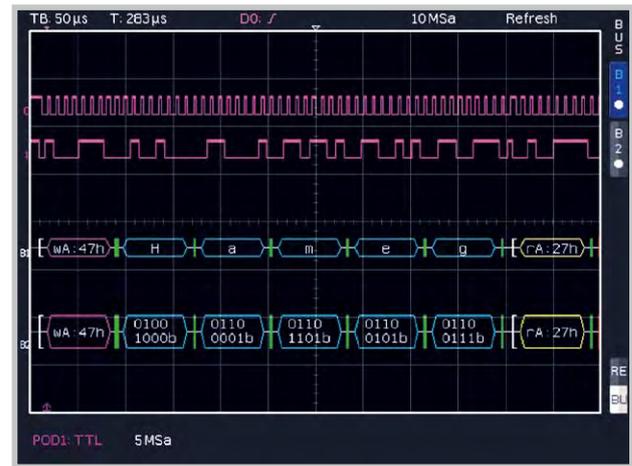
I<sup>2</sup>C Bus Hex decoding on the Analog ChannelI<sup>2</sup>C Bus ASCII and Binary

- ✓ H0010 via Analog Channels and/or Logic Channels, H0011 via Analog Channels
- ✓ I<sup>2</sup>C, SPI, UART/RS-232 Bus Trigger and Decode
- ✓ Hardware accelerated Decode in Realtime
- ✓ Color Coded Display of the Content for intuitive Analysis and easy Overview
- ✓ More Details of the decoded Values become visible with increasing Zoom Factor
- ✓ Bus Display with synchronous Display of the Data and maybe Clock Signal
- ✓ Decode into ASCII, Binary, Hexadecimal or Decimal Format
- ✓ Up to four Lines to comfortably show the decoded Values
- ✓ Powerful Trigger to isolate specific Messages
- ✓ Option for all Oscilloscopes of the HMO Series, retrofittable

**CAN/LIN**  
See Page 90

See page 89 for technical specifications or [www.hameg.com/H0010](http://www.hameg.com/H0010)

# 40MHz Analog Oscilloscope HM400

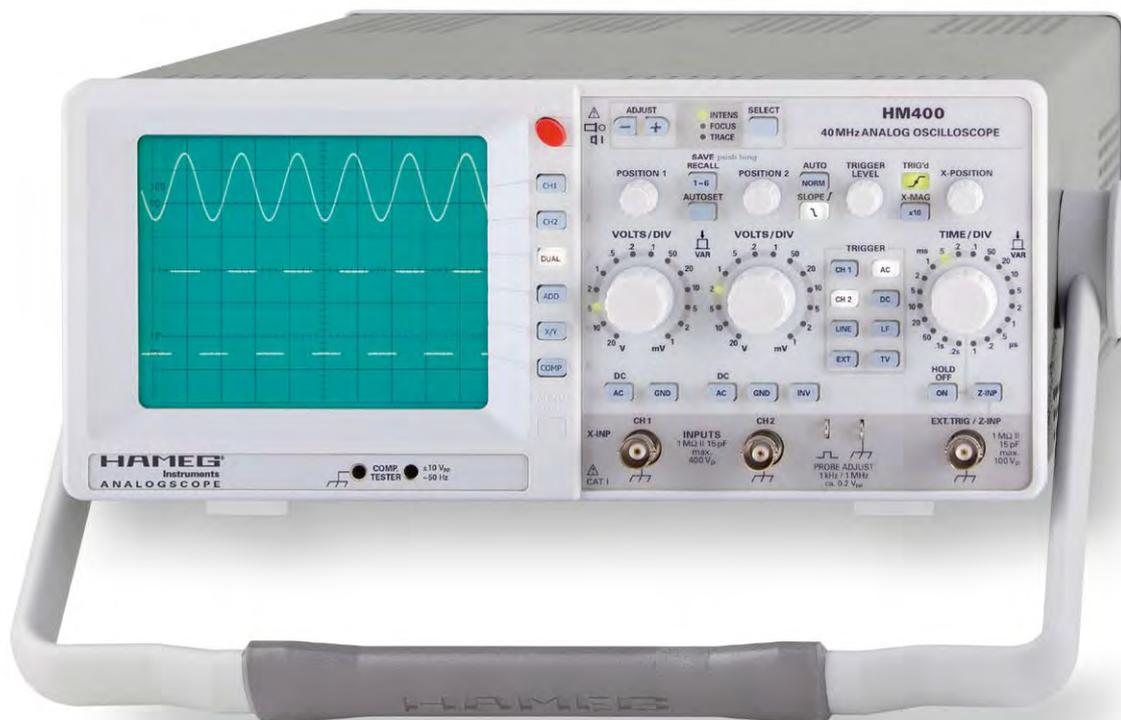


# HM400


- ✓ Reference-Class in Sensitivity and Input Voltage Range
- ✓ 2 Channels with Deflection Coefficients 1mV/div....20V/div., variable up to 50V/div.
- ✓ Time Base 100ns/div....0.2s/div., with X Magnification to 10ns/div.
- ✓ Low Noise Measuring Amplifiers with high Pulse Fidelity and minimum Overshoot
- ✓ Peak to Peak Trigger for stable Triggering 0...50MHz at 0.5div. Signal Level (up to 80MHz at 1div.)
- ✓ Autoset, Save/Recall Memories for 6 Instrument Settings
- ✓ Yt- and XY-Mode with Z-Input for Intensity Modulation
- ✓ Component Characterisation with Component Tester (two Terminal Network Measurement)
- ✓ Low Power Consumption, no Fan

See page 62 for technical specifications or [www.hameg.com/HM400](http://www.hameg.com/HM400)


No Signal Distortion  
resulting from Overshoot



Line triggered composite  
Video Signal



Characteristic of a Z-Diode  
with Component Test Mode



Oscilloscopes

## Spectrum Analysis

Power Supplies

Programmable Measuring Instruments  
Series 8100

Modular System Series 8000

Options

Accessories

Specifications



# HAMEG Spectrum Analysis

## Change of paradigms in measurement technology

With the introduction of the modern HMS series spectrum analyzers, HAMEG started a change of paradigms in the design lab. Until a short time ago, this measurement technology was unaffordable for most users. HAMEG Instruments puts an end to this exclusivity by offering the HMS series – according to its tradition of delivering high performance measurement technology at a fair price. During the design, a practically oriented concept of instrument operation took highest priority so that the user can forget about the complex theory behind spectrum analysis. The increasing wide-spread use of wireless applications as well as the requirement for minimizing electromagnetic emissions from high performance digital systems caused a change of approach in design labs and test sites. While signal analysis in the time domain is well established, spectrum analysis is now starting to find its place on the lab bench.


The scope of applications of a spectrum analyzer in R & D, test sites, service and EMI testing is wide. Spectrum analyzers can display signals up into the GHz range. By employing the superhet receiver principle and using logarithmic signal processing and a logarithmically scaled display, their sensitivity exceeds that of oscilloscopes by more than 3 orders of magnitude and the dynamic range is markedly larger (>80 dB).

Caution – the sensitive measuring input is 50 ohms and easily destroyed! (Observe the maximum input power whenever measuring higher power signals!) It is hence recommended, whenever analysing unknown signals, to provide protective measures, e.g. to insert an attenuator of sufficient power rating at the input. When measuring signals with spectrum analyzers in the frequency domain, the phase information is lost, but in many practical applications this information is not required.

Spectrum analysis with HAMEG spectrum analyzers features a frequency range of up to 3GHz and a large dynamic range; for transmission measurements instruments with a tracking generator are available which are easy to operate. Integrated interfaces for fast data communication with an external pc including free software for EMI pre-compliance test measurement functions, as well as the availability of a vast range of optional accessories (e.g. near-field probes for diverse measurements) promote HAMEG spectrum analyzers to be the „ideal partners“ for a variety of applications including EMI tests and measurements on wireless systems such as UMTS, GSM, TETRA, DBV-T, Bluetooth, WLAN etc, ...



# 1GHz [3GHz] Spectrum Analyzer HMS1000 [HMS3000]

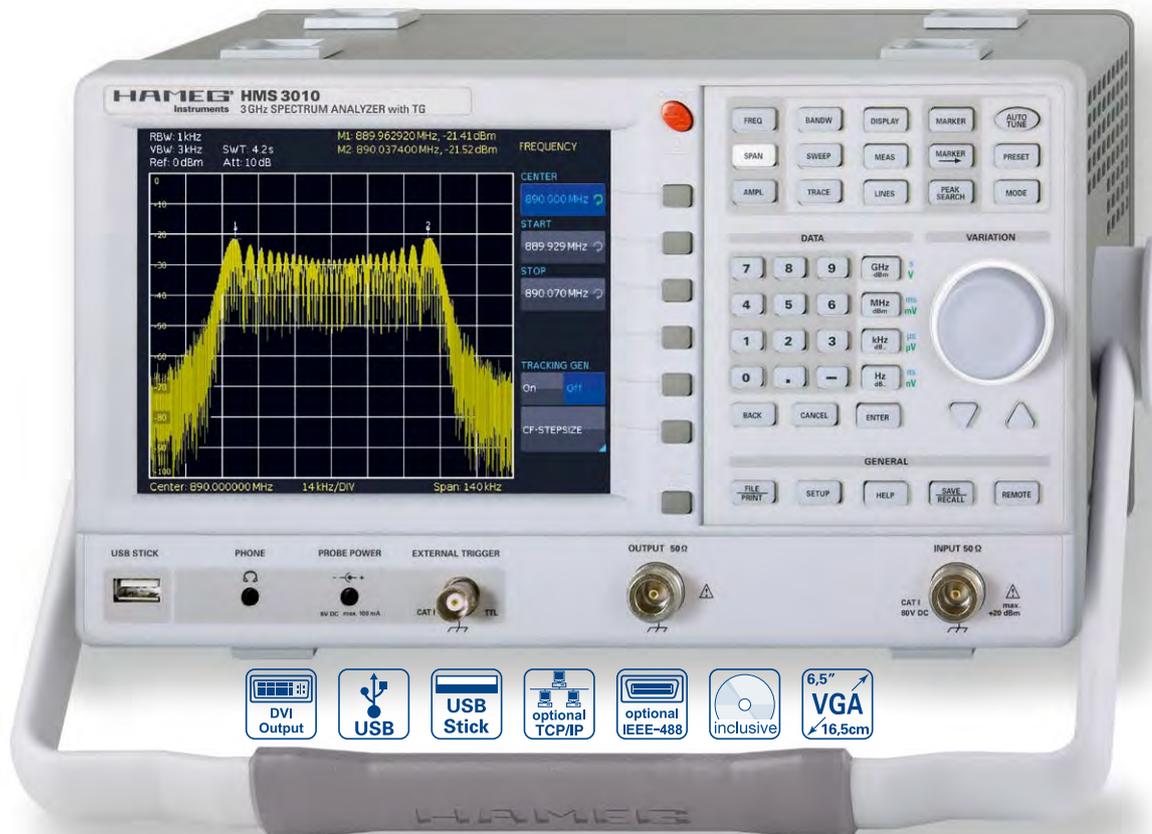

# HMS3010

1GHz Spectrum Analyzer  
HMS1000 without TG



3GHz EMI Near Field Probe  
Set HZ550L



VSWR Test Unit HZ547




- ✓ Frequency Range 100kHz...1GHz [3GHz]
- ✓ Tracking Generator HMS1010 [HMS3010] -20...0dBm
- ✓ Amplitude Measurement Range -114...+20dBm  
DANL -135dBm with Preamp. Option H03011
- ✓ Sweep Time 20ms...1000s
- ✓ Resolution Bandwidth 100Hz...1MHz in 1-3 Steps,  
200kHz (-3dB); additional 200Hz, 9kHz, 120kHz, 1MHz (-6dB)
- ✓ Spectral Purity <-100dBc/Hz (@100kHz)
- ✓ Video Bandwidth 10Hz...1MHz in 1-3 Steps
- ✓ Integrated AM and FM Demodulators (Phone and int. Speaker)
- ✓ Detectors: Auto-, Min-, Max-Peak, Sample, RMS, Quasi-Peak
- ✓ 8 Markers with Delta Marker, miscellaneous Peak Functions
- ✓ Crisp 16.5cm (6.5") TFT VGA Display, DVI Output
- ✓ 3 x USB for Mass-Storage, Printer and Remote Control  
optional IEEE-488 (GPIB) or Ethernet/USB Interface

See page 73 for technical specifications or [www.hameg.com/HMS1010](http://www.hameg.com/HMS1010) [[www.hameg.com/HMS3010](http://www.hameg.com/HMS3010)]

# 1GHz Spectrum Analyzer HMS1000E

NEW

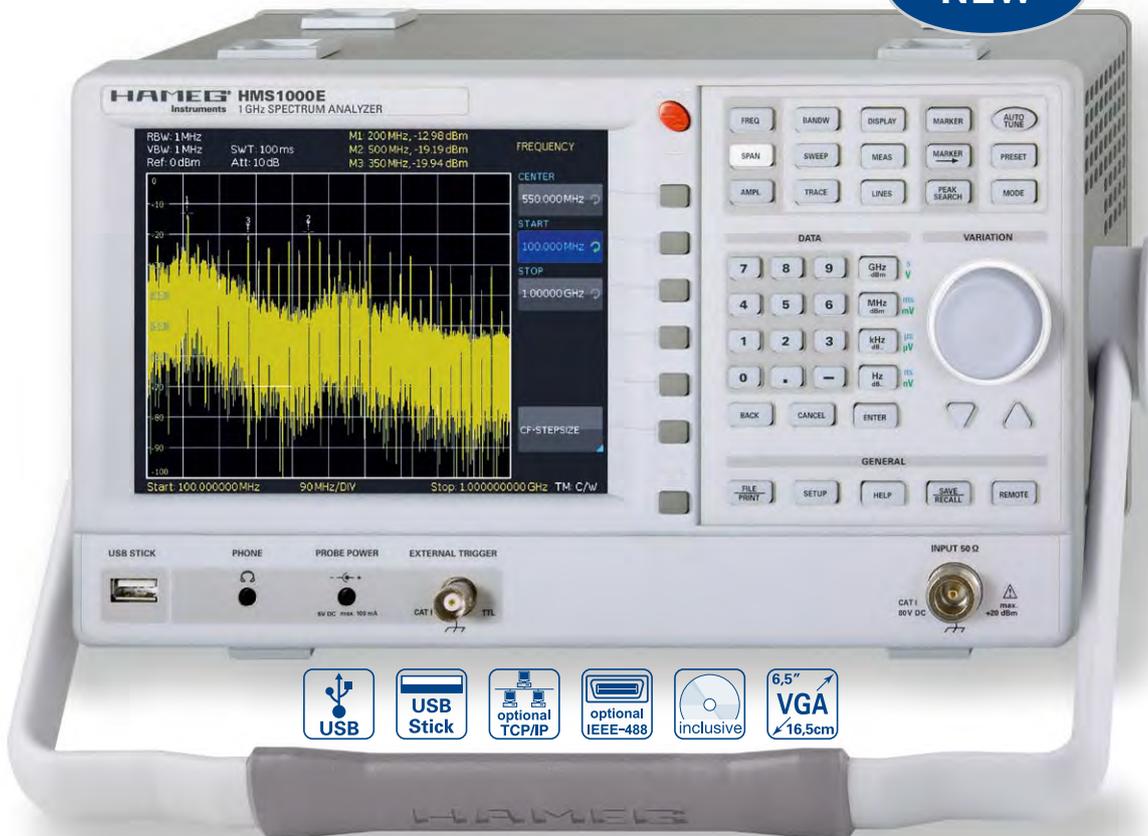


HMS1000E

- ✓ Frequency Range 100kHz...1GHz
- ✓ Amplitude Measurement Range -104...+20dBm
- ✓ Sweep Time 20ms...1000s
- ✓ Resolution Bandwidth 10kHz...1MHz in 1-3 Steps, 200kHz (-3dB)
- ✓ Spectral Purity <math>< -100\text{dBc}/\text{Hz}</math> (@100kHz)
- ✓ Video Bandwidth 1kHz...1MHz in 1-3 Steps
- ✓ Integrated AM and FM Demodulator (Phone and int. Speaker)
- ✓ Detectors: Auto-, Min-, Max-Peak, Sample, RMS
- ✓ 8 Marker with Delta Marker, miscellaneous Peak Functions
- ✓ Crisp 16.5cm (6.5") TFT VGA Display
- ✓ 3 x USB for Mass-Storage, Printer and Remote Control, optional IEEE-488 (GPIB) or Ethernet/USB Interface

See page 72 for technical specifications or [www.hameg.com/HMS1000E](http://www.hameg.com/HMS1000E)

Comfortable automatic measurement functions with up to 8 markers



1GHz EMI Near Field Probe Set HZ530




Ethernet/USB-interface H0730 (Option)






Absolut Marker M1; Delta Marker D2; Noise Marker N3

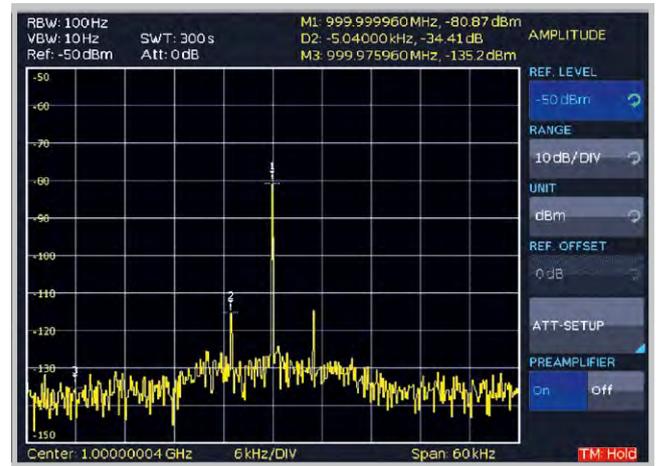

Preamplifier Option HO3010 for HMS1000, HMS1010, HMS3000, HMS3010 (Licence Key)

## Pre-Compliance Software (HM Explorer)

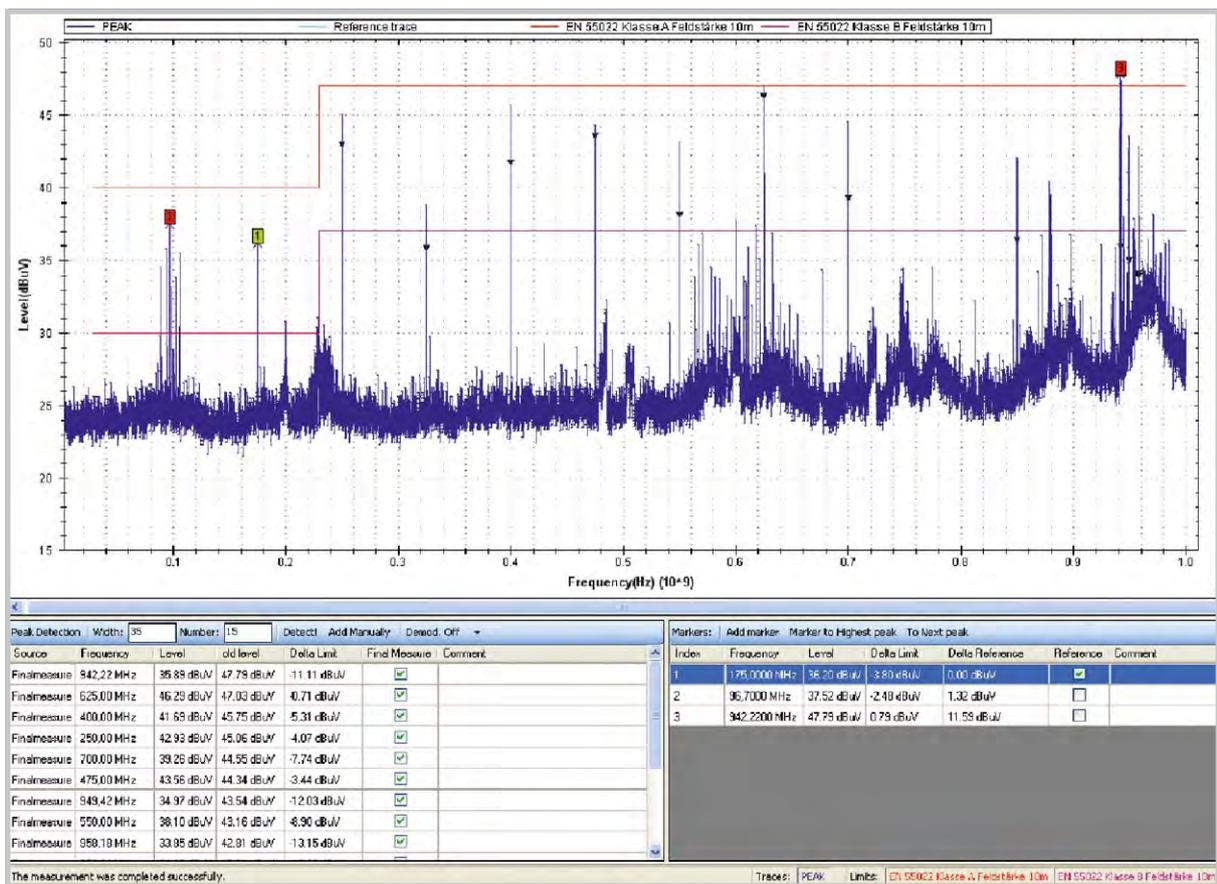

- ✓ Screenshot of the free Pre-Compliance EMI PC Software (not available for HMS1000E)

# Line Impedance Stabilization Network HM6050-2



# HM6050-2

- ✓ Measurement of Line-conducted Interference within the Range from 9kHz...30MHz (CISPR 16)
- ✓ Selectable Transient Limiter
- ✓ Artificial Hand Connector

## Technical Specifications at 23°C ±2°C

Frequency Range:	9kHz...30MHz
Impedance Characteristics:	$Z = 50\Omega \parallel (50\mu\text{H} + 5\Omega)$ , Error <20% under terms of VDE 876T1
Max. Current:	16A
Line Voltage/Frequency:	230V/50...60Hz, CAT II
Artificial Hand:	220pF + 511Ω
PE (selectable):	50μH    50Ω

## Transient Limiter

Frequency Range:	150kHz...30MHz
Transmission Loss:	10dB (+1.5/-0.5dB)

## Connectors

Measurement Output:	50Ω BNC
Power Supply Socket for DUT:	Standard German (UK, US) wall outlets
Artificial Hand:	4mm banana socket
Line Cord	fixed


## Miscellaneous

Operating Temperature:	10...40°C
Power Supply:	HM6050-2D (DE Version) 230V ±10%, 50...60Hz HM6050-2K (UK Version) 230V ±10%, 50...60Hz HM6050-2S (US Version) 115V ±10%, 50...60Hz
Safety Class:	Safety class I (IEC1010-1/VDE 0411)
Dimensions and Weight:	285 x 125 x 380mm (W x H x D), approx. 6kg


HM6050-2K  
(UK Version, 230V)  
HM6050-2S  
(US Version, 115V)



Measurement  
of Line-conducted  
Interference: Fail



Measurement  
of Line-conducted  
Interference: Pass



## HZ540/HZ550 EMV Near-Field Probe Set up to 3GHz

HZ550

Picture  
HZ550L

## HZ540 and HZ550 EMI-Near Field Probe Sets

The HZ540/550 are the ideal toolkits for the investigation of RF electromagnetic fields. They are indispensable for EMI pre-compliance testing during product development, prior to third party testing. The sets include 3 or 5 hand-held probes with built-in pre-amplifier covering the frequency range from <1MHz to approx. 3000MHz.

The probes of the basic set HZ540 include one magnetic field probe, one electric field probe, and a high impedance probe. In addition to the HZ550 features an optional  $\mu$ -magnetic field probe and an antenna. All probe outputs are matched to the 50 $\Omega$  inputs of spectrum analyzers or RF-receivers.

## Probe Set HZ540 (Basic Set)

<b>HZ551</b>	Electrical Field Probe
Frequency range:	<1MHz to approx. 3GHz
Directional sensitivity:	omnidirectional Sensitive to electrical fields
Output impedance:	50 $\Omega$ ; SMA-connector
Power supply:	6V <sub>dc</sub> /80mA (directly from HAMEG Spectrum Analyzer)

<b>HZ552</b>	Magnetic Field Probe
Frequency range:	<30MHz to approx. 3GHz
Directional sensitivity:	similar to a frame antenna Sensitive to changing magnetic fields
Output impedance:	50 $\Omega$ ; SMA-connector
Power supply:	6V <sub>dc</sub> /50mA (directly from HAMEG Spectrum Analyzer)

<b>HZ553</b>	High Impedance Probe
Frequency range:	<1MHz to approx. 3GHz
Input capacity:	<2pF // approx. 250k $\Omega$
Attenuation:	between 10:1 and 30:1
Max. input voltage:	10V <sub>pp</sub> (without significant distortion)
Max. voltage of a non-insulated conductor:	30V
Output impedance:	50 $\Omega$ ; SMA-connector
Power supply:	6V <sub>dc</sub> /80mA (directly from HAMEG Spectrum Analyzer)

<b>Physical dimensions:</b>	13 x 27 x 70mm (W x H x D) (+ antenna at HZ551)
-----------------------------	--

<b>HZ540 consists of:</b>	HZ551 Electrical Field Probe HZ552 Magnetic Field Probe HZ553 High Impedance Probe 1 SMA to N-Cable 1.2m Case Manual
---------------------------	---

## Probe Set HZ550

<b>HZ554</b>	Magnetic Field Probe (small sensor)
Frequency range:	<50MHz to approx. 3GHz
Directional sensitivity:	Sensitive to changing magnetic fields High spatial resolution due to very small sensor area
Max. voltage of a non-insulated conductor:	30V
Output impedance:	50 $\Omega$ ; SMA-connector
Power supply:	6V <sub>dc</sub> /50mA

<b>HZ556</b>	Active antenna
Frequency range:	<30MHz to approx. 3GHz
Directional pattern:	like a frame antenna Radiation of changing magnetic fields
Max. input power:	0.5W (short term)
Output impedance:	50 $\Omega$ ; SMA-connector
Power supply:	not required; passive probe

<b>Physical dimensions:</b>	13 x 27 x 70mm (W x H x D) (+ antenna at HZ551)
-----------------------------	--

<b>HZ550 consists of:</b>	1 HZ540 Basic Set 1 HZ554 Magnetic Field Probe 1 HZ556 Active antenna 1 SMA to N-Cable 1.2m
---------------------------	--


## Probe Set HZ540L and HZ550L

HZ540L = HZ540 (without HZ553) + HZ555 Low Capacitance Probe  
HZ550L = HZ550 (without HZ553) + HZ555 Low Capacitance Probe


<b>HZ555</b>	Low Capacitance Probe
Frequency range:	approx. 400kHz...3GHz
Input impedance:	<0.2pF // 250k $\Omega$
Attenuation:	10:1
Max. input voltage:	5V <sub>pp</sub>
Max. voltage of a non-insulated conductor:	30V
Output impedance:	50 $\Omega$ ; SMA-connector
Power supply:	6V <sub>dc</sub> /80mA

## HZ530 EMV Near-Field Probe Set up to 1GHz


Typical frequency response E-field probe

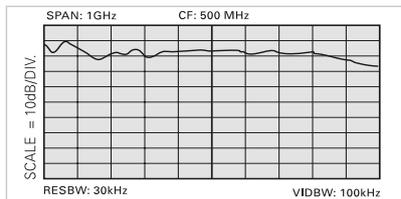

Typical frequency response H-field probe

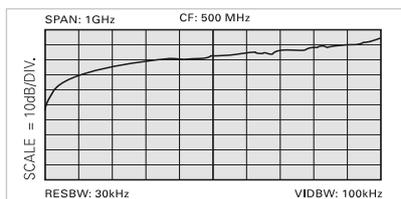

Typical frequency response high-impedance probe

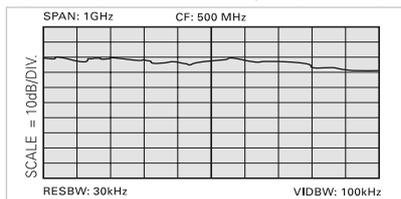

# HZ530

### Technical specifications at 23°C ±2°C

Frequency Range:	100kHz...1GHz
Supply Voltage:	6V <sub>dc</sub> from Spectrum Analyzer or batteries, 4 x Mignon/AA, not included
Supply Current:	approx. 10...24mA <sub>dc</sub>
Probe Dimensions:	40 x 90 x 195mm (W x H x D)
Cases:	plastic, internal electrical shielding
Set includes:	1 E-field probe 1 H-field probe 1 high-impedance probe 1 BNC cable 1.5m 1 power cable Operator's Manual Robust carrying case

The HZ530 Probe Set consists of three active broadband probes for EMI diagnosis. The probes are designed for connection to a HAMEG spectrum analyzer with input impedance of 50Ω. The probes can be powered by the spectrum analyzer or batteries. The slim format ensures easy access to the test object even in cramped test environments.

The H-field probe provides a signal that is proportional to the magnetic field strength to the spectrum analyzer. This makes it possible to localize sources of interference with relatively high precision.

The high-impedance probe can be used to determine interference levels on contacts, lines and printed circuit boards.

The E-field probe is the most sensitive of the three probes. It can be used to assess the total effect of shielding and filtering in a tested unit.

Oscilloscopes

Spectrum Analysis

**Power Supplies**

Programmable Measuring Instruments  
Series 8100

Modular System Series 8000

Options

Accessories

Specifications



# HAMEG Power Supplies

## Keeping things simple – One for All

The power supplies market is highly partitioned. The user is faced with a seemingly unlimited number of models with diverse specifications, the result being the accumulation of a whole assembly of power supplies in the design lab or test site, the better part of which are rarely used.

HAMEG Instruments' two types of power supplies (**HM8143** and **HMP4040**) cover numerous applications; each type excels by being universally applicable, simple to operate, its compactness, and an unexcelled price/performance ratio. Test sites especially value this advantage because universal instruments minimize set-up times. The power supply portfolio consists in total of 6 types in order to also care for smaller budgets.

In the **HMP** series there are two 200W and two 400W types available which cover the range of 0...32V and up to 10A, depending on the number of channels required. This series is based on a classical concept with a mains transformer, high efficiency electronic pre regulators and linear post regulators. This concept yields the high power in the smallest space with the highest efficiency. The HMP series further excels by its intelligent power management which allows higher currents (e.g. up to 10A) at medium voltages (e.g. up to 16V) to be made available. Excellent low residual ripple voltages ( $150\mu\text{V}_{\text{rms}}$ ) are realized even at full power output.

The high adjustment and back-reading resolution of up to 1mV/0.1mA fulfills even the strictest requirements. Last but not least there is the **EasyArb** function available on all channels which allows you to program simple arbitrary voltage and current waveforms.

The **HM8143** resides in the 130W class and is unique in its class with its two 0...32V/2A two-quadrant outputs which can operate as source and **sink** outputs. It also features an arbitrary function, and its output voltage may be modulated via an external input. In the past 20 years, literally thousands of users, predominately in test sites, used this type and its predecessor, the HM8142, taking advantage of its flexibility to realize numerous applications.

The **HM7042-5** with 2 x 0...32V/2A and 0...5.5V/5A is our best selling power supply for many years and became indispensable in many labs.

All power supplies feature galvanically isolated floating overload and short-circuit proof outputs and may be connected in series or in parallel, thus making very high currents and voltages available. A precondition is the common electronic fuse which disconnects all channels simultaneously in case of a fault. The HMP series also provides an extended **FuseLink** system which allows individual logic combinations.



# Programmable 3[4] Channel High-Performance Power Supply HMP4030 [HMP4040]


HMP4040




3 Channel Version  
HMP4030



Individual Linking of single  
Channels using FuseLink



Rear Outputs for simple  
Integration in Rack Systems



- ✓ 3 x 0...32V/0...10A 384W max.  
[4 x 0...32V/0...10A 384W max.]
- ✓ 384 W Output Power realized by intelligent Power Management
- ✓ Low Residual Ripple: <math>< 150\mu\text{V}\_{\text{rms}}</math> due to linear Post Regulators
- ✓ High Setting- and Read-Back Resolution of 1mV up to 0.2mA
- ✓ Keypad for direct Parameter Entry
- ✓ Galvanically isolated, earth-free and short circuit protected Output Channels
- ✓ Advanced Parallel- and Serial Operation via V/I Tracking
- ✓ EasyArb Function for free definable V/I Characteristics
- ✓ FuseLink: Individual Channel Combination of Electronic Fuses
- ✓ Free adjustable Overvoltage Protection (OVP) for all Outputs
- ✓ All Parameters clearly displayed via LCD/Illuminated Buttons
- ✓ Rear Connectors for all Channels including Sense
- ✓ USB/RS-232 Interface, optional Ethernet/USB or IEEE-488 (GPIB)

See page 76 for technical specifications or [www.hameg.com/HMP4030](http://www.hameg.com/HMP4030) [[www.hameg.com/HMP4040](http://www.hameg.com/HMP4040)]

# Programmable 2[3] Channel High-Performance Power Supply HMP2020 [HMP2030]



- ✓ 1 x 0...32V/0...10A    1 x 0...32V/0...5A    188W max.  
[3 x 0...32V/0...5A    188W max.]
- ✓ 188W Output Power realized by intelligent Power Management
- ✓ Low Residual Ripple:  $<150\mu\text{V}_{\text{rms}}$  due to linear Post Regulators
- ✓ High Setting- and Read-Back Resolution of 1mV up to 0.1mA
- ✓ Galvanically isolated, earth-free and short circuit protected Output Channels
- ✓ Advanced Parallel- and Serial Operation via V/I Tracking
- ✓ EasyArb Function for free definable V/I Characteristics
- ✓ FuseLink: Individual Channel Combination of Electronic Fuses
- ✓ Free adjustable Overvoltage Protection (OVP) for all Outputs
- ✓ All Parameters clearly displayed via LCD/Illuminated Buttons
- ✓ Rear Connectors for all Channels including Sense
- ✓ USB/RS-232 Interface, optional Ethernet/USB or IEEE-488 (GPIB)

See page 75 for technical specifications or [www.hameg.com/HMP2020](http://www.hameg.com/HMP2020) [[www.hameg.com/HMP2030](http://www.hameg.com/HMP2030)]

# HMP2030

2 Channel Version  
HMP2020



Individual Linking of single Channels using FuseLink



Rear Outputs for simple Integration in Rack Systems



# Triple Power Supply HM7042-5



# HM7042-5

- ✓ 2 x 0...32V/0...2A      1 x 0...5.5V/0...5A
- ✓ High-Performance and inexpensive Laboratory Power Supply
- ✓ Floating, overload and short-circuit proof Outputs
- ✓ Separate Voltage and Current Displays for each Output  
4 Digits at Channel 1+3; 3 Digits at Channel 2
- ✓ Display Resolution:  
10mV/1mA at Channel 1+3; 10mV/10mA at Channel 2
- ✓ Protection of sensitive Loads by Current Limit or Electronic Fuse
- ✓ Pushbutton for activating/deactivating all Outputs
- ✓ Low Residual Ripple, high Output Power, very good Regulation
- ✓ Parallel (up to 9A) and Series (up to 69.5V) Operation
- ✓ Temperature-controlled Fan

HZ42 19" Rackmount Kit  
2RU



Silicone Test Cable HZ10S



See page 74 for technical specifications or [www.hameg.com/HM7042](http://www.hameg.com/HM7042)

# Arbitrary Power Supply HM8143




- ✓ 2 x 0...30V/0...2A      1 x 5V/0...2A
- ✓ Display Resolution 10mV/1mA
- ✓ Parallel (up to 6A) and Series (up to 65V) Operation
- ✓ Electronic Load up to 60W per Channel (max. 2A)
- ✓ Arbitrary Waveform Power Supply (4096 Points, 12 Bit):  
Creation of customized Waveforms
- ✓ Software for Remote Control and for Creation of Arbitrary Waveforms
- ✓ Electronic Fuse and Tracking Mode for 30V Outputs
- ✓ External Modulation of Output Voltages:  
Input Voltage 0...10V, Bandwidth 50kHz
- ✓ SENSE Lines for Compensation of the Voltage drop across the Cables
- ✓ Multimeter Mode for all adjustable Outputs
- ✓ Galvanically isolated USB/RS-232 Interface, optional IEEE-488 (GPIB)

See page 74 for technical specifications or [www.hameg.com/HM8143](http://www.hameg.com/HM8143)

# HM8143

AF Arbitrary Signal



H0880 IEEE-488 (GPIB) Interface (Option)



HZ42 19" Rackmount Kit 2RU



[Oscilloscopes](#)

[Spectrum Analysis](#)

[Power Supplies](#)

**Programmable Measuring  
Instruments Series 8100**

[Modular System Series 8000](#)

[Options](#)

[Accessories](#)

[Specifications](#)




# HAMEG Programmable Measuring Instruments Series 8100

## HAMEG Programmable Measuring Instruments Series 8100...

...are ideally suited for test installations in production and automated tests in laboratories. They support either an USB/RS-232, or an IEEE-488 (GPIB) interface and thus may be easily integrated in any test system. In combination with other HAMEG remote controlled instruments high performance test systems may be easily and cost effectively set up. Of course, any of these instruments can be operated manually and used in laboratories.

The 6½ Digit Precision Multimeter **HM8112-3**, the 8kW Power Meter **HM8115-2**, the LCR Bridge **HM8118**, the 3GHz Universal Counter **HM8123** as well as the

new 25MHz and 50MHz Arbitrary Function Generators **Series HMF** are high performance precision measuring instruments for research and development labs, industry, universities, test and production facilities as well as for service. The RF signal generators **HM8134-3** and **HM8135** are high precision synthesizers with a frequency range of 1Hz to 1.2GHz respectively 3GHz. The 12.5MHz Function Generator **HM8150** uses direct digital frequency synthesis (DDS) for the generation of stable low distortion signals and guarantees optimum performance.

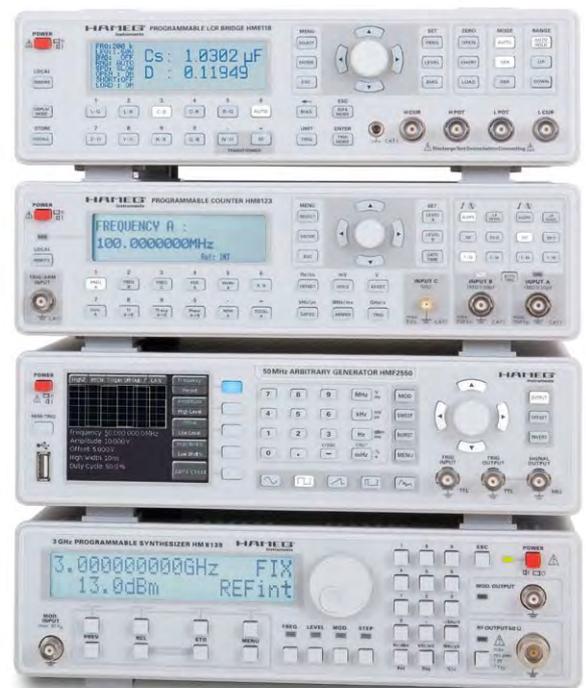


# 25MHz [50MHz] Arbitrary Function Generator HMF2525 [HMF2550]

HMF2550



Generation of complex Waveforms with 256kPts in 14Bit



All Parameters at a glance on the 3.5" TFT and interactive Softkeys



Ethernet/USB-Interface H0730 (Option)



- Frequency Range 10 $\mu$ Hz...25MHz [50MHz]
- Output Voltage 5mV<sub>pp</sub>...10V<sub>pp</sub> (into 50 $\Omega$ ) DC Offset  $\pm$ 5mV...5V
- Arbitrary Waveform Generator: 250MSa/s, 14Bit, 256kPts
- Sine, Square, Pulse, Triangle, Ramp, Arbitrary Waveforms incl. Standard Curves (white Noise, Cardiac etc.)
- Total harmonic Distortion 0.04% (f < 100kHz)
- Burst, Sweep, Gating, external Trigger
- Rise Time <8ns, in Pulse Mode 8...500ns Variable-Edge-Time
- Pulse Mode: Frequency Range 100 $\mu$ Hz...12.5MHz [25MHz], Pulse Width 15ns...999s, Resolution 5ns
- Modulation Modes AM, FM, PM, PWM, FSK (int. and ext.)
- 10MHz Timebase:  $\pm$ 1ppm TCXO, rear I/O BNC Connector
- Front USB Connector: Save and Recall of Waveforms and Settings
- 8.9cm (3.5") TFT: crisp Representation of the Waveform and all Parameters
- USB/RS-232 Dual-Interface, optional Ethernet/USB or IEEE-488 (GPIB)

See page 83 for technical specifications or [www.hameg.com/HMF2525](http://www.hameg.com/HMF2525) [[www.hameg.com/HMF2550](http://www.hameg.com/HMF2550)]

# 6½-Digit Precision Multimeter HM8112-3



HM8112-3

- ✓ 6½-Digit Display (1,200,000 Counts)
- ✓ Resolution: 100nV, 100pA, 100μΩ, 0.01°C/F
- ✓ DC Basic Accuracy 0.003%
- ✓ 2-Wire/4-Wire Measurements
- ✓ Measurement Intervals adjustable from 0.1...60s
- ✓ Up to 100 Measurements per Second transmitted to a PC
- ✓ True RMS Measurement, AC and DC+AC
- ✓ Mathematic Functions: Limit Testing, Minimum/Maximum, Average and Offset
- ✓ Temperature Measurements with Platinum (PT100/PT1000) and Ni (K and J types) Sensors
- ✓ Internal Data Logger for up to 32,000 Measurement Results
- ✓ Offset Correction
- ✓ Galvanically isolated USB/RS-232 Interface, optional IEEE-488 (GPIB)
- ✓ Optional: Scanner Card (8+1 Channels each 2- and 4-Wire)

See page 76 for technical specifications or [www.hameg.com/HM8112](http://www.hameg.com/HM8112)

HM8112-3S:  
Multimeter with built-in  
Scanner Card (8+1  
Channels, 2- and 4-Wire)



HZ42 19" Rackmount Kit  
2RU



Precise Temperature  
Measurement with Sensor



# 8kW Power Meter HM8115-2


HM8115-2




HZ815 Power Adapter



RMS Value



Active Power



- ✓ Wide Measurement Range 1mW...8kW
- ✓ Voltage Range 100mV...500V, Current Range 1mA...16A
- ✓ Frequency Range DC...1kHz
- ✓ Simultaneous Voltage, Current and Power Display
- ✓ Display of apparent, active and reactive Power
- ✓ Power Factor Display
- ✓ Autoranging, simple Operation
- ✓ Monitor Output (BNC) representing the instantaneous Power
- ✓ Suitable for Measurements on Frequency Converters
- ✓ Software for Remote Control and Data Acquisition included
- ✓ Galvanically isolated USB/RS-232 Interface, optional IEEE-488 (GPIB)

See page 77 for technical specifications or [www.hameg.com/HM8115](http://www.hameg.com/HM8115)

# 200kHz LCR-Bridge HM8118



HM8118



- ✓ Basic Accuracy 0.05%
- ✓ Measurement Functions L, C, R, |Z|, X, |Y|, G, B, D, Q,  $\Theta$ ,  $\Delta$ , M, N
- ✓ Test Frequencies 20Hz...200kHz
- ✓ Up to 12 Measurements per Second
- ✓ Parallel and Series Mode
- ✓ Binning Interface H0118 (optional) for automatic Sorting of Components
- ✓ Internal programmable Voltage and Current Bias
- ✓ Transformer Parameter Measurement
- ✓ External Capacitor Bias up to 40V
- ✓ Kelvin Cable and 4-Wire SMD Test Adapter included in Delivery
- ✓ Galvanically isolated USB/RS-232 Interface, optional IEEE-488 (GPIB)

See page 78 for technical specifications or [www.hameg.com/HM8118](http://www.hameg.com/HM8118)

HZ188 4-Wire SMD Test Fixture (included in Delivery)



HZ184 Kelvin Clip Leads (included in Delivery)



HZ181 4-Wire Test Fixture with Shorting Plate (optional)



# 3GHz Programmable Counter HM8123

HM8123



HZ33, HZ34  
Test Cable BNC/BNC



HZ42 19" Rackmount Kit  
2RU



HZ20 Connector BNC to  
4mm Socket



- ✓ Measurement Range 0Hz...3GHz
- ✓ 2 Measurement Inputs DC...200MHz,  
1 Measurement Input 100MHz...3GHz
- ✓ Input Impedance A/B: 1MΩ/50Ω (switchable), Sensitivity 25mV<sub>rms</sub>
- ✓ Input Impedance C: 50Ω, Sensitivity 30mV<sub>rms</sub>
- ✓ 400MHz Time Base with 0.5ppm Stability
- ✓ 10-Digit Resolution at 10s Gate Time
- ✓ 9 Measurement Functions, external Gate and Arming
- ✓ Input for external Time Base (10MHz)
- ✓ Standard: TCX0 (Temperature Stability:  $\pm 0.5 \times 10^{-6}$ )  
Optional: OCX0 (Temperature Stability:  $\pm 1 \times 10^{-8}$ )
- ✓ Intuitive One-Pushbutton Operation each Function directly addressable
- ✓ Galvanically isolated USB/RS-232 Interface, optional IEEE-488 (GPIB)

See page 79 for technical specifications or [www.hameg.com/HM8123](http://www.hameg.com/HM8123)

# 1.2GHz RF-Synthesizer HM8134-3



- ✓ Frequency Range 1Hz...1.2GHz
- ✓ Output Power -127...+13dBm
- ✓ Frequency Resolution 1Hz (Accuracy 0.5ppm)
- ✓ Input for external Time Base (10MHz)
- ✓ Modulation Modes: AM, FM, Pulse,  $\Phi$ , FSK, PSK
- ✓ Rapid Pulse Modulation: typ. 200ns
- ✓ Internal Modulator (Sine Wave, Square Wave, Triangle, Sawtooth) 10Hz...150kHz
- ✓ High spectral Purity
- ✓ 10 Configuration Memories including Turn-On Configuration
- ✓ Standard: TCXO (Temperature Stability:  $\pm 0.5 \times 10^{-6}$ )  
Optional: OCXO (Temperature Stability:  $\pm 1 \times 10^{-8}$ )
- ✓ Galvanically isolated USB/RS-232 Interface, optional IEEE-488 (GPIO)

See page 80 for technical specifications or [www.hameg.com/HM8134](http://www.hameg.com/HM8134)

# HM8134-3

HZ42 19" Rackmount Kit  
2RU



H0880 IEEE-488 (GPIO)  
Interface (Option)



# 3GHz RF-Synthesizer HM8135

HM8135




- Frequency Range 1Hz...3GHz
- Output Power -135...+13dBm
- Frequency Resolution 1Hz (Accuracy 0.5ppm)
- Input for external Time Base (10MHz)
- Modulation Modes: AM, FM, Pulse,  $\Phi$ , FSK, PSK
- Rapid Pulse Modulation: typ. 200ns
- Internal Modulator (Sine Wave, Square Wave, Triangle, Sawtooth) 10Hz...200kHz
- High spectral Purity
- 10 Configuration Memories including Turn-On Configuration
- Standard: TCXO (Temperature Stability:  $\pm 0.5 \times 10^{-6}$ )  
Optional: OCXO (Temperature Stability:  $\pm 1 \times 10^{-8}$ )
- Galvanically isolated USB/RS-232 Interface, optional IEEE-488 (GPIB)

H0880 IEEE-488 (GPIB) Interface (Option)



Internal Modulation Source



See page 81 for technical specifications or [www.hameg.com/HM8135](http://www.hameg.com/HM8135)

# 12.5MHz Arbitrary Function Generator HM8150




HM8150




- ✓ Frequency Range 10MHz...12.5MHz
- ✓ Output Voltage 10mV<sub>pp</sub>...10V<sub>pp</sub> (into 50Ω)
- ✓ Waveforms: Sine Wave, Square Wave, Triangle, Pulse, Sawtooth, Arbitrary
- ✓ Rise and Fall Time <10ns
- ✓ Pulse width Adjustment: 100ns...80s
- ✓ Arbitrary Waveform Generator 40MSa/s
- ✓ Burst, Gating, External Triggering, Sweep
- ✓ Software for Remote Control and for Creation of Arbitrary Waveforms
- ✓ External Amplitude Modulation (Bandwidth 20kHz)
- ✓ Intuitive Operation with one touch of a Button – quick Change of Signals
- ✓ Galvanically isolated USB/RS-232 Interface, optional IEEE-488 (GPIB)


Gated Sine Wave,  
PC-Software included



Amplitude-modulated  
Sine Wave



Triggered Arbitrary Signal



See page 82 for technical specifications or [www.hameg.com/HM8150](http://www.hameg.com/HM8150)

Oscilloscopes

Spectrum Analysis

Power Supplies

Programmable Measuring Instruments  
Series 8100

**Modular System Series 8000**

Options

Accessories

Specifications



# HAMEG Modular System Series 8000

## In many years of practical application...

...the HAMEG Modular System Series 8000 has proven its value to the customer. The advantages of this Modular System have been demonstrated by several 100,000 modules sold. The unexcelled price-performance ratio and the enormous flexibility of the plug-in system allow you to adapt your measurement setups quickly and cost effectively to changing requirements. You save space by stacking up to 5 instruments. This will offer you 10 instruments in a minimum of space. The top covers of the instruments feature receptacles for the feet of the instrument above. The mainframes thus cannot move and may also be stacked together with other HAMEG instruments like power supplies, spectrum analyzers and oscilloscopes.

The blank module **HM800** is available for your own designs to be integrated with the other measuring instruments. The power supply voltages necessary are available from the mainframe. Especially for schools and

training centers the Modular System Series 8000 offers a cost effective flexible alternative to conventional measuring equipments. As the mainframe **HM8001-2** allows the simultaneous operation of two modules in any combination most often a single such basic unit will be all that is needed for a student in a laboratory. The modules necessary will be issued to the students depending on the requirements of the specific exercise.

The Modular System Series 8000 offers, in addition to the mainframe **HM8001-2** and the blank module **HM800**, the 4 $\frac{3}{4}$ -Digit Programmable Multimeter **HM8012**, the 25kHz LCR-Meter **HM8018**, the 1.6GHz Universal Counter **HM8021-4**, the 10MHz Function Generator **HM8030-6** and the Triple Power Supply **HM8040-3**.



# Mainframe HM8001-2

HM8001-2



The Mainframe is supplied without the Modules shown in the Illustration

### Modular System



HM8001-2 Mainframes can be stacked up to 5 Units high



Option H0801 – 4 BNC Connectors on Rear Panel



- Basic Unit for Modules of the Modular System Series 8000
- Power Supply for 2 Modules
- DC Voltages electronically regulated, floating and short-circuit proof
- Power Transformer with thermal Fuse
- Up to 5 Mainframes can be stacked
- Module HM800 for customized Instrument Construction available
- 4 BNC Connectors on the Rear Panel of the HM8001-2 (Option H0801) provide for Signal Transmission to or from HM8021-4 and HM8030-6 Modules

See page 84 for technical specifications or [www.hameg.com/HM8001](http://www.hameg.com/HM8001)

# 4<sup>3</sup>/<sub>4</sub>-Digit Programmable Multimeter HM8012



- ✓ 4<sup>3</sup>/<sub>4</sub>-Digit Display with 50,000 Counts
- ✓ Basic Accuracy 0.05%
- ✓ Max. Resolution: 10μV, 0.01dBm, 10nA, 10mΩ, 0.1°C
- ✓ Offset Function/Relative Value Measurement
- ✓ RS-232 Interface and Software included

See page 85 for technical specifications or [www.hameg.com/HM8012](http://www.hameg.com/HM8012)

HZ15 (included)



WDM8012 Software (included)



Mainframe HM8001-2 required for Operation

HM8012

# 25kHz LCR-Meter HM8018



- ✓ Measurement Functions: L, C, R, Θ, Q/D, |Z|
- ✓ Basic Accuracy 0.2%
- ✓ 5 Measurement Frequencies: 100Hz, 120Hz, 1kHz, 10kHz, 25kHz
- ✓ Max. Resolution: 0.001Ω, 0.001pF, 0.01μH
- ✓ 2- and 4-Wire Measurement, parallel and series Mode

See page 86 for technical specifications or [www.hameg.com/HM8018](http://www.hameg.com/HM8018)

Option HZ19 SMD Test Tweezers



Option HZ18 Kelvin Test Lead



Mainframe HM8001-2 required for Operation

HM8018

HM8021-4

## 1.6GHz Universal Counter HM8021-4

Mainframe HM8001-2  
required for Operation



HZ33, HZ34  
Test Cable BNC/BNC



- Measurement Range 0Hz...1.6GHz
- 10MHz Time Base with 1ppm Stability (TCXO)
- Input A: Input Impedance 1M $\Omega$ , Sensitivity 20mV<sub>rms</sub>  
Input C: Input Impedance 50 $\Omega$ , Sensitivity 30mV<sub>rms</sub>  
8-Digit Resolution for 10s Measuring Time
- Time Interval Resolution up to 10ps
- External Gate Input (with Option H0801)

See page 86 for technical specifications or [www.hameg.com/HM8021](http://www.hameg.com/HM8021)

HM8030-6

## 10MHz Function Generator HM8030-6

Option H0801, page 38



Mainframe HM8001-2  
required for Operation



- Frequency Range 50mHz...10MHz,  
Output Voltage up to 10V<sub>pp</sub> (into 50 $\Omega$ )
- Waveforms: Sine Wave, Triangle, Square Wave, Pulse, DC
- Distortion Factor <0.5% up to 1MHz,  
Rise and Fall Time typ. 15ns
- Internal and external Sweep, FM (with Option H0801)
- Surge- and short-circuit-proof Output

See page 87 for technical specifications or [www.hameg.com/HM8030](http://www.hameg.com/HM8030)

## Triple Power Supply HM8040-3



- ✓ 2 x 0...20V/0.5A      1 x 5V/1A
- ✓ 3-Digit switchable Displays (Display Resolution 0.1V/1mA)
- ✓ Pushbutton for Activating/Deactivating all Outputs
- ✓ Adjustable Current Limiting and Electronic Fuse
- ✓ Low Residual Ripple and Low Noise

See page 87 for technical specifications or [www.hameg.com/HM8040](http://www.hameg.com/HM8040)

Mainframe HM8001-2  
required for Operation



Silicone Test Lead HZ10R



## Blank Module HM800



- ✓ Module for customized Instrument Construction
- ✓ Guide Rails for Mounting Circuit Boards at 4 different Levels
- ✓ Plastic Front Panel for easy mechanical Processing
- ✓ Power is supplied by the Mainframe HM8001-2
- ✓ Available Supply Voltages, Load Capability  
see Manual of HM800

[www.hameg.com/HM800](http://www.hameg.com/HM800)

Mainframe HM8001-2  
required for Operation



Open Blank Module



HM8040-3

HM800

**Oscilloscopes**

**Spectrum Analysis**

**Power Supplies**

**Programmable Measuring Instruments  
Series 8100**

**Modular System Series 8000**

**Options**

**Accessories**

**Specifications**



## H0118 Binning Interface



The binning interface option H0118 within the HM8118 enables the LCR bridge to control an external binning hardware in order to physically sort components according to the measurement result and the user defined limits. Data lines for eight sorting bins are provided, as well as output and input control lines (ALARM, INDEX, EOM, and TRIG). This option is useful for production testing, component matching or other tests where similar components must be compared to each other. The binning feature is an automatic process which simplifies the sorting, eliminating the need to manually compare the parameters. A maximum of 9 binning configurations can be set using the store/recall feature. Binning configurations can also be entered using the communication interface.

### Technical Specifications

I/O Connector:	D-Sub 25 socket
Output signal:	Negative TRUE, OC (open collector), opto-isolated, selectable pull-ups. $I_{max}$ 15mA @ $V_{ce} < 1V$ , $V_{ce}$ max.: 40V pass bins: BIN 0...5 for primary parameter fail bins: BIN 6 for secondary parameter BIN 7 for general failure bin
Index:	Analog measurement complete
EOM:	Full measurement complete
Alarm:	Notification that an error was detected
TRIG:	External opto-isolated trigger input, selectable pull-up, $V_{max}$ 15V, falling edge, pulse width $> 10\mu s$

## H03508[H03516] Logic Probe

for all Oscilloscopes of the HMO Series



Multi pin Connector for Connection of the Logic Probe



Measurement with the Logic Probe




- ✓ Logic Probe H03508 for MSO Extension, also available in a double Package as H03516 (2 x H03508)
- ✓ With the Logic Probe H03508, 8 Logic Channels (LCH 0...LCH 7 or LCH 8...LCH 15) are available in MSO Mode
- ✓ The Display on the Oscilloscope will be either as individual Channels or as a Bus Display
- ✓ Decoding may be in the ASCII, Binary, Decimal or Hexadecimal Formats
- ✓ The Threshold can be adjusted for 8 Logic Channels as a Group at the Oscilloscope
- ✓ The Activation of the Logic Channels is indicated by a LED on the Logic Probe

### Specifications H03508

Channels:	8
Input Impedance:	100kΩ    <4pF
Max. Input Frequency:	350MHz
Max. Input Voltage:	40V (DC + peak AC)
Measuring Category:	CAT I
Cable Length:	approx. 1m

## H03011 Preamplifier


for Spectrum Analyser of the HMS Series

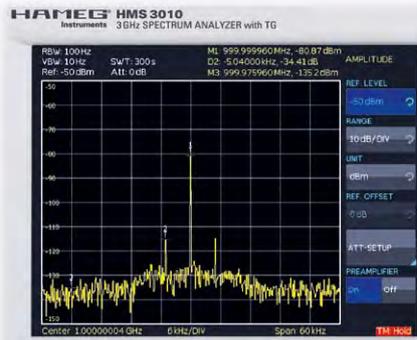

- ✓ Preamplifier Option for HMS1000, HMS1010, HMS3000, HMS3010 (Licence Key)
- ✓ DANL -135dBm typ. (100Hz RBW)


## H0010/H0011 Serial Bus

for all Oscilloscopes of the HMO Series

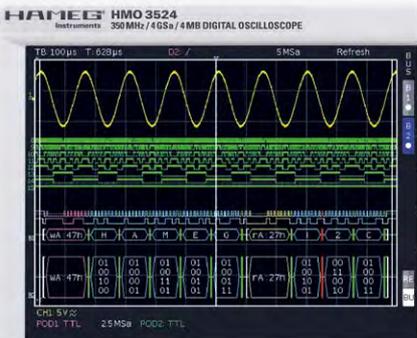


**CAN/LIN**  
See Page 90


I<sup>2</sup>C Bus Hex Decode on the Analog Channel

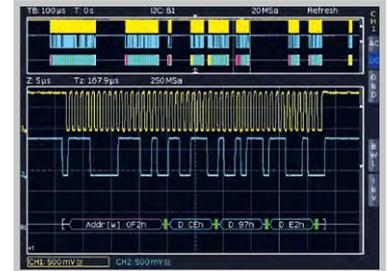

I<sup>2</sup>C Bus ASCII and Binary Decode of the Digital Channels

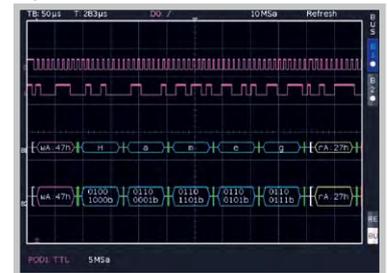

SPI Bus Trigger Setup

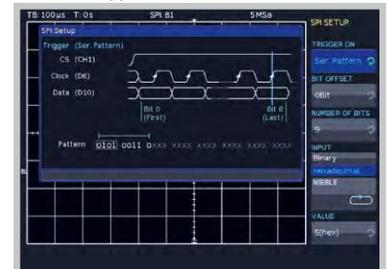

- ✓ H0010 via Analog Channels and/or Logic Channels, H0011 via Analog Channels
- ✓ I<sup>2</sup>C, SPI, UART/RS-232 Bus Trigger and Decode
- ✓ Hardware accelerated Decode in Realtime
- ✓ Color Coded Display of the Content for intuitive Analysis and easy Overview
- ✓ More Details of the decoded Values become visible with increasing Zoom Factor
- ✓ Bus Display with synchronous Display of the Data and maybe Clock Signal
- ✓ Decode into ASCII, Binary, Hexadecimal or Decimal Format
- ✓ Up to four Lines to comfortably show the decoded Values
- ✓ Powerful Trigger to isolate specific Messages
- ✓ Option for all Oscilloscopes of the HMO Series, retrofittable

See page 89 for technical specifications or [www.hameg.com/H0010](http://www.hameg.com/H0010) [[www.hameg.com/H0011](http://www.hameg.com/H0011)]

## H0730 Dual Ethernet/USB Interface



- ✓ Ethernet 10/100MBit/s
- ✓ Additionally integrated Web Server
- ✓ Screenshot Function using Web Server
- ✓ USB 2.0 standard, USB Type B Connector
- ✓ For mounting into Oscilloscopes HM1008, HM1508, HM1008-2, HM1500-2, HM1508-2, HM2005-2, HM2008, Series HMF, HMO, HMP and HMS



## H0740 IEEE-488 (GPIB) Interface



- ✓ 24-pin Connection in accordance with IEEE-488 (GPIB) (Socket)
- ✓ Galvanic Separation of Test Device and Interface
- ✓ For mounting into Oscilloscopes HM1008, HM1508, HM1008-2, HM1500-2, HM1508-2, HM2005-2, HM2008, Series HMF, HMO, HMP and HMS



## H0880 IEEE-488 (GPIB) Interface



- ✓ 24-pin Connection in accordance with IEEE-488 (GPIB) (Socket)
- ✓ Galvanic Separation of Test Device and Interface
- ✓ Up to 15 Devices on one IEEE-488 (GPIB) Bus
- ✓ For installation in Programmable Measuring Instruments Series 81XX



Oscilloscopes

Spectrum Analysis

Power Supplies

Programmable Measuring Instruments  
Series 8100


Modular System Series 8000

Options

Accessories

Specifications

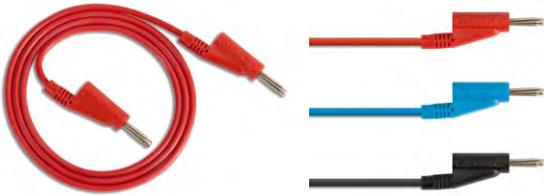

**HZ10 Silicone Test Lead**

Silicone test lead with stackable banana plugs.

Length:	1.0m
Packaging unit:	set of 5
HZ10R	color: red
HZ10B	color: blue
HZ10S	color: black

**HZ15 PVC Test Lead**

PVC test lead with test probes and sheathed banana plugs.

Color:	black and red
Length:	1.0m
Packaging unit:	1 piece per color

**HZ16 Test Cable with micro-clamps**

Silicone-test lead with BNC plug to miniature clamp probe.

Packaging unit:	1 piece
-----------------	---------

**HZ17 Kelvin Test Lead**

Kelvin test lead (4-wire) with test probe, 5-pin DIN connector for HM8018.

Packaging unit:	1 piece
-----------------	---------

**HZ18 Kelvin Test Lead**

Kelvin test lead (4-wire) with gold-plated alligator clip, 5-pin DIN connector and shielding mass, for HM8018.

Packaging unit:	1 piece
-----------------	---------

**HZ19 SMD Test Tweezers**

Kelvin test lead (4-wire) with SMD test tweezers, 5-pin DIN connector for HM8018.

Packaging unit:	1 piece
-----------------	---------

### HZ31 Test Cable 50Ω



Test cable 50Ω, BNC to BNC angle connector.

Length: 1.0m  
Packaging unit: 1 piece

### HZ32 Test Cable



Test cable, BNC to 4mm banana plug.

Length: 1.0m  
Packaging unit: 1 piece

### HZ33/HZ34 Test Cable 50Ω



Test cable 50Ω, BNC to BNC, BNC straight plug.

Length: 0.5m – HZ33  
Packaging unit: 1 piece

Length: 1.0m – HZ34  
Packaging unit: 1 piece

### HZ33S/HZ34S Test Cable 50Ω



Test cable 50Ω, BNC to BNC socket, insulated.

Length: 0.5m – HZ33S  
Packaging unit: 1 piece

Length: 1.0m – HZ34S  
Packaging unit: 1 piece

### HZ20 Adapter Plug



Adapter BNC plug/4mm banana socket.

Description: BNC plug with 2 x 4mm sockets  
Packaging unit: 1 piece

### HZ21 Adapter Plug



Adapter N male to BNC female.

Description: N male to BNC female  
Packaging unit: 1 piece

## HZ22 Feed-Through Termination 50Ω



50Ω feed-through termination, 1GHz, 2 Watt.

Description: BNC plug BNC socket  
 Packaging unit: 1 piece

## HZ24 Attenuators 50Ω



One set of 50Ω attenuators with 3/6/10/20dB attenuation (1GHz, 1 Watt) and 1 HZ22.

Packaging unit: 1 set

## HZ26 BNC-T-Adapter



BNC-T-Adapter UG274, 50Ω.

Description: 1 BNC plug to 2 BNC sockets  
 Packaging unit: 1 piece

## HZ72 IEEE-488 (GPIB) Interface Cable



IEEE-488 (GPIB) bus interface cable double-shielded 90° angle, stackable.


Length: 2.0m

### HZ154 Probe 1:1/10:1



Attenuation ratio:	1:1
Switchable:	10:1
Bandwidth:	10/100MHz
Rise time :	<35/3.5ns
Input impedance:	1/10MΩ    82/12pF
Max. Voltage:	(10:1) 600V (DC + peak AC)
LF compensation:	1 Trimmer at 10:1
RF compensation:	2 Trimmer at 10:1
Cable length:	1.2m
Measuring category:	CAT I

### HZ355 Probe 10:1

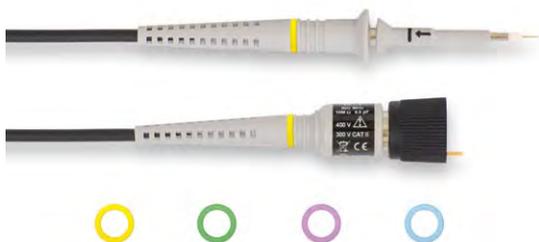

Attenuation ratio:	10:1
Bandwidth:	500MHz
Rise time:	<700ps
Input impedance:	10MΩ    9.5pF
Max. Voltage:	400V (DC + peak AC)
LF compensation:	1 Trimmer
RF compensation:	2 Trimmer
Cable length:	1.3m
Probe factor identification:	automatically after connection
Measuring category:	CAT I

### HZ350 Probe 10:1



Attenuation ratio:	10:1
Bandwidth:	350MHz
Rise time:	<1.0ns
Input impedance:	10MΩ    12pF
Max. Voltage:	400V (DC + peak AC)
LF compensation:	1 Trimmer
RF compensation:	2 Trimmer
Cable length:	1.2m
Probe factor identification:	automatically after connection
Measuring category:	CAT I

### HZ200 Probe 10:1



Attenuation ratio:	10:1
Bandwidth:	250MHz
Rise time:	<1.4ns
Input impedance:	10MΩ    12pF
Max. Voltage:	400V (DC + peak AC)
LF compensation:	1 Trimmer
RF compensation:	2 Trimmer
Cable length:	1.2m
Probe factor identification:	automatically after connection
Measuring category:	CAT I

### HZ51 Probe 10:1



Attenuation ratio:	10:1
Bandwidth:	150MHz
Rise time:	<2.4ns
Input impedance:	10MΩ    12pF
Max. Voltage:	600V (DC + peak AC)
LF compensation:	1 Trimmer
RF compensation:	1 Trimmer
Cable length:	1.2m
Measuring category:	CAT I

**HZ52 Probe 10:1**

Attenuation ratio:	10:1
Bandwidth:	250MHz
Rise time:	<1.4ns
Input impedance:	10MΩ    10pF
Max. Voltage:	600V (DC + peak AC)
LF compensation:	1 Trimmer
RF compensation:	2 Trimmer
Cable length:	1.2m
Measuring category:	CAT I

**HZ53 Probe 100:1**

Attenuation ratio:	100:1
Bandwidth:	100MHz
Rise time:	<3.5ns
Input impedance:	100MΩ    4.5pF
Max. Voltage:	1200V (DC + peak AC)
LF compensation:	1 Trimmer
Cable length:	1.2m
Measuring category:	CAT I

**HZ020 Probe 1000:1**

Attenuation ratio:	1000:1
Bandwidth:	400MHz
Rise time:	<900ps
Input impedance:	50MΩ    7.5pF
Max. Voltage:	1000V <sub>rms</sub>
LF compensation:	1 Trimmer
RF compensation:	1 Trimmer
Cable length:	1.3m
Probe factor identification:	automatically after connection
Measuring category:	CAT II

**HZ030 Active Probe 10:1**

Attenuation ratio:	10:1
Bandwidth:	1GHz
Rise time:	600ps
Input impedance:	1MΩ    0.9pF
Max. Input Voltage:	20V
Input Dynamic Range:	±8V
Cable length:	1.3m
Oscilloscope Input Coupling:	50Ω
External Power Supply:	included

**HZ010 Probe 10:1**

Attenuation ratio:	10:1
Bandwidth:	250 MHz
Rise time:	<1.4 ns
Input impedance:	10 MΩ    15 pF
Max. Voltage:	400V (DC + peak AC)
LF compensation:	1 Trimmer
RF compensation:	2 Trimmers
Cable length:	1.2m
Probe factor identification:	automatically after plugging
Measuring category:	CAT I

**HZ 100 Differential Probe 20 : 1 / 200 : 1** Technical specifications at 23°C ±2°C



Differential input voltage (DC + peak AC) max.:	±700V
Max. input voltage per input:	600V <sub>rms</sub>
Attenuation ratio:	20:1
Selectable:	200:1
Bandwidth:	30/40MHz
Rise time:	12/9ns
Input impedance:	8MΩ    1.2pF
Output impedance:	50Ω
Max. output Voltage:	±3.5V at 1MΩ
Max. noise:	2mV
Accuracy after 1 min:	±3% (18...30°C)
Common mode rejection DC/AC 1MHz:	70dB/>50dB
Inputs (CAT III):	2 safety connectors
Input leads:	2 test leads 50cm with spring hooks
Battery operation:	9V battery 6LR61
Input for an external power supply:	12...14V <sub>dc</sub> /30mA

**HZ 109 Differential Probe 1 : 1 / 10 : 1** Technical specifications at 23°C ±2°C



Differential input voltage (DC + peak AC) max.:	±3,5V/35V
Max. input voltage per input:	100V <sub>rms</sub>
Attenuation ratio:	1:1
Selectable:	10:1
Bandwidth:	30/40MHz
Rise time:	12/9ns
Input impedance:	8MΩ    1.2pF
Output impedance:	50Ω
Max. output Voltage:	±3.5V at 1MΩ
Max. background noise	at x1: <8mV <sub>rms</sub> at x10: <2mV <sub>rms</sub>
Accuracy after 1 min:	±3% (18...30°C)
Common mode rejection DC/AC 1MHz:	70dB/>50dB
Inputs (CAT III):	2 safety connectors
Input leads:	2 test leads 50cm with spring hooks
Battery operation:	9V battery 6LR61
Input for an external power supply:	12...14V <sub>dc</sub> /30mA

**HZ 115 Differential Probe 100 : 1 / 1000 : 1** Technical specifications at 23°C ±2°C



Differential input voltage (AC <sub>rms</sub> ):	1000V
(DC + peak AC) max.:	±1400V <sup>*)</sup>
Max. input voltage per input:	±1400V <sup>*)</sup>
Attenuation ratio:	100:1
Selectable:	1000:1
Bandwidth:	20/30MHz
Rise time:	17/12ns
Input impedance:	60MΩ    1.5pF
Output impedance:	50Ω
Max. output Voltage:	±1.5V at 1MΩ
Max. background noise:	2mV
Accuracy after 1 min:	±3% (18...30°C)
Common mode rejection DC/AC 1MHz:	70dB/>50dB
Inputs (CAT III):	2 safety connectors
Input leads:	2 test leads 75cm with safety test clips
Battery operation:	9V battery 6LR61
Input for an external power supply:	12...14V <sub>dc</sub> /30mA

<sup>\*)</sup> due to test clip 1000V CAT III

**HZ040 Differential Probe 10:1****Technical specifications at 23°C ±2°C**

Bandwidth:	200 MHz
Attenuation ratio:	10:1
Rise time (10...90 %):	1.75 ns
Gain accuracy:	±1 %
Max. Input Voltage per Input:	±60V
Max. Differential Input Voltage (DC + peak AC):	±20V
Max. Common Mode Input Voltage:	±60V
Input impedance	
Between Inputs:	1 MΩ    3.5 pF
Each Input to Ground:	500 kΩ    7 pF
Output Voltage (into 50 Ω):	±2V
Offset (typical):	±2 mV
CMRR (typical):	-80 dB at 60 Hz -50 dB at 10 MHz
Battery operation:	9V battery 6LR61
Battery life (typical):	7.5 h
Input for an external power supply:	USB Power adapter cable (5...9 V <sub>DC</sub> /200 mA)

**HZ041 Differential Probe 10:1****Technical specifications at 23°C ±2°C**

Bandwidth:	800 MHz
Attenuation ratio:	10:1
Rise time (10...90 %):	437 ps
Gain accuracy:	±2 %
Max. Input Voltage per Input:	±40V
Max. Differential Input Voltage (DC + peak AC):	±15V
Max. Common Mode Input Voltage:	±30V
Input impedance	
Between Inputs:	200 kΩ    1 pF
Each Input to Ground:	100 kΩ    2 pF
Output Voltage (into 50 Ω):	±1.5V
Offset (typical):	±5 mV
CMRR (typical):	-60 dB at 60 Hz -15 dB at 500 MHz
Battery operation:	9V battery 6LR61
Battery life (typical):	4.5 h
Input for an external power supply:	USB Power adapter cable (5...9 V <sub>DC</sub> /300 mA)

## HZ050 AC/DC Current Probe 30 A



Current measurement with HMO



This AC/DC current probe is used to measure currents from 1mA to 30A over a broad frequency range. The measurement principle is based on the Hall Effect that registers the magnetic field generated by the current flow. Even for complex waveforms a high degree of measurement accuracy is achieved. The output voltage is proportional to the measured current and well suited to be displayed on an oscilloscope. The current probe complies with the safety standards defined in IEC/EN 61010.

### Specifications

Measurement range:	$\pm 20A_{rms}/30A_p$
Accuracy:	$\pm 1\%$ from measurement value $\pm 2mA$
Bandwidth:	DC...100kHz (0.5dB)
Resolution:	$\pm 1mA$
Output Voltage:	100mV/A
Load impedance:	$>100k\Omega \parallel \leq 100pF$
Max. Voltage:	$300V_{rms}$ (AC or DC)
Output cable/Connector:	2m (50 $\Omega$ )/BNC
Measuring category:	CAT III

## HZ051 AC/DC Current Probe 100A/1000A



Current measurement with HMO



This AC/DC current probe is used to measure currents from 100mA to 1000A over a broad frequency range. The measurement principle is based on the Hall Effect that registers the magnetic field generated by the current flow. Even for complex waveforms a high degree of measurement accuracy is achieved. The output voltage is proportional to the measured current and well suited to be displayed on an oscilloscope. The current probe complies with the safety standards defined in IEC/EN 61010.

### Specifications

Measurement range:	$\pm 100A_{rms}/1000A_{rms}$
Accuracy:	$\pm 1\%$ from measurement value $\pm 0.1A/\pm 0.5A$
Bandwidth:	DC...20kHz
Resolution:	$\pm 100mA/\pm 500mA$
Output Voltage:	10mV/A/1mV/A
Load impedance:	$>100k\Omega \parallel \leq 100pF$
Max. Voltage:	$300V_{rms}$ (AC or DC)
Output cable/Connector:	2m (50 $\Omega$ )/BNC
Measuring category:	CAT III

## HZ525 Termination



Frequency range:	DC...6GHz
Impedance:	50 $\Omega$
VSWR:	1.05 (DC...1GHz)
	1.1 (1...4GHz)
	1.2 (4...6GHz)
Power:	1W aver.
Connection:	N-male

## HZ575 Converter



HZ575 is a 75Ω to 50Ω converter enabling measurement in 75Ω systems in connection with 50Ω input impedance spectrum analyzers. The 75Ω input is a 75Ω BNC socket which is AC coupled internally. The output is a 50Ω N male connector which is DC coupled. HZ575 can also be used for reverse operation converting 50Ω to 75Ω.

### Specifications

Frequency Range:	5MHz...1.2GHz
Insertion loss:	less than 1dB
Max. Level/Voltage	
at 75Ω connector:	+10dBm/±20V <sub>dc</sub>
at 50Ω connector:	+10dBm/0V <sub>dc</sub>
Dimensions:	25 x 25 x 58mm (W x H x D)
Weight:	100g

## HZ812/HZ887 PT100 Temperature Probe



HZ812



HZ887

The HZ812 and HZ887 Temperature Probes are immersion sensors with PT100 sensing resistors. They ensure excellent precision over a broad temperature range. The probes are of robust construction, waterproof and also suitable for use in air or dusty environments. The technical specifications apply for immersion depths of at least 60mm.

The probe is connected to the measuring instrument either with a 2-pin connection using a safety plug (HZ812) or with a 4-pin connection via a 4mm banana plug (HZ887). The length of the connector cable is 1.2m for both probes.

HZ812 is suitable for use in combination with HM8012  
 HZ887 is suitable for use in combination with HM8112

### Technical specifications in accordance with EN60751 (formerly IEC751)

Probe diameter:	4mm
Measurement range:	-50...+400°C
Accuracy, Class A:	±(0.2% of the reading + 0.15 °C)
t <sub>99</sub> (s):	12s (time required to display 99% of the temperature change)
Connection HZ812:	Safety plug, 4mm, 1.2m PVC cable
Connection HZ887:	4mm banana plug, 1.2m PVC cable

Temperature measurement HZ887 in combination with HM8112-3



Accuracy, HZ812 in combination with HM8012:  
 -50°C < T° < 200°C      ±(0.2% of reading + 0.25°C)  
 200°C < T° < 400°C      ±(0.2% of reading + 0.45°C)

**HZ181 4 Terminal Test Fixture including Shorting Plate**



4 Terminal Test Fixture including Shorting Plate (for HM8118) for evaluation of lead type devices.

**HZ184 4 Terminal Kelvin Test Cable**




The 4 Terminal Kelvin Test Cable with Kelvin clips (for HM8118, included in delivery) makes it possible to measure odd-shaped components that cannot be measured with conventional fixtures.

**HZ186 4 Terminal Transformer Test Cable**



Transformer Test Cable (for HM8118) for transformer measurements.

**HZ188 4 Terminal SMD Component Test Fixture**

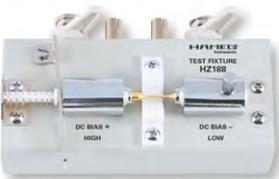


4 Terminal SMD Component Test Fixture (for HM8118, included in delivery) for evaluation of SMD components.

**HZ809 Test Adapter for Modular System Series 8000**



Test adapter for the testing and repair of insert modules for Modular System Series 8000 outside the mainframe HM8001-2. The module connection terminals in the basic unit are led through 1 to 1. The modules can then be operated outside the mainframe while the housing is open.

**HZ815 Power Adapter for HM8115-2**

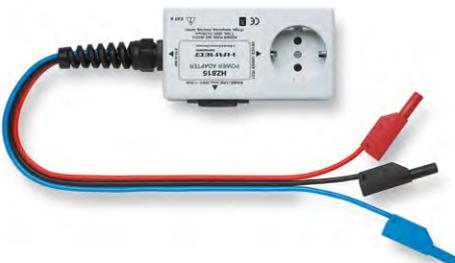

Adapter for simplified measurement of power consumption, line voltage and current consumption of mains operated gear (3-wire safety plug or European standard plug) using the HM8115-2 Power Meter.

## HZ520 Plug-in Antenna



Telescopic Antenna for RF reception

BNC connector

## HZ547 VSWR Bridge



HZ547 connected with HMS3010



This unit is used to measure the voltage standing wave ratio (VSWR) and the reflection coefficient of a device under test with an impedance of 50Ω.

Typical test objects include attenuators, terminations, frequency switches, amplifiers, cables and mixers.

**Frequency range:** 100kHz...3GHz  
**Impedance:** 50Ω  
**Directivity:** >28dB (100...300kHz)  
 >35dB (300kHz...1GHz)  
 >30dB (1...3GHz)

**Reflection loss at DUT port:** >20dB

**Insertion loss**  
 IN → OUT: 20dB (100...300kHz)  
 IN → OUT: 18dB (300kHz...3GHz)  
 IN → DUT: 1.7dB  
 DUT → OUT: 16dB

**Max. Power Dissipation:** +26dBm

**Connectors:** N (female)

**Dimensions:** 150 x 68 x 29.5mm  
 (W x H x D), without connectors

**Weight:** approx. 650g

**Temperature range:** +10...+45°C

**Accessories supplied:** HZ525 (Termination 50Ω 1W),  
 N male to N male (2 pcs.),  
 Carrying case  
 265 x 225 x 50mm (W x H x D)

Technical specifications: (typical values) see [www.hameg.com/HZ547](http://www.hameg.com/HZ547)

## HZ560 Transient Limiter



The HZ560 Transient Limiter protects the input circuits of spectrum analyzers and test receivers.

The input of the Transient Limiter is connected via BNC cable to the signal source. The output can be connected directly to the spectrum analyzer.

**Frequency range:** 150kHz...30MHz  
 $a = 10\text{dB} + 1.5/-0.5\text{dB}$   
 at  $f < 1\text{kHz}$   $a \geq 90\text{dB}$   
 at  $f < 10\text{kHz}$   $a \geq 50\text{dB}$

**Insertion loss:** 10dB (+1.5/-0.5dB)

**Max. input level:** +33dBm (2W, average)

**Max. input voltage:**  $\pm 50V_{dc}$

**VSWR:** 1.5:1 or better

**Connections:** BNC (input and output)

**Dimensions:** 67 x 32 x 32mm (W x H x D)

Technical specifications at 23°C ±2°C

### HZ42 2RU 19" Rackmount Kit



For mounting HAMEG instruments with a case height of 75mm (for Series 8100, HM8143, HM7042-5, HM8001-2, HMP2020, HMP2030 and HMF Series).

Dimensions (W x D): 440 x 360mm  
plus overhang of the instrument  
2 RU: 88mm

Please order instruments, which are installed into HZ42, with note „without housing feet“, as otherwise the feet must be dismantled before installation.

### HZ43 3RU 19" Rackmount Kit




For mounting HAMEG instruments with a case height of 125mm (for HM2005, HM303-6, HM504-2, HM507, HM5510, HM5014-2, HM5530, HM6050-2, HM7044, HMP4030\*, HMP4040\*).

Dimensions (W x D): 440 x 360mm  
plus overhang of the instrument  
3 RU: 132.5mm

When ordering instruments which are to be used with the HZ43 option installed, please state expressly "without feet", because, if space is at a premium, those might have to be dismantled before the instrument can be placed.

\* For reasons of stability and weight, if the space available in the rack permits, we recommend the HZP91. It allows to install and remove the instrument even with the feet in place.


### HZ45 4RU 19" Rackmount Kit

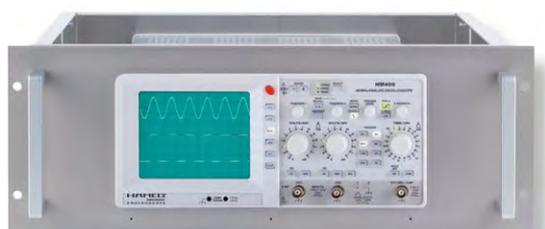

For mounting HAMEG instruments with a case height of 125mm (for HM400, HM1000, HM1000-2, HM1008, HM1008-2, HM1500, HM1500-2, HM1508, HM1508-2, HM2005-2, HM2008).

Dimensions (W x D): 440 x 360mm  
plus overhang of the instrument  
4 RU: 177mm


### HZ46 4RU 19" Rackmount Kit

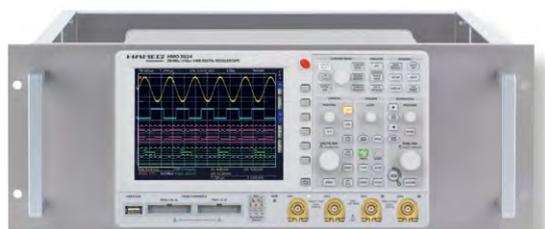

For mounting HAMEG instruments with a case height of 175mm (for HMO3522/24, HMO2524 and HMS Series).

Dimensions (W x D): 440 x 170mm  
plus overhang of the instrument  
4 RU: 177mm

### HZ091 4RU 19" Rackmount Kit

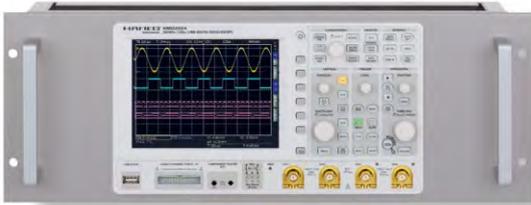

For mounting HAMEG instruments with a case height of 175mm (for HMO72x, HMO102x, HMO152x, HMO202x).

Dimensions (W x D): 440 x 110mm  
 plus overhang of the instrument  
 4 RU: 177mm

### HZP91 4RU 19" Rackmount Kit



For mounting HAMEG instruments with a case height of 125mm (for HMP4030, HMP4040).

Dimensions (W x D): 440 x 360mm  
 plus overhang of the instrument  
 4 RU: 177mm

### HZ99 Carrying Case



We recommend the HZ99 Carrying Case for protection and transport of oscilloscopes (HMO series) and spectrum analyzers (HMS series). The instruments can be transported conveniently and safely in the case. An extra pocket provides space for test gear and accessories.

Running the device inside the case is not permitted.  
 (HMO2524, HMO352x, HMS)

### HZ090 Carrying Case



We recommend the HZ090 Carrying Case for protection and transport of oscilloscopes (HMO series). The instruments can be transported conveniently and safely in the case. An extra pocket provides space for test gear and accessories.

Running the device inside the case is not permitted.  
 (HMO72x, HMO102x, HMO152x, HMO202x)

**Oscilloscopes**

**Spectrum Analysis**

**Power Supplies**

**Programmable Measuring Instruments  
Series 8100**

**Modular System Series 8000**

**Options**

**Accessories**

**Specifications**



	HM03522 [HM03524]	HM02524	HM02022 [HM02024]	HM01522 [HM01524]	HM01022 [HM01024]	HM0722 [HM0724]
<b>Vertical</b>						
Number of Channel	2 [4]	4	2 [4]	2 [4]	2 [4]	2 [4]
Bandwidth	350 MHz	250 MHz	200 MHz	150 MHz	100 MHz	70 MHz
Input Impedance	1 M $\Omega$ /50 $\Omega$	1 M $\Omega$ /50 $\Omega$	1 M $\Omega$ /50 $\Omega$	1 M $\Omega$ /50 $\Omega$	1 M $\Omega$	1 M $\Omega$
V/div. 1 M $\Omega$	1 mV/div....5V/div.	1 mV/div....5V/div.	1 mV/div....5V/div.	1 mV/div....5V/div.	1 mV/div....10V/div.	1 mV/div....10V/div.
Max. Input voltage 1 M $\Omega$	200 Vpk					
V/div. 50 $\Omega$	1 mV/div....1V/div.	1 mV/div....1V/div.	1 mV/div....1V/div.	1 mV/div....1V/div.	N/A	N/A
Probe Attenuation Sense	Standard					
<b>Horizontal</b>						
Sample Rate per Analog Channel	2 GSa/s	1.25 GSa/s	1 GSa/s	1 GSa/s	1 GSa/s	1 GSa/s
Max. Sample Rate	4 GSa/s	2.5 GSa/s	2 GSa/s	2 GSa/s	2 GSa/s	2 GSa/s
Memory Depth per Ch.	2 MPts.	2 MPts.	1 MPts.	1 MPts.	1 MPts.	1 MPts.
Max. Memory	4 MPts.	4 MPts.	2 MPts.	2 MPts.	2 MPts.	2 MPts.
Timebase Accuracy	15 ppm	15 ppm	50 ppm	50 ppm	50 ppm	50 ppm
<b>Trigger</b>						
Trigger Rate	2500 wfs/s	2500 wfs/s	2000 wfs/s	2000 wfs/s	2000 wfs/s	2000 wfs/s
Trigger Modes	Edge, Pulse Width, Pattern, Video incl. HDTV, A/B Trigger					
<b>Measurement</b>						
Cursor measurement List	$\Delta V$ , $\Delta t$ , $1/\Delta t$ (f), V to Gnd, Vt related to Trigger point, ratio X and Y, pulse count, peak to peak, peak+, peak-					
Parameter List	Frequency, Period, pulse count, $V_{pp}$ , $V_{p+}$ , $V_{p-}$ , $V_{rms}$ , $V_{avg}$ , $V_{top}$ , $V_{base}$ , $t_{width+}$ , $t_{width-}$ , $t_{duty+}$ , $t_{duty-}$ , $t_{rise}$ , $t_{fall}$ , pos. edge count, neg. edge count, pos. pulse count, neg. pulse count"					
HW Counter	6 Digit					
Advanced Math, Math on Math	Standard					
Math Functions std.	ADD, SUB, 1/X, ABS, MUL, DIV, SQ, POS, NEG, INV, INTG, DIFF, SQR, MIN, MAX, LOG, LN, Filter (low-pass, high-pass)					
Pass/Fail Mask testing	Standard					
<b>Mixed Signal</b>						
Mixed Signal Functionality	via Option HO3508 (8 Channel) or HO3516 (16 Channel)		via Option HO3508 (8 Channel)			
Max. Number of Logic Channel	16	16	8	8	8	8
Sample Rate of the Digital Channel	1 GSa/s	1,25 GSa/s	1 GSa/s	1 GSa/s	1 GSa/s	1 GSa/s
Memory Depth of the Digital Channel	1 MPts.	2 MPts.	1 MPts.	1 MPts.	1 MPts.	1 MPts.
<b>Serial Trigger and Decode</b>						
Serial Trigger and Decode I <sup>2</sup> C, SPI, UART/RS-232	H0010 via Analog Channels and/or Logic Channels, H0011 via Analog Channels					
<b>Display</b>						
Display Size	6.5 inch					
Display Resolution	640 x 480					
Virtual Screen	20 div.					
<b>Interfaces</b>						
Monitor Output	Standard: DVI-D					
USB Remote Interface	Standard					
RS-232 Remote Interface	Standard					
Ethernet Remote Interface	Option H0730					
GPIO Remote Interface	Option H0740					
<b>Miscellaneous</b>						
Fan noise	very low					
Dimension (W x H x D)	28.5 x 17.5 x 22 cm	28.5 x 17.5 x 22 cm	28.5 x 17.5 x 14 cm	28.5 x 17.5 x 14 cm	28.5 x 17.5 x 14 cm	28.5 x 17.5 x 14 cm
Footprint	627 cm <sup>2</sup>	627 cm <sup>2</sup>	399 cm <sup>2</sup>	399 cm <sup>2</sup>	399 cm <sup>2</sup>	399 cm <sup>2</sup>
Weight	3.6 kg	3.6 kg	2.5 kg	2.5 kg	2.5 kg	2.5 kg
Power	70 W max.	70 W max.	55 W max.	55 W max.	55 W max.	55 W max.
Component Tester	N/A	N/A	Standard	Standard	Standard	Standard
Additional Bus Signal Source	Standard					
Languages	German, English, French, Spain					

## 40 MHz Analog Oscilloscope HM400

Product description, page 11

### Vertical Deflection

<b>Operating Modes:</b>	Channel 1 or 2 only Channels 1 and 2 (alternate or chopped) Sum or Difference of CH 1 and CH 2
<b>Invert:</b>	CH 2
<b>XY Mode:</b>	CH 1 (X) and CH 2 (Y)
<b>Bandwidth (-3 dB):</b>	
DC, 5 mV/div...20V/div.:	0...40 MHz
AC, 5 mV/div...20V/div.:	2Hz...40 MHz
DC, 1...2 mV/div.:	0...10 MHz
AC, 1...2 mV/div.:	2Hz...10 MHz
<b>Rise Time (calculated):</b>	<35 ns (1...2 mV/div.) <8.75 ns (5 mV/div...20V/div.)
<b>Deflection Coefficient:</b>	1-2-5 Sequence ±5% (1...2 mV/div.) ±3% (5 mV/div...20V/div.)
Variable (uncalibrated):	>2.5:1 to >50V/div.
<b>Input Impedance:</b>	1 MΩ    15 pF
<b>Input Coupling:</b>	DC, AC, GND (ground)
<b>Max. Input Voltage:</b>	400V (DC + peak AC)

### Triggering

<b>Automatic:</b>	Linking of peak detection and trigger level
<b>Min. signal height</b>	0.5 div.
<b>Frequency range</b>	5 Hz...50 MHz
<b>Level control range</b>	From peak- to peak+
<b>Normal (without peak):</b>	
<b>Min. signal height</b>	0.5 div.
<b>Frequency range</b>	0...50 MHz
<b>Level control range</b>	-10...+10 div.
<b>Slope:</b>	Rising or falling
<b>Sources:</b>	Channel 1 or 2, Line and External
<b>Coupling:</b>	AC (5 Hz...80 MHz), DC (0...80 MHz), LF (0...1.5 kHz)
<b>Trigger Indicator:</b>	LED
<b>External Trigger:</b>	
<b>Input Impedance:</b>	1 MΩ    15 pF
<b>External Trigger Signal:</b>	0.3V <sub>pp</sub> ≤5V, DC (0...50 MHz), AC (20 Hz...50 MHz)
<b>Max. input voltage:</b>	100V (DC + peak AC)
<b>Active TV sync. separator:</b>	Field and Line, +/-

### Horizontal Deflection

<b>Time Base:</b>	100 ns/div...0.2s/div (1-2-5 Sequence)
<b>Accuracy:</b>	±3%
Variable (uncalibrated):	>2.5:1 to >1.25s/div.
<b>X Magnification x10:</b>	up to 10 ns/div.
<b>Accuracy:</b>	±5%
<b>Hold-Off Time:</b>	variable to approx. 10:1
<b>XY</b>	
<b>Bandwidth X amplifier:</b>	0...2.5 MHz (-3 dB)
<b>XY Phase shift &lt;3°:</b>	<120 kHz

### Operation/Readout/Control

<b>Manual:</b>	via controls and buttons
<b>Autoset:</b>	automatic signal related parameter settings
<b>Save and Recall:</b>	6 instrument parameter settings

### Component Tester

<b>Test Voltage:</b>	approx. 7V <sub>rms</sub> (open circuit)
<b>Test Current:</b>	max. 7mA <sub>rms</sub> (short-circuit)
<b>Test Frequency:</b>	approx. 50 Hz
<b>Test Connection:</b>	2 banana jacks 4 mm Ø One test circuit lead is grounded via protective earth (PE)

### Miscellaneous

<b>CRT:</b>	D14-363GY, 8 x 10 div. with internal graticule
<b>Acceleration Voltage:</b>	approx. 2 kV
<b>Trace Rotation:</b>	adjustable on front panel
<b>Z-Input (Intens. modulation):</b>	max. +5V (TTL), 10 kHz

<b>Probe ADJ Output:</b>	1 kHz/1 MHz Square Wave Signal approx. 0.2V <sub>pp</sub> (tr <5ns) for probe adjustment
<b>Power Supply (Mains):</b>	105...253V, 50...60 Hz ±10%, CAT II
<b>Power Consumption:</b>	approx. 30W at 230V/50 Hz
<b>Safety class:</b>	Safety class I (EN61010-1)
<b>Operating temperature:</b>	+5...+40 °C
<b>Storage temperature:</b>	-20...+70 °C
<b>Rel. humidity:</b>	5...80% (non condensing)
<b>Dimensions (W x H x D):</b>	285 x 125 x 380 mm
<b>Weight:</b>	approx. 4.8 kg

All data valid at 23 °C after 30 minutes warm-up.

**Accessories supplied:** Line Cord, Operating Manual, 2 Probes 1:1/10:1 (HZ154) with LF/HF adjustment, CD

### Recommended accessories:

HZ20	Adapter, BNC to 4 mm banana
HZ33	Test cable 50 Ω, BNC/BNC, 0.5 m
HZ34	Test cable 50 Ω, BNC/BNC, 1 m
HZ45	19"-Rackmount Kit 4RU
HZ51	Probe 10:1 (150 MHz)
HZ52	Probe 10:1 RF (250 MHz)
HZ53	Probe 100:1 (100 MHz)
HZ100	Differential probe 20:1/200:1
HZ109	Differential probe 1:1/10:1
HZ115	Differential probe 100:1/1000:1
HZ200	Probe 10:1 with auto attenuation ID (250 MHz)
HZ350	Probe 10:1 with automatic identification (350 MHz)
HZ355	Slimline probe 10:1 with automatic identification (500 MHz)
HZO20	High voltage probe 1000:1 (400 MHz, 1000V <sub>rms</sub> )
HZO30	Active probe 1 GHz (0.9 pF, 1 MΩ, including many accessories)
HZO50	AC/DC Current probe 20A, DC...100 kHz
HZO51	AC/DC Current probe 1000A, DC...20 kHz

## 70 MHz 2 [4] Channel Digital Oscilloscope HM0722 [HM0724]

Product description, page 9

### Display

<b>Display:</b>	16.5 cm (6.5") VGA Color TFT
<b>Resolution:</b>	640 x 480 Pixel
<b>Backlight:</b>	LED 400 cd/m <sup>2</sup>
<b>Display area for traces:</b>	
without menu	400 x 600 Pixel (8 x 12 div.)
with menu	400 x 500 Pixel (8 x 10 div.)
<b>Color depth:</b>	256 colors
<b>Intensity steps per channel:</b>	0...31

### Vertical System

<b>Channels:</b>	
<b>DSO mode</b>	CH 1, CH 2 [CH 1...CH 4]
<b>MSO mode</b>	CH 1, CH 2, LCH 0...7 (logic channels) [CH 1, CH 2, LCH 0...7, CH 4] with Option HO3508
<b>Auxiliary input:</b>	Frontside [Rear side]
<b>Function</b>	Ext. Trigger
<b>Impedance</b>	1 MΩ    13 pF ±2 pF
<b>Coupling</b>	DC, AC
<b>Max. input voltage</b>	100V (DC + peak AC)
<b>XYZ-mode:</b>	All analog channels on individual choice
<b>Invert:</b>	CH 1, CH 2 [CH 1...CH 4]
<b>Y-bandwidth (-3 dB):</b>	70 MHz (5 mV...10V)/div. 20 MHz (1 mV, 2 mV)/div.
<b>Lower AC bandwidth:</b>	2 Hz
<b>Bandwidth limiter</b>	
(switchable):	approx. 20 MHz
<b>Rise time (calculated):</b>	<5 ns
<b>DC gain accuracy</b>	2%
<b>Input sensitivity:</b>	13 calibrated steps
<b>CH 1, CH 2 [CH 1...CH 4]</b>	1 mV/div...10V/div. (1-2-5 Sequence)
<b>Variable</b>	Between calibrated steps
<b>Inputs CH 1, CH 2 [CH 1...CH 4]:</b>	
<b>Impedance</b>	1 MΩ    14 pF ±2 pF
<b>Coupling</b>	DC, AC, GND

<b>Max. input voltage</b>	200V (DC + peak AC)
<b>Measuring circuits:</b>	Measuring Category I [CAT I]
<b>Position range</b>	±10 Divs
<b>Logic channels</b>	With Option H03508
<b>Select. switching thresholds</b>	TTL, CMOS, ECL, User -2...+8V
<b>Impedance</b>	100kΩ    <4 pF
<b>Coupling</b>	DC
<b>Max. input voltage</b>	40V (DC + peak AC)

### Triggering

<b>Analog channels:</b>	
<b>Automatic:</b>	Linking of peak detection and trigger level
<b>Min. signal height</b>	0.8 div.; 0.5 div. typ. (1.5 div. at ≤2 mV/div.)
<b>Frequency range</b>	5 Hz...100 MHz (5 Hz...30 MHz at ≤2 mV/div.)
<b>Level control range</b>	From peak- to peak+
<b>Normal (without peak):</b>	
<b>Min. signal height</b>	0.8 div.; 0.5 div. typ. (1.5 div. at ≤2 mV/div.)
<b>Frequency range</b>	0 Hz...100 MHz (0 Hz...30 MHz at ≤2 mV/div.)
<b>Level control range</b>	-10...+10 div.
<b>Operating modes:</b>	Slope/Video/Logic/Pulses/Buses (optional)
<b>Slope:</b>	Rising, falling, both
<b>Sources:</b>	CH 1, CH 2, Line, Ext., LCH 0...7 [CH 1...CH 4, Line, Ext., LCH 0...7]
<b>Coupling (Analog Channel):</b>	<b>AC:</b> 5 Hz...100 MHz <b>DC:</b> 0...100 MHz <b>HF:</b> 30 kHz...100 MHz <b>LF:</b> 0...5 kHz <b>Noise rejection:</b> selectable

<b>Video:</b>	
<b>Standards</b>	PAL, NTSC, SECAM, PAL-M, SDTV 576i, HDTV 720p, HDTV 1080i, HDTV 1080p
<b>Fields</b>	Field 1, field 2, both
<b>Line</b>	All, selectable line number
<b>Sync. Impulse</b>	Positive, negative
<b>Sources:</b>	CH 1, CH 2, Ext. [CH 1...CH 4]
<b>Logic:</b>	AND, OR, TRUE, FALSE
<b>Sources:</b>	LCH 0...7
<b>State</b>	LCH 0...7 X, H, L
<b>Pulses:</b>	Positive, negative
<b>Modes</b>	equal, unequal, less than, greater than, within/without a range
<b>Range</b>	min. 32 ns, max. 10 s, resolution min. 8 ns
<b>Sources:</b>	CH 1, CH 2, Ext. [CH 1...CH 4]
<b>Indicator for trigger action:</b>	LED
<b>Ext. Trigger via:</b>	Auxiliary input 0.3V...10V <sub>pp</sub>
<b>2nd Trigger:</b>	
<b>Slope:</b>	Rising, falling, both
<b>Min. signal height</b>	0.8 div.; 0.5 div. typ. (1.5 div. at ≤2 mV/div.)
<b>Frequency range</b>	0 Hz...100 MHz (0 Hz...30 MHz at ≤2 mV/div.)
<b>Level control range</b>	-10...+10 div.
<b>Operating modes:</b>	
<b>after time</b>	32 ns...10 s
<b>after incidence</b>	1...2 <sup>16</sup>
<b>Buses (Opt. H0010):</b>	I <sup>2</sup> C/SPI/UART/RS-232
<b>Sources:</b>	CH 1, CH 2, Ext., LCH 0...7 [CH 1...CH 4, Ext., LCH 0...7]
<b>Buses (Opt. H0011):</b>	I <sup>2</sup> C/SPI/UART/RS-232
<b>Sources:</b>	CH 1, CH 2, Ext. (for Chip Select at SPI) [CH 1...CH 4, Ext.] (for Chip Select at SPI)
<b>Format</b>	hexadecimal, binary
<b>I<sup>2</sup>C</b>	Trigger on Start, Stop, Restart, NACK, Address (7 or 10 Bit), Data, Address and Data, up to 5 Mb/s
<b>SPI</b>	up to 32 Bit Data, Chip select (CS) pos. or neg., without CS, up to 12.5 Mb/s
<b>UART/RS-232</b>	up to 8 Bit Data, up to 31 Mb/s

### Horizontal System

<b>Domain representation:</b>	Time, Frequency (FFT), Voltage (XY)
<b>Representation Time Base:</b>	Main-window, main- and zoom-window
<b>Memory Zoom:</b>	Up to 50,000:1
<b>Accuracy:</b>	50 ppm
<b>Time Base:</b>	2 ns/div...50 s/div.
<b>Roll Mode:</b>	50 ms/div...50 s/div.

### Digital Storage

<b>Sampling rate (real time):</b>	2 x 1GSa/s, 1 x 2GSa/s [4 x 1GSa/s, 2 x 2GSa/s] Logic channels: 8 x 1GSa/s
-----------------------------------	---

<b>Memory:</b>	2 x 1 MPts, 1 x 2 MPts [4 x 1 MPts, 2 x 2 MPts]
<b>Operation modes:</b>	Refresh, Average, Envelope, Peak-Detect Roll: free run/triggered, Filter, HiRes
<b>Resolution (vertical)</b>	8 Bit, (HiRes up to 10 Bit)
<b>Resolution (horizontal)</b>	40 ps
<b>Interpolation:</b>	Sinx/x, linear, Sample-hold
<b>Persistence:</b>	Off, 50 ms...∞
<b>Delay pretrigger:</b>	0...8 Million x (1/samplerate)
<b>posttrigger:</b>	0...2 Million x (1/samplerate)
<b>Display refresh rate:</b>	Up to 2000 waveforms/s
<b>Display:</b>	Dots, vectors, 'persistence'
<b>Reference memories:</b>	typ. 10 Traces

### Operation/Measuring/Interfaces

<b>Operation:</b>	Menu-driven (multilingual), Autoset, help functions (multilingual)
<b>Save/Recall memories:</b>	typ. 10 complete instrument parameter settings
<b>Frequency counter:</b>	
<b>0.5 Hz...100 MHz</b>	6 Digit resolution
<b>Accuracy</b>	50 ppm
<b>Auto measurements:</b>	Amplitude, standard deviation, V <sub>pp</sub> , V <sub>p+</sub> , V <sub>p-</sub> , V <sub>rms</sub> , V <sub>avg</sub> , V <sub>top</sub> , V <sub>base</sub> , frequency, period, pulse count, t <sub>width+</sub> , t <sub>width-</sub> , t <sub>dutycycle+</sub> , t <sub>dutycycle-</sub> , t <sub>rise</sub> , t <sub>fall</sub> , pos. edge count, neg. edge count, pos. pulse count, neg. pulse count, trigger frequency, trigger period, phase, delay
<b>Cursor measurements:</b>	ΔV, Δt, 1/Δt (f), V to Gnd, Vt related to Trigger point, ratio X and Y, pulse count, peak to peak, peak+, peak-, mean value, RMS value, standard deviation
<b>Interface:</b>	Dual-Interface USB type B/RS-232 (H0720), 2 x USB type A (front- and rear side each 1 x) max. 100 mA, DVI-D for ext. Monitor
<b>Optional:</b>	IEEE-488 (GPIB) (H0740), Ethernet/USB (H0730)

### Display functions

<b>Marker:</b>	up to 8 user definable marker for easy navigation
<b>VirtualScreen:</b>	virtual Display with 20 div. vertical for all Math-, Logic-, Bus- and Reference Signals
<b>Busdisplay:</b>	up to 2 buses, user definable, parallel or serial buses (option), decode of the bus value in ASCII, binary, decimal or hexadecimal, up to 4 lines
<b>Parallel</b>	logic channels can also be used as source for bus definition
<b>I<sup>2</sup>C</b> (Opt. H0010, H0011)	color coded Read-, Write Address, Data, Start, Stop, acknowledge, missing acknowledge, Errors and Trigger condition
<b>SPI</b> (Opt. H0010, H0011)	color coded Data, Start, Stop, Errors and Trigger condition
<b>UART/RS-232</b> (Opt. H0010, H0011)	color coded Data, Start, Stop, Errors and Trigger condition

### Mathematic functions

<b>Number of formula sets:</b>	5 formula sets with up to 5 formulas each
<b>Sources:</b>	All channels and math. memories
<b>Targets:</b>	Math. memories
<b>Functions:</b>	ADD, SUB, 1/X, ABS, MUL, DIV, SQ, POS, NEG, INV, INTG, DIFF, SQR, MIN, MAX, LOG, LN, Low-, High-pass filter
<b>Display:</b>	Up to 4 math. memories with label

### Pass/Fail functions

<b>Sources:</b>	Analog channels
<b>Type of test:</b>	Mask around a signal, userdefined tolerance
<b>Functions:</b>	Stop, Beep, screen shot (screen print-out) and/or output to printer for pass or fail, event counting up to 4 billion, including the number and the percentage of pass and fail events

General Information	
<b>Component tester</b>	
Test voltage:	10V <sub>P</sub> (open) typ.
Test current:	10 mA <sub>P</sub> (short) typ.
Test frequency:	50 Hz/200 Hz typ.
Reference Potential:	Ground (safety earth)
Probe ADJ Output:	1 kHz/1 MHz square wave signal ~1V <sub>pp</sub> (ta <4 ns)
Bus Signal Source	SPI, I <sup>2</sup> C, UART, Parallel (4 Bit)
<b>Internal RTC</b>	
(Realtime clock):	Date and time for stored data
Line voltage:	100...240V, 50...60 Hz, CAT II
Power consumption:	Max. 45W, typ. 25W [max. 55W, typ. 35W]
Protective system:	Safety class I (EN61010-1)
Operating temperature:	+5...+40 °C
Storage temperature:	-20...+70 °C
Rel. humidity:	5...80% (non condensing)
Dimensions (W x H x D):	285 x 175 x 140 mm
Weight:	<2.5 kg

All data valid at 23 °C after 30 minutes warm-up.

<b>Accessories supplied:</b> Line cord, Operating manual, 2 [4] Probes, 10:1/1:1 switchable (HZ154), CD, Software	
<b>Recommended accessories:</b>	
H0010	Serial bus trigger and hardware accelerated decode, I <sup>2</sup> C, SPI, UART/RS-232 on Logic channels and Analog channels
H0011	Serial bus trigger and hardware accelerated decode, I <sup>2</sup> C, SPI, UART/RS-232 on Analog channels
H03508	Active 8 Channel Logic Probe
H0730	Dual-Interface Ethernet/USB
H0740	Interface IEEE-488 (GPIB) galvanically isolated
HZ091	4RU 19" Rackmount Kit
HZ090	Carrying Case for protection and transport
HZ020	High voltage probe 1000:1 (400 MHz, 1000V <sub>rms</sub> )
HZ030	Active probe 1 GHz (0.9 pF, 1 MΩ, including many accessories)
HZ050	AC/DC Current probe 20A, DC...100 kHz
HZ051	AC/DC Current probe 1000A, DC...20 kHz

## 100 MHz 2 [4] Channel Digital Oscilloscope HMO1022 [HMO1024] Product description, page 9

Display	
Display:	16.5 cm (6.5") VGA Color TFT
Resolution:	640 x 480 Pixel
Backlight:	LED 400 cd/m <sup>2</sup>
<b>Display area for traces:</b>	
without menu	400 x 600 Pixel (8 x 12 div.)
with menu	400 x 500 Pixel (8 x 10 div.)
Color depth:	256 colors
Intensity steps per channel:	0...31
Vertical System	
<b>Channels:</b>	
DSO mode	CH 1, CH 2 [CH 1...CH 4]
MSO mode	CH 1, CH 2, LCH 0...7 (logic channels) [CH 1, CH 2, LCH 0...7, CH 4] with Option H03508
<b>Auxiliary input:</b> Frontside [Rear side]	
Function	Ext. Trigger
Impedance	1 MΩ    13 pF ±2 pF
Coupling	DC, AC
Max. input voltage	100V (DC + peak AC)
XYZ-mode:	All analog channels on individual choice
Invert:	CH 1, CH 2 [CH 1...CH 4]
Y-bandwidth (-3 dB):	100 MHz (5 mV...10V)/div. 20 MHz (1 mV, 2 mV)/div.
Lower AC bandwidth:	2 Hz
<b>Bandwidth limiter</b> (switchable): approx. 20 MHz	
Rise time [calculated]:	<3.5 ns
DC gain accuracy	2%
Input sensitivity:	13 calibrated steps

CH 1, CH 2 [CH 1...CH 4]	1 mV/div...10V/div. (1-2-5 Sequence)
Variable	Between calibrated steps
<b>Inputs CH 1, CH 2 [CH 1...CH 4]:</b>	
Impedance	1 MΩ    14 pF ±2 pF
Coupling	DC, AC, GND
Max. input voltage	200V (DC + peak AC)
Measuring circuits:	Measuring Category I (CAT I)
Position range	±10 Divs
Logic channels	With Option H03508
Select. switching thresholds	TTL, CMOS, ECL, User -2...+8V
Impedance	100 kΩ    <4 pF
Coupling	DC
Max. input voltage	40V (DC + peak AC)

Triggering	
<b>Analog channels:</b>	
Automatic:	Linking of peak detection and trigger level
Min. signal height	0.8 div.; 0.5 div. typ. (1.5 div. at ≤2 mV/div.)
Frequency range	5 Hz...150 MHz (5 Hz...30 MHz at ≤2 mV/div.)
Level control range	From peak- to peak+
<b>Normal (without peak):</b>	
Min. signal height	0.8 div.; 0.5 div. typ. (1.5 div. at ≤2 mV/div.)
Frequency range	0 Hz...150 MHz (0 Hz...30 MHz at ≤2 mV/div.)
Level control range	-10...+10 div.
Operating modes:	Slope/Video/Logic/Pulses/Buses (optional)
<b>Slope:</b> Rising, falling, both	
Sources:	CH 1, CH 2, Line, Ext., LCH 0...7 [CH 1...CH 4, Line, Ext., LCH 0...7]
Coupling (Analog Channel):	AC: 5 Hz...150 MHz DC: 0...150 MHz HF: 30 kHz...150 MHz LF: 0...5 kHz
<b>Noise rejection:</b> selectable	

<b>Video:</b>	
Standards	PAL, NTSC, SECAM, PAL-M, SDTV 576i, HDTV 720p, HDTV 1080i, HDTV 1080p
Fields	Field 1, field 2, both
Line	All, selectable line number
Sync. Impulse	Positive, negative
Sources:	CH 1, CH 2, Ext. [CH 1...CH 4]
<b>Logic:</b>	
Sources:	LCH 0...7
State	LCH 0...7 X, H, L
<b>Pulses:</b>	
Modes	Positive, negative equal, unequal, less than, greater than, within/without a range
Range	min. 32 ns, max. 10 s, resolution min. 8 ns
Sources:	CH 1, CH 2, Ext. [CH 1...CH 4]
<b>Indicator for trigger action:</b> LED	
Ext. Trigger via:	Auxiliary input 0.3V...10V <sub>pp</sub>
<b>2nd Trigger:</b>	
Slope:	Rising, falling, both
Min. signal height	0.8 div.; 0.5 div. typ. (1.5 div. at ≤2 mV/div.)
Frequency range	0 Hz...150 MHz (0 Hz...30 MHz at ≤2 mV/div.)
Level control range	-10...+10 div.
<b>Operating modes:</b>	
after time	32 ns...10 s
after incidence	1...2 <sup>16</sup>
<b>Buses (Opt. H0010):</b> I <sup>2</sup> C/SPI/UART/RS-232	
Sources:	CH 1, CH 2, Ext., LCH 0...7 [CH 1...CH 4, Ext., LCH 0...7]
<b>Buses (Opt. H0011):</b> I <sup>2</sup> C/SPI/UART/RS-232	
Sources:	CH 1, CH 2, Ext. (for Chip Select at SPI) [CH 1...CH 4, Ext.] (for Chip Select at SPI)
Format	hexadecimal, binary
I <sup>2</sup> C	Trigger on Start, Stop, Restart, NACK, Address (7 or 10 Bit), Data, Address and Data, up to 5 Mb/s
SPI	up to 32 Bit Data, Chip select (CS) pos. or neg., without CS, up to 12.5 Mb/s
UART/RS-232	up to 8 Bit Data, up to 31 Mb/s

Horizontal System	
Domain representation:	Time, Frequency (FFT), Voltage (XY)
Representation Time Base:	Main-window, main- and zoom-window
Memory Zoom:	Up to 50,000:1
Accuracy:	50 ppm
Time Base:	2 ns/div...50 s/div.

<b>Roll Mode:</b>	50 ms/div...50 s/div.
-------------------	-----------------------

**Digital Storage**

<b>Sampling rate (real time):</b>	2 x 1GSa/s, 1 x 2GSa/s [4 x 1GSa/s, 2 x 2GSa/s] Logic channels: 8 x 1GSa/s
<b>Memory:</b>	2 x 1MPts, 1 x 2MPts [4 x 1MPts, 2 x 2MPts]
<b>Operation modes:</b>	Refresh, Average, Envelope, Peak-Detect Roll: free run/triggered, Filter, HiRes
<b>Resolution (vertical):</b>	8Bit, (HiRes up to 10Bit)
<b>Resolution (horizontal):</b>	40ps
<b>Interpolation:</b>	Sinx/x, linear, Sample-hold
<b>Persistence:</b>	Off, 50ms...∞
<b>Delay pretrigger:</b>	0...8 Million x (1/samplerate)
<b>posttrigger:</b>	0...2 Million x (1/samplerate)
<b>Display refresh rate:</b>	Up to 2000 waveforms/s
<b>Display:</b>	Dots, vectors, 'persistence'
<b>Reference memories:</b>	typ. 10 Traces

**Operation/Measuring/Interfaces**

<b>Operation:</b>	Menu-driven (multilingual), Autoset, help functions (multilingual)
<b>Save/Recall memories:</b>	typ. 10 complete instrument parameter settings
<b>Frequency counter:</b>	
<b>0.5 Hz...150 MHz</b>	6 Digit resolution
<b>Accuracy</b>	50 ppm
<b>Auto measurements:</b>	Amplitude, standard deviation, $V_{pp}$ , $V_{p+}$ , $V_{p-}$ , $V_{rms}$ , $V_{avg}$ , $V_{top}$ , $V_{base}$ , frequency, period, pulse count, $t_{width+}$ , $t_{width-}$ , $t_{duty+}$ , $t_{duty-}$ , $t_{rise}$ , $t_{fall}$ , pos. edge count, neg. edge count, pos. pulse count, neg. pulse count, trigger frequency, trigger period, phase, delay
<b>Cursor measurements:</b>	$\Delta V$ , $\Delta t$ , $1/\Delta t$ (f), V to Gnd, Vt related to Trigger point, ratio X and Y, pulse count, peak to peak, peak+, peak-, mean value, RMS value, standard deviation
<b>Interface:</b>	Dual-Interface USB type B/RS-232 (H0720), 2 x USB type A (front- and rear side each 1 x) max. 100 mA, DVI-D for ext. Monitor
<b>Optional:</b>	IEEE-488 (GPIB) (H0740), Ethernet/USB (H0730)

**Display functions**

<b>Marker:</b>	up to 8 user definable marker for easy navigation
<b>VirtualScreen:</b>	virtual Display with 20 div. vertical for all Math-, Logic-, Bus- and Reference Signals
<b>Busdisplay:</b>	up to 2 buses, user definable, parallel or serial buses (option), decode of the bus value in ASCII, binary, decimal or hexadecimal, up to 4 lines
<b>Parallel</b>	logic channels can also be used as source for bus definition
<b>I<sup>2</sup>C</b> (Opt. H0010, H0011)	color coded Read-, Write Address, Data, Start, Stop, acknowledge, missing acknowledge, Errors and Trigger condition
<b>SPI</b> (Opt. H0010, H0011)	color coded Data, Start, Stop, Errors and Trigger condition
<b>UART/RS-232</b> (Opt. H0010, H0011)	color coded Data, Start, Stop, Errors and Trigger condition

**Mathematic functions**

<b>Number of formula sets:</b>	5 formula sets with up to 5 formulas each
<b>Sources:</b>	All channels and math. memories
<b>Targets:</b>	Math. memories
<b>Functions:</b>	ADD, SUB, 1/X, ABS, MUL, DIV, SQ, POS, NEG, INV, INTG, DIFF, SQR, MIN, MAX, LOG, LN, Low-, High-pass filter
<b>Display:</b>	Up to 4 math. memories with label

**Pass/Fail functions**

<b>Sources:</b>	Analog channels
<b>Type of test:</b>	Mask around a signal, userdefined tolerance

<b>Functions:</b>	Stop, Beep, screen shot (screen print-out) and/or output to printer for pass or fail, event counting up to 4 billion, including the number and the percentage of pass and fail events
-------------------	---

**General Information**

<b>Component tester</b>	
<b>Test voltage:</b>	10V <sub>p</sub> (open) typ.
<b>Test current:</b>	10 mA <sub>p</sub> (short) typ.
<b>Test frequency:</b>	50 Hz/200 Hz typ.
<b>Reference Potential:</b>	Ground (safety earth)
<b>Probe ADJ Output:</b>	1 kHz/1 MHz square wave signal ~1V <sub>pp</sub> (ta <4 ns)
<b>Bus Signal Source</b>	SPI, I <sup>2</sup> C, UART, Parallel (4 Bit)
<b>Internal RTC</b> (Realtime clock):	Date and time for stored data
<b>Line voltage:</b>	100...240V, 50...60 Hz, CAT II
<b>Power consumption:</b>	Max. 45 W, typ. 25 W [max. 55 W, typ. 35 W]
<b>Protective system:</b>	Safety class I (EN61010-1)
<b>Operating temperature:</b>	+5...+40 °C
<b>Storage temperature:</b>	-20...+70 °C
<b>Rel. humidity:</b>	5...80 % (non condensing)
<b>Dimensions (W x H x D):</b>	285 x 175 x 140 mm
<b>Weight:</b>	<2.5 kg

All data valid at 23 °C after 30 minutes warm-up.

<b>Accessories supplied:</b>	Line cord, Operating manual, 2 [4] Probes, 10:1/1:1 switchable (HZ154), CD, Software
<b>Recommended accessories:</b>	
H0010	Serial bus trigger and hardware accelerated decode, I <sup>2</sup> C, SPI, UART/RS-232 on Logic channels and Analog channels
H0011	Serial bus trigger and hardware accelerated decode, I <sup>2</sup> C, SPI, UART/RS-232 on Analog channels
H03508	Active 8 Channel Logic Probe
H0730	Dual-Interface Ethernet/USB
H0740	Interface IEEE-488 (GPIB) galvanically isolated
HZ091	4RU 19" Rackmount Kit
HZ090	Carrying Case for protection and transport
HZ020	High voltage probe 1000:1 (400 MHz, 1000V <sub>rms</sub> )
HZ030	Active probe 1 GHz (0.9 pF, 1 MΩ, including many accessories)
HZ050	AC/DC Current probe 20 A, DC...100 kHz
HZ051	AC/DC Current probe 1000 A, DC...20 kHz

**150 MHz 2 [4] Channel Digital Oscilloscope HMO1522 [HMO1524]**  
Product description, page 8

**Display**

<b>Display:</b>	16.5 cm (6.5") VGA Color TFT
<b>Resolution:</b>	640 x 480 Pixel
<b>Backlight:</b>	LED 400 cd/m <sup>2</sup>
<b>Display area for traces:</b>	
<b>without menu</b>	400 x 600 Pixel (8 x 12 div.)
<b>with menu</b>	400 x 500 Pixel (8 x 10 div.)
<b>Color depth:</b>	256 colors
<b>Intensity steps per trace:</b>	0...31

**Vertical System**

<b>Channels:</b>	
<b>DSO mode</b>	CH 1, CH 2 [CH 1...CH 4]
<b>MSO mode</b>	CH 1, CH 2, LCH 0...7 (logic channels) [CH 1, CH 2, LCH 0...7, CH 4] with Option H03508
<b>Auxiliary input:</b>	Frontside [Rear side]
<b>Function</b>	Ext. Trigger
<b>Impedance</b>	1 MΩ    14 pF ±2 pF
<b>Coupling</b>	DC, AC
<b>Max. input voltage</b>	100V (DC + peak AC)
<b>XYZ-mode:</b>	All analog channels on individual choice
<b>Invert:</b>	CH 1, CH 2 [CH 1...CH 4]
<b>Y-bandwidth (-3 dB):</b>	150 MHz (5 mV...10V)/div. 100 MHz (1 mV, 2 mV)/div.

<b>Lower AC bandwidth:</b>	2 Hz
<b>Bandwidth limiter</b> (switchable):	approx. 20 MHz
<b>Rise time</b> (calculated):	<2.4 ns
<b>DC gain accuracy:</b>	2%
<b>Input sensitivity:</b>	12 calibrated steps
<b>CH 1, CH 2 [CH 1...CH 4]</b>	1 mV/div...10V/div. (1-2-5 Sequence)
<b>Variable</b>	Between calibrated steps
<b>Inputs CH 1, CH 2 [CH 1...CH 4]:</b>	
<b>Impedance</b>	1 MΩ    14 pF ±2 pF (50 Ω switchable)
<b>Coupling</b>	DC, AC, GND
<b>Max. input voltage</b>	200V (DC + peak AC), 50 Ω <5V <sub>rms</sub>
<b>Measuring circuits:</b>	Measuring Category I (CAT I)
<b>Position range</b>	±10 Divs
<b>Offset control:</b>	
<b>1 mV, 2 mV</b>	±0.2V - 10 div. x Sensitivity
<b>5...50 mV</b>	±1V - 10 div. x Sensitivity
<b>100 mV</b>	±2.5V - 10 div. x Sensitivity
<b>200 mV...2V</b>	±40V - 10 div. x Sensitivity
<b>5V</b>	±100V - 10 div. x Sensitivity
<b>Logic channels</b>	With Option H03508
<b>Select. switching thresholds</b>	TTL, CMOS, ECL, User -2...+8V
<b>Impedance</b>	100 kΩ    <4 pF
<b>Coupling</b>	DC
<b>Max. input voltage</b>	40V (DC + peak AC)
<b>Triggering</b>	
<b>Analog channels:</b>	
<b>Automatic:</b>	Linking of peak detection and trigger level
<b>Min. signal height</b>	0.8 div.; 0.5 div. typ. (1.5 div. at ≤2 mV/div.)
<b>Frequency range</b>	5 Hz...200 MHz (5 Hz...120 MHz at ≤2 mV/div.)
<b>Level control range</b>	From peak- to peak+
<b>Normal (without peak):</b>	
<b>Min. signal height</b>	0.8 div.; 0.5 div. typ. (1.5 div. at ≤2 mV/div.)
<b>Frequency range</b>	0 Hz...200 MHz (0 Hz...120 MHz at ≤2 mV/div.)
<b>Level control range</b>	-10...+10 div from center of the screen
<b>Operating modes:</b>	Slope/Video/Logic/Pulses/Buses (optional)
<b>Slope:</b>	Rising, falling, both
<b>Sources:</b>	CH 1, CH 2, Line, Ext., LCH 0...7 [CH 1...CH 4, Line, Ext., LCH 0...7]
<b>Coupling (Analog Channel):</b>	<b>AC:</b> 5 Hz...200 MHz <b>DC:</b> 0...200 MHz <b>HF:</b> 30 kHz...200 MHz <b>LF:</b> 0...5 kHz <b>Noise rejection:</b> selectable
<b>Video:</b>	
<b>Standards</b>	PAL, NTSC, SECAM, PAL-M, SDTV 576i, HDTV 720p, HDTV 1080i, HDTV 1080p
<b>Fields</b>	Field 1, field 2, both
<b>Line</b>	All, selectable line number
<b>Sync. Impulse</b>	Positive, negative
<b>Sources:</b>	CH 1, CH 2, Ext. [CH 1...CH 4]
<b>Logic:</b>	AND, OR, TRUE, FALSE
<b>Sources:</b>	LCH 0...7
<b>State</b>	LCH 0...7 X, H, L
<b>Pulses:</b>	Positive, negative
<b>Modes</b>	equal, unequal, less than, greater than, within/without a range
<b>Range</b>	min. 32 ns, max. 10 s, resolution min. 8 ns
<b>Sources:</b>	CH 1, CH 2, Ext. [CH 1...CH 4]
<b>Indicator for trigger action:</b>	LED
<b>Ext. Trigger via:</b>	Auxiliary input 0.3V...10V <sub>pp</sub>
<b>2nd Trigger:</b>	
<b>Slope:</b>	Rising, falling, both
<b>Min. signal height</b>	0.8 div.; 0.5 div. typ. (1.5 div. at ≤2 mV/div.)
<b>Frequency range</b>	0 Hz...200 MHz (0 Hz...120 MHz at ≤2 mV/div.)
<b>Level control range</b>	-10...+10 div.
<b>Operating modes:</b>	
<b>after time</b>	32 ns...10 s
<b>after incidence</b>	1...2 <sup>16</sup>
<b>Buses (Opt. H0010):</b>	I <sup>2</sup> C/SPI/UART/RS-232
<b>Sources:</b>	CH 1, CH 2, Ext., LCH 0...7 [CH 1...CH 4, Ext., LCH 0...7]
<b>Buses (Opt. H0011):</b>	I <sup>2</sup> C/SPI/UART/RS-232
<b>Sources:</b>	CH 1, CH 2, Ext. (for Chip Select at SPI) [CH 1...CH 4, Ext.] (for Chip Select at SPI)
<b>Format</b>	hexadecimal, binary

<b>I<sup>2</sup>C</b>	Trigger on Start, Stop, Restart, NACK, Address (7 or 10 Bit), Data, Address and Data, up to 5 Mb/s
<b>SPI</b>	up to 32 Bit Data, Chip select (CS) pos. or neg., without CS, up to 12.5 Mb/s
<b>UART/RS-232</b>	up to 8 Bit Data, up to 31 Mb/s

<b>Horizontal System</b>	
<b>Domain representation:</b>	Time, Frequency (FFT), Voltage (XY)
<b>Representation Time Base:</b>	Main-window, main- and zoom-window
<b>Memory Zoom:</b>	Up to 50,000:1
<b>Accuracy:</b>	50 ppm
<b>Time Base:</b>	2 ns/div...50 s/div.
<b>Roll Mode:</b>	50 ms/div...50 s/div.

<b>Digital Storage</b>	
<b>Sampling rate (real time):</b>	2 x 1 GSa/s, 1 x 2 GSa/s [4 x 1 GSa/s, 2 x 2 GSa/s] Logic channels: 8 x 1 GSa/s
<b>Memory:</b>	2 x 1 MPts, 1 x 2 MPts [4 x 1 MPts, 2 x 2 MPts]
<b>Operation modes:</b>	Refresh, Average, Envelope, Peak-Detect Roll: free run/triggered, Filter, HiRes
<b>Resolution (vertical):</b>	8 Bit, (HiRes up to 10 Bit)
<b>Resolution (horizontal):</b>	40 ps
<b>Interpolation:</b>	Sin <sup>x</sup> /x, linear, Sample-hold
<b>Persistence:</b>	Off, 50 ms...∞
<b>Delay pretrigger:</b>	0...8 Million x (1/samplerate)
<b>posttrigger:</b>	0...2 Million x (1/samplerate)
<b>Display refresh rate:</b>	Up to 2000 waveforms/s
<b>Display:</b>	Dots, vectors, 'persistence'
<b>Reference memories:</b>	typ. 10 Traces

<b>Operation/Measuring/Interfaces</b>	
<b>Operation:</b>	Menu-driven (multilingual), Autoset, help functions (multilingual)
<b>Save/Recall memories:</b>	typ. 10 complete instrument parameter settings
<b>Frequency counter:</b>	
<b>0.5 Hz...200 MHz</b>	6 Digit resolution
<b>Accuracy</b>	50 ppm
<b>Auto measurements:</b>	Amplitude, standard deviation, V <sub>pp</sub> , V <sub>p+</sub> , V <sub>p-</sub> , V <sub>rms</sub> , V <sub>avg</sub> , V <sub>top</sub> , V <sub>base</sub> , frequency, period, pulse count, t <sub>width+</sub> , t <sub>width-</sub> , t <sub>dutycycle+</sub> , t <sub>dutycycle-</sub> , t <sub>rise</sub> , t <sub>fall</sub> , pos. edge count, neg. edge count, pos. pulse count, neg. pulse count, trigger frequency, trigger period, phase, delay
<b>Cursor measurements:</b>	ΔV, Δt, 1/Δt (f), V to Gnd, Vt related to Trigger point, ratio X and Y, pulse count, peak to peak, peak+, peak-, mean value, RMS value, standard deviation
<b>Interface:</b>	Dual-Interface USB type B/RS-232 (H0720), 2 x USB type A (front- and rear side each 1 x) max. 100 mA, DVI-D for ext. Monitor
<b>Optional:</b>	IEEE-488 (GPIB) (H0740), Ethernet/USB (H0730)

<b>Display functions</b>	
<b>Marker:</b>	up to 8 user definable marker for easy navigation
<b>VirtualScreen:</b>	virtual Display with 20 div. vertical for all Math-, Logic-, Bus- and Reference Signals
<b>Busdisplay:</b>	up to 2 buses, user definable, parallel or serial buses (option), decode of the bus value in ASCII, binary, decimal or hexa-decimal, up to 4 lines
<b>Parallel</b>	logic channels can also be used as source for bus definition
<b>I<sup>2</sup>C</b> (Opt. H0010, H0011)	color coded Read-, Write Address, Data, Start, Stop, acknowledge, missing acknowledge, Errors and Trigger condition
<b>SPI</b> (Opt. H0010, H0011)	color coded Data, Start, Stop, Errors and Trigger condition
<b>UART/RS-232</b> (Opt. H0010, H0011)	color coded Data, Start, Stop, Errors and Trigger condition

Mathematic functions	
Number of formula sets:	5 formula sets with up to 5 formulas each
Sources:	All channels and math. memories
Targets:	Math. memories
Functions:	ADD, SUB, 1/X, ABS, MUL, DIV, SQ, POS, NEG, INV, INTG, DIFF, SQR, MIN, MAX, LOG, LN, Low-, High-pass filter
Display:	Up to 4 math. memories with label

Pass/Fail functions	
Sources:	Analog channels
Type of test:	Mask around a signal, userdefined tolerance
Functions:	Stop, Beep, screen shot (screen print-out) and/or output to printer for pass or fail, event counting up to 4 billion, including the number and the percentage of pass and fail events

General Information	
Component tester	
Test voltage:	10V <sub>P</sub> (open) typ.
Test current:	10 mA <sub>P</sub> (short) typ.
Test frequency:	50 Hz/200Hz typ.
Reference Potential:	Ground (safety earth)
Probe ADJ Output:	1 kHz/1 MHz square wave signal ~1V <sub>pp</sub> (ta <4 ns)
Bus Signal Source	SPI, I <sup>2</sup> C, UART, Parallel (4Bit)
Internal RTC (Realtime clock):	
	Date and time for stored data
Line voltage:	100...240V, 50...60Hz, CAT II
Power consumption:	Max. 45W, typ. 25W [max. 55W, typ. 35W]
Protective system:	Safety class I (EN61010-1)
Operating temperature:	+5...+40 °C
Storage temperature:	-20...+70 °C
Rel. humidity:	5...80% (non condensing)
Dimensions (W x H x D):	285 x 175 x 140 mm
Weight:	<2.5 kg

All data valid at 23 °C after 30 minutes warm-up.

<b>Accessories supplied:</b>	Line cord, Operating manual, 2 [4] Probes, 10:1 with attenuation ID (HZ010), CD, Software
<b>Recommended accessories:</b>	
H0010	Serial bus trigger and hardware accelerated decode, I <sup>2</sup> C, SPI, UART/RS-232 on Logic channels and Analog channels
H0011	Serial bus trigger and hardware accelerated decode, I <sup>2</sup> C, SPI, UART/RS-232 on Analog channels
H03508	Active 8 Channel Logic Probe
H0730	Dual-Interface Ethernet/USB
H0740	Interface IEEE-488 (GPIB) galvanically isolated
HZ091	4RU 19" Rackmount Kit
HZ090	Carrying Case for protection and transport
HZ020	High voltage probe 1000:1 (400MHz, 1000V <sub>rms</sub> )
HZ030	Active probe 1GHz (0.9pF, 1MΩ, including many accessories)
HZ050	AC/DC Current probe 20A, DC...100 kHz
HZ051	AC/DC Current probe 1000A, DC...20 kHz

## 200 MHz 2 [4] Channel Digital Oscilloscope HM02022 [HM02024] Product description, page 8

Display	
Display:	16.5 cm (6.5") VGA Color TFT
Resolution:	640 x 480 Pixel
Backlight:	LED 400 cd/m <sup>2</sup>
Display area for traces:	
without menu	400 x 600 Pixel (8 x 12 div.)
with menu	400 x 500 Pixel (8 x 10 div.)
Color depth:	256 colors
Intensity steps per trace:	0...31

Vertical System	
Channels:	
DSO mode	CH 1, CH 2 [CH 1...CH 4]

MSO mode	CH 1, CH 2, LCH 0...7 (logic channels) [CH 1, CH 2, LCH 0...7, CH 4] with Option H03508
Auxiliary input:	Frontside [Rear side]
Function	Ext. Trigger
Impedance	1 MΩ    14 pF ±2pF
Coupling	DC, AC
Max. input voltage	100V (DC + peak AC)
XYZ-mode:	All analog channels on individual choice
Invert:	CH 1, CH 2 [CH 1...CH 4]
Y-bandwidth (-3 dB):	200 MHz (5mV...10V)/div. 100 MHz (1 mV, 2 mV)/div.
Lower AC bandwidth:	2Hz
Bandwidth limiter (switchable):	approx. 20 MHz
Rise time (calculated):	<1.75 ns
DC gain accuracy:	2%
Input sensitivity:	12 calibrated steps
CH 1, CH 2 [CH 1...CH 4]	1 mV/div...10V/div. (1-2-5 Sequence)
Variable	Between calibrated steps
Inputs CH 1, CH 2 [CH 1...CH 4]:	
Impedance	1 MΩ    14 pF ±2pF (50Ω switchable)
Coupling	DC, AC, GND
Max. input voltage	200V (DC + peak AC), 50Ω <5V <sub>rms</sub>
Measuring circuits:	Measuring Category I (CAT I)
Position range:	±10 Divs
Offset control:	
1 mV, 2 mV	±0,2V - 10 div. x Sensitivity
5...50 mV	±1V - 10 div. x Sensitivity
100 mV	±2,5V - 10 div. x Sensitivity
200 mV...2 V	±40V - 10 div. x Sensitivity
5 V	±100V - 10 div. x Sensitivity
Logic channels	With Option H03508
Select. switching thresholds	TTL, CMOS, ECL, User -2...+8V
Impedance	100 kΩ    <4 pF
Coupling	DC
Max. input voltage	40V (DC + peak AC)

Triggering	
Analog channels:	
Automatic:	Linking of peak detection and trigger level
Min. signal height	0.8 div.; 0.5 div. typ. (1.5 div. at ≤2 mV/div.)
Frequency range	5 Hz...250 MHz (5 Hz...120 MHz at ≤2 mV/div.)
Level control range	From peak- to peak+
Normal (without peak):	
Min. signal height	0.8 div.; 0.5 div. typ. (1.5 div. at ≤2 mV/div.)
Frequency range	0 Hz...250 MHz (0 Hz...120 MHz at ≤2 mV/div.)
Level control range	-10...+10 div. from center of the screen
Operating modes:	Slope/Video/Logic/Pulses/Buses (optional)
Slope:	Rising, falling, both
Sources:	CH 1, CH 2, Line, Ext., LCH 0...7 [CH 1...CH 4, Line, Ext., LCH 0...7]
Coupling (Analog Channel):	AC: 5 Hz...250 MHz DC: 0...250 MHz HF: 30 kHz...250 MHz LF: 0...5 kHz Noise rejection: selectable

Video:	
Standards	PAL, NTSC, SECAM, PAL-M, SDTV 576i, HDTV 720p, HDTV 1080i, HDTV 1080p
Fields	Field 1, field 2, both
Line	All, selectable line number
Sync. Impulse	Positive, negative
Sources:	CH 1, CH 2, Ext. [CH 1...CH 4]
Logic:	AND, OR, TRUE, FALSE
Sources:	LCH 0...7
State	LCH 0...7 X, H, L
Pulses:	Positive, negative
Modes	equal, unequal, less than, greater than, within/without a range
Range	min. 32 ns, max. 10 s, resolution min. 8 ns
Sources:	CH 1, CH 2, Ext. [CH 1...CH 4]
Indicator for trigger action:	LED
Ext. Trigger via:	Auxiliary input 0.3V...10V <sub>pp</sub>
2nd Trigger:	
Slope:	Rising, falling, both
Min. signal height	0.8 div.; 0.5 div. typ. (1.5 div. at ≤2 mV/div.)
Frequency range	0 Hz...250 MHz (0 Hz...120 MHz at ≤2 mV/div.)

<b>Level control range</b>	-10...+10 div.
<b>Operating modes:</b>	
<b>after time</b>	32 ns...10 s
<b>after incidence</b>	1...2 <sup>16</sup>
<b>Buses (Opt. H0010):</b>	I <sup>2</sup> C/SPI/UART/RS-232
<b>Sources:</b>	CH 1, CH 2, Ext., LCH 0...7 [CH 1...CH 4, Ext., LCH 0...7]
<b>Buses (Opt. H0011):</b>	I <sup>2</sup> C/SPI/UART/RS-232
<b>Sources:</b>	CH 1, CH 2, Ext. (for Chip Select at SPI) [CH 1...CH 4, Ext.] (for Chip Select at SPI)
<b>Format</b>	hexadecimal, binary
<b>I<sup>2</sup>C</b>	Trigger on Start, Stop, Restart, NACK, Address (7 or 10Bit), Data, Address and Data, up to 5 Mb/s
<b>SPI</b>	up to 32Bit Data, Chip select (CS) pos. or neg., without CS, up to 12,5 Mb/s
<b>UART/RS-232</b>	up to 8Bit Data, up to 31 Mb/s

<b>Horizontal System</b>	
<b>Domain representation:</b>	Time, Frequency (FFT), Voltage (XY)
<b>Representation Time Base:</b>	Main-window, main- and zoom-window
<b>Memory Zoom:</b>	Up to 50,000:1
<b>Accuracy:</b>	50 ppm
<b>Time Base:</b>	2 ns/div...50 s/div.
<b>Roll Mode:</b>	50 ms/div...50 s/div.

<b>Digital Storage</b>	
<b>Sampling rate (real time):</b>	2 x 1 GSa/s, 1 x 2 GSa/s [4 x 1 GSa/s, 2 x 2 GSa/s] Logic channels: 8 x 1 GSa/s
<b>Memory:</b>	2 x 1 MPts, 1 x 2 MPts [4 x 1 MPts, 2 x 2 MPts]
<b>Operation modes:</b>	Refresh, Average, Envelope, Peak-Detect Roll: free run/triggered, Filter, HiRes
<b>Resolution (vertical)</b>	8 Bit, (HiRes up to 10 Bit)
<b>Resolution (horizontal)</b>	40 ps
<b>Interpolation:</b>	Sinx/x, linear, Sample-hold
<b>Persistence:</b>	Off, 50 ms...∞
<b>Delay pretrigger:</b>	0...8 Million x (1/samplerate)
<b>posttrigger:</b>	0...2 Million x (1/samplerate)
<b>Display refresh rate:</b>	Up to 2000 waveforms/s
<b>Display:</b>	Dots, vectors, 'persistence'
<b>Reference memories:</b>	typ. 10 Traces

<b>Operation/Measuring/Interfaces</b>	
<b>Operation:</b>	Menu-driven (multilingual), Autoset, help functions (multilingual)
<b>Save/Recall memories:</b>	typ. 10 complete instrument parameter settings
<b>Frequency counter:</b>	
<b>0.5 Hz...250 MHz</b>	6 Digit resolution
<b>Accuracy</b>	50 ppm
<b>Auto measurements:</b>	Amplitude, standard deviation, $V_{pp}$ , $V_{p+}$ , $V_{p-}$ , $V_{rms}$ , $V_{avg}$ , $V_{top}$ , $V_{base}$ , frequency, period, pulse count, $t_{width+}$ , $t_{width-}$ , $t_{duty+}$ , $t_{duty-}$ , $t_{rise}$ , $t_{fall}$ , pos. edge count, neg. edge count, pos. pulse count, neg. pulse count, trigger frequency, trigger period, phase, delay $\Delta V$ , $\Delta t$ , $1/\Delta t$ (f), V to Gnd, Vt related to Trigger point, ratio X and Y, pulse count, peak to peak, peak+, peak-, mean value, RMS value, standard deviation
<b>Cursor measurements:</b>	$\Delta V$ , $\Delta t$ , $1/\Delta t$ (f), V to Gnd, Vt related to Trigger point, ratio X and Y, pulse count, peak to peak, peak+, peak-, mean value, RMS value, standard deviation
<b>Interface:</b>	Dual-Interface USB type B/RS-232 (H0720), 2 x USB type A (front- and rear side each 1 x) max. 100 mA, DVI-D for ext. Monitor
<b>Optional:</b>	IEEE-488 (GPIB) (H0740), Ethernet/USB (H0730)

<b>Display functions</b>	
<b>Marker:</b>	up to 8 user definable marker for easy navigation
<b>VirtualScreen:</b>	virtual Display with 20 div. vertical for all Math-, Logic-, Bus- and Reference Signals
<b>Busdisplay:</b>	up to 2 buses, user definable, parallel or serial buses (option), decode of the bus value in ASCII, binary, decimal or hexadecimal, up to 4 lines

<b>Parallel</b>	logic channels can also be used as source for bus definition
<b>I<sup>2</sup>C</b> (Opt. H0010, H0011)	color coded Read-, Write Address, Data, Start, Stop, acknowledge, missing acknowledge, Errors and Trigger condition
<b>SPI</b> (Opt. H0010, H0011)	color coded Data, Start, Stop, Errors and Trigger condition
<b>UART/RS-232</b> (Opt. H0010, H0011)	color coded Data, Start, Stop, Errors and Trigger condition

<b>Mathematic functions</b>	
<b>Number of formula sets:</b>	5 formula sets with up to 5 formulas each
<b>Sources:</b>	All channels and math. memories
<b>Targets:</b>	Math. memories
<b>Functions:</b>	ADD, SUB, 1/X, ABS, MUL, DIV, SQ, POS, NEG, INV, INTG, DIFF, SQR, MIN, MAX, LOG, LN, Low-, High-pass filter
<b>Display:</b>	Up to 4 math. memories with label

<b>Pass/Fail functions</b>	
<b>Sources:</b>	Analog channels
<b>Type of test:</b>	Mask around a signal, userdefined tolerance
<b>Functions:</b>	Stop, Beep, screen shot (screen print-out) and/or output to printer for pass or fail, event counting up to 4 billion, including the number and the percentage of pass and fail events

<b>General Information</b>	
<b>Component tester</b>	
<b>Test voltage:</b>	10V <sub>P</sub> (open) typ.
<b>Test current:</b>	10 mA <sub>P</sub> (short) typ.
<b>Test frequency:</b>	50 Hz/200 Hz typ.
<b>Reference Potential:</b>	Ground (safety earth)
<b>Probe ADJ Output:</b>	1 kHz/1 MHz square wave signal $\sim 1V_{pp}$ (ta < 4 ns)
<b>Bus Signal Source</b>	SPI, I <sup>2</sup> C, UART, Parallel (4 Bit)
<b>Internal RTC</b>	
(Realtime clock):	Date and time for stored data
<b>Line voltage:</b>	100...240V, 50...60 Hz, CAT II
<b>Power consumption:</b>	Max. 45 W, typ. 25 W [max. 55 W, typ. 35 W]
<b>Protective system:</b>	Safety class I (EN61010-1)
<b>Operating temperature:</b>	+5...+40 °C
<b>Storage temperature:</b>	-20...+70 °C
<b>Rel. humidity:</b>	5...80 % (non condensing)
<b>Dimensions (W x H x D):</b>	285 x 175 x 140 mm
<b>Weight:</b>	<2.5kg

All data valid at 23 °C after 30 minutes warm-up.

<b>Accessories supplied:</b> Line cord, Operating manual, 2 [4] Probes, 10:1 with attenuation ID (H010), CD, Software	
<b>Recommended accessories:</b>	
H0010	Serial bus trigger and hardware accelerated decode, I <sup>2</sup> C, SPI, UART/RS-232 on Logic channels and Analog channels
H0011	Serial bus trigger and hardware accelerated decode, I <sup>2</sup> C, SPI, UART/RS-232 on Analog channels
H03508	Active 8 Channel Logic Probe
H0730	Dual-Interface Ethernet/USB
H0740	Interface IEEE-488 (GPIB) galvanically isolated
H091	4RU 19" Rackmount Kit
H090	Carrying Case for protection and transport
H020	High voltage probe 1000:1 [400 MHz, 1000V <sub>rms</sub> ]
H030	Active probe 1 GHz [0.9 pF, 1 MΩ, including many accessories]
H050	AC/DC Current probe 20A, DC...100 kHz
H051	AC/DC Current probe 1000A, DC...20 kHz

## 250 MHz 4 Channel Digital Oscilloscope HM02524

Product description, page 7

### Display

Display:	16.5 cm (6.5") VGA Color TFT
Resolution:	640 x 480 Pixel
Backlight:	LED 400 cd/m <sup>2</sup>
Display area for traces:	
without menu	400 x 600 Pixel (8 x 12 div.)
with menu	400 x 500 Pixel (8 x 10 div.)
Color depth:	256 colors
Intensity steps per channel:	0...31

### Vertical System

Channels:	
DSO mode	CH1...CH4
MSO mode	CH1...CH3 LCH0...7 (with 1x Option HO3508) CH1, CH2, LCH0...15 (with 2x Option HO3508)
Auxiliary input:	Rear side
Function	Ext. Trigger
Impedance	1 M $\Omega$    13 pF $\pm$ 2 pF
Coupling	DC, AC
Max. input voltage	100V (DC + peak AC)
XYZ-mode:	All analog channels on individual choice
Invert:	CH 1...CH 4
Y-bandwidth [-3 dB]:	250 MHz [5 mV...5V]/div. 100 MHz [1 mV, 2 mV]/div.
Lower AC bandwidth:	2 Hz
Bandwidth limiter (switchable):	approx. 20 MHz
Rise time [calculated]:	<1.5 ns
DC gain accuracy	2%
Input sensitivity:	12 calibrated steps
CH 1...C H4	1 mV/div...5V/div. (1-2-5 Sequence)
Variable	Between calibrated steps
Inputs CH1...CH4:	
Impedance	1 M $\Omega$    13 pF $\pm$ 2 pF (50 $\Omega$ switchable)
Coupling	DC, AC, GND
Max. input voltage	200V (DC + peak AC), 50 $\Omega$ <5V <sub>rms</sub>
Measuring circuits:	Measuring Category I (CAT I)
Position range	$\pm$ 10 Divs
Offset control:	
1 mV, 2 mV	$\pm$ 0.2V
5...50 mV	$\pm$ 1V
100 mV...5V	$\pm$ 20V
Logic channels	With Option HO3508
Select. switching thresholds	TTL, CMOS, ECL, 2x User -2...+8V
Impedance	100 k $\Omega$    <4 pF
Coupling	DC
Max. input voltage	40V (DC + peak AC)

### Triggering

Analogue channels:	
Automatic:	Linking of peak detection and trigger level
Min. signal height	0.8 div; 0.5 div typ.
Frequency range	5 Hz...300 MHz
Level control range	From peak- to peak+
Normal (without peak):	
Min. signal height	0.8 div; 0.5 div typ.
Frequency range	0...300 MHz
Level control range	-10...+10 div.
Operating modes:	Slope/Video/Logic/Pulse/Buses (optional)
Slope:	Rising, falling, both
Sources:	CH 1...CH 4, Line, Ext., LCH 0...15
Coupling:	AC: 5 Hz...300 MHz DC: 0...300 MHz HF: 30 kHz...300 MHz LF: 0...5 kHz Noise rejection: 100 MHz LPF selectable

### Video:

Standards	PAL, NTSC, SECAM, PAL-M, SDTV 576i, HDTV 720p, HDTV 1080i, HDTV 1080p
Fields	Field 1, field 2, both

Line	All, selectable line number
Sync. Impulse	Positive, negative
Source	CH 1...CH 4
Logic:	AND, OR, TRUE, FALSE
Source	LCH 0...15
State	LCH 0...15 X, H, L
Pulse:	Positive, negative
Modes	equal, unequal, less than, greater than, within/without a range
Range	min. 8 ns, max. 134,217 ms, resolution from 8 ns until 1 $\mu$ s
Sources:	CH 1, CH 2, Ext. [CH 1...CH 4]
Indicator for trigger action:	LED
Ext. Trigger via:	Auxiliary input 0.3V...10V <sub>pp</sub>
2nd Trigger:	
Slope	Rising, falling, both
Min. signal height	0.8 div.; 0.5 div. typ.
Frequency range	0...300 MHz
Level control range	-10...+10 div.
Operating modes:	
after time	20 ns...0.1 s
after incidence	1...2 <sup>16</sup>
Buses (Opt. H0010):	I <sup>2</sup> C/SPI/UART/RS-232
Sources:	CH 1, CH 2, Ext., LCH 0...7 [CH 1...CH 4, Ext., LCH 0...7]
Buses (Opt. H0011):	I <sup>2</sup> C/SPI/UART/RS-232
Sources:	CH 1, CH 2, Ext. (for Chip Select at SPI) [CH 1...CH 4, Ext.] (for Chip Select at SPI)
Format	hexadecimal, binary
I <sup>2</sup> C	Trigger on Start, Stop, Restart, NACK, Address (7 or 10 Bit), Data, Address and Data, up to 5 Mb/s
SPI	up to 32 Bit Data, Chip select (CS) pos. or neg., without CS, up to 12.5 Mb/s
UART/RS-232	up to 8 Bit Data, up to 31 Mb/s

### Horizontal System

Domain representation:	Time, Frequency (FFT), Voltage (XY)
Representation Time Base:	Main-window, main- and zoom-window
Memory Zoom:	Up to 100,000:1
Accuracy:	15 ppm
Time Base:	
Refresh operating modes	2 ns/div...20 ms/div.
Roll operating modes	50 ms/div...50 s/div.

### Digital Storage

Sampling rate (real time):	4 x 1.25 GSa/s, 2 x 2.5 GSa/s Logic channels: 16 x 1.25 GSa/s
Sampling rate (random):	25 GSa/s (n/a to logic channels)
Memory:	4 x 2 MPts, 2 x 4 MPts
Operation modes:	Refresh, Average, Envelope, Peak-Detect Roll: free run/triggered, Filter
Resolution (vertical):	8 Bit
Resolution (horizontal):	
Yt Mode	50 Pts./div.
XY Mode	8 Bit
Interpolation:	Sin/x (CH 1...CH 4), Pulse (LCH 0...15)
Persistence:	Off, 50 ms... $\infty$
Delay pretrigger:	0...2 Million x (1/samplerate)
posttrigger:	0...8 Million x (1/samplerate)
Display refresh rate:	Up to 2500 waveforms/s
Display:	Dots, vectors (interpolation), 'persistence'
Reference memories:	typ. 10 Traces

### Operation/Measuring/Interfaces

Operation:	Menu-driven (multilingual), Autoset, help functions (multilingual)
Save/Recall memories:	typ. 10 complete instrument parameter settings
Frequency counter:	
0.5 Hz...300 MHz	6 Digit resolution
Accuracy	15 ppm
Auto measurements:	Amplitude, standard deviation, V <sub>pp</sub> , V <sub>p+</sub> , V <sub>p-</sub> , V <sub>rms</sub> , V <sub>avg</sub> , V <sub>top</sub> , V <sub>base</sub> , frequency, period, pulse count, t <sub>width+</sub> , t <sub>width-</sub> , t <sub>duty</sub> , t <sub>duty</sub> , t <sub>rise</sub> , t <sub>fall</sub> , pos. edge count, neg. edge count, pos. pulse count, neg. pulse count, trigger frequency, trigger period, phase, delay

<b>Cursor measurements:</b>	$\Delta V$ , $\Delta t$ , $1/\Delta t$ (f), V to Gnd, Vt related to Trigger point, ratio X and Y, pulse count, peak to peak, peak+, peak-, mean value, RMS value, standard deviation
<b>Interface:</b>	Dual-Interface USB/RS-232 (H0720), USB-Stick (frontside), USB-Printer (rear side) for Postscript Printer, DVI-D for ext. monitor
<b>Optional:</b>	IEEE-488 (GPIB) (H0740), Ethernet/USB (H0730)

Display functions	
<b>Marker:</b>	up to 8 user definable marker for easy navigation
<b>VirtualScreen:</b>	virtual Display with 20 div. vertical for all Math-, Logic-, Bus- and Reference Signals
<b>Busdisplay:</b>	up to 2 buses, user definable, parallel or serial buses (option), decode of the bus value in ASCII, binary, decimal or hexadecimal, up to 4 lines
<b>Parallel</b>	logic channels can also be used as source for bus definition
<b>I<sup>2</sup>C</b> (Opt. H0010, H0011)	color coded Read-, Write Address, Data, Start, Stop, acknowledge, missing acknowledge, Errors and Trigger condition
<b>SPI</b> (Opt. H0010, H0011)	color coded Data, Start, Stop, Errors and Trigger condition
<b>UART/RS-232</b> (Opt. H0010, H0011)	color coded Data, Start, Stop, Errors and Trigger condition

Mathematic functions	
<b>Number of formula sets:</b>	5 formula sets with up to 5 formulas each
<b>Sources:</b>	All channels and math. memories
<b>Targets:</b>	Math. memories
<b>Functions:</b>	ADD, SUB, 1/X, ABS, MUL, DIV, SQ, POS, NEG, INV, INTG, DIFF, SQR, MIN, MAX, LOG, LN, Low-, High-pass filter
<b>Display:</b>	Up to 4 math. memories with label

Pass/Fail functions	
<b>Sources:</b>	Analog channels
<b>Type of test:</b>	Mask around a signal, userdefined tolerance
<b>Functions:</b>	Stop, Beep, screen shot, (screen print-out), output to printer and/or pulse on the Y output for pass or fail, event counting up to 4 billion, including the number and the percentage of pass and fail events.

General Information	
<b>Probe ADJ Output:</b>	1 kHz/1 MHz square wave signal approx. 1 V <sub>pp</sub> (t <sub>a</sub> < 4 ns)
<b>Bus Signal Source:</b>	SPI, I <sup>2</sup> C, UART, Parallel (4Bit)
<b>Internal RTC</b> (Realtime clock):	Date and time for stored data
<b>Line voltage:</b>	105...253V, 50...60Hz, CAT II
<b>Power consumption:</b>	Max. 70W at 230V, 50Hz
<b>Protective system:</b>	Safety class I (EN61010-1)
<b>Operating temperature:</b>	+5...+40 °C
<b>Storage temperature:</b>	-20...+70 °C
<b>Rel. humidity:</b>	5...80% (non condensing)
<b>Dimensions (W x H x D):</b>	285 x 175 x 220 mm
<b>Weight:</b>	3.6 kg

All data valid at 23 °C after 30 minute warm-up

<b>Accessories supplied:</b>	Line cord, Operating manual, 4 Probes, 10:1 with attenuation ID (HZ350), CD, Software
<b>Recommended accessories:</b>	
H0010	Serial bus trigger and hardware accelerated decode, I <sup>2</sup> C, SPI, UART/RS-232 on Logic channels
H0011	Serial bus trigger and hardware accelerated decode, I <sup>2</sup> C, SPI, UART/RS-232 on Analog channels
H03508	Active 8 Channel Logic Probe
H03516	2 x H03508, active 8 Channel Logic Probes
H0730	Dual-Interface Ethernet/USB
H0740	Interface IEEE-488 (GPIB) galvanically isolated
HZ46	4RU 19" Rackmount Kit

HZ99	Carrying Case for protection and transport
HZ355	Slimline Probe 10:1 with automatic identification
HZ355DU	Upgrade from 2x HZ350 to 2x HZ355
HZO20	High voltage probe 1000:1 (400MHz, 1000V <sub>rms</sub> )
HZO30	Active probe 1 GHz (0.9 pF, 1 MΩ, including many accessories)
HZO50	AC/DC Current probe 20A, DC...100kHz
HZO51	AC/DC Current probe 1000A, DC...20kHz

## 350 MHz 2 [4] Channel Digital Oscilloscope HMO3522 [HMO3524] Product description, page 6

Display	
<b>Display:</b>	16.5 cm (6.5") VGA Color TFT
<b>Resolution:</b>	640 x 480 Pixel
<b>Backlight:</b>	LED 400 cd/m <sup>2</sup>
<b>Display area for traces:</b>	
<b>without menu</b>	400 x 600 Pixel (8 x 12 div.)
<b>with menu</b>	400 x 500 Pixel (8 x 10 div.)
<b>Color depth:</b>	256 colors
<b>Intensity steps per channel:</b>	0...31

Vertical System	
<b>Channels:</b>	
<b>DSO mode</b>	CH 1, CH 2 [CH 1...CH 4]
<b>MSO mode</b>	CH 1, CH 2, LCH 0...15 (logic channels) with 2 x Option H03508
<b>Auxiliary input:</b>	Frontside [Rear side]
<b>Function</b>	Ext. Trigger
<b>Impedance</b>	1 MΩ    13 pF ±2 pF
<b>Coupling</b>	DC, AC
<b>Max. input voltage</b>	100V (DC + peak AC)
<b>XYZ-mode:</b>	All analog channels on individual choice
<b>Invert:</b>	CH 1, CH 2 [CH 1...CH 4]
<b>Y-bandwidth (-3 dB):</b>	350MHz (5mV...5V)/div. 100MHz (1 mV, 2 mV)/div.
<b>Lower AC bandwidth:</b>	2Hz
<b>Bandwidth limiter</b> (switchable):	approx. 20 MHz
<b>Rise time (calculated):</b>	<1 ns
<b>DC gain accuracy</b>	2%
<b>Input sensitivity:</b>	12 calibrated steps
<b>CH 1, CH 2 [CH 1...CH 4]</b>	1 mV/div...5V/div. [1-2-5 Sequence]
<b>Variable</b>	Between calibrated steps
<b>Inputs CH 1, CH 2</b> [CH 1...CH 4]:	
<b>Impedance</b>	1 MΩ    13 pF ±2 pF [50 Ω switchable]
<b>Coupling</b>	DC, AC, GND
<b>Max. input voltage</b>	200V (DC + peak AC), 50 Q <5V <sub>rms</sub>
<b>Measuring circuits:</b>	Measuring Category I [CAT I]
<b>Position range</b>	±10 Divs
<b>Offset control:</b>	
<b>1 mV, 2 mV</b>	±0.2V
<b>5...50 mV</b>	±1V
<b>100 mV...5V</b>	±20V
<b>Logic channels</b>	With Option H03508
<b>Select. switching</b>	
<b>thresholds</b>	TTL, CMOS, ECL, 2 x User -2...+8V
<b>Impedance</b>	100 kΩ    <4 pF
<b>Coupling</b>	DC
<b>Max. input voltage</b>	40V (DC + peak AC)

Triggering	
<b>Analog channels:</b>	
<b>Automatic:</b>	Linking of peak detection and trigger level
<b>Min. signal height</b>	0.8 div; 0.5 div typ.
<b>Frequency range</b>	5 Hz...400 MHz
<b>Level control range</b>	From peak- to peak+
<b>Normal (without peak):</b>	
<b>Min. signal height</b>	0.8 div; 0.5 div typ.
<b>Frequency range</b>	0...400 MHz
<b>Level control range</b>	-10...+10 div.
<b>Operating modes:</b>	Slope/Video/Logic/Pulse/Buses (optional)
<b>Slope:</b>	Rising, falling, both

<b>Sources:</b>	CH 1, CH 2, Line, Ext., LCH 0...15 [CH 1...CH 4, Line, Ext., LCH 0...15]
<b>Coupling:</b>	<b>AC:</b> 5 Hz...400 MHz <b>DC:</b> 0...400 MHz <b>HF:</b> 30 kHz...400 MHz <b>LF:</b> 0...5 kHz <b>Noise rejection:</b> 100 MHz LPF selectable
<b>Video:</b>	
<b>Standards</b>	PAL, NTSC, SECAM, PAL-M, SDTV 576i, HDTV 720p, HDTV 1080i, HDTV 1080p
<b>Fields</b>	Field 1, field 2, both
<b>Line</b>	All, selectable line number
<b>Sync. Impulse Source</b>	Positive, negative CH 1, CH 2, Ext. [CH 1...CH 4]
<b>Logic:</b>	AND, OR, TRUE, FALSE
<b>Source</b>	LCH 0...15
<b>State</b>	LCH 0...15 X, H, L
<b>Pulse:</b>	Positive, negative
<b>Modes</b>	equal, unequal, less than, greater than, within/without a range
<b>Range</b>	min. 8 ns, max. 134,217 ms, resolution from 8 ns until 1 $\mu$ s
<b>Sources:</b>	CH 1, CH 2, Ext. [CH 1...CH 4]
<b>Indicator for trigger action:</b>	LED
<b>Ext. Trigger via:</b>	Auxiliary input 0.3V...10V <sub>pp</sub>
<b>2nd Trigger:</b>	
<b>Slope</b>	Rising, falling, both
<b>Min. signal height</b>	0.8 div.; 0.5 div. typ.
<b>Frequency range</b>	0...400 MHz
<b>Level control range</b>	-10...+10 div.
<b>Operating modes:</b>	
<b>after time</b>	20 ns...0.1 s
<b>after incidence</b>	1...2 <sup>16</sup>
<b>Buses (Opt. H0010):</b>	I <sup>2</sup> C/SPI/UART/RS-232
<b>Sources:</b>	CH 1, CH 2, Ext., LCH 0...7 [CH 1...CH 4, Ext., LCH 0...7]
<b>Buses (Opt. H0011):</b>	I <sup>2</sup> C/SPI/UART/RS-232
<b>Sources:</b>	CH 1, CH 2, Ext. (for Chip Select at SPI) [CH 1...CH 4, Ext.] (for Chip Select at SPI)
<b>Format</b>	hexadecimal, binary
<b>I<sup>2</sup>C</b>	Trigger on Start, Stop, Restart, NACK, Address (7 or 10 Bit), Data, Address and Data, up to 5 Mb/s
<b>SPI</b>	up to 32 Bit Data, Chip select (CS) pos. or neg., without CS, up to 12.5 Mb/s
<b>UART/RS-232</b>	up to 8 Bit Data, up to 31 Mb/s

<b>Horizontal System</b>	
<b>Domain representation:</b>	Time, Frequency (FFT), Voltage (XY)
<b>Representation Time Base:</b>	Main-window, main- and zoom-window
<b>Memory Zoom:</b>	Up to 100,000:1
<b>Accuracy:</b>	15 ppm
<b>Time Base:</b>	
<b>Refresh operating modes</b>	1 ns/div...20 ms/div.
<b>Roll operating modes</b>	50 ms/div...50 s/div.

<b>Digital Storage</b>	
<b>Sampling rate (real time):</b>	2 x 2 GSa/s, 1 x 4 GSa/s [4 x 2 GSa/s, 2 x 4 GSa/s] Logic channels: 16 x 1 GSa/s
<b>Sampling rate (random):</b>	50 GSa/s (n/a to logic channels)
<b>Memory:</b>	2 x 2 MPts, 1 x 4 MPts [4 x 2 MPts, 2 x 4 MPts]
<b>Operation modes:</b>	Refresh, Average, Envelope, Peak-Detect Roll: free run/triggered, Filter
<b>Resolution (vertical):</b>	8 Bit
<b>Resolution (horizontal):</b>	
<b>Yt Mode</b>	50 Pts./div.
<b>XY Mode</b>	8 Bit
<b>Interpolation:</b>	Sinx/x (CH 1...CH 4), Pulse (LCH 0...15)
<b>Persistence:</b>	Off, 50 ms... $\infty$
<b>Delay pretrigger:</b>	0...2 Million x (1/samplerate)
<b>posttrigger:</b>	0...8 Million x (1/samplerate)
<b>Display refresh rate:</b>	Up to 2500 waveforms/s
<b>Display:</b>	Dots, vectors (interpolation), 'persistence'
<b>Reference memories:</b>	typ. 10 Traces

<b>Operation/Measuring/Interfaces</b>	
<b>Operation:</b>	Menu-driven (multilingual), Autoset, help functions (multilingual)
<b>Save/Recall memories:</b>	typ. 10 complete instrument parameter settings
<b>Frequency counter:</b>	
<b>0.5 Hz...350 MHz</b>	6 Digit resolution
<b>Accuracy</b>	15 ppm
<b>Auto measurements:</b>	
Amplitude, standard deviation, V <sub>pp</sub> , V <sub>p+</sub> , V <sub>p-</sub> , V <sub>rms</sub> , V <sub>avg</sub> , V <sub>top</sub> , V <sub>base</sub> , frequency, period, pulse count, t <sub>width+</sub> , t <sub>width-</sub> , t <sub>duty cycle+</sub> , t <sub>duty cycle-</sub> , t <sub>rise</sub> , t <sub>fall</sub> , pos. edge count, neg. edge count, pos. pulse count, neg. pulse count, trigger frequency, trigger period, phase, delay $\Delta$ V, $\Delta$ t, 1/ $\Delta$ t (f), V to Gnd, Vt related to Trigger point, ratio X and Y, pulse count, peak to peak, peak+, peak-, mean value, RMS value, standard deviation	
<b>Cursor measurements:</b>	
$\Delta$ V, $\Delta$ t, 1/ $\Delta$ t (f), V to Gnd, Vt related to Trigger point, ratio X and Y, pulse count, peak to peak, peak+, peak-, mean value, RMS value, standard deviation	
<b>Interface:</b>	
Dual-Interface USB/RS-232 (H0720), USB-Stick (frontside), USB-Printer (rear side) for Postscript Printer, DVI-D for ext. monitor	
<b>Optional:</b>	
IEEE-488 (GPIB) (H0740), Ethernet/USB (H0730)	

<b>Display functions</b>	
<b>Marker:</b>	up to 8 user definable marker for easy navigation
<b>VirtualScreen:</b>	virtual Display with 20 div. vertical for all Math-, Logic-, Bus- and Reference Signals
<b>Busdisplay:</b>	up to 2 buses, user definable, parallel or serial buses (option), decode of the bus value in ASCII, binary, decimal or hexadecimal, up to 4 lines
<b>Parallel</b>	
<b>I<sup>2</sup>C</b> (Opt. H0010, H0011)	logic channels can also be used as source for bus definition color coded Read-, Write Address, Data, Start, Stop, acknowledge, missing acknowledge, Errors and Trigger condition
<b>SPI</b> (Opt. H0010, H0011)	color coded Data, Start, Stop, Errors and Trigger condition
<b>UART/RS-232</b> (Opt. H0010, H0011)	color coded Data, Start, Stop, Errors and Trigger condition

<b>Mathematic functions</b>	
<b>Number of formula sets:</b>	5 formula sets with up to 5 formulas each
<b>Sources:</b>	All channels and math. memories
<b>Targets:</b>	Math. memories
<b>Functions:</b>	ADD, SUB, 1/X, ABS, MUL, DIV, SQ, POS, NEG, INV, INTG, DIFF, SQ, MIN, MAX, LOG, LN, Low-, High-pass filter
<b>Display:</b>	Up to 4 math. memories with label

<b>Pass/Fail functions</b>	
<b>Sources:</b>	Analog channels
<b>Type of test:</b>	Mask around a signal, userdefined tolerance
<b>Functions:</b>	Stop, Beep, screen shot (screen print-out) and/or output to printer for pass or fail, event counting up to 4 billion, including the number and the percentage of pass and fail events

<b>General Information</b>	
<b>Probe ADJ Output:</b>	1 kHz/1 MHz square wave signal approx 1V <sub>pp</sub> (ta < 4ns)
<b>Bus Signal Source:</b>	SPI, I <sup>2</sup> C, UART, Parallel (4 Bit)
<b>Internal RTC (Realtime clock):</b>	Date and time for stored data
<b>Line voltage:</b>	105...253V, 50...60 Hz, CAT II
<b>Power consumption:</b>	Max. 70W at 230V, 50 Hz
<b>Protective system:</b>	Safety class I (EN61010-1)
<b>Operating temperature:</b>	+5...+40 °C
<b>Storage temperature:</b>	-20...+70 °C
<b>Rel. humidity:</b>	5...80 % (non condensing)
<b>Dimensions (W x H x D):</b>	285 x 175 x 220 mm
<b>Weight:</b>	3.6 kg

All data valid at 23 °C after 30 minute warm-up.

**Accessories supplied:** Line cord, Operating manual, 2 [4] Probes, 10:1 with attenuation ID (HZ350), CD, Software

**Recommended accessories:**

H0010	Serial bus trigger and hardware accelerated decode, I <sup>2</sup> C, SPI, UART/RS-232 on Logic channels
H0011	Serial bus trigger and hardware accelerated decode, I <sup>2</sup> C, SPI, UART/RS-232 on Analog channels
H03508	Active 8 Channel Logic Probe
H03516	2 x H03508, active 8 Channel Logic Probes
H0730	Dual-Interface Ethernet/USB
H0740	Interface IEEE-488 (GPIB) galvanically isolated
HZ46	4RU 19" Rackmount Kit
HZ99	Carrying Case for protection and transport
HZ355	Stimline Probe 10:1 with automatic identification
HZ355DU	Upgrade from 2 x HZ350 to 2 x HZ355
HZ020	High voltage probe 1000:1 (400 MHz, 1000 V <sub>rms</sub> )
HZ030	Active probe 1 GHz (0.9 pF, 1 MΩ, including many accessories)
HZ050	AC/DC Current probe 20A, DC...100 kHz
HZ051	AC/DC Current probe 1000A, DC...20 kHz

## 1 GHz Spectrum Analyzer HMS1000E

Product description, page 15

### Frequency

<b>Frequency range:</b>	100 kHz...1 GHz
<b>Temperature stability:</b>	±2 ppm (0...30 °C)
<b>Aging:</b>	±1 ppm/year
<b>Span setting range:</b>	0 Hz (zero span) and 1 MHz...1 GHz

**Spectral purity, SSB phase noise:**

<b>100 kHz from carrier</b> (500 MHz, +20...30 °C)	< -100 dBc/Hz
<b>1 MHz from carrier</b> (500 MHz, +20...30 °C)	< -120 dBc/Hz

**Sweep time:**

<b>Span = 0 Hz</b>	20 ms...100 s
<b>Span &gt; 0 Hz</b>	20 ms...1000 s, min. 20 ms/600 MHz

**Resolution bandwidths (-3 dB):** 10 kHz...1 MHz in 1-3 steps, 200 kHz

<b>Tolerance:</b>	
≤300 kHz	±5 % typ.
1 MHz	±10 % typ.

**Video bandwidths:** 1 kHz...1 MHz in 1-3 steps

### Amplitude

<b>Display range:</b>	Average noise level displayed up to +20 dBm
-----------------------	---

**Amplitude measurement range:**

	Typ. -104...+20 dBm
--	---------------------

**Max. permissible DC at HF input:**

	80 V
--	------

**Max. power at HF input:** 20 dBm, 30 dBm for max. 3 Min.

**Intermodulation free range:**

TOI products, 2x -20 dBm (-10 dBm ref. level)	66 dB typ. (typ. +13 dBm third-order intercept)
(at distance between signals ≤2 MHz)	60 dB typ. (+10 dBm TOI)
(at distance between signals >2 MHz)	66 dB typ. (typ. +13 dBm TOI)

**DANL** (Displayed average noise level):

(RBW 10 kHz, VBW 1 kHz, ref. level ≤-30 dBm 10 MHz...1 GHz)	-95 dBm, typ. -104 dBm
---	------------------------

**Inherent spurious:**

(ref. level ≤-20 dBm, f >30 MHz, RBW ≤100 kHz)	< -80 dBm
--	-----------

**Input related spurious:**

(Mixer level ≤-40 dBm, carrier offset >1 MHz)	-70 dBc typ.
---	--------------

**2<sup>nd</sup> harmonic receive frequency:**

(mixer level -40 dBm)	-60 dBc typ.
-----------------------	--------------

**Level display:**

<b>Reference level</b>	-80...+20 dBm in 1 dB steps
------------------------	-----------------------------

<b>Display range</b>	100 dB, 50 dB, 20 dB, 10 dB
----------------------	-----------------------------

**Logarithmic display scaling**

	dBm, dBμV, dBmV
--	-----------------

**Measured curves:** 1 curve and 1 memory curve

**Trace mathematics:** A-B (curve-stored curve), B-A

**Detectors:** Auto-, Min-, Max-Peak, Sample, RMS, Average

**Failure of level display:** <1.5 dB, typ. 0.5 dB (ref. level -50 dBm, 20...30 °C)

### Marker/Deltamarker

<b>Number of marker:</b>	8
<b>Marker functions:</b>	Peak, next peak, minimum, center = marker, frequency, reference level = marker level, all marker on peak
<b>Marker displays:</b>	Normal (level & log.), delta marker, noise marker

### Inputs/Outputs

<b>HF Input</b>	N socket
<b>Input Impedance:</b>	50 Ω
<b>VSWR (10 MHz...1 GHz):</b>	<1.5 typ.
<b>Trigger input:</b>	BNC female
<b>Trigger voltage</b>	TTL
<b>Ext. reference input/output:</b>	BNC females
<b>Reference frequency</b>	10 MHz
<b>Essential level (50 Ω)</b>	10 dBm
<b>Supply output for field probes:</b>	6 V <sub>dc</sub> , max. 100 mA (2.5 mm DIN jack)
<b>Audio output (Phone):</b>	3.5 mm DIN jack
<b>Demodulation</b>	AM and FM (internal speaker)

### Miscellaneous

<b>Display:</b>	16.5 cm (6.5") TFT Color VGA Display
<b>Save/Recall memory:</b>	10 complete device settings
<b>Trigger:</b>	Free run, Single Trigger, external Trigger
<b>Interfaces:</b>	Dual-Interface USB/RS-232 (H0720), USB-Stick (frontside), USB-Printer (rear side)
<b>Power supply:</b>	105...253 V, 50...60 Hz, CAT II
<b>Power consumption:</b>	Max. 40 W at 230 V, 50 Hz
<b>Protection class:</b>	Safety class I (EN61010-1)
<b>Operating temperature:</b>	+5...+40 °C
<b>Storage temperature:</b>	-20...+70 °C
<b>Rel. humidity:</b>	5...80 % (non condensing)
<b>Dimensions (W x H x D):</b>	285 x 175 x 220 mm
<b>Weight:</b>	3.6 kg

All data valid at 23 °C after 30 minute warm-up.

**Accessories supplied:** Line cord, Operating manual, HZ21 Adapter plug, N plug to BNC socket, CD, Software

**Recommended accessories:**

H0730	Dual-Interface Ethernet/USB
H0740	Interface IEEE-488 (GPIB), galvanically isolated
HZ13	Interface cable (USB) 1.8 m
HZ14	Interface cable (serial) 1:1
HZ20	Adapter, BNC to 4 mm banana
HZ33	Test cable 50 Ω, BNC/BNC, 0.5 m
HZ34	Test cable 50 Ω, BNC/BNC, 1 m
HZ46	4RU 19" Rackmount Kit
HZ72	GPIB-Cable 2 m
HZ99	Carrying Case for protection and transport
HZ520	Plug-in Antenna with BNC connection
HZ525	50 Ω-Termination, N plug
HZ530	Near-Field Probe Set 1 GHz for EMV diagnostics
HZ540/550	Near-Field Probe Set 3 GHz for EMV diagnostics
HZ540L/550L	Near-Field Probe Set 3 GHz for EMV diagnostics
HZ560	Transient limiter
HZ575	75/50 Ω Converter
HZ030	active probe 1 GHz (0.9 pF, 1 MΩ, including many accessories)

**1 GHz Spectrum Analyzer HMS1000, HMS1010 (with TG)  
[3GHz Spectrum Analyzer HMS3000, HMS3010 (with TG)]**  
Product description, page 14

Frequency	
Frequency range:	HMS1000, HMS1010 100 kHz...1 GHz HMS3000, HMS3010 100 kHz...3 GHz
Temperature stability:	±2 ppm (0...30 °C)
Aging:	±1 ppm/year
Frequency counter*:	Resolution 1 Hz Accuracy ±(Frequency x tolerance of reference)
Span setting range:	HMS1000, HMS1010 0 Hz (zero span) and 100 Hz...1 GHz HMS3000, HMS3010 0 Hz (zero span) and 100 Hz...3 GHz
Spectral purity, SSB phase noise:	30 kHz from carrier (500 MHz, +20...30 °C) <-85 dBc/Hz 100 kHz from carrier (500 MHz, +20...30 °C) <-100 dBc/Hz 1 MHz from carrier (500 MHz, +20...30 °C) <-120 dBc/Hz
Sweep time:	Span = 0 Hz 20 ms...100 s Span > 0 Hz 20 ms...1000 s, min. 20 ms/600 MHz
Resolution bandwidths (-3 dB):	100 Hz...1 MHz in 1-3 steps, 200 kHz
Tolerance:	≤300 kHz ±5 % typ. 1 MHz ±10 % typ.
Resolution bandwidths (-6 dB):	200 Hz, 9 kHz, 120 kHz, 1 MHz
Video bandwidths:	10 Hz...1 MHz in 1-3 steps
Amplitude	
Display range:	Average noise level displayed up to +20 dBm
Amplitude measurement range:	Typ. -114...+20 dBm
Max. permissible DC at HF input:	80 V
Max. power at HF input:	20 dBm, 30 dBm for max. 3 Min.
Intermodulation free range:	TOI products, 2 x -20 dBm (-10 dBm ref. level) 66 dB typ. (typ. +13 dBm third-order intercept) (at distance between signals ≤2 MHz) 60 dB typ. (+10 dBm TOI) (at distance between signals >2 MHz) 66 dB typ. (typ. +13 dBm TOI)
DANL [Displayed average noise level]:	(RBW 100 Hz, VBW 10 Hz, ref. level ≤-30 dBm 10 MHz...1 GHz resp. 3 GHz) -115 dBm, typ. -124 dBm With Preamp. -135 dBm typ.
Inherent spurious:	(ref. level ≤-20 dBm, f >30 MHz, RBW ≤100 kHz) <-80 dBm
Input related spurious:	(Mixer level ≤-40 dBm, carrier offset >1 MHz) -70 dBc typ., [-55 dBc (2...3 GHz)]
2 <sup>nd</sup> harmonic receive frequency:	(mixer level -40 dBm) -60 dBc typ.
Level display:	Reference level -80...+20 dBm in 1 dB steps Display range 100 dB, 50 dB, 20 dB, 10 dB, linear* Logarithmic display scaling dBm, dBμV, dBmV Linear display scaling Percentage of reference level*
Measured curves:	1 curve and 1 memory curve
Trace mathematics:	A-B (curve-stored curve), B-A
Detectors:	Auto-, Min-, Max-Peak, Sample, RMS, Average, Quasi-Peak
Failure of level display:	<1.5 dB, typ. 0.5 dB (ref. level -50 dBm, 20...30 °C)

Marker/Deltamarker	
Number of marker:	8
Marker functions:	Peak, next peak, minimum, center = marker, frequency, reference level = marker level, all marker on peak
Marker displays:	Normal (level, lin. & log.), delta marker, noise marker, (frequency) counter*

Inputs/Outputs	
HF Input	N socket
Input Impedance:	50 Ω
VSWR (10 MHz...1 GHz/3 GHz):	<1.5 typ.
Output tracking generator: (HMS1010/HMS3010)	N socket
Output Impedance:	50 Ω
Frequency range:	5 MHz...1 GHz [3 GHz]
Output level:	-20...0 dBm, in 1 dB steps
Trigger input:	BNC female
Trigger voltage	TTL
Ext. reference input/output:	BNC females
Reference frequency	10 MHz
Essential level (50 Ω)	10 dBm
Supply output for field probes:	6 V <sub>dc</sub> , max. 100 mA (2.5 mm DIN jack)
Audio output (Phone):	3.5 mm DIN jack
Demodulation	AM and FM (internal speaker)

Miscellaneous	
Display:	16.5 cm (6.5") TFT Color VGA Display
Save/Recall memory:	10 complete device settings
Trigger:	Free run, Video Trigger*, Single Trigger, external Trigger
Interfaces:	Dual-Interface USB/RS-232 (H0720), USB-Stick (frontside), USB-Printer (rear side), DVI-D for ext. monitor
Power supply:	105...253 V, 50...60 Hz, CAT II
Power consumption:	Max. 40 W at 230 V, 50 Hz
Protection class:	Safety class I (EN61010-1)
Operating temperature:	+5...+40 °C
Storage temperature:	-20...+70 °C
Rel. humidity:	5...80 % (non condensing)
Dimensions (W x H x D):	285 x 175 x 220 mm
Weight:	3.6 kg

All data valid at 23 °C after 30 minute warm-up  
\*from 02.2012

<b>Accessories supplied:</b> Line cord, Operating manual, HZ21 Adapter plug, N-plug to BNC socket (2x HMS1010/3010), CD, Software	
<b>Recommended accessories:</b>	
H0730	Dual-Interface Ethernet/USB
H0740	Interface IEEE-488 (GPIB), galvanically isolated
H03011	Preamplifier -135 dBm DANL (100 Hz RBW)
HZ13	Interface cable (USB) 1.8 m
HZ14	Interface cable (serial) 1:1
HZ20	Adapter, BNC to 4 mm banana
HZ33	Test cable 50 Ω, BNC/BNC, 0.5 m
HZ34	Test cable 50 Ω, BNC/BNC, 1 m
HZ46	4RU 19" Rackmount Kit
HZ72	GPIB-Cable 2 m
HZ99	Carrying Case for protection and transport
HZ520	Plug-in Antenna with BNC connection
HZ525	50 Ω-Termination, N plug
HZ530	Near-Field Probe Set 1 GHz for EMC diagnostics
HZ540/550	Near-Field Probe Set 3 GHz for EMC diagnostics
HZ540L/550L	Near-Field Probe Set 3 GHz for EMC diagnostics
HZ547	3 GHz VSWR Bridge for HMS1010, HMS3010
HZ560	Transient limiter
HZ575	75/50 Ω Converter
HZ030	Active probe 1 GHz (0.9 pF, 1 MΩ, including many accessories)

### Triple Power Supply HM7042-5

Product description, page 24

#### Outputs

2 x 0...32V/2A and 0...5.5V/5A	ON/OFF pushbutton control, SMPS followed by a linear regulator, floating outputs for parallel/serial operation, current limit and electronic fuse.
-----------------------------------	--

#### Channel 1+3 (32V)

Range:	2 x 0...32V, continuously adjustable 2 knobs (coarse/fine)
Ripple:	≤100 μV <sub>rms</sub> (3 Hz...300 kHz)
Current:	max. 2A
Current limit/ electronic fuse:	0...2A, continuously adjustable (knob)
Recovery time (10...90% load variation)	
	80 μs within ±1 mV of nominal value
	30 μs within ±10 mV of nominal value
	0 μs within ±100 mV of nominal value
Max. transient deviation:	typ. 75 mV
Recovery time (50% basic load, 10% load variation)	
	30 μs within ±1 mV of nominal value
	5 μs within ±10 mV of nominal value
	0 μs within ±100 mV of nominal value
Max. transient deviation:	typ. 17 mV
Display	
7-segment LED:	32.00V (4 digit)/2.000A (4 digit)
Resolution:	0.01 V/1 mA
Display accuracy:	±3 digit voltage/±4 digit current
LED:	indicates current limit

#### Channel 2 (5.5V)

Range:	0...5.5V, continuously adjustable (knobs)
Ripple:	≤100 μV <sub>rms</sub> (3 Hz...300 kHz)
Current:	max. 5A
Current limit/electronic fuse:	0...5A, continuously adjustable (knob)
Recovery time (10...90% load variation):	
	80 μs within ±1 mV of nominal value
	10 μs within ±100 mV of nominal value
Max. transient deviation:	typ. 170 mV
Recovery time (50% basic load, 10% load variation):	
	30 μs within ±1 mV of nominal value
	15 μs within ±10 mV of nominal value
	0 μs within ±100 mV of nominal value
Max. transient deviation:	typ. 60 mV
Display	
7-segment LED:	5.50V (3 digit)/5A (3 digit)
Resolution:	0.01 V/10 mA
Display accuracy:	±3 digit voltage/±1 digit current
LED:	indicates current limit

#### Maximum ratings

Max. voltage applicable to output terminals:	
CH 1 + CH 3:	33V
CH 2:	6V
Reverse voltage:	max. 0.4V
Reverse current:	max. 5A
Voltage to earth:	max. 150V

#### Miscellaneous

Safety class:	Safety class I (EN61010-1)
Mains supply:	115/230V ±10%; 50...60 Hz, CAT II
Mains Fuse:	115V: 2 x 5A slow blow 5 x 20 mm 230V: 2 x 2.5A slow blow 5 x 20 mm
Power consumption:	max. 330VA/250W
Operating temperature:	+5...+40 °C
Storage temperature:	-20...+70 °C
Rel. humidity:	5...80% (non condensing)
Dimensions (W x H x D):	285 x 75 x 365 mm
Weight:	approx. 7.4 kg

All data valid at 23 °C after 30 minutes warm-up.

**Accessories supplied:** Operating manual, line cord, CD

#### Recommended accessories:

HZ10S	5 x silicone test lead (measurement connection in black)
HZ10R	5 x silicone test lead (measurement connection in red)
HZ10B	5 x silicone test lead (measurement connection in blue)
HZ42	19" Rackmount Kit 2RU

### Arbitrary Power Supply HM8143

Product description, page 25

#### Outputs

2 x 0...30V/2A 1 x 5V/2A	On/off pushbutton control, Floating outputs (allowing parallel and series operation), current limit, electronic fuse, tracking mode
-----------------------------	---

#### Channels 1+3 (0...30V)

Output voltage:	2 x 0...30V
Setting resolution:	10 mV
Setting accuracy:	±3 digits (typ. ±2 digit)
Measurement accuracy:	±3 digits (typ. ±2 digit)
Residual ripple:	<5 mV <sub>rms</sub> (3 Hz...300 kHz)
Recovery time (10...90% load variation)	
	45 μs within ±1 mV of nominal value
	16 μs within ±100 mV of nominal value
Max. transient deviation:	typ. 800 mV
Recovery time (50% basic load, 10% load variation)	
	30 μs within ±1 mV of nominal value
	10 μs within ±100 mV of nominal value
Max. transient deviation:	typ. 120 mV
Compensation of lead resistances (SENSE):	up to 300 mV
Output current:	2 x 0...2A
Setting resolution:	1 mA
Setting accuracy:	±3 digits (typ. ±2 digit)
Measurement accuracy:	±3 digits (typ. ±2 digit)
Recovery time:	<100 μs

#### Channel 2 (5V)

Accuracy:	5V ±50 mV
Output current:	max. 2A
Ripple:	≤100 μV <sub>rms</sub> (3 Hz...300 kHz)
Recovery time (10...90% load variation)	
	30 μs within ±1 mV of nominal value
	0 μs within ±100 mV of nominal value
Max. transient deviation:	typ. 60 mV
Recovery time (50% basic load, 10% load variation)	
	30 μs within ±1 mV of nominal value
	0 μs within ±100 mV of nominal value
Max. transient deviation:	typ. 20 mV

#### Arbitrary Function (Channel 1 only)

Number of points:	max. 4096
Resolution:	12 Bit
Parameters of points:	Dwell time and Voltage
Dwell time:	100 μs...60 s
Repetition rate:	1...255 and continuous

#### Inputs:

Modulation input (BNC socket):	0...10V
Accuracy:	1% of full scale
Modulation bandwidth (-3 dB):	>50 kHz
Slew rate (dV/dt):	1V/μs
Trigger input (BNC socket):	Triggering the arbitrary function
Level:	TTL

#### Miscellaneous

Max. voltage applicable to output terminals	
CH 1 + CH 3:	30V
CH 2:	5V
Voltage to earth:	max. 150V

<b>Display:</b>	4 x 4-digit 7-segment LEDs
<b>Interface:</b>	USB/RS-232 (H0820), IEEE-488 (GPIB) (optional)
<b>Protection class:</b>	I acc. to EN 61010 (IEC 61010) with protective earth
<b>Power supply:</b>	115/230V ±10%; 50...60Hz, CAT II
<b>Mains fuse:</b>	115V: 2 x 6A slow blow 5 x 20mm 230V: 2 x 3.15A slow blow 5 x 20mm
<b>Power consumption:</b>	approx. 300VA
<b>Operating temperature:</b>	+5...+40°C
<b>Storage temperature:</b>	-20...+70°C
<b>Rel. humidity:</b>	5...80% (non condensing)
<b>Dimensions (W x H x D):</b>	285 x 75 x 365mm
<b>Weight:</b>	approx. 9 kg

All data valid at 23°C after 30 minutes warm-up.

<b>Accessories supplied:</b> Operating manual, line cord, CD, Software	
<b>Recommended accessories:</b>	
H0880	IEEE-488 (GPIB) Interface (galvanically isolated)
HZ10S	5 x silicone test lead (measurement connection in black)
HZ10R	5 x silicone test lead (measurement connection in red)
HZ10B	5 x silicone test lead (measurement connection in blue)
HZ13	Interface cable (USB) 1.8m
HZ14	Interface cable (serial) 1:1
HZ42	19" Rackmount Kit 2RU
HZ72	GPIB-Cable 2m

**Programmable 2 Channel High Performance Power Supply HMP200**  
**[Programmable 3 Channel High Performance Power Supply HMP2030]**  
 Product description, page 23

**Outputs**

Advanced parallel and series operation: simultaneous switching on/off of active channels via "Output" button, common voltage- and current control using tracking mode (individual channel linking), individual mapping of channels which shall be affected by FuseLink overcurrent protection (switch-off), all channels galvanically isolated from each other and the protective earth.

<b>HMP2020</b>	1 x 0...32V/0...10A	1 x 32V/0...5A
<b>HMP2030</b>	3 x 0...32V/0...5A	
<b>Output terminals:</b>	4mm safety sockets frontside, Screw-type terminal rear side (4 units per channel)	
<b>Output power:</b>	188W max.	
<b>Compensation of lead resistances (SENSE):</b>	1V	
<b>Overvoltage/overcurrent protection (OVP/OCP):</b>	Adjustable for each channel	
<b>Electronic fuse:</b>	Adjustable for each channel, may be combined using FuseLink	
<b>Response time:</b>	<10ms	

**32V channels**

<b>Output values:</b>	
<b>HMP2020</b>	1 x 0...32V/0...10A, (5A at 32V, 160W max.) 1 x 0...32V/0...5A, (2,5A at 32V, 80W max.)
<b>HMP2030</b>	3 x 0...32V/0...5A, (2,5A at 32V, 80W max.)

<b>Resolution:</b>	
<b>Voltage</b>	1mV
<b>Current HMP2030</b>	<1A: 0.1mA; ≥1A: 1mA
<b>Current HMP2020</b>	<1A: 0.2mA; ≥1A: 1mA, (10A Channel, CH 1) <1A: 0.2mA; ≥1A: 1mA, (5A Channel, CH 2)

<b>Setting accuracy:</b>	
<b>Voltage</b>	<0.05% + 5mV (typ. ±2mV)
<b>Current HMP2030</b>	<0.1% + 5mA (typ. ±0.5mA at I <500mA)
<b>Current HMP2020</b>	<0.1% + 5mA (typ. ±1mA at I <500mA), (10A Channel, CH 1)
<b>Current HMP2020</b>	<0.1% + 5mA (typ. ±0,5mA at I <500mA), (5A Channel, CH 2)

<b>Measurement accuracy:</b>	
<b>Voltage</b>	<0.05% + 2mV

<b>Current HMP2030</b>	<500mA: <0.05% + 0.5mA, typ. ±0.2mA	
<b>Current HMP2030</b>	≥500mA: <0.05% + 2mA, typ. ±1mA	
<b>Current HMP2020</b>	<500mA: <0,05% + 0,5mA, typ. ±0,5mA, (10A Channel, CH 1)	
<b>Current HMP2020</b>	<500mA: <0,05% + 0,5mA, typ. ±0,2mA, (5A Channel, CH 2)	
<b>Current HMP2020</b>	≥500mA: <0,05% + 2mA, typ. ±2mA, (10A Channel, CH 1)	
<b>Current HMP2020</b>	≥500mA: <0,05% + 2mA, typ. ±1mA, (5A Channel, CH 1)	
<b>Residual ripple</b>	3Hz...100kHz	3Hz...20MHz
<b>Voltage</b>	<150µV <sub>rms</sub>	1.5mV <sub>rms</sub> typ.
<b>Current</b>	<1mA <sub>rms</sub>	
<b>Residual deviation after a load change (10...90%):</b>		
<b>Voltage</b>	<0.01% + 2mV	
<b>Current</b>	<0.01% + 250µA	
<b>Residual deviation after a line voltage change (±10%):</b>		
<b>Voltage</b>	<0.01% + 2mV	
<b>Current</b>	<0.01% + 250µA	
<b>Recovery time after a load step from 10...90% for return within a ±10mV window:</b>	<100µs	

**Arbitrary Function EasyArb**

<b>Parameters of points:</b>	Voltage, current, time
<b>Number of points:</b>	128
<b>Dwell time:</b>	10ms...60s
<b>Repetition rate:</b>	Continuous or burst mode with 1...255 repetitions
<b>Trigger:</b>	Manually via keyboard or via Interface

**Maximum ratings**

<b>Reverse voltage:</b>	33V max.
<b>Reverse polarized voltage:</b>	0.4V max.
<b>Max. permitted current in case of reverse voltage:</b>	5A max.
<b>Voltage to earth:</b>	150V max.

**Miscellaneous**

<b>Temperature coefficient/°C:</b>	
<b>Voltage</b>	0.01% + 2mV
<b>Current</b>	0.02% + 3mA
<b>Display:</b>	240 x 64 Pixel LCD (full graphical)
<b>Memory:</b>	Non volatile memory for 3 Arbitrary functions and 10 device settings
<b>Interface:</b>	Dual-Interface USB/RS-232 (H0720)
<b>Processing time:</b>	<50ms
<b>Protection class:</b>	Safety class I [EN61010-1]
<b>Power supply:</b>	115/230V±10%; 50...60Hz, CAT II
<b>Mains fuses:</b>	5 x 20mm slow blow 115V: 2 x 6A 230V: 2 x 3.15A
<b>Power consumption:</b>	350VA max.
<b>Operating temperature:</b>	+5...+40°C
<b>Storage temperature:</b>	-20...+70°C
<b>Rel. humidity:</b>	5...80% (non condensing)
<b>Dimensions (W x H x D):</b>	285 x 75 x 365mm
<b>Weight:</b>	8,5kg

All data valid at 23°C after 30 minutes warm-up.

<b>Accessories supplied:</b> Line cord, Operating manual, CD, Software	
<b>Recommended accessories:</b>	
H0730	Dual-Interface Ethernet/USB
H0740	Interface IEEE-488 (GPIB), galvanically isolated
HZ10S	5 x silicone test lead (measurement connection in black)
HZ10R	5 x silicone test lead (measurement connection in red)
HZ10B	5 x silicone test lead (measurement connection in blue)
HZ13	Interface cable (USB) 1.8m
HZ14	Interface cable (serial) 1:1
HZ42	2RU 19" Rackmount Kit
HZ72	GPIB-Cable 2m

## Programmable 3 Channel High Performance Power Supply HMP4030 [Programmable 4 Channel High Performance Power Supply HMP4040] Product description, page 22

### Outputs

Advanced parallel and series operation: simultaneous switching on/off of active channels via "Output" button, common voltage- and current control using tracking mode (individual channel linking), individual mapping of channels which shall be affected by FuseLink overcurrent protection (switch-off), all channels galvanically isolated from each other and the protective earth.

HMP4030	3 x 0...32V/0...10A
HMP4040	4 x 0...32V/0...10A
Output terminals:	4 mm safety sockets frontside, Screw-type terminal rear side (4 units per channel)
Output power:	384 W max.
Compensation of lead resistances (SENSE):	1 V
Overvoltage/overcurrent protection (OVP/OCP):	Adjustable for each channel
Electronic fuse:	Adjustable for each channel, may be combined using FuseLink
Response time:	<10 ms

### 32V channels

Output values:	
HMP4030	3 x 0...32V/0...10A, [5A at 32V, 160W max.]
HMP4040	4 x 0...32V/0...10A, [5A at 32V, 160W max.]
Resolution:	
Voltage	1 mV
Current	<1A: 0.2mA; ≥1A: 1 mA
Setting accuracy:	
Voltage	<0.05% + 5 mV (typ. ±2mV)
Current	<0.1% + 5 mA (typ. ±1 mA at I <500 mA)
Measurement accuracy:	
Voltage	<0.05% + 2 mV
Current	<500 mA: <0.05% + 1 mA, typ. ±0.5 mA
Current	≥500 mA: <0.05% + 2 mA, typ. ±2 mA
Residual ripple	
Voltage	3 Hz...100 kHz      3 Hz...20 MHz
Current	<150 μV <sub>rms</sub> 1.5 mV <sub>rms</sub> typ.
Residual deviation after a load change (10...90%):	
Voltage	<0.01% + 2 mV
Current	<0.01% + 250 μA
Residual deviation after a line voltage change (±10%):	
Voltage	<0.01% + 2 mV
Current	<0.01% + 250 μA
Recovery time after a load step from 10...90% for return within a ±10 mV window:	
	<100 μs

### Arbitrary Function EasyArb

Parameters of points:	Voltage, current, time
Number of points:	128
Dwell time:	10 ms...60 s
Repetition rate:	Continuous or burst mode with 1...255 repetitions
Trigger:	Manually via keyboard or via Interface

### Maximum ratings

Reverse voltage:	33 V max.
Reverse polarized voltage:	0.4 V max.
Max. permitted current in case of reverse voltage:	5 A max.
Voltage to earth:	150 V max.

### Miscellaneous

Temperature coefficient/°C:	
Voltage	0.01% + 2 mV
Current	0.02% + 3 mA
Display:	240 x 128 Pixel LCD (full graphical)
Memory:	Non volatile memory for 3 Arbitrary functions and 10 device settings
Interface:	Dual-Interface USB/RS-232 (H0720)
Processing time:	<50 ms

Protection class:	Safety class I (EN61010-1)
Power supply:	115/230V±10%; 50...60Hz, CAT II
Mains fuses:	5 x 20 mm slow blow 115V: 2 x 10A 230V: 2 x 5A
Power consumption:	550 VA max.
Operating temperature:	+5...+40 °C
Storage temperature:	-20...+70 °C
Rel. humidity:	5...80% (non condensing)
Dimensions (W x H x D):	285 x 125 x 365 mm
Weight:	approx. 10 kg

All data valid at 23 °C after 30 minutes warm-up.

**Accessories supplied:** Line cord, Operating manual, CD, Software

### Recommended accessories:

H0730	Dual-Interface Ethernet/USB
H0740	Interface IEEE-488 (GPIB), galvanically isolated
HZ10S	5 x silicone test lead (measurement connection in black)
HZ10R	5 x silicone test lead (measurement connection in red)
HZ10B	5 x silicone test lead (measurement connection in blue)
HZ13	Interface cable (USB) 1.8 m
HZ14	Interface cable (serial) 1:1
HZ43	19" Rackmount Kit 3RU
HZ72	GPIB-Cable 2m
HZP91	19" Rackmount Kit 4RU

## 6½-Digit Precision Multimeter HM8112-3

Product description, page 29

### DC specifications

Ranges:	0.1V; 1V; 10V; 100V; 600V			
Input impedance	0.1V, 1.0V:	>1 GΩ		
	10V, 100V, 600V:	10 MΩ		
	Accuracy:	Values given are in ±(% of reading (rdg.) + % of full scale (f.s.))		
	Range	1 year; % rdg.	23 °C ±2 °C % f.s.	Temp. coefficient 10...21 °C + 25...40 °C
	0,1V	0,005	0,0006	0,0008
	1,0V	0,003	0,0006	0,0008
	10,0V	0,003	0,0006	0,0008
	100,0V	0,003	0,0006	0,0008
	600,0V	0,004	0,0006	0,0008

Integration time:	0.1 s	1...60 s
Display range:	120.000 digit	1,200.000 digit
600V range:	60.000 digit	600.000 digit
Resolution:	1 μV	100 nV
Zero point		
Temperature drift:	better than 0.3 μV/°C	
Long-term stability:	better than 3 μV for 90 days	

### AC specifications

Measurement ranges:	0.1V; 1V; 10V; 100V; 600V		
Measurement method:	true rms, DC or AC coupled (not in 0.1 V range)		
Input impedance:	0.1 V, 1 V:	1 GΩ    <60 pF	
	10...600V:	10 MΩ    <60 pF	
	Response time:	1.5 sec to within 0.1% of reading	
Accuracy:	For sine wave signals >5% of full scale		
Values given are in ±(% of reading + % of full scale); 23 °C ±2 °C for 1 year			

Range	20 Hz...1 kHz	1...10 kHz	10...50 kHz	50...100 kHz	100...300 kHz
0.1V	0.1+0.08	5+0.5 (5 kHz)			
1.0V	0.08+0.08	0.15+0.08	0.3+0.1	0.8+0.15	7+0.15
10.0V	0.08+0.08	0.1+0.08	0.3+0.1	0.8+0.15	4+0.15
100.0V	0.08+0.08	0.1+0.08	0.3+0.1	0.8+0.15	
600.0V	0.08+0.08	0.1+0.08			

<b>Temperature coefficient 10...21 °C and 25...40 °C; [% rdg. + % f.s.]</b>		
at 20 Hz...10 kHz:	0.01 + 0.008	
at 10...100 kHz:	0.08 + 0.01	
<b>Crest factor:</b>	7:1 [max. 5x range]	
<b>Integration time:</b>	0.1 s	1...60 s
<b>Display range:</b>	120.000 digit	1,200.000 digit
<b>600V range:</b>	600.00 digit	600.000 digit
<b>Resolution:</b>	1 µV	100 nV
<b>Overload protection:</b>		
<b>(V/Ω-HI to V/Ω-LO) and to chassis:</b>		
<b>Measurement ranges:</b>	all	
all the time	850V <sub>peak</sub> or 600V <sub>dc</sub>	
<b>Maximum input voltage LOW against chassis/safety earth:</b>		
	250V <sub>rms</sub> at max. 60 Hz or 250V <sub>dc</sub>	

<b>Current specifications</b>			
<b>Ranges:</b>	100 µA; 1 mA; 10 mA; 100 mA; 1 A		
<b>Integration time:</b>	0.1 s	1...60 s	
<b>Display ranges:</b>	120.000 digit	1,200.000 digit	
<b>1 A range:</b>	100.000 digit	1,000.000 digit	
<b>Resolution:</b>	1 nA	100 pA	
<b>Accuracy:</b>	DC	45 Hz...1 kHz	1...5 kHz
(1 year; 23 °C ±2 °C)	0.02 + 0.002	0.1 + 0.08	0.2 + 0.08
<b>Temperature coefficient/°C:</b>	10...21 °C	25...40 °C	
(%rdg. + %f.s.)	0.002 + 0.001	0.01 + 0.01	
<b>Voltage:</b>	<600 mV...1.5 V		
<b>Response time:</b>	1.5 s to within 0.1% of reading		
<b>Crest factor:</b>	7:1 (max. 5 x range)		
<b>Input protection:</b>	fuse, FF 1 A 250 V		

<b>Resistance</b>			
<b>Ranges:</b>	100 Ω, 1 kΩ, 10 kΩ, 100 kΩ, 1 MΩ, 10 MΩ		
<b>Integration time:</b>	0.1 s	1...60 s	
<b>Display ranges:</b>	120.000 digit	1,200.000 digit	
<b>Resolution:</b>	1 mΩ	100 µΩ	
<b>Accuracy:</b>	Values given are in ±[% of reading + % of full scale]		

Range	1 year; %rdg	23 °C ±2 °C %f.s.	Temp. coefficient/°C 10...21 °C	25...40 °C
100 Ω	0.005	0.0015	0.0008	0.0008
1 kΩ	0.005	0.001	0.0008	0.0008
10 kΩ	0.005	0.001	0.0008	0.0008
100 kΩ	0.005	0.001	0.0008	0.0008
1 MΩ	0.05	0.002	0.002	0.002
10 MΩ	0.5	0.02	0.01	0.01

<b>Measurement current:</b>	<b>Range</b>	<b>Current</b>
	100 Ω, 1 kΩ	1 mA
	10 kΩ	100 µA
	100 kΩ	10 µA
	1 MΩ	1 µA
	10 MΩ	100 nA

max. measurement voltage: approx. 3V  
 Overload protection: 250V<sub>p</sub>

<b>Temperature measurement</b>	
<b>PT100/PT1000 (EN60751):</b>	2- and 4-wire measurement
<b>Range:</b>	-200...+800 °C
<b>Resolution:</b>	0.01 °C; measurement current 1 mA
<b>Accuracy:</b>	±(0.05 °C + sensor tolerance + 0.08 K)
<b>Temperature coefficient</b>	
10...21 °C and 25...40 °C:	<0.0018 °C/°C
<b>NiCr-Ni (K-type)</b>	
<b>Range:</b>	-270...+1,372 °C
<b>Resolution:</b>	0.1 °C
<b>Accuracy:</b>	±(0.7% rdg. + 0.3 K)
<b>NiCr-Ni (J-type)</b>	
<b>Range:</b>	-210...+1,200 °C
<b>Resolution:</b>	0.1 °C
<b>Accuracy:</b>	±(0.7% rdg. + 0.3 K)

<b>Frequency and period specifications</b>	
<b>Range:</b>	1 Hz...100 kHz
<b>Resolution:</b>	0.00001...1 Hz
<b>Accuracy:</b>	0.05 % of reading
<b>Measurement time:</b>	1...2 s

<b>Interface</b>	
<b>Interface:</b>	USB/RS-232 (H0820), IEEE-488 (GPIB) (optional)
<b>Functions:</b>	Control/Data fetch
<b>Inputs:</b>	Function, range, integration time, start command
<b>Outputs:</b>	Measurement results, function, range, integration time (10 ms...60 s)

<b>Miscellaneous</b>	
<b>Time to change range or function</b>	approx. 125 ms with DC voltage, DC current, resistance approx. 1 s with AC voltage, AC current
<b>Memory:</b>	30,000 readings/128 kB
<b>Safety class:</b>	Safety class I (EN 61010)
<b>Power supply:</b>	105...254 V~; 50...60 Hz, CAT II
<b>Power consumption:</b>	approx. 8 W
<b>Operating temperature:</b>	+5...+40 °C
<b>Storage temperature:</b>	-20...+70 °C
<b>Rel. humidity:</b>	5...80 % (non condensing)
<b>Dimensions (W x H x D):</b>	285 x 75 x 365 mm
<b>Weight:</b>	approx. 3 kg

All data valid at 23 °C after 30 minutes warm-up.

<b>Accessories supplied:</b> Line cord, Operating manual, PVC test lead (HZ15), Interface cable (HZ14), CD	
<b>Recommended accessories:</b>	
H0112	Scanner Card (Installation only ex factory) as HM8112-3S
H0880	IEEE-488 (GPIB) Interface (galvanically isolated)
HZ10S	5 x Silicone test lead black
HZ10R	5 x Silicone test lead red
HZ10B	5 x Silicone test lead blue
HZ13	Interface cable (USB) 1.8 m
HZ33	Test cable 50 Ω, BNC/BNC, 0.5 m
HZ34	Test cable 50 Ω, BNC/BNC, 1 m
HZ42	19" Rackmount kit 2RU
HZ72	GPIB-Cable 2 m
HZ887	Temperature probe

## 8 kW Power Meter HM8115-2

Product description, page 30

<b>Voltage</b>		<b>True RMS voltage measurement (AC + DC)</b>	
<b>Ranges:</b>	50V	150V	500V
<b>Resolution:</b>	0.1V	1V	1V
<b>Accuracy:</b>	20 Hz...1 kHz:	±(0.4 % + 5 digit)	
	DC:	±(0.6 % + 5 digit)	
<b>Input impedance:</b>	1 MΩ    100 pF		
<b>Crest factor:</b>	max. 3.5 at full scale		
<b>Input protection:</b>	max. 500V <sub>p</sub>		

<b>Current</b>		<b>True RMS current measurement (AC + DC)</b>	
<b>Ranges:</b>	160 mA	1.6 A	16 A
<b>Resolution:</b>	1 mA	1 mA	10 mA
<b>Accuracy:</b>	20 Hz...1 kHz:	±(0.4 % + 5 digit)	
	DC:	±(0.6 % + 5 digit)	
<b>Crest factor:</b>	max. 4 at full scale		
<b>Input protection:</b>	fuse, FF 16 A 6.3 x 32 mm (superfast)		

<b>Active power measurement</b>							
The measurement range is the product of the selected voltage respective current ranges.							
<b>Ranges:</b>	8 W	24 W	80 W	240 W	800 W	2400 W	8000 W
<b>Resolution:</b>	1 mW	10 mW	10 mW	100 mW	100 mW	1 W	1 W
<b>Accuracy:</b>	20 Hz...1 kHz:	±(0.8 % + 10 digit)					
	DC:	±(0.8 % + 10 digit)					
<b>Display:</b>	4-digit, 7-segment LED						

<b>Reactive power measurement</b>					
<b>Ranges:</b>	8 var	24 var	80 var	240/800 var	2400/8000 var
<b>Resolution:</b>	10 mvar	100 mvar	100 mvar	1 var	1 var

<b>Accuracy:</b>	20...400 Hz: $\pm(2.5\% + 10 \text{ digit} + 0.02 \times P)$ P = active power
<b>Display:</b>	4-digit, 7-segment LED

Apparent power measurement					
<b>Ranges:</b>	8 VA	24 VA	80 VA	240/800 VA	2400/8000 VA
<b>Resolution:</b>	1 mVA	10 mVA	10 mVA	100 mVA	1 VA
<b>Accuracy:</b>	20 Hz...1 kHz: $\pm(0.8\% + 5 \text{ digit})$				
<b>Display:</b>	4-digit, 7-segment LED				

Power factor measurement	
<b>Display:</b>	0.00...+1.00
<b>Accuracy:</b>	50...60 Hz: $\pm(2\% + 3 \text{ digit})$ (sine wave) voltage and current >1/10 of full scale

Monitor output (analog)	
<b>Connection:</b>	BNC connector (galvanic isolation to test circuit and RS-232 interface)
<b>Reference potential:</b>	protective earth
<b>Level:</b>	1 V <sub>ac</sub> at full scale (2400/8000 digit)
<b>Accuracy:</b>	typ. 5%
<b>Output impedance:</b>	approx. 10 kΩ
<b>Bandwidth:</b>	DC...1 kHz
<b>Protected up to:</b>	±30V

Functions and displays	
<b>Measurement functions:</b>	voltage, current, power, power factor
<b>Range selection:</b>	automatic/manual
<b>Overrange alarm:</b>	visual and acoustic
<b>Display resolution</b>	
<b>Voltage:</b>	3-digit, 7-segment LED
<b>Current:</b>	4-digit, 7-segment LED
<b>Power:</b>	4-digit, 7-segment LED
<b>Power factor:</b>	3-digit, 7-segment LED

Interface	
<b>Interface:</b>	USB/RS-232 (H0820), IEEE-488 (GPIB) (optional)
<b>Connection RS-232:</b>	D-sub connector (galvanic isolation to test circuit and monitor output)
<b>Protocol:</b>	Xon/Xoff
<b>Data rate:</b>	9600 Baud
<b>Functions:</b>	control/data fetch

Miscellaneous	
<b>Safety Class:</b>	Safety Class I (EN 61010)
<b>Power supply:</b>	115/230 V $\pm 10\%$ , 50...60 Hz, CAT II
<b>Power consumption:</b>	approx. 15 W at 50 Hz
<b>Operating temperature:</b>	+5...+40 °C
<b>Storage temperature:</b>	-20...+70 °C
<b>Rel. humidity:</b>	5...80% (non condensing)
<b>Dimensions (W x H x D):</b>	285 x 75 x 365 mm
<b>Weight:</b>	approx. 4 kg

All data valid at 23 °C after 30 minutes warm-up.

<b>Accessories supplied:</b>	Line cord, Operating manual, CD, Software
<b>Recommended accessories:</b>	
H0880	IEEE-488 (GPIB) Interface (galvanically isolated)
HZ10S	5 x silicone test lead black
HZ10R	5 x silicone test lead red
HZ10B	5 x silicone test lead blue
HZ13	Interface cable (USB) 1.8 m
HZ14	Interface cable (serial) 1:1
HZ33	Test cable 50Ω, BNC/BNC, 0.5 m
HZ34	Test cable 50Ω, BNC/BNC, 1 m
HZ42	19" Rackmount kit 2RU
HZ72	GPIB-Cable 2 m
HZ815	Socket adapter


## 200 kHz LCR-Bridge HM8118

Product description, page 31

Conditions	
<b>Test signal voltage:</b>	1 V
<b>Open and short corrections performed</b>	
<b>Measurement time:</b>	SLOW

Display	
<b>Measurement modes:</b>	Auto, L-Q, L-R, C-D, C-R, R-Q, Z-Θ, Y-Θ, R-X, G-B, N-Θ, M
<b>Equivalent circuits:</b>	Auto, Series or Parallel
<b>Parameters displayed:</b>	Value, Deviation or % Deviation
<b>Averaging:</b>	2...99 measurements

Accuracy	
<b>Primary Parameters:</b>	Basic accuracy (Test voltage: 1.0V, measurement SLOW/MEDIUM, autoranging mode, constant voltage OFF, bias off). For FAST mode double the basic accuracy values

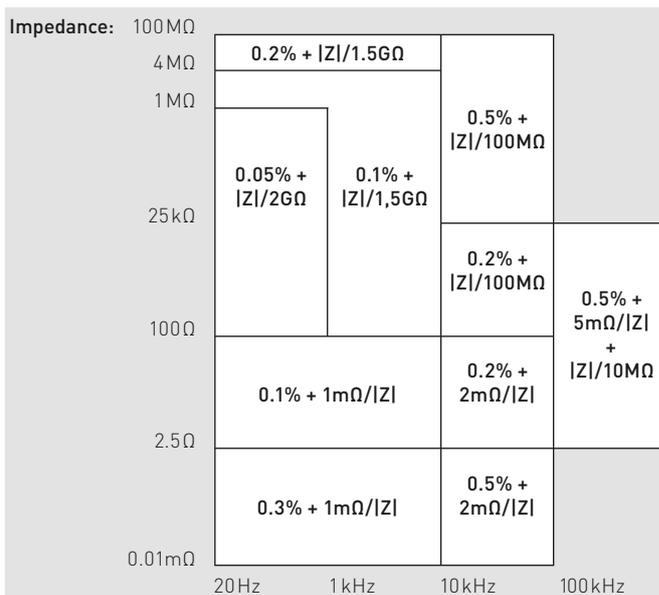

Secondary Parameters:	
Basic accuracy D, Q:	±0.0001 @ f = 1 kHz
Phase angle:	±0.005° @ f = 1 kHz

Ranges	
<b> Z , R, X:</b>	0.01 mΩ...100 MΩ
<b> Y , G, B:</b>	10 nS...1000 S
<b>C:</b>	0.01 pF...100 mF
<b>L:</b>	10 nH...100 kH
<b>D:</b>	0.0001...9.9999
<b>Q:</b>	0.1...9999.9
<b>Θ:</b>	-180...+180°
<b>Δ:</b>	-999.99...999.99%
<b>M:</b>	1 μH...100 H
<b>N:</b>	0.95...500

Measurement conditions and functions	
<b>Test frequency:</b>	20 Hz...200 kHz (69 steps)
<b>Frequency accuracy:</b>	±100 ppm
<b>AC test signal level:</b>	50 mV <sub>rms</sub> ...1.5 V <sub>rms</sub>
<b>Resolution:</b>	10 mV <sub>rms</sub>
<b>Drive level accuracy:</b>	±(5% + 5 mV)
<b>Internal Bias Voltage:</b>	0...+5.00 V <sub>dc</sub>
<b>Resolution:</b>	10 mV
<b>External Bias Voltage:</b>	0...+40 V <sub>dc</sub> (fused 0.5 A)
<b>Internal Bias Current:</b>	0...+200 mA
<b>Resolution:</b>	1 mA
<b>Range Selection:</b>	Auto and Hold

<b>Trigger:</b>	Continuous, manual or external via interface, Binning Interface or Trigger Input
<b>Trigger delay time:</b>	0...999 ms in 1 ms steps
<b>Measurement time (f ≥ 1 kHz)</b>	
<b>FAST</b>	70 ms
<b>MEDIUM</b>	125 ms
<b>SLOW</b>	0.7 s

Other Instrument Functions	
<b>Test signal level monitor:</b>	Voltage, current
<b>Error Correction:</b>	Open, Short, Load
<b>Save/Recall:</b>	9 instrument settings
<b>Front-end Protection:</b>	$V_{max} < \sqrt{2/C}$ @ $V_{max} < 200V$ , C in Farads (1 Joule of stored energy)
<b>Low Potential and Low Current Guarding:</b> Ground, Driven Guard or Auto (fused)	
<b>Constant Voltage Mode (25 Ω source)</b>	
<b>Temperature effects:</b>	
<b>R, L or C:</b>	±5 ppm/°C
<b>Interface:</b>	USB/RS-232 (H0820), IEEE-488 (GPIB) (optional)
<b>Safety Class:</b>	Safety Class I (EN61010-1)
<b>Power supply:</b>	110...230V ±10%, 50...60 Hz, CAT II
<b>Power consumption:</b>	approx. 20 W
<b>Operating temperature:</b>	+5...+40 °C
<b>Storage temperature:</b>	-20...+70 °C
<b>Rel. humidity:</b>	5...80% (non condensing)
<b>Dimensions (W x H x D):</b>	285 x 75 x 365 mm
<b>Weight:</b>	approx. 4 kg

All data valid at 23 °C after 30 minutes warm-up.

<b>Accessories supplied:</b>	Line cord, Operating manual, HZ184 4 Terminal Kelvin Test Cable and HZ188 4 Terminal SMD Component Test Fixture, CD
<b>Recommended accessories:</b>	
H0118	Binning Interface
H0880	IEEE-488 (GPIB) Interface (galvanically isolated)
HZ13	Interface cable (USB) 1.8 m
HZ14	Interface cable (serial) 1:1
HZ33	Test cable 50 Ω, BNC/BNC, 0.5 m
HZ34	Test cable 50 Ω, BNC/BNC, 1 m
HZ42	19" Rackmount kit 2RU
HZ72	GPIB-Cable 2 m
HZ181	4 Terminal Test Fixture including Shorting Plate
HZ186	4 Terminal Transformer Test Cable

### 3 GHz Programmable Counter HM8123

Product description, page 32

Input characteristics (Input A and B)		
<b>Connection:</b>	BNC socket	
<b>Frequency range:</b>		
0...200 MHz	(DC-coupled)	
10 Hz...200 MHz	(1 MΩ, AC-coupled)	
500 kHz...200 MHz	(50 Ω, AC-coupled)	
<b>Input impedance:</b>	1 MΩ    30 pF or 50 Ω (switchable)	
<b>Attenuation:</b>	1:1, 1:10, 1:100 (selectable)	
<b>Sensitivity: (normal triggering)</b>		
0...80 MHz	25 mV <sub>rms</sub> (sine wave), 80 mV <sub>pp</sub> (pulse)	
80...200 MHz	65 mV <sub>rms</sub> (sine wave)	
20 Hz...80 MHz	50 mV <sub>rms</sub> (sine wave, auto trigger)	
<b>Trigger (programmable via encoder or software)</b>		
<b>Attenuation:</b>	<b>Trigger level:</b>	<b>Resolution:</b>
1:1	0...±2V	1 mV
1:10	0...±20V	10 mV
1:100	0...±200V	100 mV
<b>Max. input voltage:</b>		
<b>Input 1 MΩ:</b>	250 V (DC + AC <sub>peak</sub> ) from 0...440 Hz decreasing to 8V <sub>rms</sub> at 1 MHz	
<b>Input 50 Ω:</b>	5V <sub>rms</sub>	
<b>Minimum pulse duration:</b>	<5 ns for single pulse	
<b>Input noise:</b>	(typ.) 100 μV	

<b>Auto trigger (AC coupling):</b>	trigger point: 50% of peak-to-peak value
<b>Trigger slope:</b>	Rising or falling
<b>Filter:</b>	100 kHz low-pass filter (selectable)

Input characteristics (Input C)	
<b>Connection:</b>	SMA socket
<b>Frequency range:</b>	100 MHz...3 GHz
<b>Input sensitivity:</b>	up to 1 GHz: 30 mV <sub>rms</sub> (typ. 20 mV <sub>rms</sub> ) 1...3 GHz: 100 mV <sub>rms</sub> (typ. 80 mV <sub>rms</sub> )
<b>Input impedance:</b>	50 Ω nominal
<b>Max. input voltage:</b>	5V (DC + AC <sub>peak</sub> )

Input characteristics			
	External Reset	Reference	Gate/Arming
<b>Input impedance:</b>	5 kΩ	500 Ω	5 kΩ
<b>Max. input voltage:</b>	±30V	±20V	±30V
<b>Input sensitivity:</b>	-	typ. 2V <sub>pp</sub>	-
<b>High level:</b>	>2V	-	>2V
<b>Low level:</b>	<0.5V	-	<0.5V
<b>Min. pulse duration:</b>	200 ns	-	50 ns
<b>Input frequency:</b>	-	10 MHz	-
<b>Min. eff. gate time:</b>	-	-	20 μs

Measurement functions	
Frequency A/B/C; period duration A; width A; totalize A; RPM A; frequency ratio A:B; time interval A:B; time interval A:B (average); phase A to B; Duty cycle A; burst measurements	

Frequency measurement (Inputs A, B, C)	
<b>Frequency range:</b>	0...200 MHz (3 GHz)
<b>LSD:</b>	(1.25 x 10 <sup>-8</sup> s x frequency)/measurement time
<b>Resolution:</b>	1 LSD
<b>Accuracy:</b>	±(resolution/frequency ±time inaccuracy ±trigger error <sup>2</sup> /measurement time)

Period duration measurement	
<b>Range:</b>	5 ns...10,000 s
<b>LSD:</b>	(1.25 x 10 <sup>-8</sup> s x period)/measurement time
<b>Resolution:</b>	1 LSD
<b>Accuracy:</b>	±resolution/period ±(trigger error <sup>2</sup> /measurement time)

Totalization A		
	(manual control)	(external control)
<b>Range:</b>	0...200 MHz	0...200 MHz
<b>Min. pulse duration:</b>	10 ns	10 ns
<b>LSD:</b>	1 count	±1 count
<b>Resolution:</b>	LSD	LSD
<b>Accuracy:</b>	(resolution ±ext. gate time error x frequency A)/total	
<b>Pulse resolution:</b>	10 ns	10 ns
<b>Ext. gate error:</b>	-	100 ns

Time interval/Average time interval		
(Input A = start; input B = stop)		
<b>LSD:</b>	10 ns (0,1 ps...10 ns in „average“ mode)	
<b>Resolution:</b>	1 LSD	
<b>Accuracy:</b>	±(resolution + trigger error <sup>2</sup> +system error)/time interval ±time base uncertainty (system error: ≤4 ns)	
<b>Number of average:</b>	N = 1...25	LSD = 10 ns
	N = 26...2,500	LSD = 1 ns
	N = 2,501...250,000	LSD = 100 ps
	N = 250,001...25,000,000	LSD = 10 ps
	N = >25,000,000	LSD = 0.1 ps

RPM measurement	
<b>NPR<sup>1)</sup> presetting:</b>	1...65,535 pulses per revolution
<b>Gate time:</b>	330 ms fixed
<b>LSD:</b>	7.5x 10 <sup>-8</sup> x revolution speed
<b>Resolution:</b>	1 LSD
<b>Accuracy:</b>	±(trigger error <sup>2</sup> /0.33) ±time base error

Offset	
<b>Range:</b>	Covers the entire measurement range

<b>Resolution:</b>	Same resolution as in normal measurement. If the gate time is changed in the offset mode, the offset resolution is the reference value resolution or the current reading resolution (whichever is less precise).
--------------------	--

<b>Gate time</b>	
<b>Range:</b>	1 ms...65 s
<b>Resolution:</b>	1 ms
<b>External gate time:</b>	min. 20 μs

<b>Time base</b>	
<b>Frequency:</b>	400 MHz clock rate; 10 MHz crystal
<b>Temperature stability (0...50 °C):</b>	TCXO (standard): $\pm 0,5 \times 10^{-6}$ OCXO (H085): $\pm 1 \times 10^{-8}$
<b>Aging TCXO:</b>	<0.27 ppm per month, 0.05 ppm per day
<b>OCXO:</b>	$\leq \pm 1 \times 10^{-9}$ /day
<b>External Reference:</b>	10 MHz $\pm 20$ ppm

<b>Miscellaneous</b>	
<b>Interface:</b>	USB/RS-232 (H0820), IEEE-488 (GPIB) (optional)
<b>Safety class:</b>	Safety Class I (EN61010-1)
<b>Display:</b>	LCD display (83 x 21 mm)
<b>Power supply:</b>	115...230V $\pm 10\%$ , 45...60 Hz, CAT II
<b>Power consumption:</b>	approx. 20 W
<b>Operating temperature:</b>	+5...+40 °C
<b>Storage temperature:</b>	-20...+70 °C
<b>Rel. humidity:</b>	5...80% (non condensing)
<b>Dimensions (W x H x D):</b>	285 x 75 x 365 mm
<b>Weight:</b>	approx. 4 kg

All data valid at 23 °C after 30 minutes warm-up.

<sup>1)</sup> NPR=number of pulses per revolution

<sup>2)</sup> Trigger error=  $\pm$ noise input ( $V_{pp}$ )/slew rate of the input signal

<b>Accessories supplied:</b>	Line cord, Operating manual, CD
<b>Recommended accessories:</b>	
H085	OCXO (Installation only ex factory)
H0880	IEEE-488 (GPIB) Interface (galvanically isolated)
HZ13	Interface cable (USB) 1.8m
HZ14	Interface cable (serial) 1:1
HZ20	Adapter plug
HZ24	Attenuators 50 Ω
HZ33	Test cable 50 Ω (BNC-BNC) 0.5m
HZ34	Test cable 50 Ω (BNC-BNC) 1.0m
HZ42	19" Rackmount kit 2RU
HZ72	GPIB-Cable 2m


## 1.2 GHz RF-Synthesizer HM8134-3

Product description, page 33

<b>Frequency</b>	
<b>Range:</b>	1 Hz...1200 MHz
<b>Resolution:</b>	1 Hz
<b>Settling time:</b>	<10 ms

<b>Frequency Reference 10 MHz</b>	
<b>Standard: TCXO</b>	
<b>Temperature stability (0...50 °C):</b>	$\leq \pm 0,5$ ppm
<b>Aging:</b>	$\leq \pm 1$ ppm/year
<b>Option: OCXO (H085)</b>	
<b>Temperature stability (0...50 °C):</b>	$\leq \pm 1 \times 10^{-8}$
<b>Aging:</b>	$\leq \pm 1 \times 10^{-9}$ /day
<b>Internal reference output:</b>	(rear panel)
<b>Level:</b>	TTL
<b>External reference input:</b>	(rear panel)
<b>Level:</b>	>0 dBm
<b>Frequency:</b>	10 MHz $\pm 20$ ppm

<b>Spectral purity (without modulation)</b>	
<b>Harmonics:</b>	$\leq -35$ dBc
<b>Non-harmonics:</b>	$\leq -55$ dBc (>15 kHz from carrier)
<b>Phase noise:</b>	(at 20 kHz from carrier)
<b>f &lt; 16 MHz:</b>	$\leq -120$ dBc/Hz
<b>16 MHz <math>\leq</math> f &lt; 250 MHz:</b>	$\leq -94$ dBc/Hz
<b>250 MHz <math>\leq</math> f &lt; 500 MHz:</b>	$\leq -105$ dBc/Hz
<b>500 MHz <math>\leq</math> f &lt; 1000 MHz:</b>	$\leq -100$ dBc/Hz
<b>1000 MHz <math>\leq</math> f &lt; 1200 MHz:</b>	$\leq -95$ dBc/Hz
<b>Residual FM:</b>	$\leq 6,5$ Hz (at 1 GHz in 0.3...3 kHz bandwidth)
<b>Residual AM:</b>	typ. <0.06% (in 0.03...20 kHz bandwidth)

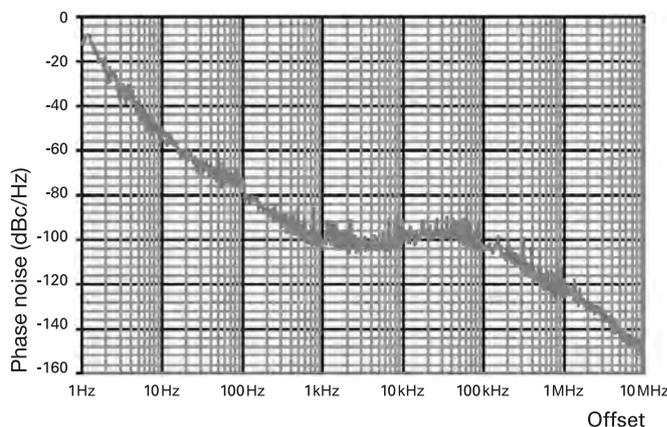

(Typical phase noise at 1 GHz)

<b>Output level</b>	
<b>Range:</b>	-127...+13 dBm
<b>Resolution:</b>	0.1 dB
<b>Display-Offset for ext. Attn.:</b>	0.0...30.0 dB in 0.1 dB steps
<b>Precision:</b>	
for level >-57 dBm:	$\leq \pm 0,5$ dB
for level <-57 dBm:	$\leq \pm (0,5 \text{ dB} + (0,2 \times (-57 \text{ dBm} - \text{level}))/10)$
<b>Impedance:</b>	50 Ω
<b>V.S.W.R.:</b>	$\leq 2$

<b>Modulation sources</b>	
<b>Internal:</b>	10 Hz...150 kHz sine wave, 10 Hz...20 kHz square wave, triangle, sawtooth
<b>Resolution:</b>	10 Hz
<b>External:</b>	(input on front panel)
<b>Impedance:</b>	10 kΩ    50 pF
<b>Input level:</b>	$2V_{pp}$ for full scale
<b>Coupling:</b>	AC or DC
<b>Output:</b>	(on front panel)
<b>Level:</b>	$2V_{pp}$
<b>Impedance:</b>	1 kΩ

<b>Amplitude modulation (Level <math>\leq</math> +7 dBm)</b>	
<b>Source:</b>	internal or external
<b>Modulation depth:</b>	0...100%
<b>Resolution:</b>	0.1%
<b>Accuracy:</b>	$\pm 4\%$ of reading $\pm 0,5\%$ (AM-depth $\leq 80\%$ , $f_{mod} \leq 40$ kHz)
<b>Ext. frequency resp. (to -1 dB):</b>	
<b>Distortion:</b>	10 Hz...50 kHz for AC <2% (AM-depth $\leq 60\%$ , $f_{mod} \leq 1$ kHz) <6% (AM-depth $\leq 80\%$ , $f_{mod} < 20$ kHz)

<b>Frequency modulation</b>	
<b>Source:</b>	internal or external
<b>Deviation:</b>	$\pm 200$ Hz...400 kHz (depending on frequency band)
<b>Resolution:</b>	100 Hz
<b>Accuracy:</b>	$\pm 3\%$ + res. FM ( $f_{mod} \leq 5$ kHz) $\pm 7\%$ + res. FM (5 kHz < $f_{mod}$ < 100 kHz)
<b>Ext. frequency response (to -1 dB):</b>	
<b>DC coupling:</b>	0...100 kHz
<b>AC coupling:</b>	10 Hz...100 kHz
<b>Distortion:</b>	<1% for deviation $\geq 50$ kHz at 1 kHz <3% for deviation $\geq 10$ kHz at 1 kHz

Phase modulation	
Source:	internal or external
Deviation:	<16 MHz: 0...3.14 rad >16 MHz: 0...10 rad
Resolution:	0.01 rad
Accuracy:	±5% up to 1 kHz + residual PM
Ext. frequency response (to -1 dB):	
DC coupling:	0...100 kHz
AC coupling:	10 Hz...100 kHz
Distortion:	<3% for $f_{mod} = 1$ kHz and deviation = 10 rad

FSK modulation	
Range (F0...F1):	16...1200 MHz
Mode:	2 FSK levels
Data source:	external
Max. rate:	10 kbit/s
Shift (F1...F0):	0...10 MHz
Resolution:	100 Hz
Accuracy:	±3% + residual FM ( $f_{mod} \leq 5$ kHz) ±7% + residual FM (5 kHz < $f_{mod} < 100$ kHz)

PSK modulation	
Mode:	2 PSK levels
Data source:	external
Max. rate:	10 kbit/s
Shift (Ph1...Ph0):	
<16 MHz:	0...±3.14 rad
>16 MHz:	0...±10 rad
Resolution:	0.01 rad
Accuracy:	±5% up to 1 kHz + residual PM

Pulse modulation	
Source:	external (rear panel)
Dynamic range:	>80 dB
Rise/fall times:	<50 ns
Delay:	<100 ns
Max. frequency:	2.5 MHz
Input level:	TTL

Sweep mode	
Range:	1...1200 MHz
Depth:	500 Hz...1199 MHz
Sweep time:	20 ms...5 s
Trigger:	internal

**Protective functions**  
The synthesizer is protected against reverse power applied to the RF output up to 1 W for a 50 Ω source and against any DC source up to ±7 V. The protection disconnects the output until manually reset by operator.

Miscellaneous	
Interface:	USB/RS-232 (H0820), IEEE-488 (GPIB) (optional)
Configuration memories:	10
Safety class:	Safety Class I (EN61010-1)
Power supply:	115/230 V ±10%, 50...60 Hz, CAT II
Power consumption:	approx. 40 VA
Operating temperature:	+5...+40 °C
Storage temperature:	-20...+70 °C
Rel. humidity:	5...80% (non condensing)
Dimensions (W x H x D):	285 x 75 x 365 mm
Weight:	approx. 5 kg

All data valid at 23 °C after 30 minutes warm-up.

<b>Accessories supplied:</b> Line cord, Operating manual, CD	
<b>Recommended accessories:</b>	
H085	OCXO temperature stability ±1x 10 <sup>-8</sup>
H0880	IEEE-488 (GPIB) Interface (galvanically isolated)
HZ13	Interface cable (USB) 1.8 m
HZ14	Interface cable (serial) 1:1
HZ20	Adapter, BNC to 4 mm banana
HZ21	Adapter plug
HZ24	Attenuator Set 50 Ω (3/6/10/20 dB)
HZ33	Test Cable 50 Ω (BNC-BNC) 0.5 m
HZ34	Test Cable 50 Ω (BNC-BNC) 1.0 m
HZ42	19" Rackmount kit 2RU
HZ72	GPIB-Cable 2 m


## 3 GHz RF-Synthesizer HM8135

Product description, page 34

Frequency	
Range:	1 Hz...3 GHz
Resolution:	1 Hz
Settling time:	<10 ms

Frequency Reference 10 MHz	
Standard: TCXO	
Temperature stability (0...50 °C):	±0.5 ppm
Aging:	±1 ppm/year
Option: OCXO (H085)	
Temperature stability (0...50 °C):	±1x 10 <sup>-8</sup>
Aging:	±1x 10 <sup>-9</sup> /day
Internal reference output:	(rear panel)
Level:	TTL
External reference input:	(rear panel)
Level:	>0 dBm
Frequency:	10 MHz ±20 ppm

Spectral purity (without modulation)	
Harmonics:	≤-35 dBc
Non-harmonics:	≤-50 dBc (>15 kHz from carrier)
Sub-harmonics:	≤-50 dBc
Phase noise:	(at 20 kHz from carrier)
f <16 MHz:	≤-120 dBc/Hz
16 MHz ≤f <250 MHz:	≤-95 dBc/Hz
250 MHz ≤f <500 MHz:	≤-105 dBc/Hz
500 MHz ≤f <1000 MHz:	≤-100 dBc/Hz
1 GHz ≤f <2 GHz:	≤-95 dBc/Hz
2 GHz ≤f <3 GHz:	≤-90 dBc/Hz
Residual FM:	typ. <4 Hz; ≤6.5 Hz (in 0.3...3 kHz bandwidth)
Residual AM:	typ. <0.06% (in 0.03...20 kHz bandwidth)

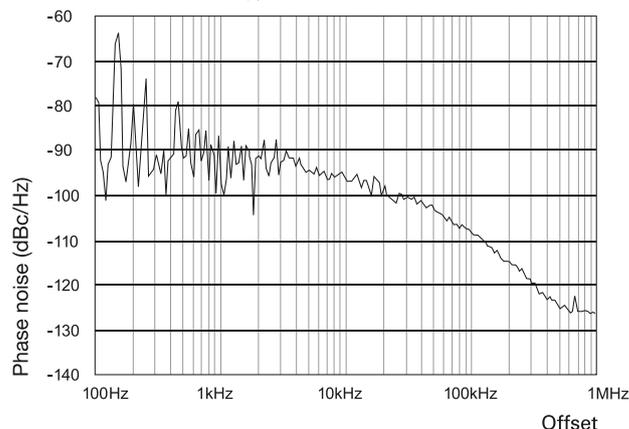

(Typical phase noise at 1 GHz)

Output level	
Range:	-135...+13 dBm
Resolution:	0.1 dB
Display-Offset for ext. Attn.:	0.0...30.0 dB in 0.1 dB steps
Precision f <1.5 GHz; level >-120 dBm	
for level >-57 dBm:	±0.5 dB
for level <-57 dBm:	±(0.5 dB + (0.2 x (-57 dBm - level))/10)
Precision f >1.5 GHz; level >-120 dBm	
for level >-57 dBm:	±0.7 dB
for level <-57 dBm:	±(0.7 dB + (0.5 x (-57 dBm - level))/10)
Impedance:	50 Ω
V.S.W.R.:	f ≤1 GHz: ≤1.5 f >1 GHz: ≤2.5

Modulation sources	
Internal:	10 Hz...200 kHz sine wave 10 Hz...20 kHz square wave, triangle, sawtooth
Resolution:	10 Hz
External:	Input on front panel

<b>Impedance:</b>	10 kΩ    50 pF
<b>Input level:</b>	2V <sub>pp</sub> for full scale
<b>Coupling:</b>	AC or DC
<b>Output:</b>	Front panel
<b>Level</b>	2V <sub>pp</sub>
<b>Impedance:</b>	1 kΩ

Amplitude modulation (Level ≤+7dBm)	
<b>Source:</b>	Internal or external
<b>AM-depth:</b>	0...100%
<b>Resolution:</b>	0.1%
<b>Accuracy:</b>	±4% displayed rate ±0.5% (AM-depth ≤80%, f <sub>mod</sub> ≤50 kHz)
<b>Ext. frequency resp. (to -1 dB):</b>	10 Hz...100 kHz for AC
<b>Distortion:</b>	<2% (AM-depth ≤60%, f <sub>mod</sub> ≤1 kHz) <6% (AM-depth ≤80%, f <sub>mod</sub> <20 kHz)

Frequency modulation	
<b>Source:</b>	internal or external
<b>Deviation:</b>	±200 Hz...400 kHz (depending on frequency band)
<b>Resolution:</b>	100 Hz
<b>Accuracy:</b>	±3% + residual FM (f <sub>mod</sub> ≤5 kHz) ±7% + residual FM (5 kHz < f <sub>mod</sub> <100 kHz)
<b>Ext. frequency response (to -1 dB):</b>	
<b>DC coupling:</b>	0...100 kHz
<b>AC coupling:</b>	100 Hz...100 kHz
<b>Distortion:</b>	<1% for deviation ≥50 kHz at 1 kHz <3% for deviation ≥10 kHz

Phase modulation	
<b>Source:</b>	internal or external
<b>Deviation:</b>	
<16 MHz:	0...3.14 rad
>16 MHz:	0...10 rad
<b>Resolution:</b>	0.01 rad
<b>Accuracy:</b>	±5% up to 1 kHz + residual PM
<b>Ext. frequency response (to -1dB):</b>	
<b>DC coupling:</b>	0...100 kHz
<b>AC coupling:</b>	100 Hz...100 kHz
<b>Distortion:</b>	<3% for f <sub>mod</sub> = 1 kHz and deviation = 10 rad

FSK modulation	
<b>Range (F0...F1):</b>	16 MHz...3 GHz
<b>Mode:</b>	2 FSK levels
<b>Data source:</b>	external
<b>Max. rate:</b>	10 kbit/s
<b>Shift (F1...F0):</b>	0...10 MHz
<b>Resolution:</b>	100 Hz
<b>Accuracy:</b>	±3% + residual FM (f <sub>mod</sub> ≤5 kHz) ±7% + residual FM (5 kHz < f <sub>mod</sub> <100 kHz)

PSK modulation	
<b>Mode:</b>	2 PSK levels
<b>Data source:</b>	external
<b>Max. rate:</b>	10 kbit/s
<b>Shift (Ph1...Ph0):</b>	
<16 MHz:	0...±3.14 rad
>16 MHz:	0...±10 rad
<b>Resolution:</b>	0.01 rad
<b>Accuracy:</b>	±5% up to 1 kHz + residual PM

Pulse modulation	
<b>Source:</b>	external (rear panel)
<b>Dynamic range:</b>	
f <2 GHz:	>80 dB
f >2 GHz:	>55 dB
<b>Rise/fall times:</b>	<50 ns (typ. <10 ns)
<b>Delay:</b>	<100 ns
<b>Max. frequency:</b>	2.5 MHz (typ. 5 MHz)
<b>Input level:</b>	TTL

Sweep mode	
<b>Range:</b>	1...3000 MHz
<b>Depth:</b>	500 Hz...2999 MHz
<b>Sweep time:</b>	20 ms...5 s

<b>Trigger:</b>	internal
-----------------	----------

Protective functions	
The synthesizer is protected against reverse power applied to the RF output up to 1W for a 50Ω source and against any DC source up to ±7V. The protection disconnects the output until manually reset by operator.	

Miscellaneous	
<b>Interfaces:</b>	USB/RS-232 (H0820), IEEE-488 (GPIB) (optional)
<b>Configuration memories:</b>	10
<b>Safety class:</b>	Safety Class I (EN61010-1)
<b>Power supply:</b>	115/230V ±10%, 50...60 Hz, CAT II
<b>Power consumption:</b>	approx. 40 VA
<b>Operating temperature:</b>	+5...+40 °C
<b>Storage temperature:</b>	-20...+70 °C
<b>Rel. humidity:</b>	5...80% (non condensing)
<b>Dimensions (W x H x D):</b>	285 x 75 x 365 mm
<b>Weight:</b>	approx. 5 kg

All data valid at 23 °C after 30 minutes warm-up.

Accessories supplied: Line cord, Operating manual, CD	
Recommended accessories:	
H085	OCXO temperature stability ±1 x 10 <sup>-8</sup>
H0880	IEEE-488 (GPIB) Interface (galvanically isolated)
HZ13	Interface cable (USB) 1.8 m
HZ14	Interface cable (serial) 1:1
HZ20	Adapter, BNC to 4 mm banana
HZ21	Adapter plug
HZ24	Attenuator Set 50 Ω (3/6/10/20 dB)
HZ33	Test Cable 50 Ω (BNC-BNC) 0.5 m
HZ34	Test Cable 50 Ω (BNC-BNC) 1.0 m
HZ42	19" Rackmount kit 2RU
HZ72	GPIB-Cable 2 m

## 12.5 MHz Arbitrary Function Generator HM8150

Product description, page 35

Frequency	
<b>Range:</b>	10 mHz...12.5 MHz
<b>Resolution:</b>	5 digit, max. 10 mHz
<b>Accuracy:</b>	±(1 digit + 5 mHz)
<b>Temperature coefficient:</b>	0.5 ppm/°C
<b>Aging:</b>	2 ppm/year

Waveforms	
Sine wave	
<b>Frequency range:</b>	10 mHz...12.5 MHz
<b>Amplitude:</b>	20 mV <sub>pp</sub> ...20 V <sub>pp</sub> (open circuit)
<b>Harmonic Distortion @ 1V<sub>pp</sub>:</b>	
f <500 kHz:	-65 dBc
500 kHz ≤ f <5 MHz:	-50 dBc
5 MHz ≤ f ≤12.5 MHz:	-40 dBc
<b>Total Harmonic Distortion @ 1V<sub>pp</sub>:</b>	
f <100 kHz:	typ. 0.05%
<b>Spurious (Non-Harmonic) @ 1V<sub>pp</sub>:</b>	
f <500 kHz:	-65 dBc
500 kHz ≤ f ≤12.5 MHz:	-65 dBc + 6 dBc/octave

Square wave	
<b>Frequency range:</b>	10 mHz...12.5 MHz
<b>Amplitude:</b>	20 mV <sub>pp</sub> ...20 V <sub>pp</sub> (open circuit)
<b>Rise/fall time:</b>	<10 ns
<b>Overshoot:</b>	<5% (V <sub>out</sub> ≤200 mV)
<b>Symmetry:</b>	50% ±(5% +10 ns)

Pulse	
<b>Frequency range:</b>	10 mHz...5 MHz
<b>Amplitude:</b>	10 mV <sub>pp</sub> ...+10V <sub>pp</sub> or -10 mV <sub>pp</sub> ...-10V <sub>pp</sub>
<b>Rise/fall time:</b>	<10 ns
<b>Pulse width:</b>	100 ns...80 s
<b>Duty cycle:</b>	max. 90%

Sawtooth	
Frequency range:	10 mHz...25 kHz
Amplitude:	20 mV <sub>pp</sub> ...20 V <sub>pp</sub> (open circuit)
Linearity:	better than 1 %

Triangle	
Frequency range:	10 mHz...250 kHz
Amplitude:	20 mV <sub>pp</sub> ...20 V <sub>pp</sub> (open circuit)
Linearity:	better than 1 %

Arbitrary generator	
Frequency range:	10 mHz...250 kHz
Amplitude:	20 mV <sub>pp</sub> ...20 V <sub>pp</sub> (open circuit)
Output rate:	40 MSa/s
Resolution:	X: 1024 (10 bit), Y: 1024 (10 bit) or X: 4096 (12 bit), Y: 4096 (12 bit)

Inputs	
Gate/Trigger:	BNC connector
Impedance:	5 kΩ    100 pF
Max. input voltage:	±30 V
Modulation Input:	BNC connector
Impedance:	10 kΩ
Max. input voltage:	±30 V

Outputs	
Signal output:	BNC connector, short circuit proof, ext. voltage up to ±15 V
Impedance:	50 Ω
Output voltage:	Range 1: 2.1...20 V <sub>pp</sub> (open circuit) Range 2: 0.21...2.0 V <sub>pp</sub> (open circuit) Range 3: 20...200 mV <sub>pp</sub> (open circuit)
Resolution:	Range 1: 100 mV Range 2: 10 mV Range 3: 1 mV
Setting accuracy (1 kHz):	Range 1: ±2 % Range 2: ±3 % Range 3: ±4 % 3 % additional for pulse and square wave
Frequency response:	<100 kHz ±0.2 dB 0.1...12.5 MHz: ±0.5 dB
Offset error:	Range 3: ±50 mV
Display:	2½ digits (LCD)
Trigger output:	BNC connector
Level:	5V/TTL
Impedance:	50 Ω
Sawtooth output:	BNC connector
Output voltage:	0...5 V, synchronous to sweep
Impedance:	1 kΩ

DC offset	
Output voltage:	Range 1: -7.5...+7.5 V (open circuit) Range 2: -0.75...+0.75 V (open circuit) Range 3: -75...+75 mV (open circuit) $V_{acrange} + 2 \times V_{offsetrange} \leq V_{range\max.}$

Sweep (internal)	
Setting of start and stop frequencies	
Internal sweep:	all waveforms
Sweep time:	linear, 20 ms...100 s continuous or triggered (ext. signal, interface)

Amplitude Modulation	
Modulation via external signal	
Modulations depth:	0...100 %
Bandwidth:	DC...20 kHz (-3 dB)

Gate (asynchronous)	
Modulation on/off via external TTL signal	
Delay time:	<150 ns
Input signal:	TTL

Trigger Function (synchronous)	
Burst mode via ext. trigger input or interface	
Frequency range:	<500 kHz

Miscellaneous	
Interface:	USB/RS-232 (H0820), IEEE-488 (GPIB) (optional)

Display:	16 characters, LCD with backlight
Memory:	for the last device settings and for 1 arbitrary signal
Safety Class:	Safety Class I (EN61010-1)
Power supply:	115...230 V ±10 %; 50...60 Hz, CAT II
Power consumption:	approx. 20 W
Operating temperature:	+5...+40 °C
Storage temperature:	-20...+70 °C
Rel. humidity:	5...80 % (non condensing)
Dimensions (W x H x D):	285 x 75 x 365 mm
Weight:	approx. 5 kg

All data valid at 23 °C after 30 minutes warm-up.

**Accessories supplied:** Line cord, Operating manual, CD, Software

**Recommended accessories:**

H0880	IEEE-488 (GPIB) Interface (galvanically isolated)
HZ13	Interface cable (USB) 1.8 m
HZ14	Interface cable (serial) 1:1
HZ20	Adapter, BNC to 4 mm banana
HZ24	Attenuator Set 50 Ω (3/6/10/20 dB)
HZ33	Test Cable 50 Ω (BNC-BNC) 0.5 m
HZ34	Test Cable 50 Ω (BNC-BNC) 1.0 m
HZ42	19" Rackmount kit 2RU
HZ72	GPIB-Cable 2 m

## 25 MHz Arbitrary Function Generator HMF2525 50 MHz Arbitrary Function Generator HMF2550

Product description, page 28

Frequency	
HMF2525:	10 μHz...25 MHz
HMF2550:	10 μHz...50 MHz
Temperature stability:	1 ppm (18...28 °C)
Aging (after 1 year):	±1 ppm (25 °C)

Amplitude	
Output voltage:	5 mV <sub>pp</sub> ...10 V <sub>pp</sub> (into 50 Ω) 10 mV <sub>pp</sub> ...20 V <sub>pp</sub> (open circuit)
Resolution:	1 mV (into 50 Ω)
Setting accuracy:	±(1 % of control + 1 mV <sub>pp</sub> ) at 1 kHz
Frequency response (Sine):	f < 10 MHz: <±0.15 dB 10 MHz ≤ f < 25 MHz: <±0.2 dB 25 MHz ≤ f < 50 MHz: <±0.4 dB

DC offset:	
Voltage range (AC + DC)	±5 mV...5 V (into 50 Ω) ±10 mV...10 V (open circuit)
Accuracy	±2 % of offset ±0.5 % of signal level ±2 mV ±1 mV/MHz
Units:	V <sub>pp</sub> , dBm

Waveform Sine Wave	
Total harmonic distortion (1 V <sub>pp</sub> ):	f < 100 kHz: <-70 dBc 100 kHz ≤ f < 10 MHz: <-55 dBc 10 MHz ≤ f < 25 MHz: <-40 dBc f ≥ 25 MHz: <-37 dBc
Spurious (Non-harmonics 1 V <sub>pp</sub> ):	f < 1 MHz: -70 dBc 1 MHz < f < 50 MHz: -70 dBc + 6 dB/Octave
Total harmonic distortion (f ≤ 100 kHz):	0.04 % typ.
Phase noise:	(10 MHz, 10 kHz Offset, 1 V <sub>pp</sub> ) <-115 dBc/Hz typ.

Waveform Square	
Rise/fall time:	<8 ns
Overshoot:	<3 % typ.
Symmetry (50 % duty cycle):	1 % + 5 ns
Jitter (RMS):	<1 ns typ.

Waveform Pulse	
<b>Frequency range:</b>	
HMF2525	100 µHz...12.5 MHz
HMF2550	100 µHz...25 MHz
<b>Amplitude:</b>	5mV...+5V respectively -5mV...-5V (into 50 Ω)
<b>Rise/fall time:</b>	<8 ns, variable up to 500 ns
<b>Pulse width:</b>	15 ns...999 s
<b>Resolution:</b>	5 ns
<b>Jitter (RMS):</b>	<500 ps typ.
<b>Overshoot:</b>	<3 % typ.

Waveform Ramp, Triangle	
<b>Frequency range:</b>	
HMF2525	10 µHz...5 MHz
HMF2550	10 µHz...10 MHz
<b>Symmetry:</b>	1...99 %
<b>Linearity:</b>	
f < 250 kHz	<0.1 % typ.
f ≥ 250 kHz	<2 % typ.

Waveform Arbitrary	
<b>Frequency range:</b>	
HMF2525	10 µHz...12.5 MHz
HMF2550	10 µHz...25 MHz
<b>Sample rate:</b>	250 MSa/s
<b>Amplitude resolution:</b>	14 Bit
<b>Bandwidth (-3 dB):</b>	>50 MHz
<b>Signal length:</b>	Up to 256 kPts
<b>Non-volatile memory:</b>	up to 4 MB (internal file system)
<b>Predefined waveforms:</b>	Sine, square (50 %), ramp (positive/negative), triangle (50 %), noise (white/pink), cardinal sine, exponential (rise/fall)

Inputs and Outputs	
<b>Signal output:</b>	BNC socket (frontside), short-circuit-proof, ext. voltage ±15V max.
<b>Impedance</b>	50 Ω
<b>Gate/Trigger input:</b>	BNC socket (frontside)
<b>Impedance</b>	5 kΩ    100 pF
<b>Level</b>	TTL (protected up to ±30V)
<b>Edge</b>	Positive/negative (selectable)
<b>Pulse width</b>	Min. 100 ns
<b>Trigger output:</b>	BNC socket (frontside)
<b>Impedance</b>	50 Ω
<b>Level</b>	Positive TTL level impulse
<b>Frequency</b>	10 MHz max.
<b>Modulation input:</b>	BNC socket (rear side)
<b>Impedance</b>	10 kΩ
<b>Max. input voltage</b>	±5V for full scale
<b>Bandwidth (-3 dB)</b>	DC...50 kHz (sample with 250 kSa/s)
<b>Reference input:</b>	BNC socket (rear side)
<b>Impedance</b>	1 kΩ
<b>Frequency</b>	10 MHz ±100 kHz
<b>Input voltage</b>	TTL
<b>Reference output:</b>	BNC socket (rear side)
<b>Impedance</b>	50 Ω
<b>Frequency</b>	10 MHz
<b>Output voltage</b>	1.65V <sub>pp</sub> (into 50 Ω)
<b>Ramp output:</b>	BNC socket (rear side)
<b>Impedance</b>	200 Ω
<b>Output voltage</b>	0...5V, synchronous with sweep

Sweep	
<b>Signals:</b>	All (except pulse)
<b>Type:</b>	linear/logarithmic
<b>Direction:</b>	up/down
<b>Sweep time:</b>	1 ms...500 s

Burst	
<b>Signals:</b>	All
<b>Type:</b>	Internal/external triggered, 1...50,000 cycles, Immediate or Gate controlled
<b>Start/stop phase:</b>	0...360° (sine only)
<b>Trigger source:</b>	Manual, internal or external via Trigger source or interface
<b>Internal Trigger period:</b>	1 µs...500 s

Modulation	
<b>Type of modulation:</b>	AM, FM, PM, PWM, FSK
<b>Waveform carrier:</b>	All (except pulse)
<b>Internal modulation (waveform):</b>	Sine, square (50 %), ramp (positive/negative), triangle (50 %), noise (white/pink), cardinal sine, exponential (rise/fall), Arbitrary with up to 4096 Pts.
<b>Internal modulation frequency:</b>	10 µHz...50 kHz
<b>Ext. modulation bandwidth (-3 dB):</b>	DC...50 kHz (sampled at 250 kSa/s)
<b>Amplitude modulation:</b>	
<b>Modulation depth</b>	0...100 %
<b>Frequency modulation:</b>	
<b>Frequency deviation</b>	Max. 10 MHz
<b>Phase modulation:</b>	
<b>Phase deviation</b>	-180...+180°
<b>Pulse width modulation:</b>	
<b>Deviation</b>	0...49,99 % of the pulse width

Miscellaneous	
<b>Display:</b>	8.9 cm (3.5") color TFT QVGA 65k colors
<b>Interface:</b>	Dual-Interface USB/RS-232 (H0720)
<b>Save/Recall memory:</b>	4 MB internal file system/ext. USB
<b>Protection class:</b>	Safety class I (EN61010-1)
<b>Power supply:</b>	105...253V, 50...60 Hz, CAT II
<b>Power consumption:</b>	approx. 30W
<b>Operating temperature:</b>	+5...+40 °C
<b>Storage temperature:</b>	-20...+70 °C
<b>Rel. humidity:</b>	5...80 % (non condensing)
<b>Dimensions (W x H x D):</b>	285 x 75 x 365 mm
<b>Weight:</b>	3.4 kg

All data valid at 23°C after 30 minutes warm-up.

<b>Accessories supplied:</b>	Line cord, Operating manual, CD, Software
<b>Recommended accessories:</b>	
H0730	Dual-Interface Ethernet/USB
H0740	Interface IEEE-488 (GPIB), galvanically isolated
HZ13	Interface cable (USB) 1.8 m
HZ14	Interface cable (serial) 1:1
HZ20	Adapter plug BNC plug - 4 mm safety sockets
HZ24	Attenuators 3/6/10 and 20 dB
HZ33	Test cable BNC plug - BNC plug 0.5 m
HZ34	Test cable BNC plug - BNC plug 1.0 m
HZ42	19" Rackmount kit 2RU
HZ72	IEEE-488 (GPIB) Cable 2m

## Mainframe HM8001-2

Product description, page 38

### General information

Mainframe with power supply accommodates 2 modules

### Power supply module

<b>Details of available supply voltages and load capability:</b>	refer to manual HM8001 ( <a href="http://www.hameg.com">www.hameg.com</a> )
<b>2 x 8V<sub>ac</sub> max.</b>	0.4 A each
<b>2 x 5V<sub>dc</sub> max.</b>	1 A each
<b>4 x 20V<sub>dc</sub> max.</b>	0.5 A each
Voltages between 5V and 20V are programmable from each module (Polarity selectable)	
<b>Available output power:</b>	each module max. 25W All DC voltages are electronically stabilized, floating and short-circuit proof. Current output of 2 HM8040-3 with HM8001-2: sum of all channels <2A

### Miscellaneous

Power switch (ON/OFF) located between the two modules on the front panel.

**Safety class:** Safety Class I (EN61010-1)

<b>Power supply:</b>	115/230V~ (50...60Hz), CAT II
Max. permissible line fluctuation:	±10%
<b>Power consumption:</b>	max. 110W (with overload protection)
<b>Operating temperature:</b>	+5...+40 °C
<b>Storage temperature:</b>	-20...+70 °C
<b>Rel. humidity:</b>	5...80% (non condensing)
<b>Dimensions (W x H x D):</b>	285 x 75 x 365mm
<b>Weight:</b>	approx. 4 kg

All data valid at 23 °C after 30 minutes warm-up.

<b>Accessories supplied:</b>	Line cord, Operating manual
<b>Recommended accessories:</b>	
H0801	4 BNC connectors
HZ42	19" Rackmount kit 2RU
HZ809	Test Adapter

## 4<sup>3</sup>/<sub>4</sub>-Digit Programmable Multimeter HM8012

Product description, page 39

<b>DC voltage</b>	
<b>Measurement ranges:</b>	500 mV, 5V, 50V, 500V, 600V
<b>Resolution:</b>	10 µV, 100 µV, 1 mV, 10 mV, 100 mV
<b>Accuracy:</b>	
5V, 500V, 600V:	±(0.05% of reading + 0.002% of full scale)
500mV, 50V:	±(0.05% of reading + 0.004% of full scale)
<b>Overload protection:</b>	
V/Q/T°/dB/  to COM and to chassis:	850V <sub>p</sub> at max. 60 Hz or 600V <sub>dc</sub>
COM against chassis:	250V <sub>rms</sub> at max. 60 Hz or 250V <sub>dc</sub>
<b>Input resistance:</b>	
50V, 500V, 600V:	10 MΩ    90 pF
500mV, 5V:	>1 GΩ    90 pF
<b>Input current:</b>	10 pA
<b>Common mode rejection ratio:</b>	≥100 dB (50...60 Hz ±0.5%)
<b>Serial mode rejection ratio:</b>	≥60 dB (50...60 Hz ±0.5%)

<b>dB Mode</b>	
<b>Accuracy:</b>	±(0.02 dB + 2 digits) [display >-38.7 dBm]
<b>Resolution:</b>	0.01 dB above 18% of rating

<b>DC current</b>	
<b>Measurement ranges:</b>	500 µA, 5 mA, 50 mA, 500 mA, 10 A
<b>Resolution:</b>	10 nA, 100 nA, 1 µA, 10 µA, 1 mA
<b>Accuracy:</b>	
0.5...500 mA:	±(0.2% of reading + 0.004% of full scale)
10 A:	±(0.3% of reading + 0.004% of full scale)
<b>Voltage drop:</b>	
10 A range:	0.2V max.
500 mA range:	2.5V max.
other ranges:	0.7V max.

<b>AC voltage</b>	
<b>Measurement ranges:</b>	500 mV, 5V, 50V, 500V, 600V
<b>Resolution:</b>	10 µV, 100 µV, 1 mV, 10 mV, 100 mV
<b>Accuracy 0.5...50V:</b>	
40 Hz...5 kHz:	±(0.4% of reading + 0.07% of full scale)
20 Hz...20 kHz:	±(1% of reading + 0.07% of full scale)
<b>Accuracy 500V and 600V:</b>	
40 Hz...1 kHz:	±(0.4% of reading + 0.07% of full scale)
20 Hz...1 kHz:	±(1% of reading + 0.07% of full scale)
<b>Overload protection:</b>	
V/Q/T°/dB/  to COM and to chassis:	850V <sub>p</sub> at max. 60 Hz or 600V <sub>dc</sub>
COM against chassis:	250V <sub>rms</sub> at max. 60 Hz or 250V <sub>dc</sub>
<b>Input impedance</b>	
AC mode:	1 MΩ    90 pF
AC + DC mode:	10 MΩ    90 pF
<b>Bandwidth at -3 dB:</b>	80 kHz typical
<b>dB mode:</b>	20 Hz...20 kHz
<b>Accuracy</b>	
-23.8...59.8 dBm:	±0.2 dBm

<b>Resolution:</b>	0.01 dB above 9 mV
<b>CMRR:</b>	≥60 dB (50...60 Hz ±0.5%)
<b>Crest factor:</b>	7 max.

<b>AC current</b>	
<b>Measurement ranges:</b>	500 µA, 5 mA, 50 mA, 500 mA, 10 A
<b>Resolution:</b>	10 nA, 100 nA, 1 µA, 10 µA, 1 mA
<b>Accuracy:</b>	
0.5...500 mA:	±(0.7% of reading + 0.07% of f.s.)
	40 Hz...5 kHz
10 A:	±(1% of reading + 0.07% of full scale)

<b>AC + DC measurements</b>	
As shown for AC + 25 digits	

<b>Resistance</b>	
<b>Measurement ranges:</b>	500 Ω, 5 kΩ, 50 kΩ, 500 kΩ, 5 MΩ, 50 MΩ
<b>Resolution:</b>	10 mΩ, 100 mΩ, 1 Ω, 10 Ω, 100 Ω, 1 kΩ
<b>Accuracy:</b>	
500 Ω...500 kΩ:	±(0.05% of reading + 0.004% of f.s.+50 mΩ)
5...50 MΩ:	±(0.3% of reading + 0.004% of full scale)
<b>Overload Protection:</b>	max. 300V <sub>rms</sub>
<b>Measurement current:</b>	
500 Ω...5 kΩ range:	1 mA
50 kΩ range:	100 µA
500 kΩ range:	10 µA
5...50 MΩ range:	100 nA
<b>Measurement voltage:</b>	10V typical for open inputs, depending on the value of resistance to be measured. Negative polarity of measurement voltage is across common terminal.

<b>Temperature</b>	
<b>2-wire resistance measurement</b>	with linearization for PT100 sensors as per standard EN60751
<b>Range:</b>	-200...+500 °C
<b>Resolution:</b>	0.1 °C
<b>Measurement current:</b>	approx. 1 mA
<b>Display:</b>	in °C, °F
<b>Accuracy:</b>	±(0.4 °C + 0.0005 x T) from -200...+200 °C ±(0.5 °C + 0.0005 x T) from +200...+500 °C (T in °C, sensor tolerance not included)

<b>Temperature coefficient: (reference 23 °C)</b>	
V = 500 mV, 50V	30 ppm/°C
600V range	80 ppm/°C
other ranges	20 ppm/°C
V ~ 600V range	80 ppm/°C
other ranges	50 ppm/°C
mA all ranges	200 ppm/°C
mA~ all ranges	300 ppm/°C
Ω 5 MΩ, 50 MΩ ranges	200 ppm/°C
other ranges	50 ppm/°C

<b>Miscellaneous</b>	
<b>Power supply (from mainframe):</b>	
+5V	300 mA
-26V	140 mA
<b>Operating temperature:</b>	+5...+40 °C
<b>Storage temperature:</b>	-20...+70 °C
<b>Rel. humidity:</b>	5...80% (non condensing)
<b>Dimensions (W x H x D)</b>	
<b>(without 22-pole flat plug):</b>	135 x 68 x 228 mm
<b>Weight:</b>	approx. 0.5 kg

All data valid at 23 °C after 30 minutes warm-up.

<b>Accessories supplied:</b>	Operating manual, Interface cable (HZ14), PVC test leads (HZ15), CD, Software
<b>Recommended accessories:</b>	
HZ10S	5 x silicone test lead (measurement connection in black)
HZ10R	5 x silicone test lead (measurement connection in red)
HZ10B	5 x silicone test lead (measurement connection in blue)
HZ812	PT100 Temperature probe

## 25 kHz-LCR-Meter HM8018

Product description, page 39

### Measurement functions

<b>Measuring modes:</b>	R, L, C, $\Theta$ , Q/D,  Z
<b>Equivalent circuits:</b>	serial, parallel
<b>Measuring method:</b>	2-wire, 4-wire
<b>Measuring ranges:</b>	R: 0.001 $\Omega$ ...99.9 M $\Omega$ C: 0.001 pF...99.9 mF L: 0.01 $\mu$ H...9999 H Q: 0.0001...99.9 D: 0.0001...9.9999 $\Theta$ : [-180.00°]...[+180.00°]
<b>Basic accuracy:</b>	0.2%
<b>Measuring frequencies:</b>	100 Hz, 120 Hz, 1 kHz, 10 kHz, 25 kHz
<b>Freq. Accuracy:</b>	$\pm 100$ ppm (except 120 Hz: 120.2 Hz $\pm 100$ ppm)
<b>Measuring voltage:</b>	0.5 V <sub>rms</sub> $\pm 10$ % (unloaded)
<b>Measuring rate:</b>	2 measurements/second
<b>Range changing:</b>	automatic, manual
<b>DC Bias voltage:</b>	1 V $\pm 10$ %
<b>Zero setting:</b>	Open/short circuit compensation
<b>Compensation limits:</b>	Short: R < 10 $\Omega$ Z < 15 $\Omega$ Open: Z > 10 k $\Omega$

### Measurement accuracy

with D < 0.1 or Q > 10:	C: $A_e = A_f [1 + C_x/C_{max} + C_{min}/C_x]$ L: $A_e = A_f [1 + L_x/L_{max} + L_{min}/L_x]$ Z: $A_e = A_f [1 + Z_x/Z_{max} + Z_{min}/Z_x]$ R: $A_e = A_f [1 + R_x/R_{max} + R_{min}/R_x]$
with D $\geq 0.1$ :	$A_e = \sqrt{1 + D_x^2}$
with the parameters:	$C_x$ = Measurement value $A_f$ = 0.2 % at f = 100 Hz, 120 Hz, 1 kHz $A_f$ = 0.3 % at f = 10 kHz $A_f$ = 0.5 % at f = 25 kHz

Parameter	Auto Range
$C_{max}$	160 $\mu$ F/f (f in kHz)
$C_{min}$	53 pF/f (f in kHz)
$L_{max}$	480 H/f (f in kHz)
$Z_{max}, R_{max}$	3 M $\Omega$
$Z_{min}, R_{min}$	0.5 $\Omega$

<b>Dissipation factor accuracy:</b>	$D_e = \pm \frac{A_e}{100}$
<b>Quality factor accuracy:</b>	$Q_e = \frac{Q_x^2 \cdot D_e}{1 \pm D_x \cdot D_e}$
<b>Phase angle accuracy:</b>	$\Theta_e = \frac{180}{\pi} \cdot \frac{A_e}{100}$

### Display

5-digits 7-Segment LEDs with sign

<b>Display Parameters:</b>	
Value	Calculation from measurement value and reference value stored
% Value	
Deviation	
% Offset	

### Miscellaneous

The inputs are short-circuit-proof and overvoltage protected up to 100V<sub>dc</sub> with a maximum energy consumption of 1 J.

One configuration can be saved.

<b>Power supply (from mainframe):</b>	+5 V/300 mA +5.2 V/50 mA -5.2 V/50 mA ( $\Sigma$ = 2 W)
<b>Operating temperature:</b>	+5...+40 °C
<b>Storage temperature:</b>	-20...+70 °C
<b>Rel. humidity:</b>	5...80 % (non condensing)
<b>Dimensions (W x H x D) (without 22-pole flat plug):</b>	135 x 68 x 228 mm
<b>Weight:</b>	approx. 0.5 kg

All data valid at 23 °C after 30 minutes warm-up.

**Included in delivery:** Operating manual, CD

### Recommended accessories:

HZ10S	5 x silicone test lead (measurement connection in black)
HZ10R	5 x silicone test lead (measurement connection in red)
HZ10B	5 x silicone test lead (measurement connection in blue)
HZ17	Kelvin test lead (4 wire) with probe tips
HZ18	Kelvin test lead (4 wire) with gold plated contacts
HZ19	Kelvin test lead (4 wire) with SMD-Test-tweezers

## 1.6 GHz Universal Counter HM8021-4

Product description, page 40

### Measurement functions

Frequency A/C, Period A;
Totalize A;
Pulse width: $\square$ / $\square$ (averaged);
Totalling A during ext. gate

### Input characteristics (Input A)

<b>Frequency range:</b>	0...150 MHz: DC-coupled 10 Hz...150 MHz: AC-coupled
<b>Sensitivity: (normal triggering)</b>	DC...80 MHz: 20 mV <sub>rms</sub> (sine wave) 80 mV (pulse) 80...150 MHz: 60 mV <sub>rms</sub> (sine wave) 20 Hz...80 MHz (auto trig.): 50 mV <sub>rms</sub> (sine wave)
<b>Minimum pulse width:</b>	5 ns
<b>Input noise:</b>	100 $\mu$ V (typ.)
<b>Coupling:</b>	AC or DC (selectable)
<b>Input impedance:</b>	1 M $\Omega$    40 pF
<b>Attenuator:</b>	x1, x20 (selectable)
<b>Max. input voltage:</b>	0...440 Hz: 400 V (DC + AC <sub>peak</sub> ) 1 MHz: decreasing to 8 V <sub>rms</sub>

### Input characteristics (Input C)

<b>Frequency range:</b>	100 MHz...1.6 GHz
<b>Sensitivity:</b>	to 1.3 GHz: 30 mV (typ. 20 mV) to 1.6 GHz: 100 mV (typ. 80 mV)
<b>Input impedance:</b>	50 $\Omega$ nominal
<b>Coupling:</b>	AC
<b>Max. input voltage:</b>	5 V (DC + AC <sub>peak</sub> )

### Input characteristics (external gate)

<b>Input impedance:</b>	4.7 k $\Omega$
<b>Max. input voltage:</b>	$\pm 30$ V
<b>High/low level:</b>	>2 V / <0.5 V
<b>Min. pulse duration:</b>	50 ns
<b>Min. effective gate time:</b>	150 $\mu$ s

### Frequency measurement (Input A)

<b>LSD:</b>	$(2.5 \times 10^{-7} \text{ s} \times \text{freq.}) / \text{measurement time}$
<b>Resolution:</b>	1 LSD

### Period duration measurement

<b>Range:</b>	66.6 ns...10,000 s
<b>LSD:</b>	$(2.5 \times 10^{-7} \text{ s} \times \text{period}) / \text{measurement time}$
<b>Resolution:</b>	1 LSD

### Totalling (manually/externally gated)

<b>Range:</b>	DC...20 MHz
<b>Min. pulse duration:</b>	25 ns
<b>LSD:</b>	1 count
<b>Resolution:</b>	LSD
<b>Ext. gate error:</b>	100 ns in manual mode only

### Time interval (averaged)

<b>LSD:</b>	10 ps...100 ns
<b>Resolution:</b>	1 LSD

<b>Offset</b>	
Range:	covers the entire measurement range
<b>Gate time</b>	
(Gate time cannot be less than 1 period.)	
Range:	100 ms...10 s in 3 steps
External gate time:	min. 150 $\mu$ s
<b>Timebase</b>	
Frequency:	10 MHz clock 10 MHz crystal
<b>Accuracy</b>	
(between 10 °C and 40 °C):	$\pm 5 \times 10^{-7}$
Aging:	$\pm 3$ ppm/15 years
<b>Miscellaneous</b>	
Display:	8-digit 7-segment LED display with 7.65 mm digit height, sign and exponent
Power consumption:	approx. 7 W
Operating temperature:	+5...+40 °C
Storage temperature:	-20...+70 °C
Rel. humidity:	5...80% (non condensing)
Dimensions (W x H x D):	135 x 68 x 228 mm
Weight:	approx. 0.6 kg

All data valid at 23 °C after 30 minutes warm-up.

<b>Accessories supplied:</b> Operating manual, CD	
<b>Recommended accessories:</b>	
HZ20	Adapter, BNC to 4 mm banana
HZ24	Attenuators 50 $\Omega$ (3/6/10/20 dB)
HZ33	Test Cable 50 $\Omega$ (BNC-BNC) 0.5 m
HZ34	Test Cable 50 $\Omega$ (BNC-BNC) 1.0 m

## 10 MHz Function Generator HM8030-6

Product description, page 40

<b>Operating modes</b>	
Sine, square, triangle, pulse; free running, internal sweep or external frequency modulation, with or without DC offset	
<b>Frequency ranges</b>	
0.05 Hz...10 MHz in 8 ranges, variable: $\times 0.09$ to $\times 1.1$ (12:1)	
Frequency drift:	<0.5%/hr or 0.8%/24 hrs. at constant ambient temperature
<b>Waveform characteristics</b>	
<b>Sine wave distortion</b>	
0.05 Hz...1 MHz:	max. 0.5%
1...10 MHz:	max. 5%
Square wave rise time:	typ. 15 ns
Overshoot:	<5% (for termination into 50 $\Omega$ )
Triangle non-linearity:	<1% (to 100 kHz)
<b>Displays</b>	
Frequency:	5-digit, 7-segment LED, each 8 x 5 mm
<b>Accuracy:</b>	
up to 5 Hz:	$\pm(3\% + 3 \text{ digits})$
5 Hz...10 MHz:	$\pm(5 \times 10^{-5} + 1 \text{ digit})$
LED indicators for mHz, Hz, kHz and s	
<b>Outputs</b>	
Signal output:	short-circuit proof protected against ext. voltage up to $\pm 45 V_{dc}$ max. (30 s)
Impedance:	50 $\Omega$
Output voltage:	10 $V_{pp}$ into 50 $\Omega$ load; 20 $V_{pp}$ (open circuit)
Attenuation:	max. 60 dB
2 attenuators:	each 20 dB $\pm 0.2$ dB
Variable:	0...20 dB
<b>Amplitude error:</b> (sine wave/triangle)	
0.05 Hz...0.5 MHz:	max. 0.2 dB
5 Hz...10 MHz:	max. 2.0 dB

<b>DC offset:</b>	variable (on/off, except pulse function)
into 50 $\Omega$ load:	max. $\pm 2.5$ V
in open circuit:	max. $\pm 5$ V
<b>Trigger output:</b>	square wave synchronous to approx. +5V/TTL

<b>FM input</b>	
(VCF, BNC connector on rear panel of HM8001-2 and option H0801)	
Frequency deviation:	approx. 1:100
Input impedance:	6 k $\Omega$    25 pF
Input voltage:	max. $\pm 30$ V

<b>Internal sweep</b>	
Sweep speed:	20 ms...15 s
Sweep range:	approx. 1:100

<b>Miscellaneous</b>	
<b>Power supply</b>	+5V/200 mA
<b>(from mainframe):</b>	+16V/300 mA -16V/250 mA ( $\Sigma = 9.8$ W)
Operating temperature:	+5...+40 °C
Storage temperature:	-20...+70 °C
Rel. humidity:	5...80% (non condensing)
Dimensions (W x H x D)	
<b>(without 22-pole flat plug):</b>	135 x 68 x 228 mm
Weight:	approx. 0.8 kg

All data valid at 23 °C after 30 minutes warm-up.

<b>Accessories supplied:</b> Operating manual, CD	
<b>Recommended accessories:</b>	
HZ20	Adapter, BNC to 4 mm banana
HZ22	Feed-Through Termination 50 $\Omega$
HZ33	Test Cable 50 $\Omega$ (BNC-BNC) 0.5 m
HZ34	Test Cable 50 $\Omega$ (BNC-BNC) 1.0 m

## Triple Power Supply (module) HM8040-3

Product description, page 41

<b>Outputs</b>	
2 x 0...20V/0,5 A and 5V/1 A	Single pushbutton control of all outputs, linear regulators with overheating protection. Floating outputs for parallel/serial operation, current limit and electronic fuse
<b>20 V Output</b>	
Setting range:	2 x 0...20V, continuously variable
Residual ripple:	$\leq 1 \text{ mV}_{rms}$
Output current:	max. 0.5 A
Current limit/electronic fuse:	0...0.5 A continuously variable
<b>Dynamic behaviour:</b>	
<b>Load change 10...90% of full load</b>	
Recovery time:	200 $\mu$ s
Dyn. transient deviation:	typ. 2 mV
Dyn. output impedance:	3.75 m $\Omega$
<b>Load change at 50% basic load and <math>\pm 10\%</math> of full load</b>	
Recovery time:	150 $\mu$ s
Dyn. transient deviation:	400 $\mu$ V
Dyn. output impedance:	4 m $\Omega$
<b>5 V Output</b>	
Range:	5V $\pm 0.5$ V screwdriver adjustment
Ripple and noise:	$\leq 1 \text{ mV}_{rms}$
Output current:	max. 1 A continuous, short-circuit-proof
<b>Combined displays of 20V outputs</b>	
7-segment LED:	2 x 3-digit displays, each can be switched to display either voltage (V) or current (mA)
Resolution:	0.1 V/1 mA
Display accuracy:	$\pm 1$ digit voltage/ $\pm 4$ digit current
LED:	current limit indication

Maximum limits	
Reverse voltage:	25 V, each output
Reverse current:	500 mA, each output
Voltage to ground:	100 V, each terminal
Temperature control:	If the internal temperature exceeds 75...80 °C, the HM8040-3 will be switched off automatically.

Miscellaneous	
Safety class:	Safety class I (EN61010-1)
Power supply (from mainframe):	1 x 8 V/1 A 2 x 24 V/530 mA 1 x 5 V/400 mA 2 x 18 V <sub>ac</sub> /100 mA ( $\Sigma = 40 \text{ W}$ )
Current output of 2 HM8040-3 with HM8001-2:	sum of all channels <2 A
Operating temperature:	+5...+40 °C
Storage temperature:	-20...+70 °C
Rel. humidity:	5...80% (non condensing)
Dimensions (W x H x D):	135 x 68 x 228 mm
Weight:	approx. 1.07 kg

All data valid at 23 °C after 30 minutes warm-up.

<b>Accessories supplied:</b>	Operating manual, CD
<b>Recommended accessories:</b>	
HZ10S	5 x silicone test lead (measurement connection in black)
HZ10R	5 x silicone test lead (measurement connection in red)
HZ10B	5 x silicone test lead (measurement connection in blue)

## H0010/H0011 Serial Bus Option description, page 10

### CAN/LIN Trigger and Decode in Progress


	I <sup>2</sup> C Bus	SPI Bus	UART/RS-232 Bus
<b>Bus Configuration</b>			
<b>Bit/Baud rate</b>	up to 10 Mbit/s (HMO352x/2524), up to 5 Mbit/s (HMO72x...202x)	up to 25 Mbit/s (HMO352x/2524), up to 12.5 Mbit/s (HMO72x...202x)	300, 600, 1200, 2400, 4800, 9600, 19200, 38400, 57600, 115200 Baud, up to 62.5 Mbit/s (HMO352x/2524), up to 31 Mbit/s (HMO72x...202x)
<b>Number of Bit's</b>	7 or 10 Bit for Address ID 8 Bit for Data	32 Bit for Data	8 Bit for Data 1, 1.5, 2 Bit for Stop Bit
<b>Polarity</b>	n/a	Chip select, positive or negative, or without Chipselect (2-wire SPI) Clock rising or falling edge Data High or Low active	High or Low active
<b>Parity</b>	n/a	n/a	none, odd or even
<b>Trigger</b>			
<b>Source</b>	H0010: digital Channel LCH 0...15 (Opt. H03508) analog Channel LCH 1...2 [CH 1...4] H0011: analog Channel LCH 1...2 [CH 1...4]	H0010: digital Channel LCH 0...15 (Opt. H03508) analog Channel LCH 1...2, external Trigger Entry for Chip Select, [CH 1...4] H0011: analog Channel LCH 1...2, external Trigger Entry for Chip Select, [CH 1...4]	H0010: digital Channel LCH 0...15 (Opt. H03508) analog Channel LCH 1...2 [CH 1...4] H0011: analog Channel LCH 1...2 [CH 1...4]
<b>Event</b>	7 or 10 Bit Address ID 7 or 10 Bit Address ID with 8 Bit Data Start, Stop, Restart missing Acknowledge Address ID without Acknowledge	Data packets up to 32 Bit with positive or negative Chip Select or without Chip Select, (2-wire SPI)	Data packets up to 8 Bit
<b>Input format</b>	Hexadecimal or Binary	Hexadecimal or Binary	Hexadecimal or Binary
<b>Hardware accelerated Decode</b>			
<b>Source</b>	H0010: digital Channel LCH 0...15 (Opt. H03508) analog Channel LCH 1...2 [CH 1...4] H0011: analog Channel LCH 1...2 [CH 1...4]	H0010: digital Channel LCH 0...15 (Opt. H03508) analog Channel LCH 1...2, external Trigger Entry for Chip Select, [CH 1...4] H0011: analog Channel LCH 1...2, external Trigger Entry for Chip Select, [CH 1...4]	H0010: digital Channel LCH 0...15 (Opt. H03508) analog Channel LCH 1...2 [CH 1...4] H0011: analog Channel LCH 1...2 [CH 1...4]
<b>Display</b>	Bus display, color coded for  Read Address ID:           Yellow Write Address ID:         Magenta Date:                         Cyan Start:                        White Stop:                         White ACK/NACK:                 Green/Red Error:                        Red Trigger Condition:         Green up to four lines for decoded values, synchronous display of the Bit lines	Bus display, color coded for  Date:                         Cyan Start:                        White Stop:                         White  Error:                        Red Trigger Condition:         Green up to four lines for decoded values, synchronous display of the Bit lines	Bus display, color coded for  Date:                         Cyan Start:                        White Stop:                         White  Error:                        Red Trigger Condition:         Green up to four lines for decoded values, synchronous display of the Bit lines
<b>Format</b>	Address ID: hexadecimal Data        ASCII, binary, decimal, hexadecimal	n/a Data        ASCII, binary, decimal, hexadecimal	n/a Data        ASCII, binary, decimal, hexadecimal

### Differences H0010/H0011


Feature	H0010	H0011
Logic channel (LC 0...LC 15) as source for serial bus trigger and decode	x	-
Analog channel (CH 1...CH 4) as source for serial bus trigger and decode	x	x
Time synchronous decode of two serial busses	x	-

# H0012 CAN/LIN


for all Oscilloscopes of the HMO Series

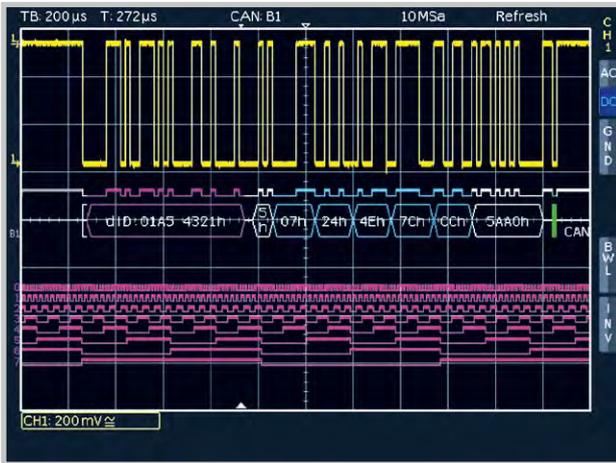

Mixed Signal and Bus Display

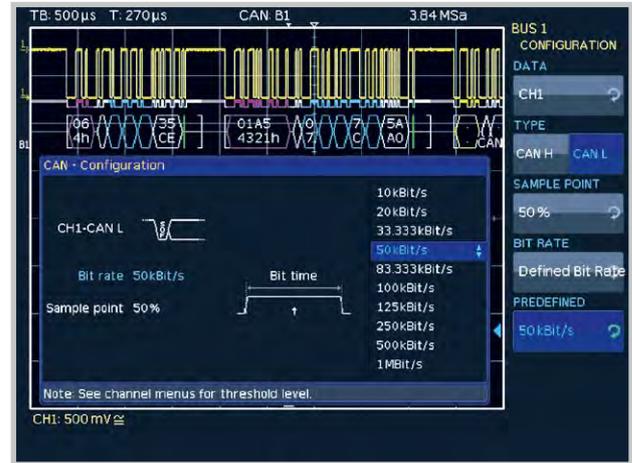

CAN Bus Configuration

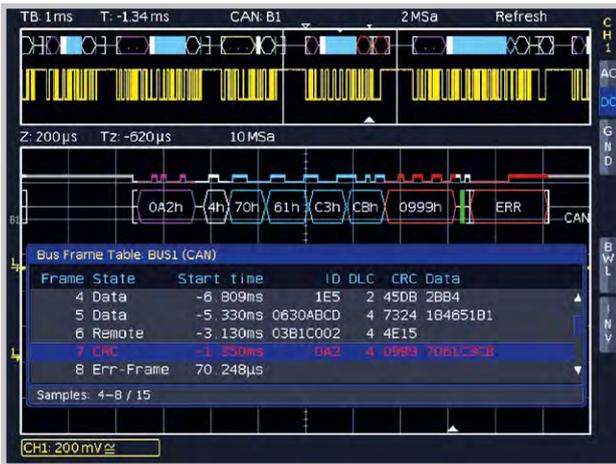

CAN Bus list display



CAN Bus HEX

- ☑ CAN, LIN Bus Trigger and Decode
- ☑ Hardware accelerated Decode in Realtime
- ☑ Color Coded Display of the Content for intuitive Analysis and easy Overview
- ☑ More Details of the decoded Values come visible with increasing Zoom Factor
- ☑ Bus and List Display with synchronous Display of the Data
- ☑ Decode into ASCII, Binary, Hexadecimal or Decimal Format
- ☑ Up to four Lines to show the decoded Values Comfortably
- ☑ Powerful Trigger to isolate specific Messages
- ☑ Option for all Oscilloscopes of the HMO Series, retrofittable

See page 91 for technical specifications or [www.hameg.com/H0012](http://www.hameg.com/H0012)

H0012

**H0012 CAN/LIN Serial Bus Option** Option description, page 90

CAN Bus		LIN Bus
<b>Bus Configuration</b>		
<b>Bit rates</b>	Pre-Defined or User-Select, 100 Bit/s...4 Mb/s (HM0352x/2524), 100 Bit/s...2 Mb/s (HM072x...202x)	Pre-Defined or User-Select, 100 Bit/s...4 Mb/s (HM0352x/2524), 100 Bit/s...2 Mb/s (HM072x...202x)
<b>Signal Type</b>	CAN-L or CAN-H, Single Ended or Differential Probe (Analog Channel only)	n/a
<b>Sample Point Range</b>	25...90%	n/a
<b>Threshold</b>	Pre-Defined or User-Select	Pre-Defined or User-Select
<b>Polarity</b>	n/a	High or Low Aktive
<b>Protocol Version</b>	n/a	1.x, 2.x, J2602, 1.x or 2.x
<b>Trigger</b>		
<b>Source</b>	digital Channel LCH 0...15 (Opt. H03508), analog Channel LCH 1...2 [CH 1...4]	digital Channel LCH 0...15 (Opt. H03508), analog Channel LCH 1...2 [CH 1...4]
<b>Event</b>	Start of Frame (SOF), End of Frame (EOF) Error Frame Error condition: Stuff Bit Error, CRC Error, Not Acknowledge, Form Error Overload Frame Data Frame (11 or 29 Bit ID) Remote Frame (11 or 29 Bit ID) Identifier: 0, 1, X (Don't Care) Pattern, Trigger when =, ≠, <, > Identifier and Data: ID and 64 Bit data pattern (0, 1, X), trigger when =, ≠, <, >	Start of Frame (SOF), Wake Up Frame Error Frame Error condition: Checksum Error, Parity Error Synchronisation Error Identifier: 0, 1, X (Don't Care) Pattern, Trigger when =, ≠, <, > Identifier and Data: ID and 64 Bit data pattern (0, 1, X), trigger when =, ≠, <, >
<b>Input format</b>	Hexadecimal or Binary	Hexadecimal or Binary
<b>Hardware accelerated Decode</b>		
<b>Source</b>	digital Channel LCH 0...15 (Opt. H03508), analog Channel CH 1...2 [CH 1...4]	digital Channel LCH 0...15 (Opt. H03508), analog Channel CH 1...2 [CH 1...4]
<b>Display Bus</b>	<b>color coded for</b>  Start and End of Frame: White brackets Data ID: Magenta, Remote ID: Yellow DLC: White, Data: Cyan, CRC: White ACK: Green, Overload: White, Error: Red  <b>up to four lines for decoded values, synchronous display of the Bit lines</b>	<b>color coded for</b>  Start and End of Frame: White brackets Break: Magenta, Synchronisation: White Identifier: Yellow, Parity: Green, Data: Cyan Checksum: White, Error: Red, Wake Up: Magenta  <b>up to four lines for decoded values, synchronous display of the Bit lines</b>
<b>Table</b>	<b>Display of Bus 0 or 1</b>  Frame Number State (Frame Type or Error Description) Start Time, Identifier, DLC, CRC, Data	<b>Display of Bus 0 or 1</b>  Frame Number State (Frame Type or Error Description) Start Time, Identifier, Length, Checksum, Data
<b>Format</b>	Identifier & other: hexadecimal Data: ASCII, binary, decimal, hexadecimal	Identifier & other: hexadecimal Data & Checksum: ASCII, binary, decimal, hexadecimal



HM400	11, 62	HZ18	47
HM800	41	HZ19	47
HM6050-2	17	HZ20	48
HM7042-5	24, 74	HZ21	48
HM8001-2	38, 84	HZ22	49
HM8012	39, 85	HZ24	49
HM8018	39, 86	HZ26	49
HM8021-4	40, 86	HZ31	48
HM8030-6	40, 87	HZ32	48
HM8040-3	41, 87	HZ33/HZ34	48
HM8112-3	29, 76	HZ33S/HZ34S	48
HM8115-2	30, 77	HZ42	58
HM8118	31, 78	HZ43	58
HM8123	32, 79	HZ45	58
HM8134-3	33, 80	HZ46	58
HM8135	34, 81	HZ51	50
HM8143	25, 74	HZ52	51
HM8150	35, 82	HZ53	51
HMF2525	28, 83	HZ72	49
HMF2550	28, 83	HZ99	59
HMP2020	23, 75	HZ100	52
HMP2030	23, 75	HZ109	52
HMP4030	22, 76	HZ115	52
HMP4040	22, 76	HZ154	50
HMO722	9, 62	HZ181	56
HMO724	9, 62	HZ184	56
HMO1022	9, 64	HZ186	56
HMO1024	9, 64	HZ188	56
HMO1522	8, 65	HZ200	50
HMO1524	8, 65	HZ350	50
HMO2022	8, 67	HZ355	50
HMO2024	8, 67	HZ520	57
HMO2524	7, 69	HZ525	54
HMO3522	6, 70	HZ530	19
HMO3524	6, 70	HZ540	18
HMS1000	14, 73	HZ547	57
HMS1000E	15, 72	HZ550	18
HMS1010	14, 73	HZ560	57
HMS3000	14, 73	HZ575	55
HMS3010	14, 73	HZ809	56
HO118	43	HZ812	55
HO730	45	HZ815	56
HO740	45	HZ887	55
HO801	38	HZO10	51
HO880	45	HZO20	51
HO3011	44	HZO30	51
HO3508/HO3516	43	HZO40	53
HOO10	10, 44, 89	HZO41	53
HOO11	10, 44, 89	HZO50	54
HOO12	90, 91	HZO51	54
HZ10	47	HZO90	59
HZ15	47	HZO91	59
HZ16	47	HZP91	59
HZ17	47		

We provide a worldwide dealer network, in order to offer best local support. For questions about our products, please visit [www.hameg.com/dealer](http://www.hameg.com/dealer) to find your local contact information.

#### Service:

Tel: +49 (0) 6182 800 500  
 Fax: +49 (0) 6182 800 501  
 E-Mail: [service@hameg.com](mailto:service@hameg.com)  
 Director Service:  
 Dipl.-Ing. (FH) Uwe Scholz  
 Repair order processing:  
 Rosalinde Andraschky


#### Sales:

Tel: +49 (0) 6182 800 300  
 Fax: +49 (0) 6182 800 301  
 E-Mail: [sales@hameg.com](mailto:sales@hameg.com)  
 Director Sales:  
 Thomas Modenbach  
 Sales Department:  
 Gerlinde Glaser, Brigitte May, Carmen Sehnert

#### Product Management:

Tel: +49 (0) 6182 800 700  
 Fax: +49 (0) 6182 800 701  
 E-Mail: [support@hameg.com](mailto:support@hameg.com)  
 Director Product Management:  
 Dipl.-Ing. Andreas Grimm  
 Support Line:  
 Dipl.-Ing. (FH) Dennis Holderbusch,  
 Dipl.-Ing. (FH) Ilka Beringer

# Great Value in Test & Measurement

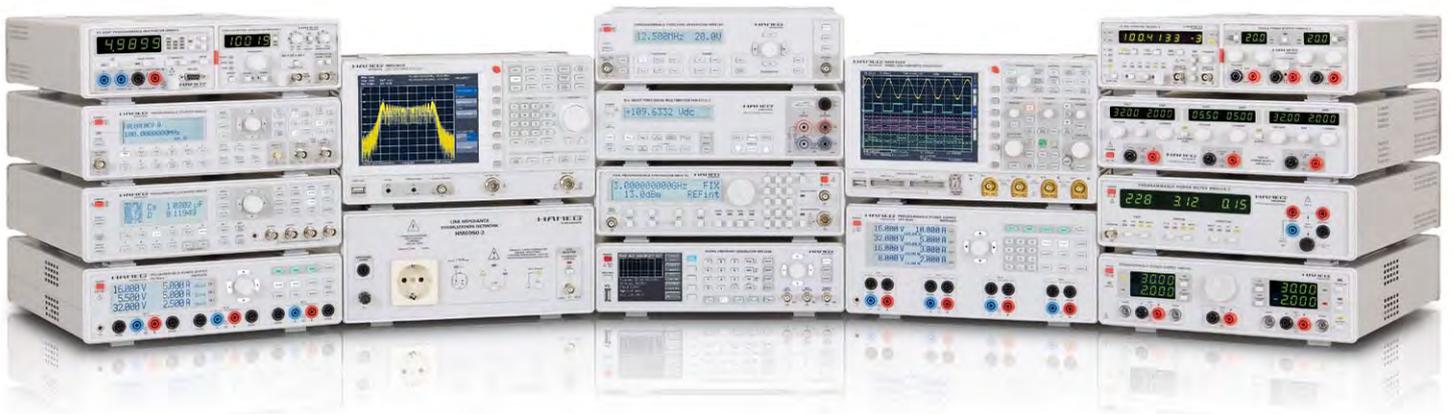

German Quality  
for more than 50 years

With Compliments

[www.hameg.com](http://www.hameg.com)