

## IEC connectors


Order code	Manufacturer code	Description
23-3224	BZV01/Z0000/01	FUSED AND SWITCHED VERTICAL INLET

IEC connectors	Page 1 of 2
The enclosed information is believed to be correct, Information may change 'without notice' due to product improvement. Users should ensure that the product is suitable for their use. E. & O. E.	Revision A 04/07/2003

## IEC Fused Inlet - Vertical



- Vertical Module Arrangement
- Snap-in Components
- Inlet Variations (with various tag sizes)
- Single Pole Switch Variations
- Filtered Inlet Option
- Options of O/I marked switches
- Fused

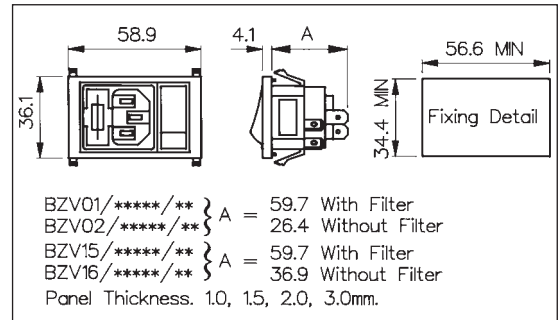

### How to Order

**BZV xx / xxxxx / xx**

Type of Inlet / Outlet	Filtered or Non Filtered Inlet	Combination of Other Components
Fused Power Inlet (cold condition), 6.3 or 2.8mm tabs:  <b>01</b> = PF0011/63 <b>02</b> = PF0011/28  Twin Fused Power Inlet (cold condition), 6.3 or 2.8mm tabs:  <b>15</b> = PF0033/63 <b>16</b> = PF0033/28	Z0000 = Non Filtered  Axxxx = Standard  Bxxxx = Medical  Cxxxx = High Performance Standard (Single Fuse Version only)  <div style="border: 1px solid black; padding: 10px; margin-top: 20px;">             For Filtered inlet use 6th to 9th characters from filter ordering code see pages 71-74.               E.g. BZV01/<b>A0620</b>/01           </div>	Single Pole Switch: <b>01</b> = S.P. Switch  Single Pole Neon Switch: <b>02</b> = S.P. Red Neon Switch <b>08</b> = S.P. Green Neon Switch  Neon Indicator: <b>03</b> = Red Neon Indicator  Single Pole High Inrush Switch: <b>46</b> = S.P. High Inrush Switch  Single Pole Switch Marked O/I: <b>69</b> = S.P. Switch (O/I)  Single Pole Neon Switch Marked (O/I): <b>71</b> = S.P. Red Neon Switch (O/I) <b>74</b> = S.P. Green Neon Switch (O/I)  Single Pole High Inrush Switch Marked (O/I): <b>98</b> = S.P. High Inrush Switch (O/I)

**Note: For technical details of individual components please see page 54**