


**IMAGE**

✓RoHS Compliant



**DIMENSIONS**







Unit: mm M5 × 0.5

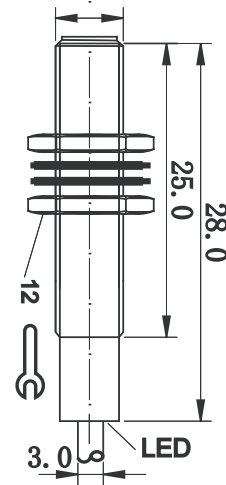

**SPECIFICATION**


Output	PNP N/O
Installation	Shielded
Connection	Wire
Sensing distance	1.0 mm
Rated operational voltage	24v dc
Supply voltage	10-30v dc
Voltage drop	<2v
Rated insulation voltage	>20 MΩ
Load current capacity	200 mA
Off state current	<15mA
Against polarity reversal	No
Short circuit protection	No
Load capacity	<1μF
Repeat accuracy	<5%
Ambient temperature range	-25 +70° C
Frequency	2000Hz
Sensing indication	LED
IP rating	67
Housing material	Nickel plated Brass
Sensing face material	ABS plastic
Cable length	2 m
Approvals	CE
Thread size	M5x0.5
Bare wire or connector type	wire

**WIRING DETAILS**

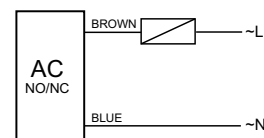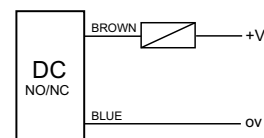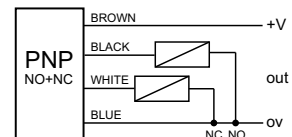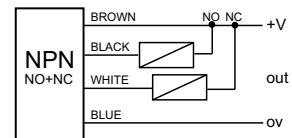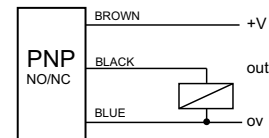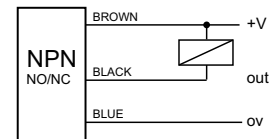




### POSITIONING

If used in an area surrounded by metal, Install the proximity Sensor as follows . ( $S_n$  = Sensing distance)

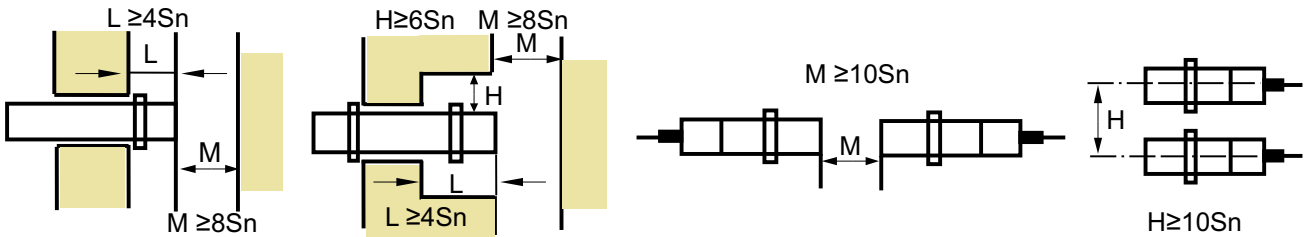

### INDUCTIVE PROXIMITY APPLICATION DIRECTION

- a. Set mounting distance roughly equal to 80% of  $S_n$ .
- b. Set mounting distance roughly equal to 50% of  $S_n$  when sensor is used in high frequency or high speed circumstances.
- c. Mounting distance will change depending on material (iron, stainless steel ,brass, copper and aluminum).

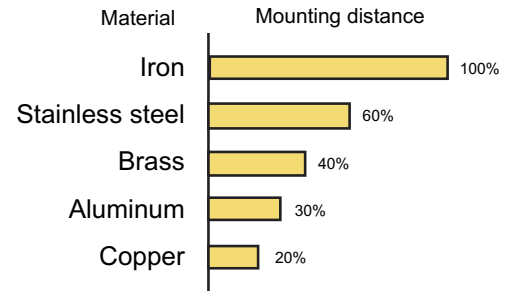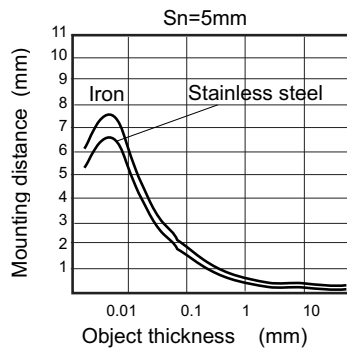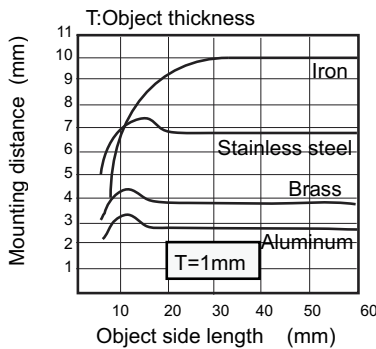

### Series connection and parallel connection

