





# Motor and power shield for Arduino™



Power shield that can drive: relays, solenoids, DC and stepper motors



## Features

- 2 channels
- choose between an external or internal (Vin) power supply
- based on the dual full bridge driver L298P
- downloadable sample sketch
- stackable design: the shield can be stacked with other shields
- large user community
- requires 1 Arduino™ UNO (not included)

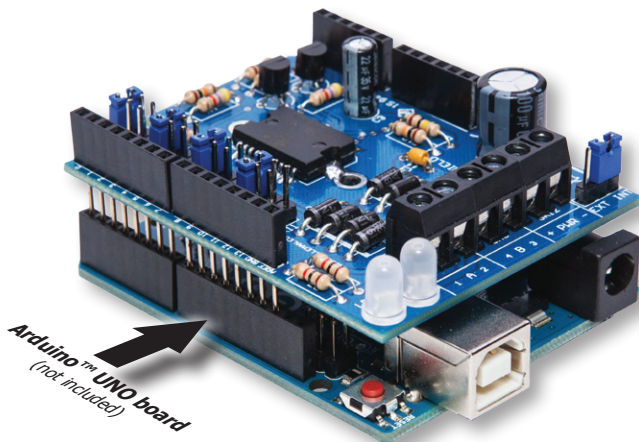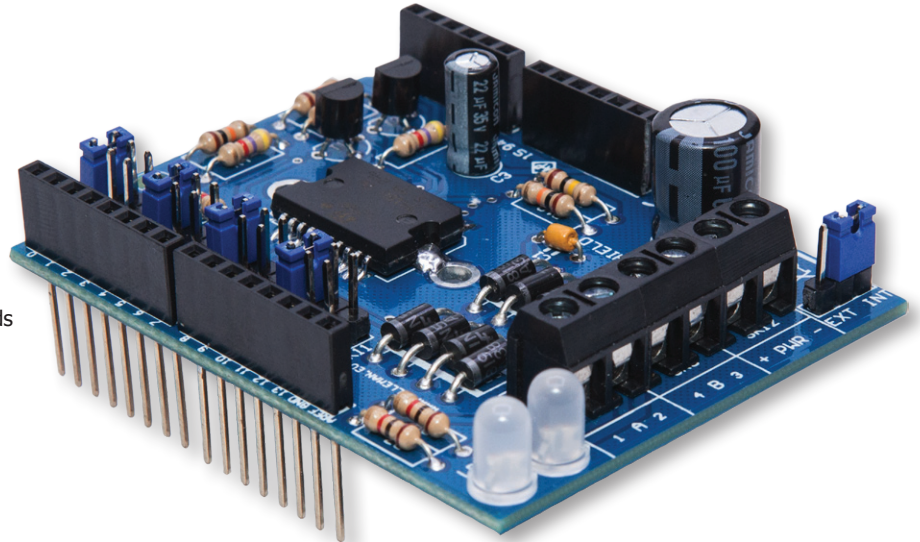

## Specifications

- 2.5 A (max.) output current (each channel)
- 50 V (max.) external power supply input
- used pins on an Arduino™ UNO board can be selected to accommodate for other stacked shields
- dimensions: 68 x 53mm / 2.67 x 2.08"

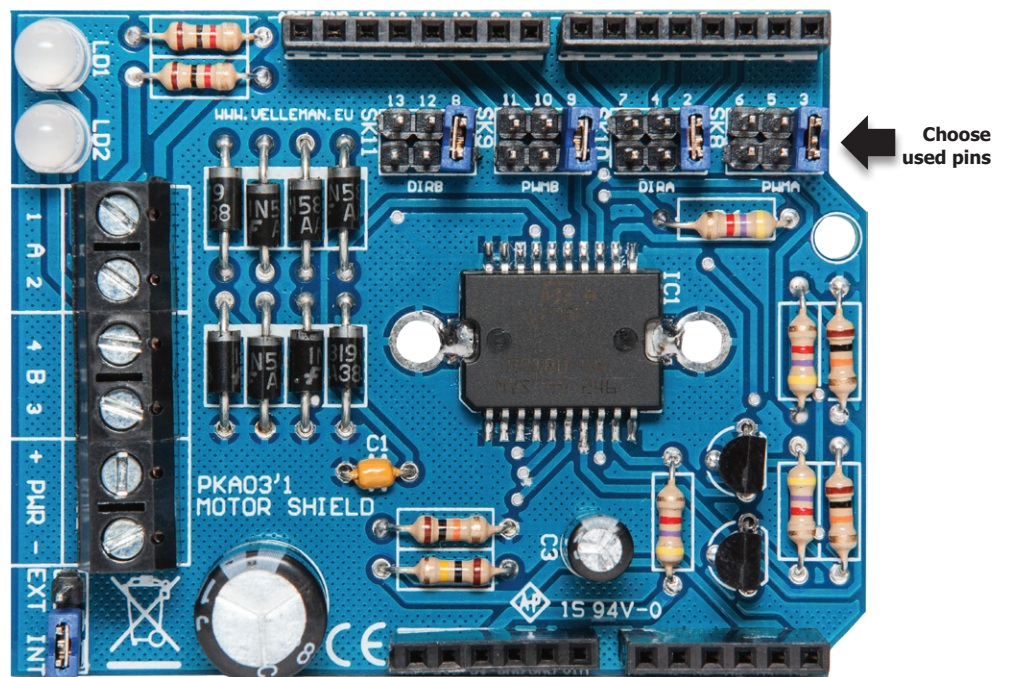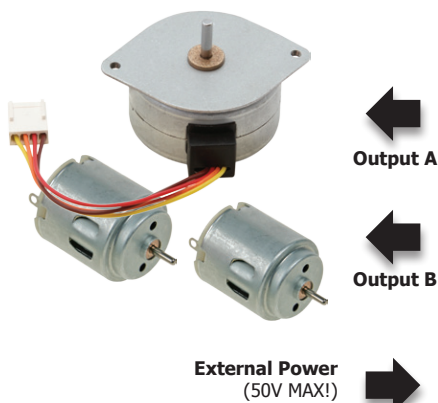

# KA03

ILLUSTRATED ASSEMBLY MANUAL HKA03IP'1

## Motor & Power shield Arduino®



**velleman**  
projects



Power shield that can drive: relays, solenoids, DC and stepper motors

### Features

- For use with Arduino Due™, Arduino Uno™, Arduino Mega™
- Based on L298P dual full bridge driver IC
- Outputs: up to 2 DC motors or 1 bipolar stepper motor
- Power supply: external power or power from Arduino board

### Specifications

- Power supply: 7..46VDC
- Max current: 2A
- Dimensions: 68 x 53mm / 2.67 x 2.08"



**Search product**

Search Product

United Kingdom - English (UK) [Change](#)

## Velleman Projects Newsletter

Are you an electronic enthusiast or simply interested in our kits, mini-kits, modules and instruments?

Subscribe to our Newsletter and receive every month the latest news, new products & updates on Velleman Projects.

You will receive an email. Click on the link in that email to confirm your subscription.

Email:

Do you want to unsubscribe? Click on the 'unsubscribe' link in the footer of the last received newsletter from Velleman Projects.

**NEW FM1253 LED CUBE**

CubeAnimator software available for download [here!](#)

Posted on 04-06-12

[Read more...](#)

**Navigation**

- + Main page
- + Products
- + Sales outlets
- + Support
- + Publications
- + Jobs
- + About us

[News](#)

**Advertisement**

- velleman.eu
- Supporter.eu
- panel.eu
- vellemanprojects.com
- vellemanproject.com
- forum.velleman.eu

**Advertisements**

- WIN7 / WIN8 / Android Application



Subscribing our newsletter?, visit [www.vellemanprojects.eu](http://www.vellemanprojects.eu)

**velleman projects**

**INSTRUMENTS**

Panel Animator  
Cube Animator  
Cube Animator

Support Forum (ENFR)

Velleman Projects

Home | Register

View unanswered posts | View active topics

Search

Forum	Topics	Posts	Last post
<b>French - France, Belgique de France, Suisse Romande &amp; les autres pays</b> Moderation: velleman Support	1	1	Wed Sep 26, 2012 12:44 pm <a href="#">vvellemans</a>
<b>Forum Administration</b> Moderation: velleman Support	1	1	Fri Sep 14, 2012 12:02 pm <a href="#">vvellemans</a>
<b>Software</b>	404	2072	Fri Sep 14, 2012 12:02 pm <a href="#">vvellemans</a>
<b>Kit (Outstanding projects - Projects in progress)</b>			
<b>General</b> For other topics, general tips and tricks, new ideas Moderation: velleman Support	176	428	Wed Sep 26, 2012 9:27 pm <a href="#">vvellemans</a>
<b>Audio-Kit (Projects)</b> All audio related projects, amplifiers, voice amplifiers Moderation: velleman Support	107	2403	Fri Sep 14, 2012 6:40 am <a href="#">vvellemans</a>
<b>PC Related Projects</b> The projects that are connected to the PC via interface cards Moderation: velleman Support	1428	4548	Fri Sep 14, 2012 6:40 am <a href="#">vvellemans</a>
<b>Microcontroller Programmer - Experimenting Projects</b> Microcontroller projects, PIC programming, Arduino stuff Moderation: velleman Support	467	1748	Fri Sep 14, 2012 6:40 am <a href="#">vvellemans</a>
<b>Remote control (RC)</b> All about our long range related projects from regular remote to programmable links Moderation: velleman Support	281	806	Fri Sep 14, 2012 6:40 am <a href="#">vvellemans</a>
<b>Remote Projects</b> Remotely related projects, from light drivers to remote control Moderation: velleman Support	638	2282	Fri Sep 14, 2012 12:02 pm <a href="#">vvellemans</a>



Participate our Velleman Projects Forum



**Velleman N.V.**  
**Legen Heirweg 33**  
**9890 Gavere**  
**(België)**

## assembly hints


### 1. Assembly (Skipping this can lead to troubles !)

Ok, so we have your attention. These hints will help you to make this project successful. Read them carefully.



#### 1.1 Make sure you have the right tools:

- A good quality soldering iron (25-40W) with a small tip.
- Wipe it often on a wet sponge or cloth, to keep it clean; then apply solder to the tip, to give it a wet look. This is called 'thinning' and will protect the tip, and enables you to make good connections. When solder rolls off the tip, it needs cleaning.
- Thin raisin-core solder. Do not use any flux or grease.
- A diagonal cutter to trim excess wires. To avoid injury when cutting excess leads, hold the lead so they cannot fly towards the eyes.
- Needle nose pliers, for bending leads, or to hold components in place.
- Small blade and Phillips screwdrivers. A basic range is fine.



For some projects, a basic multi-meter is required, or might be handy



#### 1.2 Assembly Hints :

- Make sure the skill level matches your experience, to avoid disappointments.
- Follow the instructions carefully. Read and understand the entire step before you perform each operation.
- Perform the assembly in the correct order as stated in this manual
- Position all parts on the PCB (Printed Circuit Board) as shown on the drawings.
- Values on the circuit diagram are subject to changes, the values in this assembly guide are correct\*
- Use the check-boxes to mark your progress.
- Please read the included information on safety and customer service


\* Typographical inaccuracies excluded. Always look for possible last minute manual updates, indicated as 'NOTE' on a separate leaflet.

#### 1.3 Soldering Hints :

1. Mount the component against the PCB surface and carefully solder the leads




2. Make sure the solder joints are cone-shaped and shiny




3. Trim excess leads as close as possible to the solder joint



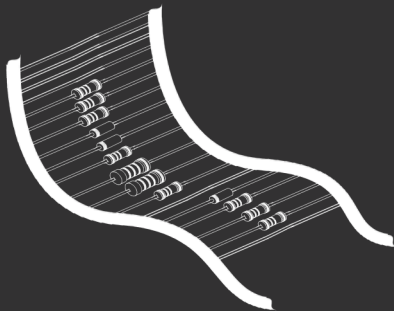


REMOVE THEM FROM THE TAPE ONE AT A TIME !

Included in  
this kit

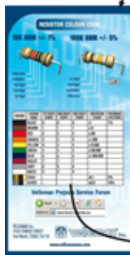

## 2. RESISTOR

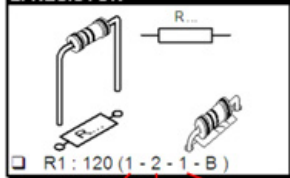


COLOUR	COLOUR NAME	1ST DIGIT/ STRIPE	2ND DIGIT/ STRIPE	3RD DIGIT/ STRIPE	MULTIPLIER STRIPE	TOLERANCE
Black	BLACK	0	0	0	x1	1%
Brown	BROWN	1	1	1	x10	
Red	RED	2	2	2	x100	
Orange	ORANGE	3	3	3	x1.000	
Yellow	YELLOW	4	4	4	x10.000	
Green	GREEN	5	5	5	x100.000	
Blue	BLUE	6	6	6	x1.000.000	

DO NOT BLINDLY FOLLOW THE ORDER OF THE COMPONENTS ONTO THE TAPE. ALWAYS CHECK THEIR VALUE ON THE PARTS LIST!


# I CONSTRUCTION

## 1 Resistors



- R1: 4K7 (4 - 7 - 2 - B)
- R2: 10K (1 - 0 - 3 - B)
- R3: 4K7 (4 - 7 - 2 - B)
- R4: 4K7 (4 - 7 - 2 - B)
- R5: 10K (1 - 0 - 3 - B)
- R6: 4K7 (4 - 7 - 2 - B)
- R7: 1K (1 - 0 - 2 - B)
- R8: 1K (1 - 0 - 2 - B)
- R9: 100K (1 - 0 - 4 - B)
- R10: 10K (1 - 0 - 3 - B)

## 2 Ceramic capacitors



- C1: 100nF (104)

## 3 Shottky diode




- D1: 1N5819
- D2: 1N5819
- D3: 1N5819
- D4: 1N5819
- D5: 1N5819
- D6: 1N5819
- D7: 1N5819
- D8: 1N5819

## 4 Transistors



- T1: BC547B
- T2: BC547B

## 5 Male header

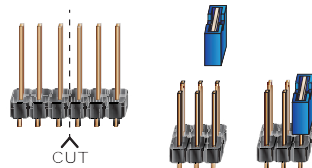

- SK8... SK10: 2x3pin



CUT

- 3pin





**EXTERNAL**  
power (max. 50V)




**INTERNAL**  
power from Arduino  
Max. 2A




## 6 Female header

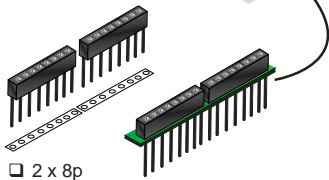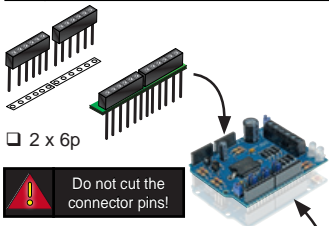


## 7 LED's





## 8 Terminal blocks

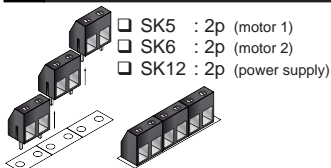


## 10 Dual Full Bridge driver

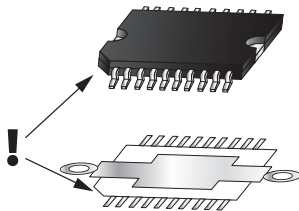

□ IC1: L298P

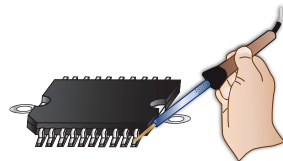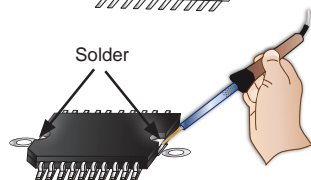


## 9 Electrolytic capacitors

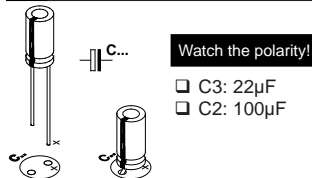





## II CONNECTION DIAGRAM

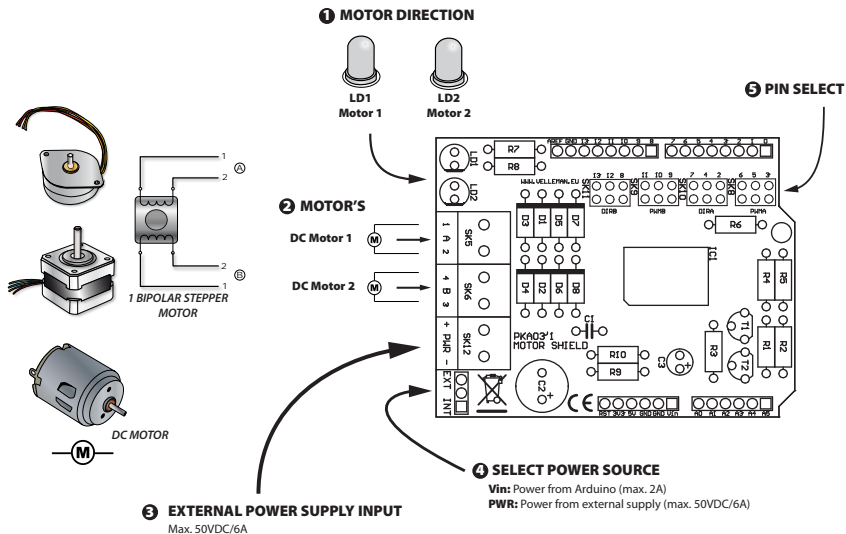


**DOWNLOAD SAMPLE CODE FROM KA03 PAGE ON [WWW.VELLEMAN.BE](http://WWW.VELLEMAN.BE)**

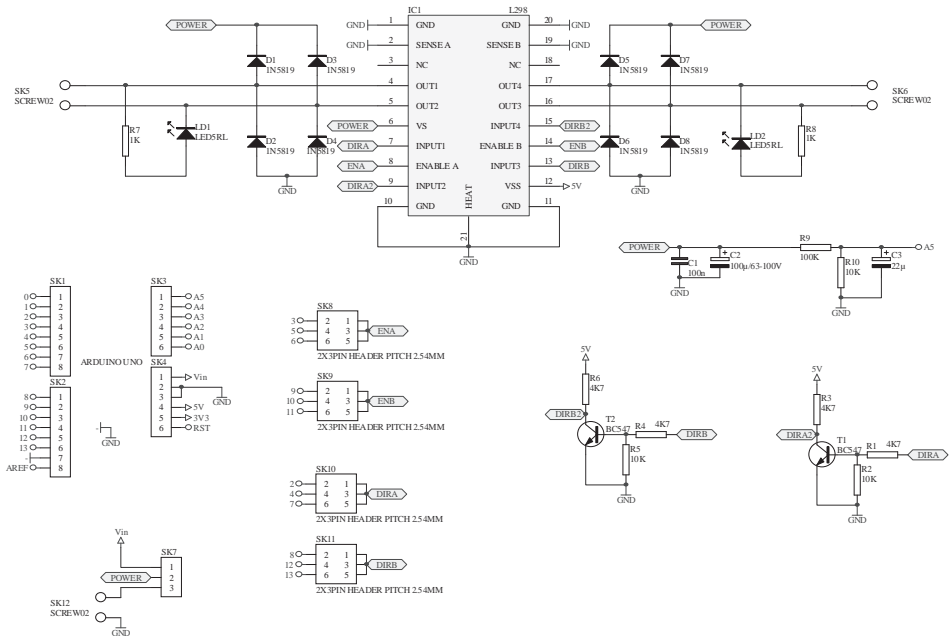


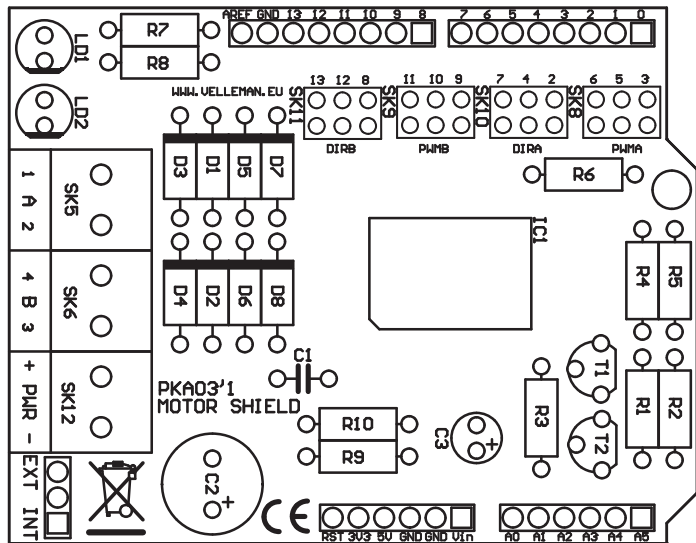


# Leds and how to use them



Leds feature a specific voltage drop, depending on type and colour. Check the datasheet for exact voltage drop and rated current !



Never connect leds in parallel

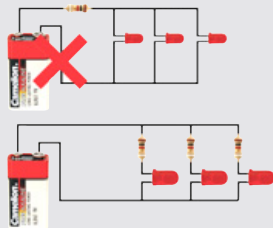

How to Calculate the series resistor:

Example: operate a red led (1.7V) on a 9Vdc source.

Required led current for full brightness: 5mA (this can be found in the datasheet of the led)

$$\frac{\text{Supply voltage (V) - led voltage (V)}}{\text{required current (A)}} = \text{series resistance (ohms)}$$



$$\frac{9V - 1.7V}{0.005A} = 1460 \text{ ohm}$$

closest value :  
use a 1k5 resistor

Required resistor power handling=  
voltage over resistor x current passed trough resistor




$$(9V - 1.7V) \times 0.005A = 0.036W$$

a standard 1/4W resistor  
will do the job

LEDs in series:

Example: 3 x red led (1.7V) on 9V battery

Required led current for full brightness: 5mA  
(this can be found in the datasheet of the led)



$$\frac{\text{Supply voltage (V) - (number of leds x led voltage (V))}}{\text{required current (A)}} = \text{series resistance (ohms)}$$




$$\frac{9V - (3 \times 1.7V)}{0.005A} = 780 \text{ ohm}$$


use an  
820 ohm resistor

## open collector outputs

An open collector output can be compared to a switch which switches to ground when operated

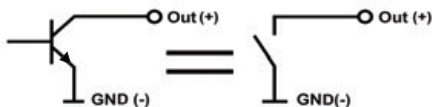

Example: How to switch an LED by means of an open collector output

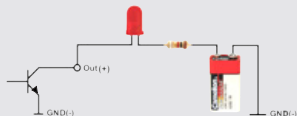



The new Velleman Projects catalogue is now available. Download your copy here:

[www.vellemanprojects.eu](http://www.vellemanprojects.eu)



Modifications and typographical errors reserved - © Velleman nv. HKA03'IP (Rev.1)  
Velleman NV, Legen Heirweg 33 - 9890 Gavere.