


ESP32-C6-DevKitM-1 [↗](#)

This user guide will help you get started with ESP32-C6-DevKitM-1 and will also provide more in-depth information.

ESP32-C6-DevKitM-1 is an entry-level development board based on [ESP32-C6-MINI-1\(U\)](#), a general-purpose module with a 4 MB SPI flash in the chip's package. This board integrates complete Wi-Fi, Bluetooth LE, Zigbee, and Thread functions.

Most of the I/O pins are broken out to the pin headers on both sides for easy interfacing. Developers can either connect peripherals with jumper wires or mount ESP32-C6-DevKitM-1 on a breadboard.

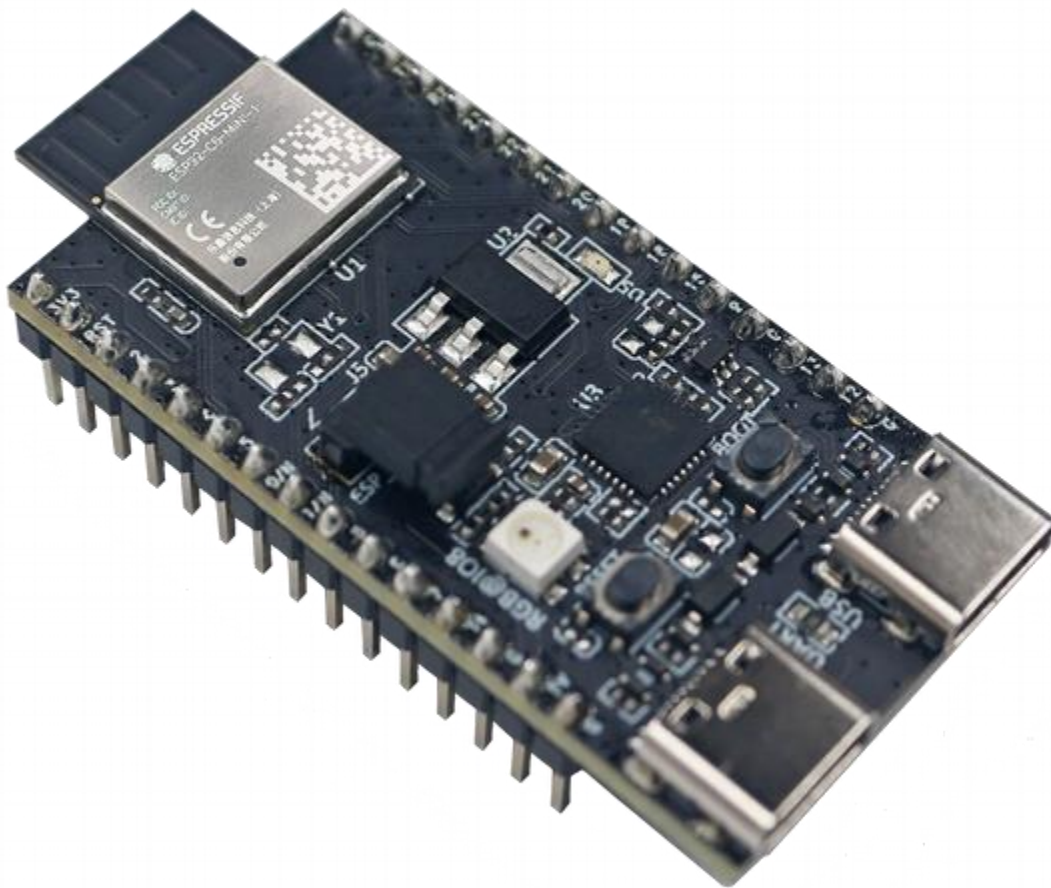

ESP32-C6-DevKitM-1 [↗](#)


The document consists of the following major sections:

- [Getting Started](#): Overview of ESP32-C6-DevKitM-1 and hardware/software setup instructions to get started.
- [Hardware Reference](#): More detailed information about the ESP32-C6-DevKitM-1's hardware.
- [Hardware Revision Details](#): Revision history, known issues, and links to user guides for previous versions (if any) of ESP32-C6-DevKitM-1.
- [Related Documents](#): Links to related documentation.

Getting Started

This section provides a brief introduction of ESP32-C6-DevKitM-1, instructions on how to do the initial hardware setup and how to flash firmware onto it.

Description of Components

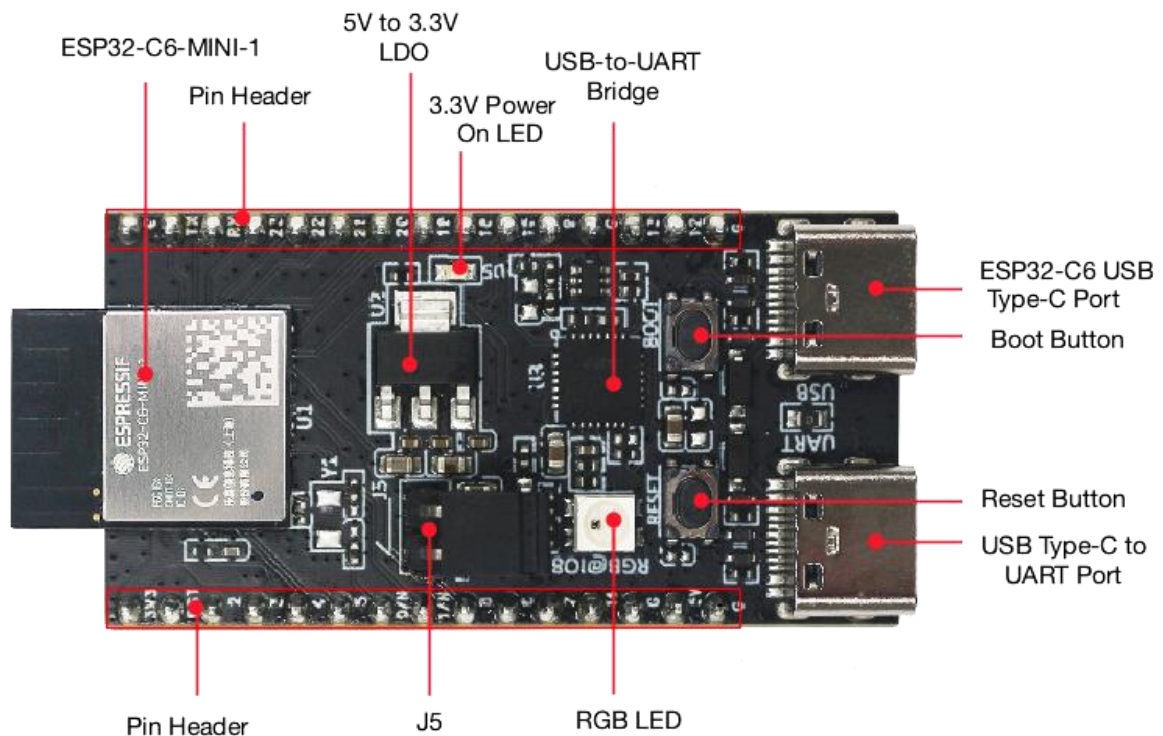

ESP32-C6-DevKitM-1 - front

The key components of the board are described in a clockwise direction.

Key Component	Description
ESP32-C6-MINI-1 or ESP32-C6-MINI-1U	ESP32-C6-MINI-1 and ESP32-C6-MINI-1U are general-purpose modules supporting Wi-Fi 6 in 2.4 GHz band, Bluetooth 5, and IEEE 802.15.4 (Zigbee 3.0 and Thread 1.3). ESP32-C6-MINI-1 comes with an on-board PCB antenna, whereas ESP32-C6-MINI-1U comes with an external antenna connector. The module is built around the ESP32-C6FH4 chip, which has a 4 MB flash in the chip's package. For more information, see ESP32-C6-MINI-1 Datasheet .
Pin Header	All available GPIO pins (except for the SPI bus for flash) are broken out to the pin headers on the board.
5 V to 3.3 V LDO	Power regulator that converts a 5 V supply into a 3.3 V output.
3.3 V Power On LED	Turns on when the USB power is connected to the board.
USB-to-UART Bridge	Single USB-to-UART bridge chip provides transfer rates up to 3 Mbps.
ESP32-C6 USB Type-C Port	The USB Type-C port on the ESP32-C6 chip compliant with USB 2.0 full speed. It is capable of up to 12 Mbps transfer speed (Note that this port does not support the faster 480 Mbps high-speed transfer mode). This port is used for power supply to the board, for flashing applications to the chip, for communication with the chip using USB protocols, as well as for JTAG debugging.
Boot Button	Download button. Holding down Boot and then pressing Reset initiates Firmware Download mode for downloading firmware through the serial port.
Reset Button	Press this button to restart the system.
USB Type-C to UART Port	Used for power supply to the board, for flashing applications to the chip, as well as the communication with the ESP32-C6 chip via the on-board USB-to-UART bridge.
RGB LED	Addressable RGB LED, driven by GPIO8.
J5	Used for current measurement. See details in Section Current Measurement .

Start Application Development

Before powering up your ESP32-C6-DevKitM-1, please make sure that it is in good condition with no obvious signs of damage.

Required Hardware[↗](#)

- ESP32-C6-DevKitM-1
- USB-A to USB-C cable
- Computer running Windows, Linux, or macOS

Note

Be sure to use a good quality USB cable. Some cables are for charging only and do not provide the needed data lines nor work for programming the boards.

Software Setup[↗](#)

Please proceed to [ESP-IDF Get Started](#), which will quickly help you set up the development environment then flash an application example onto your board.

Contents and Packaging[↗](#)

Retail orders[↗](#)

If you order a few samples, each ESP32-C6-DevKitM-1 comes in an individual package in either antistatic bag or any packaging depending on your retailer.

For retail orders, please go to <https://www.espressif.com/en/company/contact/buy-a-sample>.

Wholesale Orders[↗](#)


If you order in bulk, the boards come in large cardboard boxes.

For wholesale orders, please check [Espressif Product Ordering Information](#) (PDF)

Hardware Reference[↗](#)

Block Diagram[↗](#)

The block diagram below shows the components of ESP32-C6-DevKitM-1 and their interconnections.

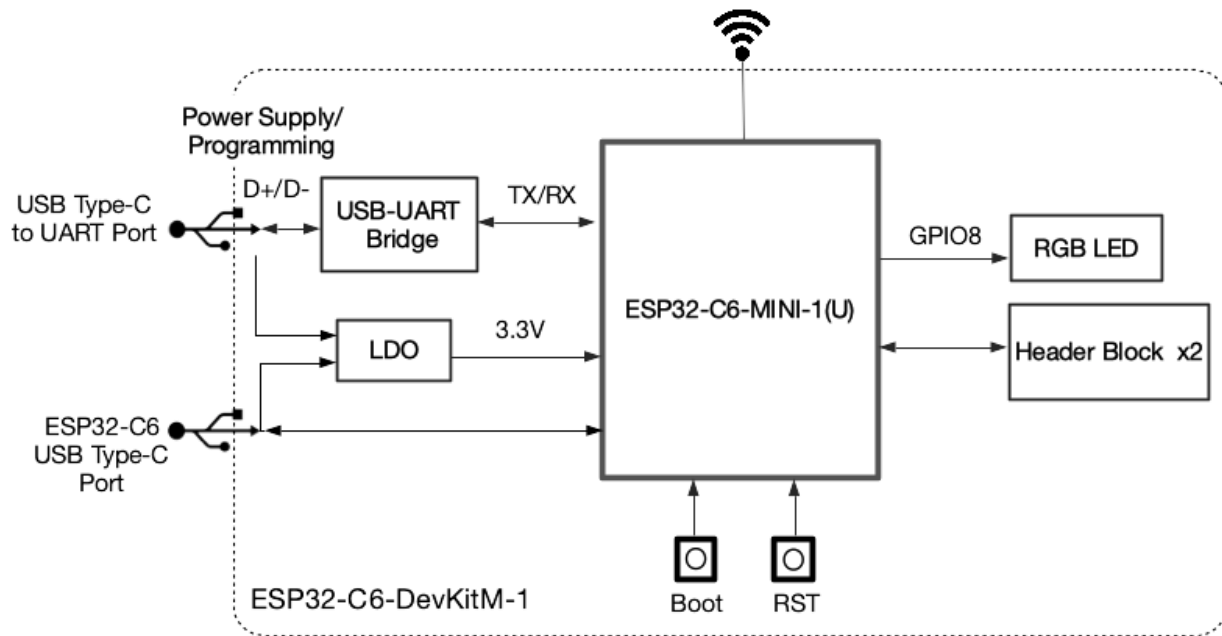

ESP32-C6-DevKitM-1 (click to enlarge) [↗](#)

Power Supply Options [↗](#)

There are three mutually exclusive ways to provide power to the board:

- USB Type-C to UART Port and ESP32-C6 USB Type-C Port (either one or both), default power supply (recommended)
- 5V and GND pin headers
- 3V3 and GND pin headers

Current Measurement [↗](#)

The J5 headers on ESP32-C6-DevKitM-1 (see J5 in Figure [ESP32-C6-DevKitM-1 - front](#)) can be used for measuring the current drawn by the ESP32-C6-MINI-1(U) module:

- Remove the jumper: Power supply between the module and peripherals on the board is cut off. To measure the module's current, connect the board with an ammeter via J5 headers.
- Apply the jumper (factory default): Restore the board's normal functionality.

Note

When using 3V3 and GND pin headers to power the board, please remove the J5 jumper, and connect an ammeter in series to the external circuit to measure the module's current.

Header Block [3](#)

The two tables below provide the **Name** and **Function** of the pin headers on both sides of the board (J1 and J3). The pin header names are shown in Figure [ESP32-C6-DevKitM-1 - front](#). The numbering is the same as in the [ESP32-C6-DevKitM-1 Schematic](#) (PDF).

J1 [3](#)

No.	Name	Type 1	Function
1	3V3	P	3.3 V power supply
2	RST	I	High: Power up; Low: Power down.
3	2	I/O/T	GPIO2, LP_GPIO2, LP_UART_RTSN, ADC1_CH2, FSPIQ
4	3	I/O/T	GPIO3, LP_GPIO3, LP_UART_CTSN, ADC1_CH3
5	4	I/O/T	MTMS 3 , GPIO4, LP_GPIO4, LP_UART_RXD, ADC1_CH4, FSPIHD
6	5	I/O/T	MTDI 3 , GPIO5, LP_GPIO5, LP_UART_TXD, ADC1_CH5, FSPIWP
7	0/N	I/O/T	GPIO0, XTAL_32K_P, LP_GPIO0, LP_UART_DTRN, ADC1_CH0
8	1/N	I/O/T	GPIO1, XTAL_32K_N, LP_GPIO1, LP_UART_DSRN, ADC1_CH1
9	8	I/O/T	GPIO8 2 3
10	6	I/O/T	MTCK, GPIO6, LP_GPIO6, LP_I2C_SDA, ADC1_CH6, FSPICLK
11	7	I/O/T	MTDO, GPIO7, LP_GPIO7, LP_I2C_SCL, FSPID
12	14	I/O/T	GPIO14
13	G	G	Ground
14	5V	P	5 V power supply

No.	Name	Type 1	Function
15	G	G	Ground

J3[3](#)

No.	Name	Type	Function
1	G	G	Ground
2	TX	I/O/T	U0TXD, GPIO16, FSPICS0
3	RX	I/O/T	U0RXD, GPIO17, FSPICS1
4	23	I/O/T	GPIO23, SDIO_DATA3
5	22	I/O/T	GPIO22, SDIO_DATA2
6	21	I/O/T	GPIO21, SDIO_DATA1, FSPICS5
7	20	I/O/T	GPIO20, SDIO_DATA0, FSPICS4
8	19	I/O/T	GPIO19, SDIO_CLK, FSPICS3
9	18	I/O/T	GPIO18, SDIO_CMD, FSPICS2
10	15	I/O/T	GPIO15 3
11	9	I/O/T	GPIO9 3
12	G	G	Ground
13	13	I/O/T	GPIO13, USB_D+
14	12	I/O/T	GPIO12, USB_D-
15	G	G	Ground

[1](#)

P: Power supply; I: Input; O: Output; T: High impedance.

[2](#)

Used to drive the RGB LED.

3([1](#),[2](#),[3](#),[4](#),[5](#))


MTMS, MTDI, GPIO8, GPIO9, and GPIO15 are strapping pins of the ESP32-C6 chip.

These pins are used to control several chip functions depending on binary voltage values

applied to the pins during chip power-up or system reset. For description and application of the strapping pins, please refer to [ESP32-C6 Datasheet](#) > Section *Strapping Pins*.

Pin Layout

ESP32-C6-DevKitM-1

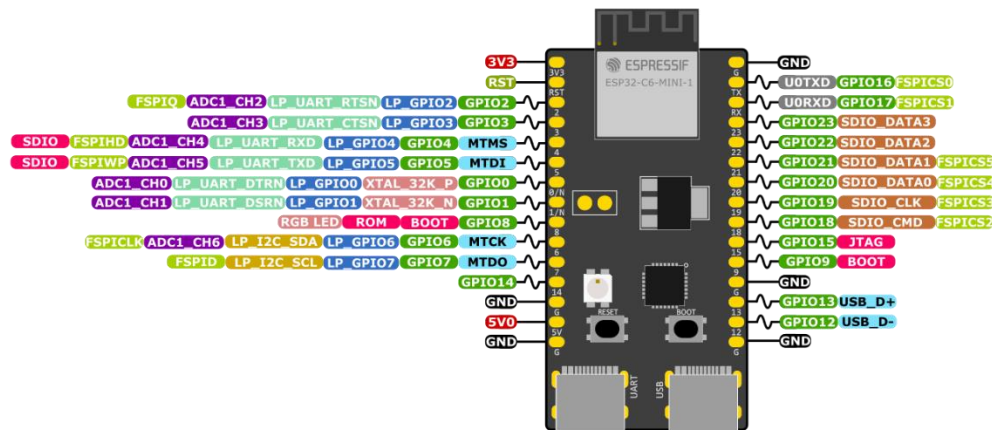

ESP32-C6 Specs

32-bit RISC-V single-core @160 MHz
Wi-Fi IEEE 802.11 ax 2.4 GHz + Bluetooth LE 5
+ IEEE 802.15.4 (Zigbee and Thread)
512 KB SRAM (21 KB for cache)
320 KB ROM
30 or 22 GPIOs, 3x SPI, 2x UART, 1x I2C, RMT
LED PWM 6ch, 1x 12-bit ADC with 7ch, TWAI®
USB Serial/JTAG, ETM, MCPWM, SDIO Slave



ESP32-C6-DevKitM-1 Pin Layout (click to enlarge)

Hardware Revision Details

- For boards with the PW number of and after PW-2023-06-XXXX (on and after June 2023), multi-point calibration is performed on ADC instead of two-point calibration, and the measurement range and accuracy are illustrated in [ESP32-C6 Datasheet](#) > Section ADC Characteristics. For boards with earlier PW number, please [ask our sales team](#) to provide the actual range and accuracy according to batch.

Note

The PW number can be found in the product label on the large cardboard boxes for wholesale orders.

Related Documents³

- [ESP32-C6 Datasheet](#) (PDF)
- [ESP32-C6-MINI-1 Datasheet](#) (PDF)
- [ESP32-C6-DevKitM-1 Schematic](#) (PDF)
- [ESP32-C6-DevKitM-1 PCB Layout](#) (PDF)
- [ESP32-C6-DevKitM-1 Dimensions](#) (PDF)
- [ESP32-C6-DevKitM-1 Dimensions source file](#) (DXF)