

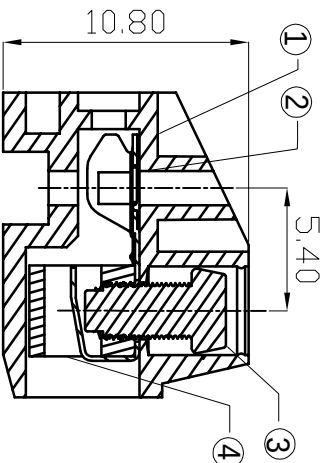
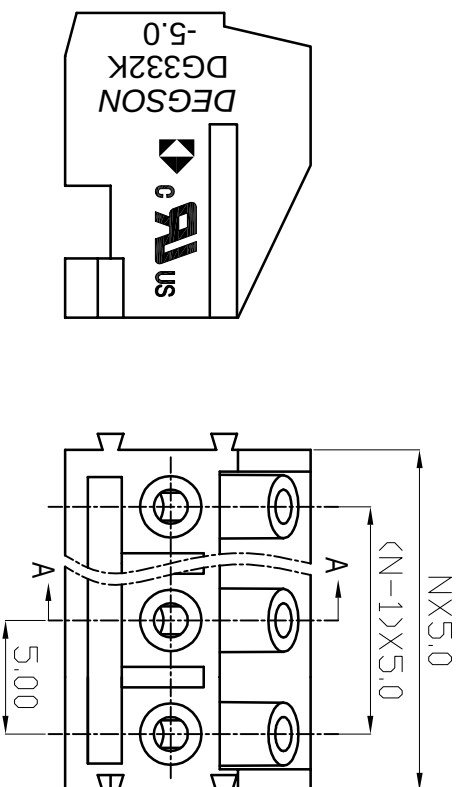
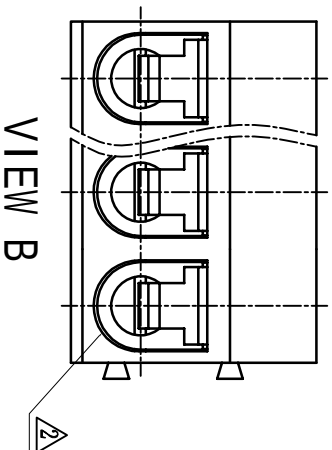


REVISION RECORD			
REV	ECD	DESCRIPTION	DRF T DATE
△		去掉U中的小“R”字	07/15/08
△		工程变更	Zengy 08/10/09

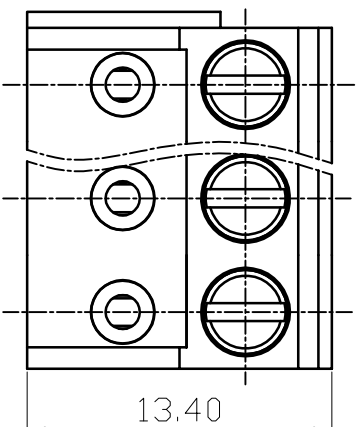

SECTION A-A

Notes:

1. Pitch: 5.0mm, Poles: 2-XXP
2. Rated current/voltage: UL 300V/10A
IEC 250V/17.5A
3. Operation temperatures: -30°C ~ +120°C
4. Withstanding Voltage: AC2000V/1Min
5. Insulation Resistance: 5000M Ω /DC1000V
6. Wire Range: 28~16AWG, 1.5mm²
7. Max. Torque Value: M2.5; 4.08kgf.cm
8. Undimensioned Tolerances:

Pitch range in mm	Nominal dimension range in mm					
over 6	over 10	over 30	over 60	over 100	over 150	—
to 6	to 10	to 30	to 60	to 100	to 150	⌒
to 10	to 24	to 30	to 60	to 100	to 150	□
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7 ±1.0 0.005/tc

4	DG332-Cage	X000000280(H)	XX	Brass	Ni plated
3	DG332- Screws	S000001390(H)	XX	Steel	Cr ³⁺ Zn
2	DG332- Spring	X000000270(H)	XX	phosphor bronze	Ni plated
1	DG332K-5. 0 Housing	4013A0YXXB(H)	1	PBT	UL94V-0
ITEM	NAME OF PART	NO. OF PART	QTY	MATERIAL	NOTES
DETACHED LISTS THIRD ANGLE PROJECTION SCALE : 1 : 1 FINISH: DRAWING NO. DG332K-ED2 PART NO. SIZE REV DATE DO NOT SCALE DRAWING SHEET 1 OF 1 NAME DG332K-5. 0-XXP-1Y-00A(H) DEGSON 宁波德正电子有限公司 DEGSON ELECTRONICS CO., LTD					
TOLERANCES EXCEPT AS NOTED		DATE 10/28/05			
DIMENSIONS		DATE	DATE		
APPROVAL		DATE	DATE		
MATERIAL		MATERIAL			
ANGLES ± 1°		G.E. :			
Ø 1 Ø 2 Ø 3 Ø 4 Ø 5 Ø 6 Ø 7 Ø 8 Ø 9 Ø 10 Ø 11 Ø 12 Ø 13 Ø 14 Ø 15 Ø 16 Ø 17 Ø 18 Ø 19 Ø 20 Ø 21 Ø 22 Ø 23 Ø 24 Ø 25 Ø 26 Ø 27 Ø 28 Ø 29 Ø 30 Ø 31 Ø 32 Ø 33 Ø 34 Ø 35 Ø 36 Ø 37 Ø 38 Ø 39 Ø 40 Ø 41 Ø 42 Ø 43 Ø 44 Ø 45 Ø 46 Ø 47 Ø 48 Ø 49 Ø 50 Ø 51 Ø 52 Ø 53 Ø 54 Ø 55 Ø 56 Ø 57 Ø 58 Ø 59 Ø 60 Ø 61 Ø 62 Ø 63 Ø 64 Ø 65 Ø 66 Ø 67 Ø 68 Ø 69 Ø 70 Ø 71 Ø 72 Ø 73 Ø 74 Ø 75 Ø 76 Ø 77 Ø 78 Ø 79 Ø 80 Ø 81 Ø 82 Ø 83 Ø 84 Ø 85 Ø 86 Ø 87 Ø 88 Ø 89 Ø 90 Ø 91 Ø 92 Ø 93 Ø 94 Ø 95 Ø 96 Ø 97 Ø 98 Ø 99 Ø 100		G.E. :			