

D-Sub PCB

Female Connectors, tin plated



SPECIFICATION:

Current rating: 1 A
Insulation resistance: 500 MΩ min.
Contact resistance: 30 mΩ max.
Dielectric voltage: 500 V AC
Operation temperature: -40 °C to +70 °C

MATERIAL:

Insulator: PBT white UL94V-0
Shell: Steel
Pins: Brass

FINISH:

Contacts: Gold Flash
Front shell: Nickel plated
Rear shell: Tin plated






HANDLING:

Processing: Wave soldering
Packing: Tray

TOLERANCE:

.X ± 0.20
.XX ± 0.10

RoHS
COMPLIANT

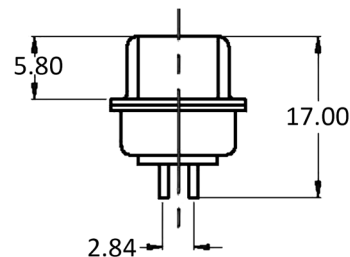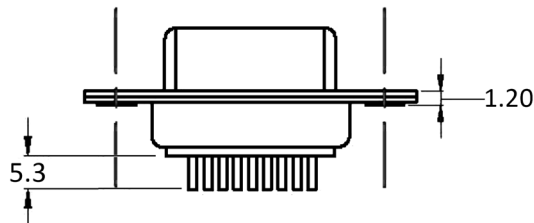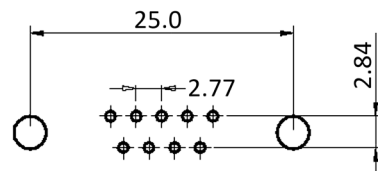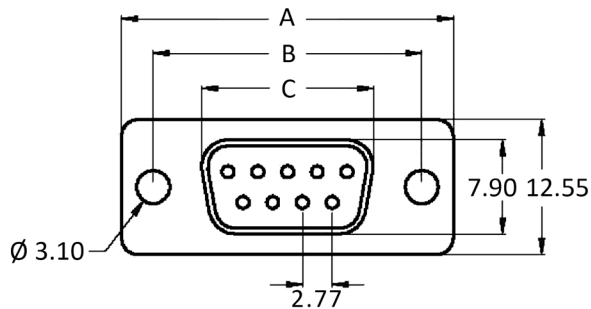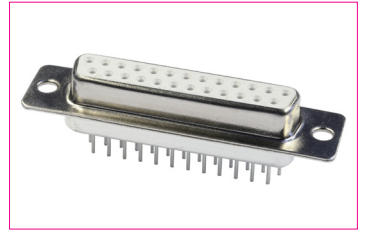

Dimensions

No. of contacts:	A:	B:	C:
9	30.85	25.00	16.40
15	39.25	33.35	24.70
19	44.80	38.86	30.00
23	50.30	44.30	35.30
25	53.10	47.04	38.52
37	69.40	63.50	54.85

Order-Information

Identifier:	No. of contacts:	Version:	Shell:
BU	#	P	V
D-Sub Female	9: 9 pin 15: 15 pin 19: 19 pin 23: 23 pin 25: 25 pin 37: 37 pin	P: Solder pins	V: Tin plated