Pin Headers
Pitch 2.54 mm SMT

Double row, SMT, height 9.3 mm

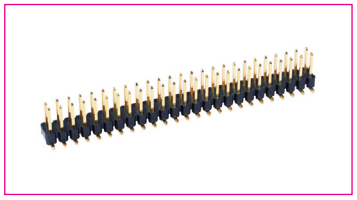

SPECIFICATION:

Operating Current (Nom.):	3 A
Operating Temperature:	-40°C to 105°C
Insulation Resistance (Min.):	1000 MΩ
Contact Resistance (Max.):	20 mΩ
Dielectric Strength:	1,000 Vac

MATERIAL:

Material (Terminal):	copper alloy
Material (Insulation):	nylon 6T
Flammability Class:	UL 94 V-0
Material (Contact Area):	copper alloy, gold plated

HANDLING:

Processing:	reflow soldering

TOLERANCE:

.X:	± 0.25
.XX:	± 0.20

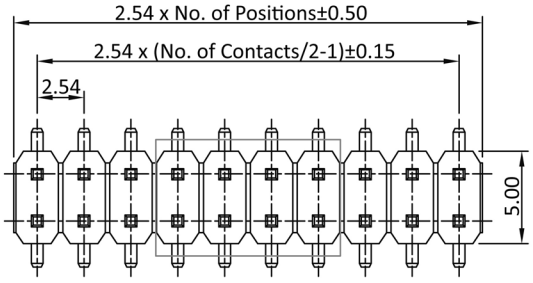

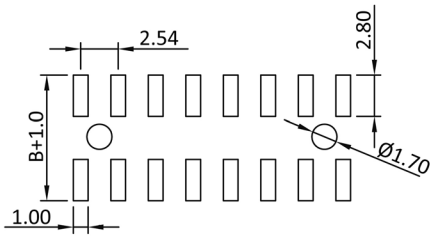

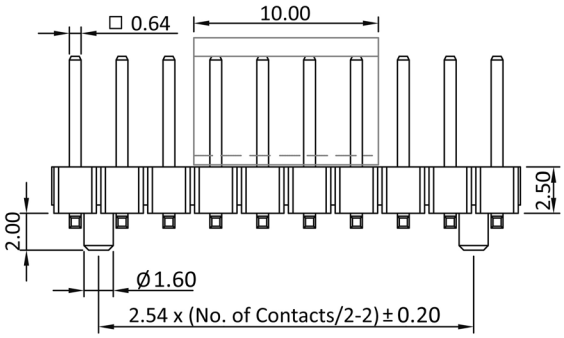

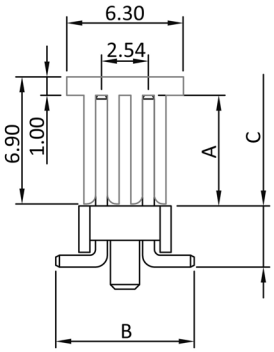

Order Information

Identifier:	No. of Contacts:	Contact Plating:	Packing:	Version:	Length:
SMZ	#	G	#	#	#
SMT Pin header pitch 2.54 mm double row straight	**4:** 2 x 2	gold plated	**B:** bulk	**O:** w/o cap + peg *	**D:** A=6.0 B=7.5 C=3.3 *
	6: 2 x 3		**T:** tube *	**C:** with Cap	**X:** Special dimensions also available
	8: 2 x 4			**P:** with Peg	
	:			**T:** with Cap + Peg	
	80: 2 x 40				

* = Standard