USB Connectors
USB 3.0 Sockets Type A

PCB, angled, Multiport

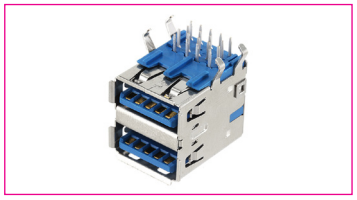

SPECIFICATION:

Operating Voltage (Max.):	30 V
Operating Current (Nom.):	1.8 A
Operating Temperature:	-55°C to 85°C
Insulation Resistance (Min.):	100 MΩ
Contact Resistance (Max.):	30 mΩ
Dielectric Strength:	100 Vac
Insertion Force (Max.):	35 N
Extraction Force:	8 N

MATERIAL:

Material (Terminal):	copper alloy, tin plated
Material (Housing):	metal, nickel plated
Flammability Class:	UL 94 V-0
Material (Insulation):	PBT
Material (Contact Area):	copper alloy, gold plated

HANDLING:

Packaging:	tray

TOLERANCE:

.X:	± 0.25
.XX:	± 0.20

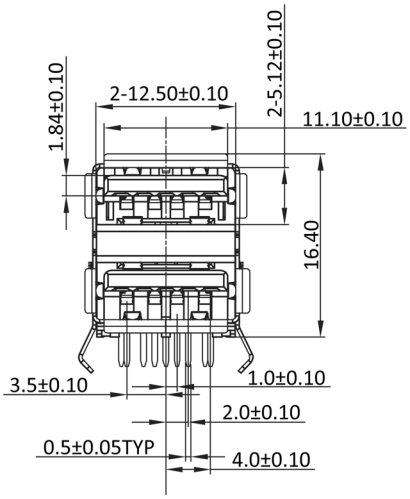









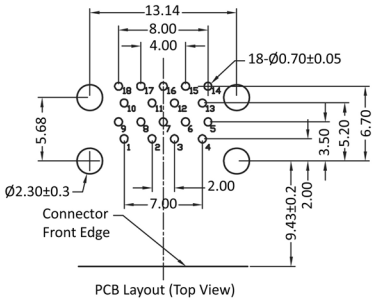

Order Information

Identifier:
U3BU2AN
Socket 2 x type A angled