

TECHNICAL SPECIFICATIONS

D-Sub Hood:

Housing material:

Operating Temperature:

Cable Entry: Top

Thumbscrews:

Cable O.D:

D-Sub High Density:

Insulator: PBT, Black, UL94 V-0

Shell: Stamped Steel, Tin Plated

Contact pins: Copper Alloy

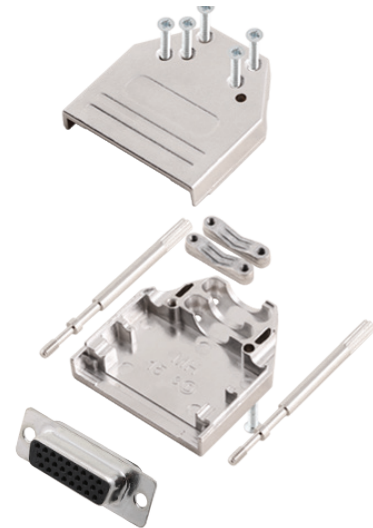
Stamped & Formed pins: 100 inserts min

Contacts Plating: Selective Gold over Nickel

Operating Temperature: -55°C to +105°C

Withstanding voltage: 500V for 1 minute

Insulator resistance: 500MΩ min

**Features:**

- D-sub hood + D-sub connector solder cup
- Available in sizes 9, 15, 25, 37 and 50-way
- Full metall cover
- Packed in Kit with male or female D-sub connector
- Class 3 or Class 1 D-sub connector as standard
- Re-openable

Ordering information:

D-Sub Connector Kits (100 inserts min.)

Size:	P/N - Kitted:	Product Code - MALE Conn. Kit
15-way	6355-0080-01	DTZI09-HDP-K
26-way	6355-0080-02	DTZI15-HDP-K
44-way	6355-0080-03	DTZI25-HDP-K
62-way	6355-0080-04	DTZI37-HDP-K
78-way	6355-0080-05	DTZI50-HDP-K

Size:	P/N - Kitted:	Product Code - FEMALE Conn. Kit
15-way	6355-0080-11	DTZI09-HDS-K
26-way	6355-0080-12	DTZI15-HDS-K
44-way	6355-0080-13	DTZI25-HDS-K
62-way	6355-0080-14	DTZI37-HDS-K
78-way	6355-0080-15	DTZI50-HDS-K