

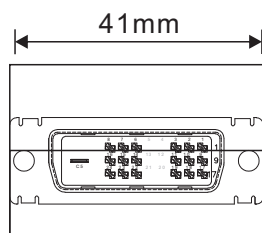


DVI-D, Single Link Connector modular

Item No. 2001C224

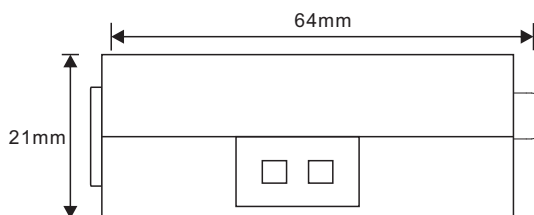

Included accessories
1x Screw driver
1x Cable strain Relief
2x Fastening screw

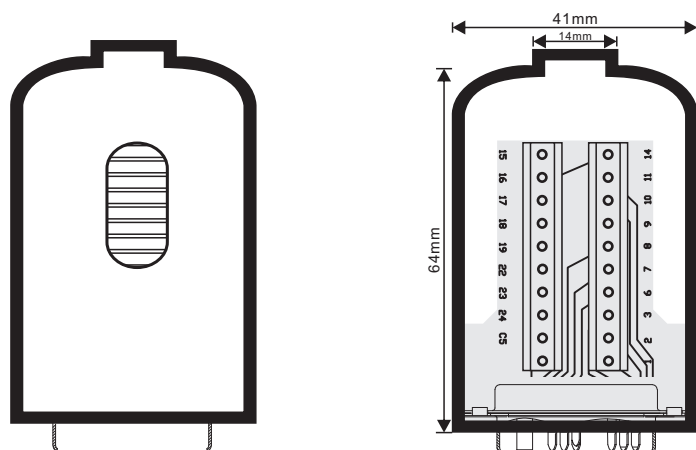

1	2	3	6	7	8	9	10	11	14
Hot Plug Detect	Utility	TMDS Data2+	TMDS Data2 Shield	TMDS Data2-	TMDS Data+	TMDS Data1 Shield	TMDS Data1-	TMDS Data0+	TMDS Data0 Shield
15	16	17	18	19	22	23	24	C5	
TMDS Data1/3 Shield	TMDS Data0-	TMDS Clock+	TMDS Clock-	DDC/CEC Ground	SCL	SDA	+5V Power	Analog Ground (analog R,G&B return)	

Material:
Housing: PP
Insulator: PBT
Connector shell: SPCC with plated Ni 40µ min.
Contact: Brass with plated Au1µ

Technical:
Voltage rating: 40V max.
Current rating: 1.5A max.
Contact resistance: 30mΩ max.
Insulation resistance: 1000MΩ min.
Dielectric withstanding voltage: 500V/AC(R.M.S)
Operation temperature: -20 ~80°C