1-1718811-1 - ACTIVE

AMP | MCON Interconnection System

TE Internal #: 1-1718811-1 MCON Interconnection System, Housing for Female Terminals, Wire-to-Wire / Wire-to-Board / Wire-to-Device, 2 Position, 4mm [. 157in] Centerline

View on TE.com >



Connectors > Automotive Connectors > Connector Housings > MCON, CONNECTOR HOUSING



Connector & Housing Type: Housing for Female Terminals

Mating Tab Width: 1.2 mm [.047 in]

Connector System: Wire-to-Board, Wire-to-Device, Wire-to-Wire

Number of Positions: 2

Centerline (Pitch): 4 mm [.157 in]

All MCON, CONNECTOR HOUSING (283)

Features

Product Type Features

Connector & Housing Type

Connector System

Housing for Female Terminals

Wire-to-Board, Wire-to-Device, Wire-to-

	Wire
Sealable	Yes
Hybrid Connector	No
Primary Locking Feature	On the Terminal
Configuration Features	
Number of Positions	2
Number of Rows	1
Electrical Characteristics	
Operating Voltage	12 VDC
Nominal Voltage Architecture	12 V
Body Features	
Cable Exit Angle	180°
Body Material	PAGF
Primary Product Color	Black
Contact Features	

C For support call+1 800 522 6752

MCON Interconnection System, Housing for Female Terminals, Wire-to-Wire / Wire-to-Board / Wire-to-Device, 2 Position, 4mm [.157in] Centerline



Mating Tab Width	1.2 mm[.047 in]
Mechanical Attachment	
Mounting Feature	Without
Terminal Position Assurance	Yes
Strain Relief	No
Mating Alignment Type	Polarized
Housing Features	
Centerline (Pitch)	4 mm[.157 in]
Dimensions	
Product Width	26.5 mm[1.043 in]
Product Length	18.8 mm[.74 in]
Product Height	11 mm[.433 in]
Usage Conditions	
Operating Temperature (Max)	70 °C, 75 °C, 80 °C, 85 °C, 90 °C, 100 °C, 105 °C, 110 °C, 120 °C, 125 °C, 130 °C[158 ° F][167 °F][176 °F][185 °F][194 °F][212 °F][221 °F][230 °F][248 °F][257 °F][266 °F]

Operating Temperature Range

-40 - 130 °C[-40 - 266 °F]

Operation/Application

Circuit Application	Signal
Industry Standards	
Degree of Protection	IP6K9K
Packaging Features	
Packaging Quantity	2000
Packaging Method	Box
Other	
Serviceable	Yes
Connector Position Assurance Capable	Yes
Product Compliance For compliance documentation, visit the product page on TE.com>	
EU RoHS Directive 2011/65/EU	Compliant

MCON Interconnection System, Housing for Female Terminals, Wire-to-Wire / Wireto-Board / Wire-to-Device, 2 Position, 4mm [.157in] Centerline



EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2021 (211) Candidate List Declared Against: JAN 2021 (211) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free

Solder Process Capability

Not applicable for solder process capability


Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-onreach

Compatible Parts



Also in the Series | MCON Interconnection System

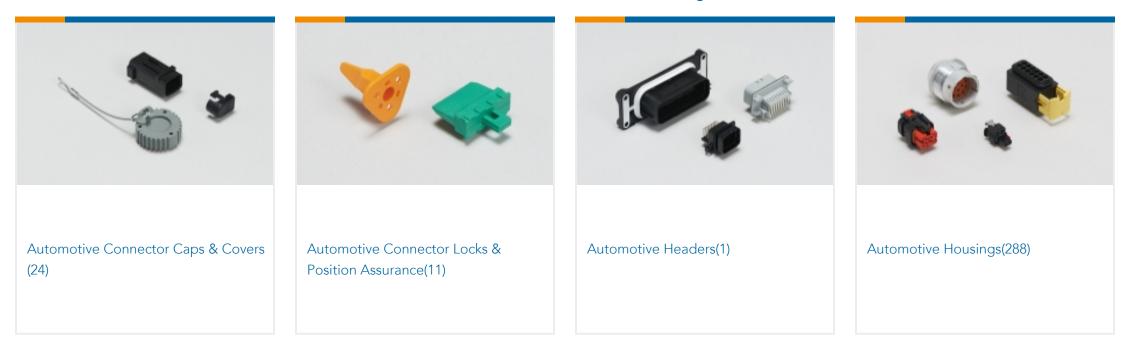

MCON Interconnection System, Housing for Female Terminals, Wire-to-Wire / Wire-to-Board / Wire-to-Device, 2 Position, 4mm [.157in] Centerline





Customers Also Bought







Documents

Product Drawings 2POS, MCON 1.2 LL REC SEALED

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_1-1718811-1_B.2d_dxf.zip

MCON Interconnection System, Housing for Female Terminals, Wire-to-Wire / Wire-to-Board / Wire-to-Device, 2 Position, 4mm [.157in] Centerline



English
Customer View Model

ENG_CVM_CVM_1-1718811-1_B.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_1-1718811-1_B.3d_stp.zip

English

By downloading the CAD file I accept and agree to the Terms and Conditions of use.

Datasheets & Catalog Pages MCON Interconnection System

English