


Intelligent Fuse - Automotive mini Blade Fuse

ASP-L Intelligent Mini Blade Fuse

The intelligent mini blade fuse is designed with an indicating device on top which lights up when the fuse is blown further provide the easy identification for blown fuse that needs replacement inside the fuse box assembly.

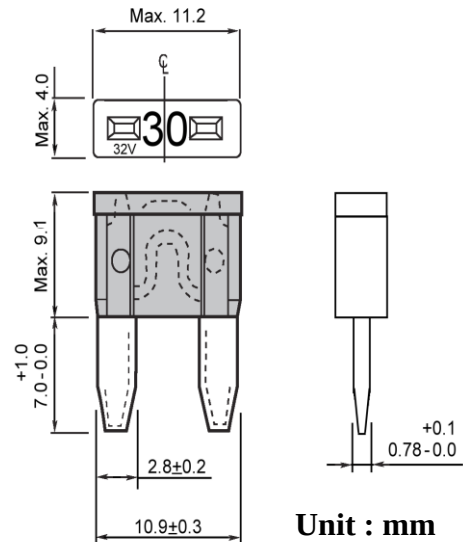

Electrical Characteristics :

TIME CURRENT CHARACTERISTICS			
% of Rating	Current Rating	Opening Time	
		Minimum	Maximum
110%	2 – 30 Amp	100 Hours	
135%	2 – 30 Amp		1800 Sec
200%	2 – 30 Amp		5 Sec

Patent : Taiwan, Japan and U.S.A.

Color – Coding: Blade Fuses are color-coded for easy amperage identification.


Material: Fuse Body is made from insulating plastic
Fuse Element: Zinc Alloy

Indicating Device: Single Bi-Polar SMD LED rated at 32V DC Maximum.


Ordering Information:

Catalogue Number	Ampere Rating	Voltage Rating	Color Code	Nominal Resistance Cold Ohms
ASP-L02	2	32	Gray	0.050
ASP-L03	3	32	Violet	0.029
ASP-L04	4	32	Pink	0.020
ASP-L05	5	32	Tan	0.016
ASP-L07	7.5	32	Brown	0.010
ASP-L10	10	32	Red	0.0071
ASP-L15	15	32	Blue	0.0043
ASP-L20	20	32	Yellow	0.0031
ASP-L25	25	32	Natural	0.0022
ASP-L30	30	32	Green	0.0018

Part Number Example:

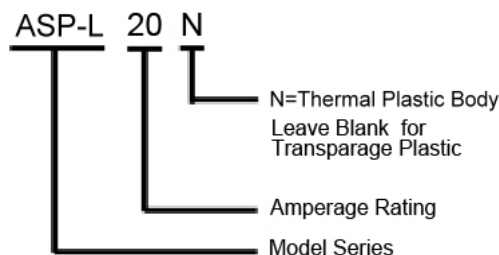

Time-Current Characteristic

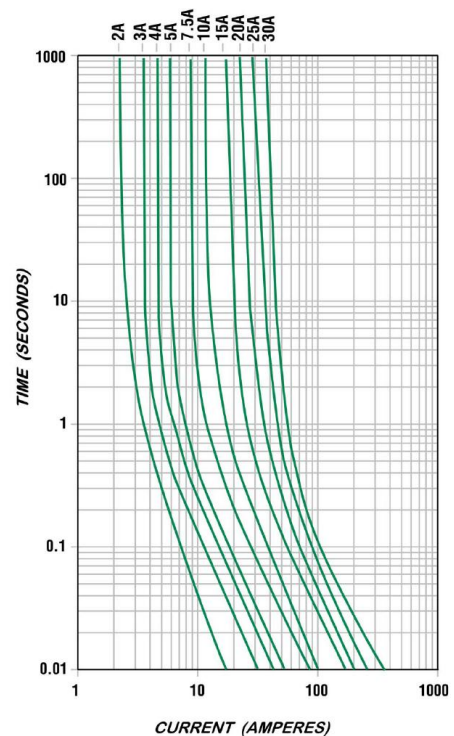

HANSOR PTC

瀚新科技股份有限公司 Hansor Polymer Technology Corp.

台北縣中和市連城路 222 巷 11 號 2 樓

2F, No. 11, LN.222, Liancheng Rd. Zhonghe Dist. New Taipei City, Taiwan, R.O.C. TEL:886-2-22220101 (REP.) FAX:886-2-22228080

V1.04