

WPD 204 2X25/4X16+6X10 2XBK**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Our WPD 1XX distribution blocks are used in all situations where power is supplied and distributed. Their user-friendly design creates a better overview and enables rapid, efficient implementation of space-saving power distribution.

General ordering data

Version	Potential distributor terminal, Screw connection, black, 25 mm², 164 A, 1000 V, Number of connections: 12, Number of levels: 1
Order No.	2725390000
Type	WPD 204 2X25/4X16+6X10 2XBK
GTIN (EAN)	4050118796193
Qty.	1 items

WPD 204 2X25/4X16+6X10 2XBK

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany

www.weidmueller.com

Technical data

Approvals

Approvals



ROHS Conform

Dimensions and weights

Depth	49 mm	Depth (inches)	1.9291 inch
Height	68 mm	Height (inches)	2.6772 inch
Width	63 mm	Width (inches)	2.4803 inch
Net weight	202 g		

Temperatures

Storage temperature	-25 °C...55 °C	Ambient temperature	-5 °C...40 °C
Continuous operating temp., min.	-50 °C	Continuous operating temp., max.	130 °C

Environmental Product Compliance

RoHS Compliance Status	Compliant with exemption
RoHS Exemption (if applicable/known)	6c
REACH SVHC	Lead 7439-92-1
SCIP	e1c310ef-6b67-4efa-80a6-d307472f4de9

Material data

Basic material	Wemid	Colour	black
UL 94 flammability rating	V-0		

System specifications

Version	Screw connection	End cover plate required	No
Number of potentials	1	Number of levels	1
Number of clamping points per level	2	Number of potentials per tier	1
Levels cross-connected internally	Yes	Mounting rail	Mounting plate, TS 35
N-function	No	PE function	No
PEN function	No		

Additional technical data

Open sides	closed	Explosion-tested version	Yes
Type of mounting	Snap-on		

Conductors for clamping (additional connection)

Connection type, additional connection Screw connection

Conductors for clamping (rated connection)

Wire connection cross section AWG, max.	AWG 4	Connection direction	on side
Type of connection 2	Screw connection	Type of connection	Screw connection

WPD 204 2X25/4X16+6X10 2XBK

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data

Number of connections	12	Clamping range, max.	25 mm ²
Clamping range, min.	1.5 mm ²	Wire connection cross section AWG, min.	AWG 16
Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/4, min.	1.5 mm ²	Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/1, max.	16 mm ²
Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/1, min.	1.5 mm ²	Wire connection cross section, finely stranded, max.	0 mm ²
Wire connection cross section, finely stranded, min.	1.5 mm ²	Connection cross-section, stranded, max.	25 mm ²
Connection cross-section, stranded, min.	1.5 mm ²	Wire connection cross-section, solid core, max.	25 mm ²
Wire connection cross-section, solid core, min.	1.5 mm ²		

General

Number of poles	2	Wire connection cross section AWG, max.	AWG 4
Wire connection cross section AWG, min.	AWG 16	Standards	IEC 60947-7-1, UL 1059
Mounting rail	Mounting plate, TS 35		

Rating data

Rated cross-section	25 mm ²	Rated voltage	1000 V
Rated AC voltage	1000 V	Rated DC voltage	1000 V
Nominal current	164 A	Current at maximum wires	164 A
Standards	IEC 60947-7-1, UL 1059	Power loss in accordance with IEC 60947-7-x	2.50 W

Important note

Product information	The socket complies with flammability class V-2 according to UL94.
---------------------	--

Classifications


ETIM 6.0	EC000897	ETIM 7.0	EC000897
ETIM 8.0	EC000897	ETIM 9.0	EC000897
ETIM 10.0	EC000897	ECLASS 9.0	27-14-11-20
ECLASS 9.1	27-14-11-20	ECLASS 10.0	27-14-11-20
ECLASS 11.0	27-14-11-20	ECLASS 12.0	27-14-11-20
ECLASS 13.0	27-25-01-19	ECLASS 14.0	27-25-01-19
ECLASS 15.0	27-25-01-19		

WPD 204 2X25/4X16+6X10 2XBK

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany

www.weidmueller.com

Drawings

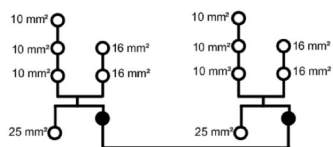[illegible][illegible]



CSA Rating data according to CSA 22.2 No. 158					
Zacharias (no. 434)					
	Load	Speed			
	CP-A	CP-A/C5	CP-A/C6	CP-B	
July 1					
July 2					
July 3	2.1 Nm				
July 4		1.8 Nm	2.1 Nm		3.3 Nm
July 5					
July 6					
July 7					
July 8					
July 9					
July 10					
July 11					
July 12					
July 13					
July 14					
July 15					
July 16					
July 17					
July 18					
July 19					
July 20					
July 21					
July 22					
July 23					
July 24					
July 25					
July 26					
July 27					
July 28					
July 29					
July 30					
July 31					
July 32					
July 33					
July 34					
July 35					
July 36					
July 37					
July 38					
July 39					
July 40					
July 41					
July 42					
July 43					
July 44					
July 45					
July 46					
July 47					
July 48					
July 49					
July 50					
July 51					
July 52					
July 53					
July 54					
July 55					
July 56					
July 57					
July 58					
July 59					
July 60					
July 61					
July 62					
July 63					
July 64					
July 65					
July 66					
July 67					
July 68					
July 69					
July 70					
July 71					
July 72					
July 73					
July 74					
July 75					
July 76					
July 77					
July 78					
July 79					
July 80					
July 81					
July 82					
July 83					
July 84					
July 85					
July 86					
July 87					
July 88					
July 89					
July 90					
July 91					
July 92					
July 93					
July 94					
July 95					
July 96					
July 97					
July 98					
July 99					
July 100					
max. error		8%	10%	10%	8%
max. error of 15%		10%			
CP: maximum peak					
	1.275	1.330			
Standard	2.00	Profile with 10%			

100000

100000

100000

100000

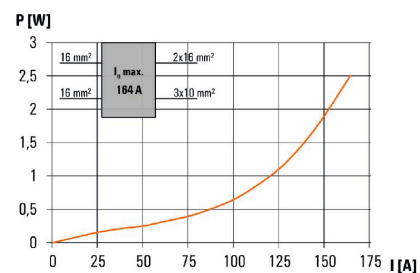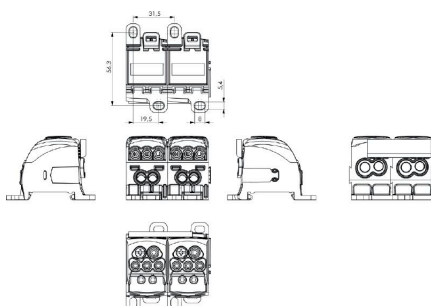


WPD 204 2X25/4X16+6X10 2XBK

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany

www.weidmueller.com

Accessories

Cross connection

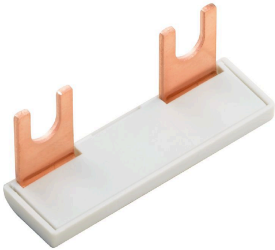

General ordering data

Type	WQB WPD X04/2	Version
Order No.	1561980000	Cross-connector (terminal), Plugged, grey, 135 A, Number of poles: 2,
GTIN (EAN)	4050118367317	Pitch in mm (P): 31.50, Insulated: Yes, Width: 49.3 mm
Qty.	20 ST	
Type	WQB WPD X04/3	Version
Order No.	1561990000	Cross-connector (terminal), Plugged, grey, 135 A, Number of poles: 3,
GTIN (EAN)	4050118367324	Pitch in mm (P): 31.50, Insulated: Yes, Width: 80.2 mm
Qty.	20 ST	

Socket wrench sets

Allen key made from fully hardened, high-alloy chromium-vanadium- steel, acc. to DIN ISO 2936 L (DIN 911), high-quality refined surface.



General ordering data

Type	SKS 2,0-8,0 MR	Version
Order No.	9008870000	socket wrenches
GTIN (EAN)	4032248266623	
Qty.	1 ST	

Crosshead screwdriver Pozidriv



Crosshead screwdriver, Pozidriv, SDK PZ DIN 5262, ISO 8764/2-PZ, output to ISO 8764/1-PZ, ChromTop tip, SoftFinish grip

WPD 204 2X25/4X16+6X10 2XBK

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany

www.weidmueller.com

Accessories

General ordering data

Type	SDK PZ2	Version	
Order No.	9008540000	Screwdriver, Screwdriver	
GTIN (EAN)	4032248056538		
Qty.	1 ST		