Datasheet

Item no. 1571073

V1_10162018_01_en

D-Sub Socket







Terminal D-Sub
1 ----- 1
2 ----- 2
3 ----- 3
. ----- .
. ----- .
. ----- .
. ----- .
. ----- .
15 ----- 15
SHL-----shell

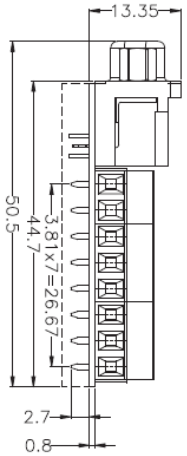



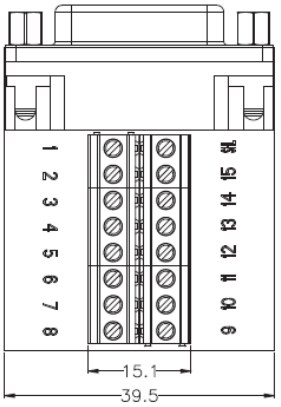

Specification

Rating Voltage:	30VDC
Rating Current:	0.5A
Contact resistance:	30mΩ max.
Insulating resistance:	min. 100mΩ/500VDC
Operating temperature:	-10°C ~ +50°C

DIMENSION	mm ±0.2
NAME	D-Sub 15pin Female Terminal Adaptor

This is a publication by Conrad Electronic SE, Klaus-Conrad-Str. 1, D-92240 Hirschau (www.conrad.com).
All rights including translation reserved. Reproduction by any method, e.g. photocopy, microfilming, or the capture in electronic data processing systems require the prior written approval by the editor. Reprinting, also in part, is prohibited. This publication represents the technical status at the time of printing.

© Copyright 2017 by Conrad Electronic SE.