


Keratherm® - Softtherm® 86/300, 86/500, 86/600

This group of Softtherm® films has the best thermal behavior. The films are characterized by low thermal resistance and best heat dissipation, as well as good dielectric strength. Good compressibility and low shore hardness ensure reliable and simple processability.

Applications:

- RD-RAM memory modules
- Heat pipe thermal solutions
- Automotive engine
- Control units
- Plasma supply console

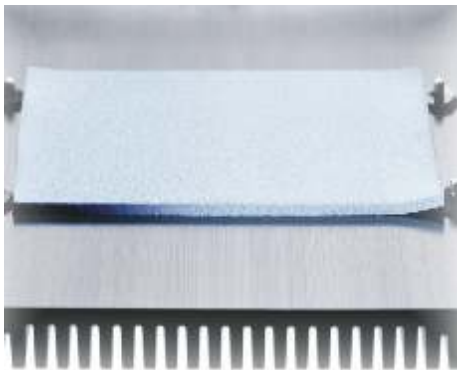

Optional available with adhesive coating!
The following film thicknesses
are available:

86/300: 0.5 - 5.0 mm


86/500: 0.5 - 2.0 mm

86/600: 0.5 mm; 1.0 mm; 1.5 mm

Properties	Unit	86/300	86/500	86/600
Colour		blue	brown	grey
Thermal properties				
Thermal resistance R_{th}	K/W	0.41	0.25	0.20
Thermal impedance R_{ti}	°Cmm²/W Kin²/W	166 0.25	100 0.15	80.0 0.12
Thermal conductivity λ	W/mK	3.0	5.0	6.0
Electrical properties				
Breakdown voltage $U_{d; ac}$	kV	8.0	1.0	1.5
Volume resistivity	Wcm	1.0×10^{11}	1.0×10^{11}	1.7×10^{10}
Dielectric loss factor $\tan \delta$	1	5.0×10^{-3}	1.5×10^{-3}	2.0×10^{-3}
Dielectric constant ϵ_r	1	3.3	3.9	2.5
Mechanical properties				
Thickness (+/-10%)	mm	0,5	0.5	0.5
Hardness	Shore 00	65	75	60 - 70
Youngs modulus *	N/cm²	220	634	692
Physical properties				
Application temperature	°C	-60 to +200	-40 to +200	-60 to +150
TML	Ma.-%	< 0.35	< 0.24	< 0.40
Flame class	UL	94V-0	-	being tested

* Youngs modulus- sample size 30mmx30mmx2.5mm; variable contact pressure;
compression 50% of the measured thickness

Compressibilities of
Softtherm® 86/300

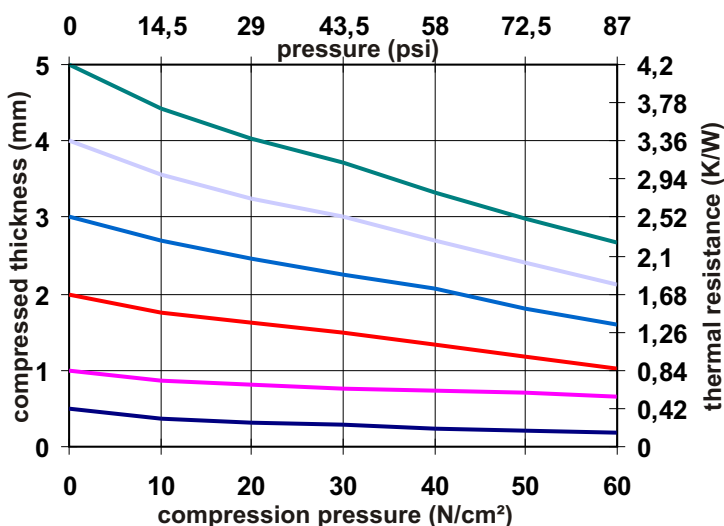

Compressibilities of
Softtherm® 86/500

