100 CIRCULAR CONNECTORS

# Push-pull connectors cable mounted plug CCA2 series


## CCA2P1/A05 5 pole

- Premium range of circular connectors
- IP68 sealed using vacuum technology (when connected and using environmental cable clamp)
- Tough, high performance interconnection
- Ideal for harsh and extreme environments
- Suitable for broadcasting, autosport, military, rail, marine, security, industrial and agricultural applications
- Key coded to prevent misconnection
- · Will not disconnect when the cable is under load or stress
- Tested to IEC 60512-3-5a



SOCKETS

| F | PART NO.   | DESCRIPTION        | POLES | SERIES     |
|---|------------|--------------------|-------|------------|
| C | CCA2P1/A05 | Cable mounted plug | 5     | CCA series |

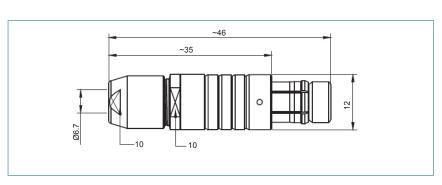


| SPECIFICATION           |  |
|-------------------------|--|
| Shell style/model       | Cable mounted straight plug, male contact  |
| Codes                   | Code 1   |
| Contact type            | Solder type  |
| Contact diameter        | 0.9mm  |
| Max. stranded conductor | AWG 21-22  |
| Max diameter            | 0.79mm   |
| Vtest (contact-shell)   | 1100V(AC) 1900V(DC)  |
| Vtest (contact-contact) | 1400V(AC) 2200V(DC)  |
| Rated current           | 6.8A   |
| Rated voltage           | ≤250V  |
| Mechanical operation    | 5000 mating cycles   |
| Housing material        | Brass (natural chrome plated)<br>shell and collet nut, nickel<br>plated brass latch sleeve and<br>mid pieces |
| Insulator               | PPS  |
| Contacts                | Brass (gold plated)  |
| Humidity (max)          | <=95% [at 60°C /140°F]   |
| Vibration               | 15g [10 Hz - 2000 Hz]  |
| Shock resistance        | 100g [6 ms]  |
| Salt spray corrosion    | >72 hr   |
| Climatical category     | 50/175/21  |
| Shielding (min)         | 75 dB (10 MHz)   |
| Shielding (min)         | 40 dB (1 GHz)  |
| IP rating               | IP68 (when connected and using environmental cable clamp)  |

## This product should be used with the following cable clamps:

| PART NO. | WIRE RANGE  |
|----------|-------------|
| CCV2C/CE | 3.7 - 4.2mm |
| CCV2C/CG | 4.2 - 4.7mm |
| CCV2C/CH | 4.7 - 5.2mm |
| CCV2C/CI | 5.2 - 5.7mm |
| CCV2C/CJ | 5.7 - 6.2mm |





Non IP68 cable clamps also available

#### **ACCESSORIES**

Metal cap for plugs

| PART NO. | DESCRIPTION                   |
|----------|-------------------------------|
| CCA22    | Camcirc metal cap for plug A2 |



#### ASSOCIATED PRODUCTS

CCM2S1/05 -CCM series A2 size socket page 126 -CCT series A2 size socket CCT2S1/05 page 149

