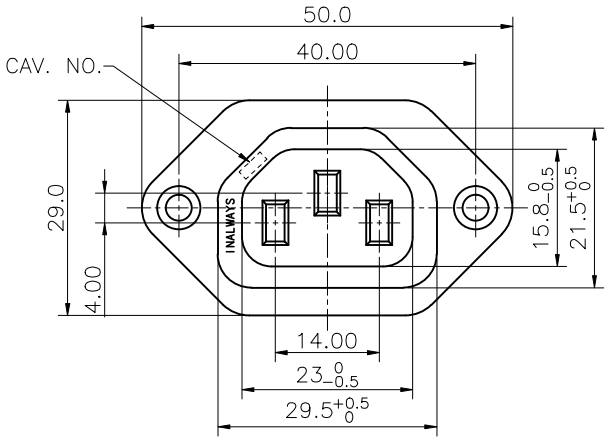

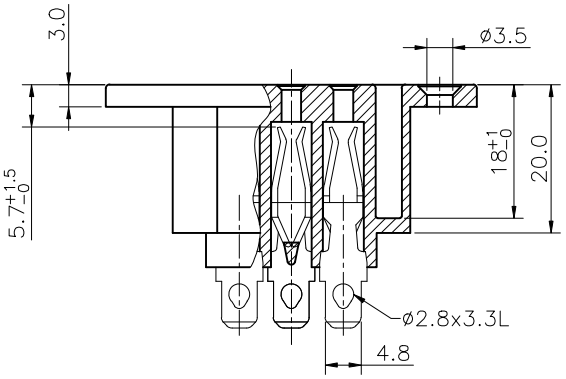

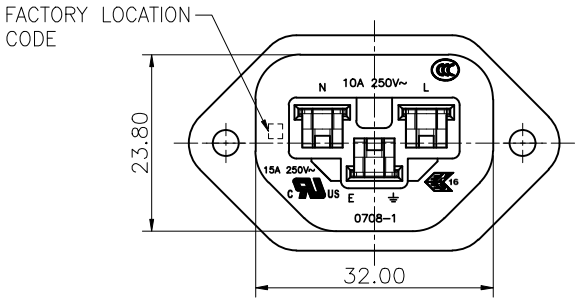



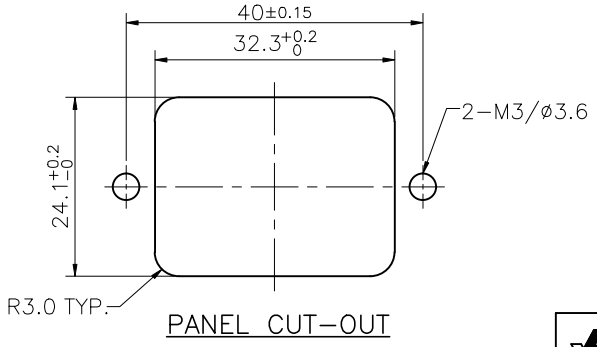

PANEL CUT-OUT

SPECIFICATION

A: MATERIAL:

1. HOUSING: PBT WITH 30% GLASS FIBER UL 94V-0
2. TERMINAL: COPPER ALLOY, TIN-PLATED

B: CHARACTERISTICS:

1. RATING: 15A 250V~ NORTH AMERICA
   10A 250V~ EUROPE
2. INSULATION RESISTANCE: 100 MΩ MIN, AT 500V DC
3. ELECTRIC STRENGTH: AC 2,000V FOR ONE MINUTE

C: APPROVALS:

UL, CUL, ENEC & CCC

D: ORDERING INFORMATION:

P/N	MOUNTING HOLE
0708-1-CQF-UBK	COUNTERSINK EAR

REV.	DATE	DOCUMENT	DESCRIPTION
T			
S			
R			
Q	2024.07.30	DGR24005	修改电流规格
P	2021.04.06	DGR21005	变更安规刻字

华玮电子（东莞）有限公司
INALWAYS ELECTRONIC(DONGGUAN)CO.,LTD

TOLERANCE UNLESS OTHERWISE MARKED
DIMENSION: .000: ±0.1 .00 : ±0.2 .0 : ±0.3
ANGULAR: ± 3°

A4	UNIT	SCALE	SHEET
	mm	1 : 1	1 of 1

PART NO.:	NAME:
0708-1-CQF-UBK	AC OUTLET 3P (SCREW-ON)
MATERIAL: SEE ABOVE	SPEC.: IEC 60320-2-2 SHEET F

APPROVED	CHECKED	DESIGNER	NOTE:
开发部 2024.07.31 兰锐		开发部 2024.07.31 兰锐	

DOC.#: S708-0001