


Magic Rubber



The World is changing... Change the technology

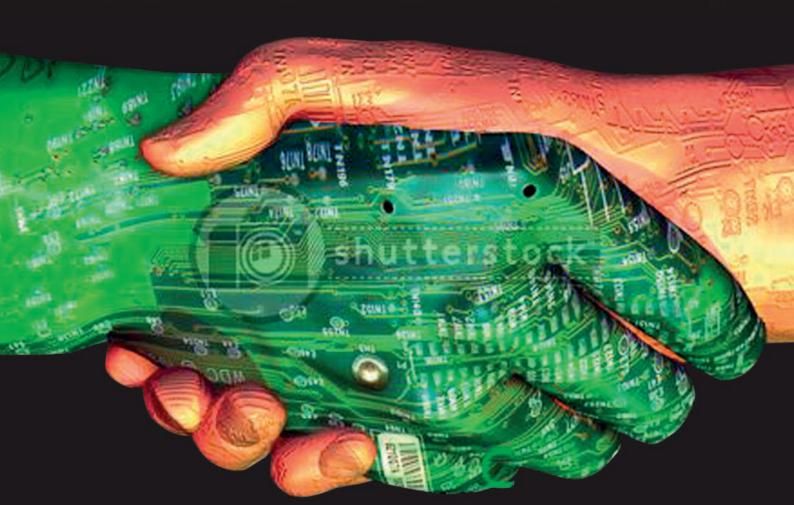

New Technology 2009



Magic Rubber

A bi-component rubber liquid that gives excellent insulation and sealing properties. Low viscosity allows for good moulding, flow, elastic and flexible characteristics. It is also flame retardant and has high dielectric and thermal properties. Rubber extremely conformable, mouldable and flexible, elastic and flame retarded with high dielectric, thermal and elastic properties.

Properties

- Non toxic, safe and easy to use
- No shelf life
- Non flammable and fire retardant
- Low smoke and fume efficient
- Re-enterbale, flexible and elastic
- Fast setting at room temperature (10 minutes at +25°C)
- Ingress protection higher than IP68
- High dielectric, thermal, mechanical and elastic properties
- Suitable for installation up to 1 kV

Applications

- Insulation components (condensers, transformers, pcb's ...) by immersion
- Waterproofing by making a cloche from gummed material
- Waterproof anti slip surfaces
- Give elasticity to seals
- Data and communications terminations and joints
- Mould rubber components of any shape and dimension
- Provide thermal insulation
- Give elasticity to the gluing of paper, cardboard and plastic materials

Heatshrinkable elastic sleeving



Insulation and protection of printed circuits boards



Insulation of components by immersion in magic Rubber



Insulation of transformer windings



Rubber sealing



The applications above are only a few of the many applications that are possible.

Try Magic Rubber and discover its unique versatility!

MAGIC RUBBER

KIT COMPOSITION:

2 BOTTLES FOR 500 GR TOTAL, 1 SMALL BASIN AND 1 MIXING SPOON

