

Extruded heatsinks for PCB mounting

SK 409 50,8 STS

45 x 12,7 mm, with solder pins and insulating ring




Features

Variants

Service

way of fixation	Schraubbefestigung
height	12.7 mm
plate thickness	3 mm
lengths	50.8 mm
$R_{\theta n}$	6.2 K/W
drilling pattern	TO 220
mounting method	with solder pin
surface	black anodised

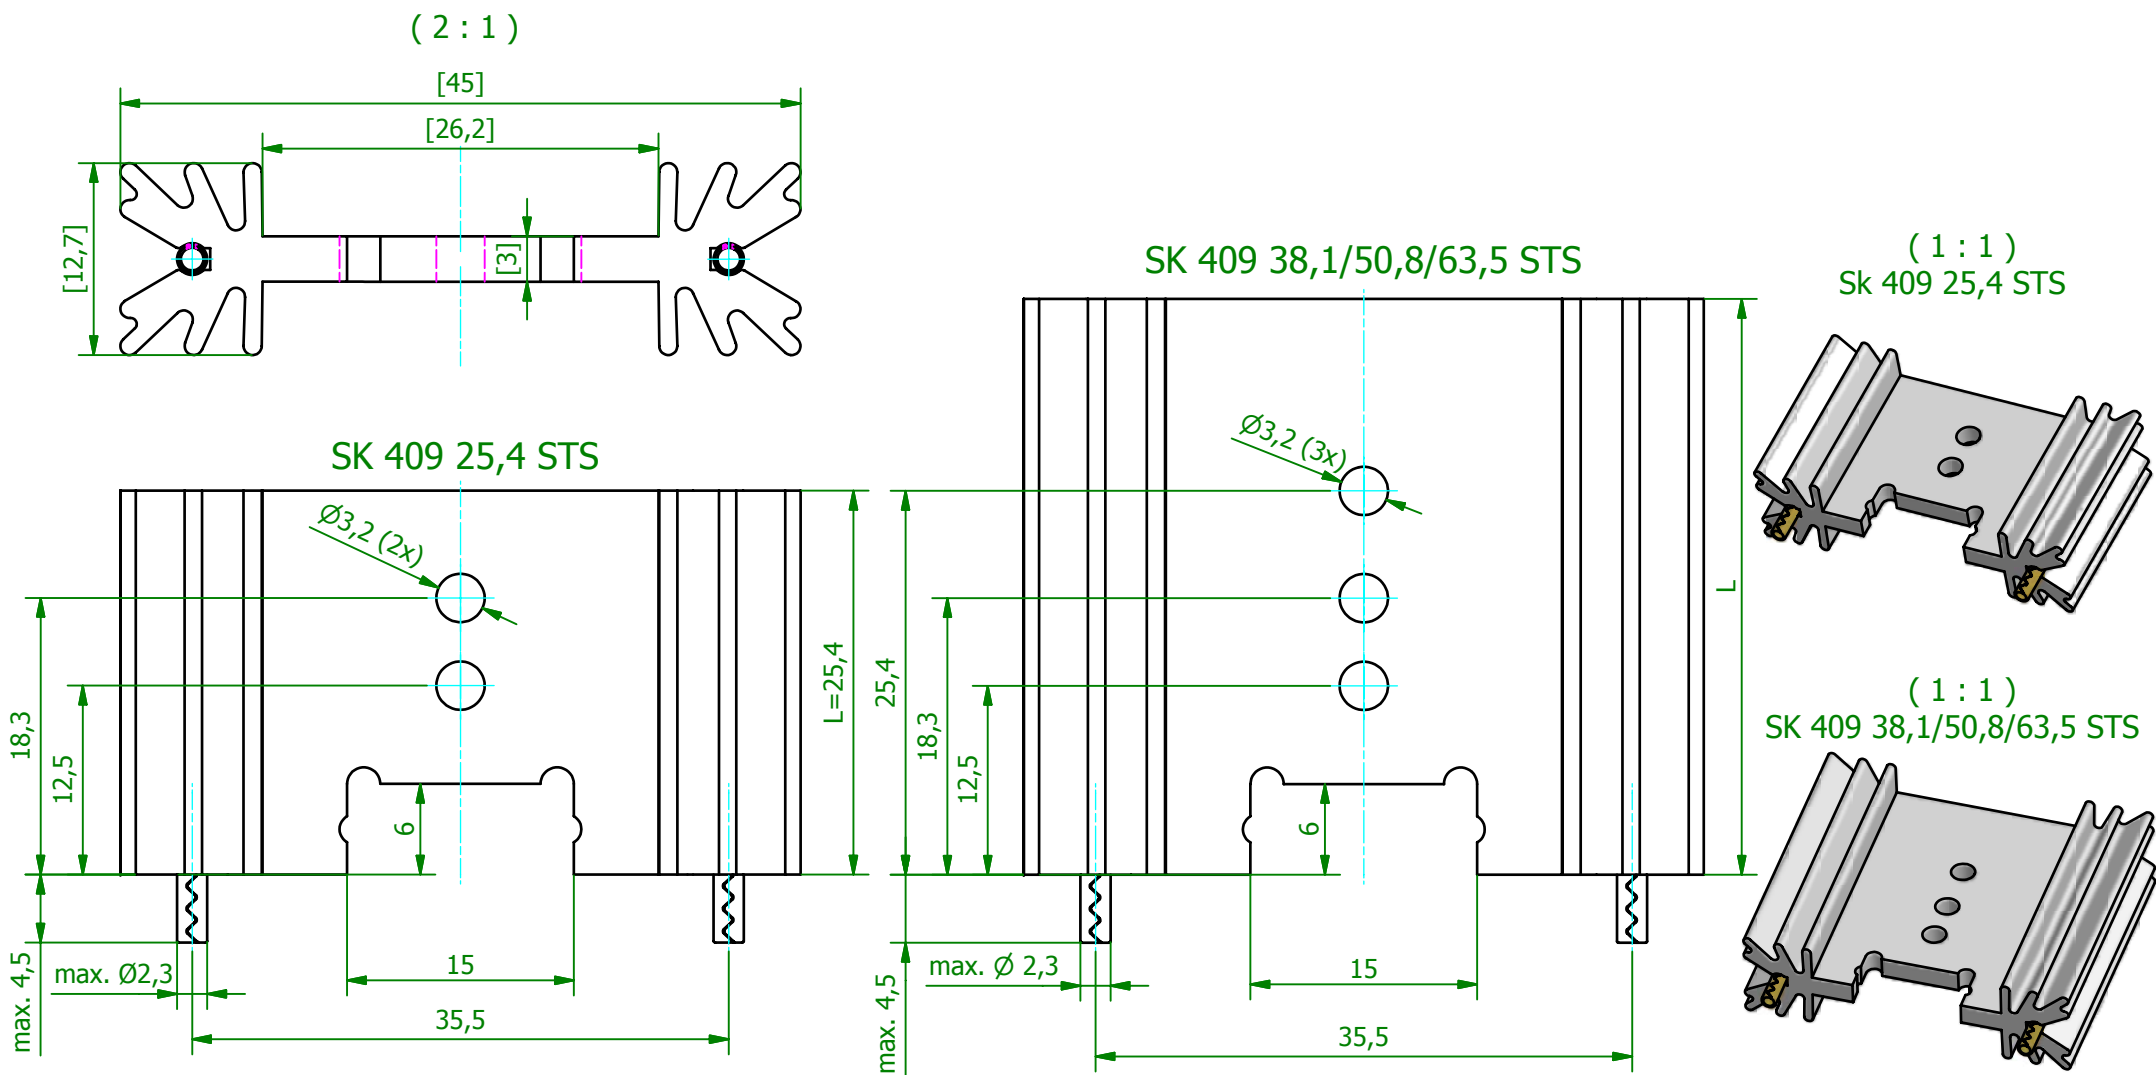

Schutzvermerk gemäß DIN ISO 16016 beachten © Fischer Elektronik GmbH & Co. KG 2005				Freimasstoleranz DIN ISO 2768m 		Oberfläche SA		Kunde 77777 - Fischer Elektronik 	
					Datum	Name		Bezeichnung / Titel	
				Erst.	26.06.2007	Lochen		SK 409 ... STS	
				Bearb.	16.02.2009	Lochen		für Leiterplattenmontage mit Lötstiften	

Art.-Nr.	L (mm)	
SK 409 25,4 STS	25,4	
SK 409 38,1 STS	38,1	
SK 409 50,8 STS	50,8	
SK 409 63,5 STS	63,5	