



## PCB for self-assembly; with 8 mounting positions

Item No.: 289-102



PCB for self-assembly; with 8 mounting positions

### Marking

RoHS ✓  
Compliant

### Business data

Supplier	WAGO
Item no.	289-102
GTIN / EAN	4045454192754
Content	1

### Notes

\* Notice! Live conductors! Protection against direct contact must be provided by the equipment builder, e.g., using a WAGO 709 Series cover (see Accessories) or a similar cover. The installation requirements for the particular application must be observed.



### Technical data


#### Miscellaneous

Connection technology	CAGE CLAMP®
WAGO terminal	WAGO 236 Series
Solid conductor	0.08 ... 2.5 mm <sup>2</sup> / 28 ... 12 AWG
Fine-stranded conductor	0.08 ... 2.5 mm <sup>2</sup> / 28 ... 12 AWG

<b>Technical data</b>	
<i>Strip length</i>	<i>5 ... 6 mm / 0.2 ... 0.24 Inch</i>
<i>Width</i>	<i>47 mm / 1.85 Inch</i>
<i>Height from upper-edge of DIN-35 rail</i>	<i>31.5 mm / 1.24 Inch</i>
<i>Depth</i>	<i>65.5 mm / 2.579 Inch</i>
<i>Type of mounting</i>	<i>Mounting on carrier rail via carrier rail adapter</i>
<i>Degree of protection</i>	<i>IP00*</i>
<i>Fire load [MJ]</i>	<i>0.778 [MJ]</i>
<i>Weight [g]</i>	<i>22.23 [g]</i>
<i>Ambient temperature (operation)</i>	<i>-25 ... 40 °C</i>
<i>Packaging type</i>	<i>BOX</i>
<i>Main product function</i>	<i>Module for build. cust. circuits</i>
<i>Product type</i>	<i>Specialty electronics</i>
<i>Housing design</i>	<i>PCB</i>
<i>Max. operating voltage (AC) [V]</i>	<i>AC250 [V]</i>
<i>Max. operating voltage (DC) [V]</i>	<i>DC250 [V]</i>

Images & drawings

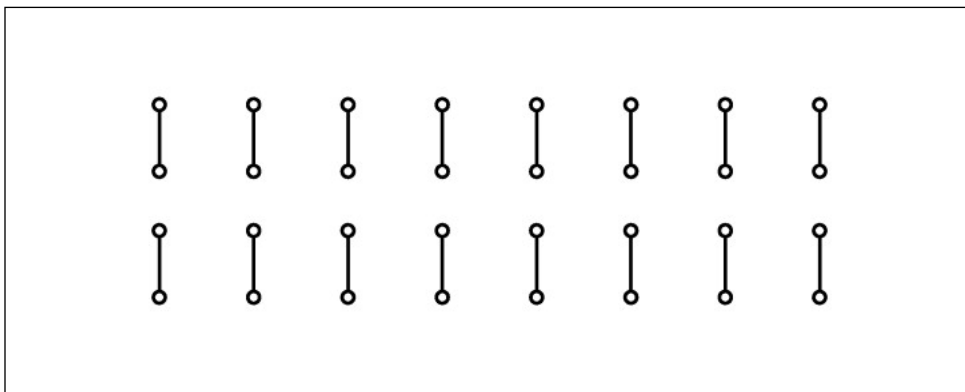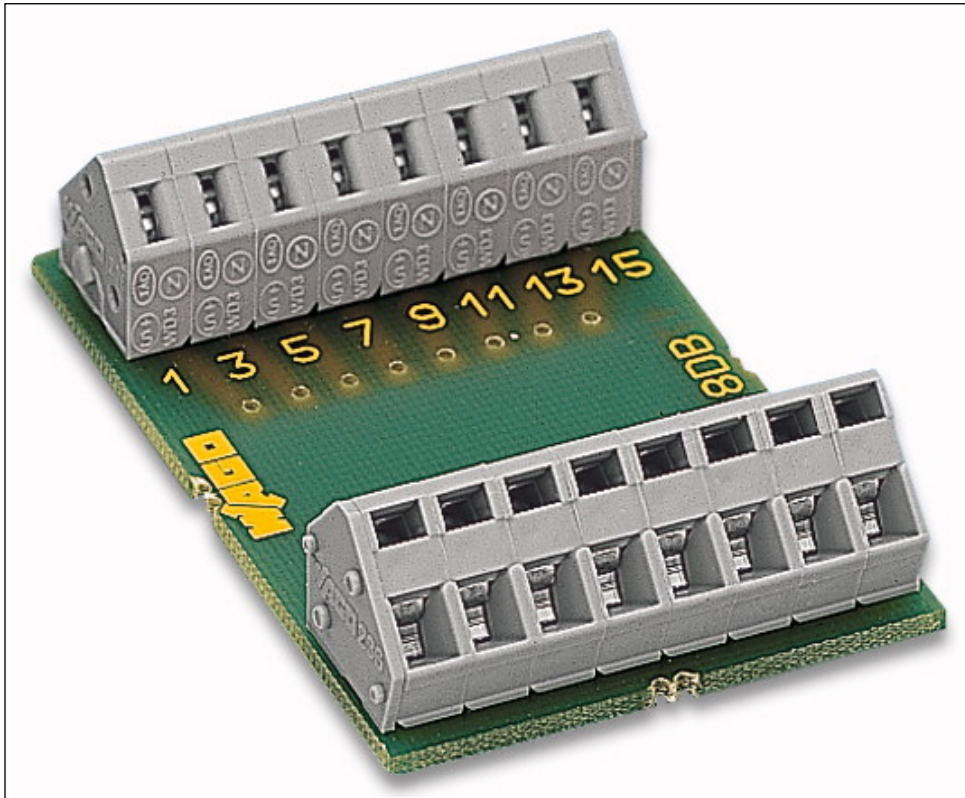

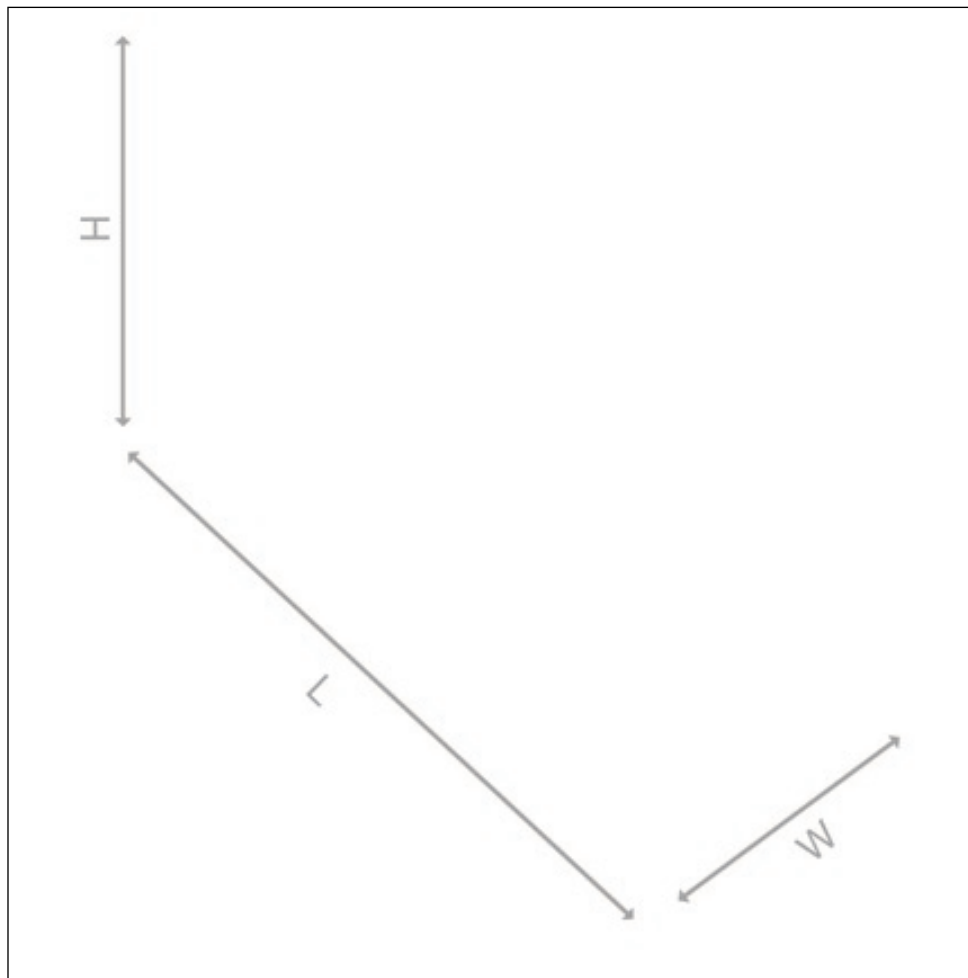

**Address**

WAGO Kontakttechnik GmbH & Co. KG

Hansastr. 27

32423 Minden

Telefon: 0571/887-0

Fax: 0571/887-169

<http://www.wago.com>

© WAGO Kontakttechnik GmbH & Co. KG

Technische Änderungen und Irrtümer vorbehalten.