



Component module with diode

Item No.: 289-105



Component module with diode

Marking

RoHS ✓
Compliant

Business data

Supplier	WAGO
Item no.	289-105
GTIN / EAN	4045454198282
Content	1

Notes

*Note: * Max. admissible current acc. to the manufacturer's data sheet. With all diodes loaded, the continuous current must be reduced. * Notice! Live conductors! Protection against direct contact must be provided by the equipment builder, e.g., using a WAGO 709 Series cover (see Accessories) or a similar cover. The installation requirements for the particular application must be observed.*


Technical data


Miscellaneous

Connection technology	CAGE CLAMP®
WAGO terminal	WAGO 236 Series
Solid conductor	0.08 ... 2.5 mm ² / 28 ... 12 AWG

Technical data	
<i>Fine-stranded conductor</i>	<i>0.08 ... 2.5 mm² / 28 ... 12 AWG</i>
<i>Strip length</i>	<i>5 ... 6 mm / 0.2 ... 0.24 Inch</i>
<i>Width</i>	<i>51 mm / 2.008 Inch</i>
<i>Height from upper-edge of DIN-35 rail</i>	<i>48 mm / 1.89 Inch</i>
<i>Depth</i>	<i>85 mm / 3.346 Inch</i>
<i>Type of mounting</i>	<i>DIN-35 rail</i>
<i>Degree of protection</i>	<i>IP00*</i>
<i>Fire load [MJ]</i>	<i>1.19 [MJ]</i>
<i>Weight [g]</i>	<i>80.64 [g]</i>
<i>Ambient temperature (operation)</i>	<i>-25 ... 40 °C</i>
<i>Pollution degree</i>	<i>2</i>
<i>Packaging type</i>	<i>BOX</i>
<i>Main product function</i>	<i>Diode gate module</i>
<i>Product type</i>	<i>Specialty electronics</i>
<i>Housing design</i>	<i>Mounting carrier</i>
<i>Max. operating voltage (AC) [V]</i>	<i>AC250 [V]</i>
<i>Max. operating voltage (DC) [V]</i>	<i>DC250 [V]</i>

Images & drawings

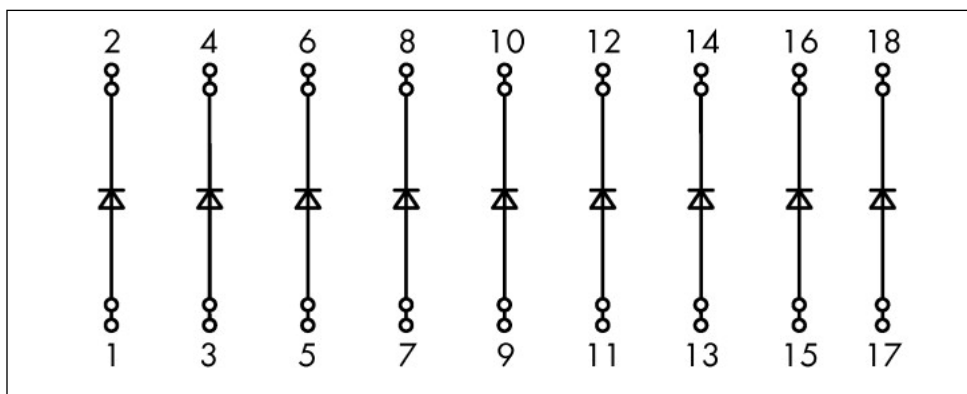

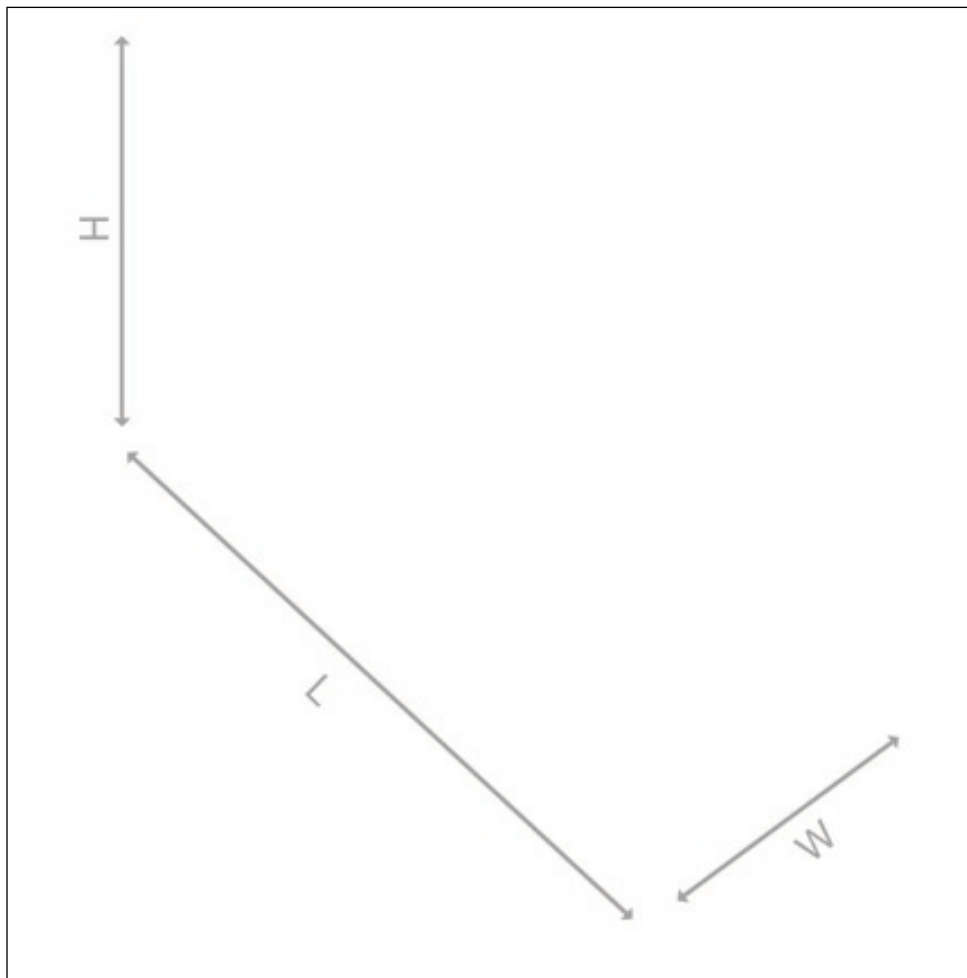

Address

WAGO Kontakttechnik GmbH & Co. KG

Hansastr. 27

32423 Minden

Telefon: 0571/887-0

Fax: 0571/887-169

<http://www.wago.com>

© WAGO Kontakttechnik GmbH & Co. KG

Technische Änderungen und Irrtümer vorbehalten.