

Voltage measuring transducers - MCR-VAC-UI-O-DC - 2811103

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



MCR voltage measuring transducer, for alternating current voltages from 0..20 V AC to 0..440 V AC, output signal 0..10 V/0(4)..20 mA

Your advantages

- ✓ Replacement device MACX MCR-VAC-(PT) 2906239 with 8 measurement ranges from 0 V ... 20 V AC to 0 V ... 660 V AC, output signals: 0 V ... 10 V / 0 (4) mA ... 20 mA
- ✓ Adjustable voltage ranges
- ✓ Bidirectional output signals
- ✓ 3-way isolation
- ✓ ZERO/SPAN adjustment ±20%
- ✓ Tool-free parameterization of measured values
- ✓ Teach-in configuration of the measured value range



Key Commercial Data

Packing unit	1 pc
GTIN	 4 017918 125400
GTIN	4017918125400
Weight per Piece (excluding packing)	204.500 g
Custom tariff number	85437090
Country of origin	Germany

Technical data

Note

Utilization restriction	EMC: class A product, see manufacturer's declaration in the download area
-------------------------	---

Dimensions

Width	22.5 mm
Height	99 mm
Depth	114.5 mm

Voltage measuring transducers - MCR-VAC-UI-O-DC - 2811103

Technical data

Ambient conditions

Ambient temperature (operation)	-25 °C ... 60 °C
Ambient temperature (storage/transport)	-40 °C ... 85 °C (non-condensing)
Maximum altitude	< 2000 m
Degree of protection	IP20

Input data

Input voltage range	0 V ... 370 V AC
Input resistance	370 kΩ
Input voltage range	0 V ... 250 V AC
Input resistance	250 kΩ
Input voltage range	0 V ... 170 V AC
Input resistance	170 kΩ
Input voltage range	0 V ... 120 V AC
Input resistance	120 kΩ
Input voltage range	0 V ... 80 V AC
Input resistance	80 kΩ
Input voltage range	0 V ... 54 V AC
Input resistance	54 kΩ
Input voltage range	0 V ... 36 V AC
Input resistance	36 kΩ
Input voltage range	0 V ... 24 V AC
Input resistance	24 kΩ
Nom. voltage	440 V (ungrounded)
	250 V (to earth)

Output data

Output name	Voltage output
Voltage output signal	0 V ... 10 V
Max. output voltage	15 V
Load/output load voltage output	> 10 kΩ
Ripple	< 50 mV _{PP}
Output name	Current output
Current output signal	0 mA ... 20 mA
	4 mA ... 20 mA
Max. output current	30 mA
Load/output load current output	< 500 Ω
Ripple	< 50 mV _{PP}

Power supply

Supply voltage range	18.5 V DC ... 30.2 V DC
Max. current consumption	< 45 mA

Connection data

Voltage measuring transducers - MCR-VAC-UI-O-DC - 2811103

Technical data

Connection data

Connection method	Pluggable screw connection
Conductor cross section solid min.	0.2 mm ²
Conductor cross section solid max.	2.5 mm ²
Conductor cross section AWG min.	24
Conductor cross section AWG max.	14
Conductor cross section flexible min.	0.2 mm ²
Conductor cross section flexible max.	2.5 mm ²
Stripping length	8 mm
Screw thread	M3
Connection technology	Screw connection

General

Maximum transmission error	< 1.5 % (of final value)
Temperature coefficient, typical	0.02 %/K (50/60 Hz)
Frequency measuring range	45 Hz ... 400 Hz
Alignment zero	± 20 %
Alignment span	± 20 %
Step response (10-90%)	250 ms
Overvoltage category	III
Degree of pollution	2
Rated insulation voltage	300 V DC
Test voltage input/output	3.3 kV (50 Hz, 1 min.)
Test voltage input/power supply	3.3 kV (50 Hz, 1 min.)
Test voltage output/power supply	1 kV (50 Hz, 1 min.)
Electromagnetic compatibility	Conformance with EMC directive
Noise emission	EN 61000-6-4
Noise immunity	EN 61000-6-2
Color	green
Housing material	Polyamide PA non-reinforced
Conformance	CE-compliant
UL, USA/Canada	cULus

Standards and Regulations

Electromagnetic compatibility	Conformance with EMC directive
Noise emission	EN 61000-6-4
Noise immunity	EN 61000-6-2
Connection in acc. with standard	CUL
Conformance	CE-compliant
UL, USA/Canada	cULus

Environmental Product Compliance

REACH SVHC	Lead 7439-92-1
------------	----------------

Voltage measuring transducers - MCR-VAC-UI-O-DC - 2811103


Technical data

Environmental Product Compliance


China RoHS	Environmentally Friendly Use Period = 50
	For details about hazardous substances go to tab "Downloads", Category "Manufacturer's declaration"

Drawings

Application drawing

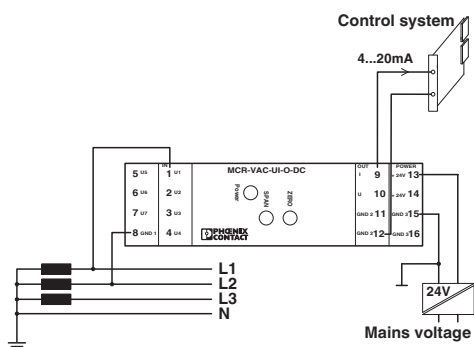


Dimensional drawing

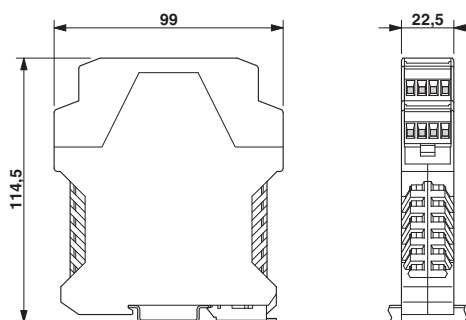

Voltage measurement in case of grounded circuits

Circuit diagram

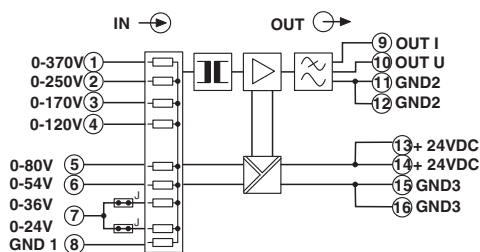

Classifications

eCl@ss

eCl@ss 5.0	27210190
eCl@ss 5.1	27200300
eCl@ss 6.0	27210100
eCl@ss 7.0	27210125
eCl@ss 8.0	27210125
eCl@ss 9.0	27210125

ETIM

ETIM 4.0	EC002477
ETIM 5.0	EC002477
ETIM 6.0	EC002477

Voltage measuring transducers - MCR-VAC-UI-O-DC - 2811103

Classifications

UNSPSC

UNSPSC 6.01	30211504
UNSPSC 7.0901	39121006
UNSPSC 11	39121006
UNSPSC 12.01	39121006
UNSPSC 13.2	39121006

Approvals

Approvals

Approvals

UL Recognized / cUL Recognized / EAC / cULus Recognized

Ex Approvals

Approval details

UL Recognized		http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm	FILE E 238705
---------------	--	---	---------------

cUL Recognized		http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm	FILE E 238705
----------------	--	---	---------------

EAC		RU C- DE.A*30.B.01082
-----	--	--------------------------

cULus Recognized	
------------------	--