


## Application

Precision video cables are used in critical analog and digital video circuits and high quality applications such as live broadcast (HDTV/SDI) in network studios and pre- or post-production facilities.

## Construction & Dimensions

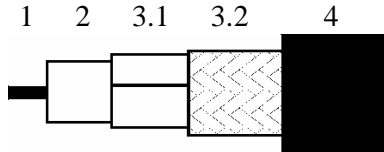

- 1. Conductor**
- 2. Dielectric**
- 3.1 Foil**
- 3.2 Braid**
- 4. Jacket**

- 1. Inner Conductor** Innenleiter - Conduttore Interno - Conducteur - Conductor - Проводник  
 Material: solid, bare copper  
 Diameter: 0.8 mm (20 AWG)  
 RG Type: 59/U
- 2. Dielectric** Dielektrikum - Dielettrico - Diélectrique - Dieléctrico - Диэлектрик  
 Material: gas injected HDPE  
 Diameter over insulation: 3.68 mm
- 3. Outer Conductor** Aussenleiter - Conduttore Esterno - Conducteur extérieur - Conductor externo - Внешний проводник  
 Material: foil + braid  
 Diameter screen: 4.5 mm
  - 3.1 Shielding foil: Duofoil®  
Coverage: 100%
  - 3.2 Shielding braid: tinned copper braid  
Coverage: 95%
- 4. Jacket** Aussenmantel - Guaina - Gaine - Revestimiento - Оболочка  
 Material: FRNC (LSNH)  
 Diameter: 5.92 ± 0.2 mm  
 Color and text: see table Marking

## Requirements and test methods

### Electrical characteristics

- Mean characteristic impedance: 75 ± 1.5 Ω  
 Wellenwiderstand - Impedenza Caratteristica Principale - Impédance nominale - Características eléctricas - Электрические характеристики
- Nominal capacitance conductor to shield: 53 pF/m  
 Kapazitaet - Capacità Nominale Conduttore/Schermo - Capacité nominale entre conducteur et blindage - Capacitancia nominal de conductor a blindaje - Номинальная емкость "проводник-экран"
- Nominal velocity of propagation: 83%  
 Ausbreitungsgeschwindigkeit - Velocità Nominale di Propagazione - Vitesse de propagation nominale - Velocidad nominal de propagación - Номинальная скорость распространения сигнала
- Nominal Delay: 4.003 ns/m

## 1505ANH FRNC Precision Video Cable

Rev. 2/ 2005-01-05 DRAFT 2/2

Nom. inner conductor DC resistance @ 20 °C: 32 Ω/km

Gleichstromwiderstand Innenleiter - Resistenza Nominale DC del Conduttore Interno - Résistance du conducteur intérieur - Resistencia CC nominal del conductor interno - Номин. сопротивление пост. тока внутреннего проводника при

Nom. outer conductor DC resistance @ 20 °C: 12 Ω/km

Gleichstromwiderstand Aussenleiter - Resistenza Nominale DC del Conduttore Esterno - Résistance du conducteur extérieur - Resistencia CC nominal del conductor externo - Номин. сопротивление пост. тока внутреннего проводника при

Return loss at 5- 850 MHz: ≥ 23 dB

851-3000 MHz: ≥ 21 dB

Rueckflussdaempfung - Perdite Cumulative di Riflessione - Taux de réflexion du signal - Pérdida de retorno - Обратные потери на

Nominal Attenuation: Wellendaempfung - Attenuazione Nominale – Affaiblissement - Atenuación nominal - Номинальное затухание

MHz	dB/100m	MHz	dB/100m
1	0.9	360	14.4
3.58	1.9	540	18.0
5	2.0	720	20.1
71.5	6.8	1500	30.5
135	8.8	2250	38.0
270	12.4	3000	43.9

Flame Resitance: CEI 20-22 III (acc. EN50266-2-4, IEC 60332-3-24 cat.C)  
CEI 20-37/2/5/7 (acc. EN50267-2-1, 50268-2, NES 713)

### Mechanical and physical characteristics

Temperature range - storage/operation -30°C to +70°C

Temperature range - installation -5 °C to + 70°C

Minimum bending radius 10x Ø cable

Biegeradius - Raggio Minimo di Curvatura - Rayon de courbure minimum - Radio de curvatura mínimo - Минимальный радиус изгиба

Nominal cable weight 46.1 kg/km

Gewicht - Peso Nominale del Cavo – Poids - Peso nominal del cable - Номинальный вес кабеля

### Ordering information

#### MARKING

Jacket colour	Text
black	BELDEN 1505ANH FRNC CEI 20-22III CEI 20-37/2/5/7

Meter marking: yes, MM-YY: month and year of manufacturing

### PACKAGING (PUT-UP, +/-2%)

305m reels

Each reel is labelled with the following data: BeldenCDT Logo, BeldenCDT code number, item description, length on the reel and date of manufacturing.