


Data sheet | Item number: 852-1411

Industrial-ECO-Switch; 5-port 1000Base-T; Extended temperature range; 4 \*  
Power over Ethernet

[www.wago.com/852-1411](http://www.wago.com/852-1411)



Color: ■

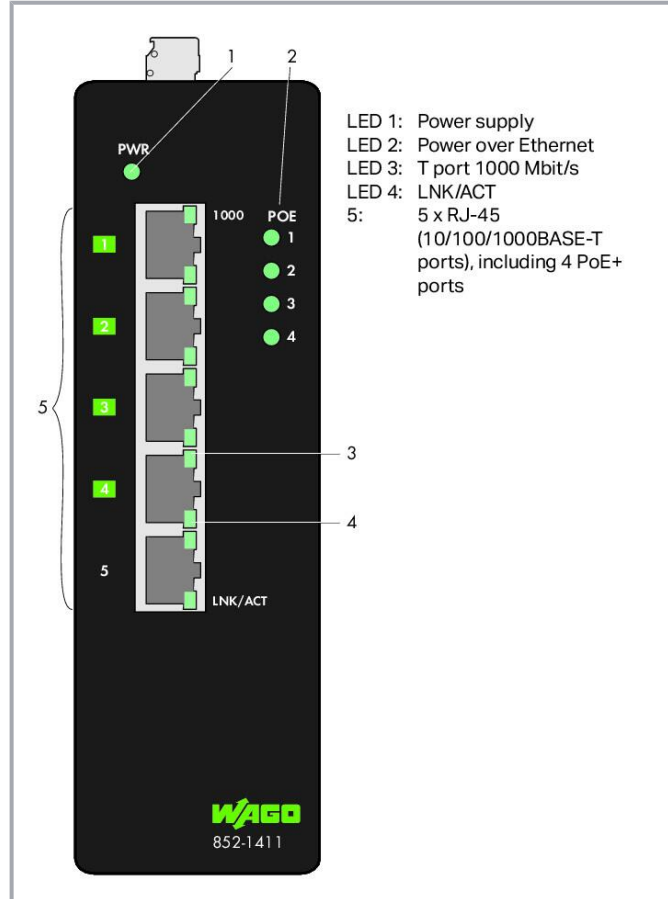

### Item description

This unmanaged industrial ETHERNET switch (852-1411) has five Gigabit ETHERNET ports, four of which support Power over Ethernet (PoE+) at 30 W. The four PoE+ ports (IEEE 802.3at) can be used simultaneously to power PoE end devices (powered devices). The integrated voltage transformer enables operation with 24 VDC, which is the standard supply voltage in control cabinets.

Its slim design paired with a DIN-rail adapter simplifies installation in the control cabinet and provides high vibration and shock resistance.

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG

Hansastr. 27

32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169

Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?

We are always happy to take your call at +49 (571) 887-44222.



Additionally, automatic transmission rate detection (auto-negotiation) and automatic identification of the transmit and receive lines (Auto MDI-X) allow simple plug-and-play operation, saving time and money during commissioning.

#### Features:

- 5 ETHERNET ports 10/100/1000 Mbit/s Autonegotiation
- 4 PoE+ ports (IEEE 802.3at)
- Front-panel diagnostic LEDs
- Supports Auto-MDI/MDI-X functions
- Full/half-duplex transfer modes for each port
- Store-and-forward switching method
- Integrated address look-up table, supports up to 8000 absolute MAC addresses
- Overvoltage protection
- Data flow control, per IEEE 802.3x Flow Control, in full-duplex mode
- Prioritization of ETHERNET data packets (PROFINET protocol, EtherType=0x8892) per IEEE802.1p
- DIN-35 rail mounting

## Data

### Technical data

Number of 1 Gbit/s ports	5
Communication standards	IEEE 802.3 10BASE-T IEEE 802.3u 100BASE-TX IEEE 802.3ab 1000BASE-T IEEE 802.3x Flow Control IEEE 802.3af Power over Ethernet (PoE) IEEE 802.3at High Power over Ethernet (PoE+) IEEE 802.1p Prioritization
MAC table (size)	8000 addresses
Jumbo frame size	10000. Byte
Supply voltage	24 ... 57 VDC
Power consumption (max.)	13 W
Power consumption (note)	133 W with 4 PoE
Baud rate	Copper cable: 10/1000 Mbit/s
Transmission medium (communication/fieldbus)	Copper cable: Cat. 5e or higher, 100 m maximum cable length
Topology	Star
Indicators	Device: LED (PWR) green: Power supply; LED (PoE 1 ... 4) green: Power over Ethernet; per port: LED (1000, LNK/ACT) green: Status 1000 Mbit/s, LNK/ACT ports 1 ... 5

Subject to changes. Please also observe the further product documentation!



## Connection data

Connection technology: communication/fieldbus	Copper cable: 5 x RJ-45
Connection technology: supply	1 x Built-in male connector: 231-432/001-000; included female connector (MCS Connectors): 2231-102/026-000

## Physical data

Width	50 mm / 1.969 inches 50 mm / 1.969 inch
Height	160 mm / 6.299 inches 160 mm / 6.299 inch
Depth	120 mm / 4.724 inches 120 mm / 4.724 inch

## Mechanical Data

Weight	520 g
Color	black
Housing material	Sheet steel
Conformity marking	CE

## Environmental requirements

Ambient temperature (operation)	-40 ... +70 °C (per CE; -10 ... +60 °C per UL 61010)
Surrounding air temperature (storage)	-40 ... +80 °C
Protection type	IP30
Relative humidity (without condensation)	95 %
Mounting type	DIN-35 rail
Vibration resistance	per IEC 60068-2-6
Shock resistance	per IEC 60068-2-27
EMC immunity to interference	per EN 61000-6-2
EMC emission of interference	per EN 61000-6-4
Fire load	0.12 MJ 0.087 MJ

## Commercial data

eCl@ss 10.0	19-17-01-30
eCl@ss 9.0	19-17-01-06
ETIM 8.0	EC000734

Subject to changes. Please also observe the further product documentation!




WAGO GmbH & Co. KG  
 Hansastr. 27  
 32423 Minden  
 Phone: +49571 887-0 | Fax: +49571 887-169  
 Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?  
 We are always happy to take your call at +49 (571) 887-44222.

ETIM 7.0	EC000734
PU (SPU)	1 pcs 1 Stück
Packaging type	box
Country of origin	TW
GTIN	4055143727167
Customs tariff number	85176200000





## Approvals / Certificates

### General approvals

Logo	Approval	Additional Approval Text	Certificate name
	<b>EAC</b> Brjansker Zertifizierungsstelle	TP TC 020/2011	EAC RU C-DE.AM02.B.00087/19
	<b>KC</b> National Radio Research Agency	Article 58-2, Clause 3	MSIP-REM-W43-ISW852
	<b>UL</b> Underwriters Laboratories Inc. (ORDINARY LOCATIONS)	UL 61010-2-201	E175199

## Optional accessories


### Power supplies

Power supply unit		
	<b>Item no.: 787-1722</b> Switched-mode power supply; Eco; 1-phase; 24 VDC output voltage; 5 A output current; DC-OK LED	<a href="http://www.wago.com/787-1722">www.wago.com/787-1722</a>
	<b>Item no.: 787-1633</b> Switched-mode power supply; Classic; 1-phase; 48 VDC output voltage; 5 A output current; TopBoost; DC OK contact	<a href="http://www.wago.com/787-1633">www.wago.com/787-1633</a>
	<b>Item no.: 787-1635</b> Switched-mode power supply; Classic; 1-phase; 48 VDC output voltage; 10 A output current; TopBoost; DC OK contact	<a href="http://www.wago.com/787-1635">www.wago.com/787-1635</a>
	<b>Item no.: 787-1226</b> Switched-mode power supply; Compact; 1-phase; 24 VDC output voltage; 6 A output current; DC-OK LED	<a href="http://www.wago.com/787-1226">www.wago.com/787-1226</a>

### Interface module

Interface module
------------------













Subject to changes. Please also observe the further product documentation!

 **Item no.: 289-195**  
Interface module; RJ-45; IDC technology; Cat. 6; in mounting carrier; with shield connection

[www.wago.com/289-195](http://www.wago.com/289-195)

**Cables and pluggable connectors**

Connector plug

	<b>Item no.: 750-976</b> PROFINET RJ-45 connector, IP20; ETHERNET 10/100 Mbit/s; for field assembly	<a href="http://www.wago.com/750-976">www.wago.com/750-976</a>
	<b>Item no.: 750-978/000-012</b> Connector ETHERNET; RJ-45; Cat. 6A; straight; Code T568B; AWG 22; Strain relief	<a href="http://www.wago.com/750-978/000-012">www.wago.com/750-978/000-012</a>
	<b>Item no.: 750-979/000-012</b> Connector ETHERNET; RJ-45; Cat. 6A; angled; Code T568B; AWG 22; Strain relief	<a href="http://www.wago.com/750-979/000-012">www.wago.com/750-979/000-012</a>
	<b>Item no.: 750-978/000-021</b> Connector ETHERNET; RJ-45; Cat. 6A; straight; Code T568A; AWG 24; Strain relief	<a href="http://www.wago.com/750-978/000-021">www.wago.com/750-978/000-021</a>
	<b>Item no.: 750-979/000-022</b> Connector ETHERNET; RJ-45; Cat. 6A; angled; Code T568B; AWG 24; Strain relief	<a href="http://www.wago.com/750-979/000-022">www.wago.com/750-979/000-022</a>
	<b>Item no.: 750-978/000-022</b> Connector ETHERNET; RJ-45; Cat. 6A; straight; Code T568B; AWG 24; Strain relief	<a href="http://www.wago.com/750-978/000-022">www.wago.com/750-978/000-022</a>
	<b>Item no.: 750-979/000-011</b> Connector ETHERNET; RJ-45; Cat. 6A; angled; Code T568A; AWG 22; Strain relief	<a href="http://www.wago.com/750-979/000-011">www.wago.com/750-979/000-011</a>
	<b>Item no.: 750-979/000-013</b> Connector PROFINET; RJ-45; Cat. 6A; angled; AWG 22; Strain relief	<a href="http://www.wago.com/750-979/000-013">www.wago.com/750-979/000-013</a>
	<b>Item no.: 750-979/000-021</b> Connector ETHERNET; RJ-45; Cat. 6A; angled; Code T568A; AWG 24; Strain relief	<a href="http://www.wago.com/750-979/000-021">www.wago.com/750-979/000-021</a>
	<b>Item no.: 750-977/000-011</b> Connector ETHERNET; RJ-45; Cat. 6A; straight; Code T568A; AWG 22	<a href="http://www.wago.com/750-977/000-011">www.wago.com/750-977/000-011</a>
	<b>Item no.: 750-978/000-013</b> Connector PROFINET; RJ-45; Cat. 6A; straight; AWG 22; Strain relief	<a href="http://www.wago.com/750-978/000-013">www.wago.com/750-978/000-013</a>
	<b>Item no.: 750-978/000-011</b> Connector ETHERNET; RJ-45; Cat. 6A; straight; Code T568A; AWG 22; Strain relief	<a href="http://www.wago.com/750-978/000-011">www.wago.com/750-978/000-011</a>

Subject to changes. Please also observe the further product documentation!



**Item no.:** 750-977/000-022  
Connector ETHERNET; RJ-45; Cat. 6A; straight; Code T568B; AWG 24

[www.wago.com/750-977/000-022](http://www.wago.com/750-977/000-022)



**Item no.:** 750-977/000-012  
Connector ETHERNET; RJ-45; Cat. 6A; straight; Code T568B; AWG 22

[www.wago.com/750-977/000-012](http://www.wago.com/750-977/000-012)



**Item no.:** 750-977/000-013  
Connector PROFINET; RJ-45; Cat. 6A; straight; AWG 22

[www.wago.com/750-977/000-013](http://www.wago.com/750-977/000-013)



**Item no.:** 750-977/000-021  
Connector ETHERNET; RJ-45; Cat. 6A; straight; Code T568A; AWG 24

[www.wago.com/750-977/000-021](http://www.wago.com/750-977/000-021)

## Downloads Documentation

### Manual

Product Manual Industrial ECO Switch; 5Port Gb; EXT; 4PoE	V 1.2.0	pdf	Download
Industrial Eco Switch, 5 Ports 1000BASE-T, extended Temperature Range, 4 * Power over Ethernet	Dec 17, 2019	1.2 MB	

### Bid Text

852-1411 X81 - Datei	Feb 19, 2019	xml 6.2 kB	Download
852-1411 doc - Datei	Jul 23, 2018	doc 30.2 kB	Download
ausschreiben.de 852-1411		URL	Download

### Instruction Leaflet

Gebrauchs- und Montageanleitung 852-1411 Industrial-ETHERNET-Switch	V 1.0.0	pdf 738.6 kB	Download
--	---------	-----------------	----------

### Additional Information

Disposal and Recycling Electrical and electronic equipment, Batteries, Packaging	V 1.1.0 Aug 18, 2022	pdf 2.2 MB	Download
---	-------------------------	---------------	----------

### System Description

Industrial Switches – General Product Information

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG  
Hansastr. 27  
32423 Minden  
Phone: +49571 887-0 | Fax: +49571 887-169  
Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?  
We are always happy to take your call at +49 (571) 887-44222.



pdf  
1.9 MB

Download

---

## CAD/CAE-Data

### CAE data

ZUKEN Portal 852-1411

URL

Download

---

### CAD data

2D/3D Models 852-1411

URL

Download

---

## Environmental Product Compliance

### Compliance Search

Environmental Product Compliance 852-1411

Industrial-ECO-Switch; 5-port 1000Base-T; Extended temperature range; 4 \* Power over Ethernet

URL

Download

---

## Installation Notes

Subject to changes. Please also observe the further product documentation!