

Polycarbonate Enclosure Grey 200 x 120 x 75mm



DESCRIPTION

A light grey polycarbonate box with a tongue-and-groove sealing system and neoprene gasket.

DISTINCTIVE FEATURES

- Tough Polycarbonate Enclosures particularly suited to outdoor applications
- Finished in Light Grey RAL 7035 with a smooth finish
- Non-magnetic lid fixings Qty 4 ⊕M4x 20mm
- Brass inserts to allow repeated insertion cycles
- Mounting holes outside sealed area preventing ingress of dust and moisture
- Designed to meet the requirements of IP65 (minimum)
- Temperature range -40 to +120°C
- Flame resistance rating UL94-HB

APPLICATIONS

This polycarbonate project box is designed for applications that require more strength & durability than ABS. Polycarbonate is less adversely affected by UV than ABS (ABS is more prone to discolouration and embrittlement) and so is more suitable for outdoor applications.

Designed to meet IP65 to protest against dust ingress and water spray. Suitable for safety glasses, lighting equipment, medical devices, and also ideal for outdoor & portable applications.









IP65





GENERAL SPECIFICATION

| Series | Polycarbonate Project Boxes | |
|-------------------|---|--|
| Туре | General Purpose Enclosure | |
| Internal Features | Printed circuit board mounting bosses in base | |
| Weight | 406g | |



MATERIALS

| Material | Polycarbonate | |
|---------------|------------------|--|
| Finish | Smooth | |
| Colour | Grey RAL 7035 | |
| Screws | Qty 4 🖰 M4x 20mm | |
| Screw Inserts | Brass | |
| Gasket | EPDM | |



ENVIRONMENTAL/OPERATING SPECIFICATION


| Flame Resistance | UL94-HB |
|-----------------------|---|
| IP Rating | Designed to meet the requirements of IP65 (minimum) |
| Operating Temperature | -40°C to +120°C |



DIMENSIONS/DRAWINGS

| Units | mm - unless stated otherwise | |
|----------------|------------------------------|--|
| Dimensions | 200 x 120 x 75mm | |
| Wall Thickness | 4mm | |



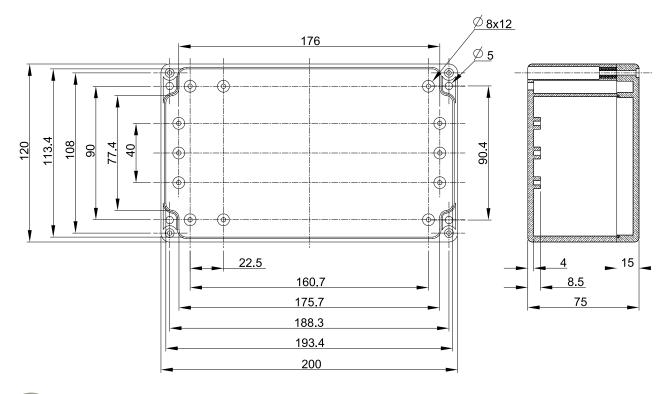



PART NUMBER TABLE

| Part Number | EAN | UNSPSC | Country of Origin |
|-------------|---------------|----------|-------------------|
| 52-4330 | 5053556004881 | 39121324 | Taiwan |



Important Notice: This data sheet and its contents (the "Information") belong to Rapid Electronics Limited or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but Rapid Electronics Limited assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where Rapid Electronics Limited were aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict Rapid Electronics Limited's liability for death or personal injury resulting from its negligence.