


Crocodile Leads - Pack of 20

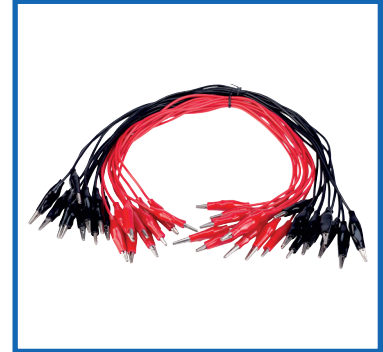

DESCRIPTION

Crocodile Test Leads with insulated crocodile clip connectors at each end.

DISTINCTIVE FEATURES

- Insulated crocodile clips
- Lead lengths of 380mm or 460mm
- Pack quantity of 20 (10 red & 10 black)

APPLICATIONS

Suitable for a wide range of applications, including Test, Measurement and Prototyping.

**380
mm**

**460
mm**

**0.5
mm²**

**20
AWG**





GENERAL SPECIFICATION

Series	Test leads
Type	Crocodile leads
Quantity	20 pieces (10 red & 10 black)
Wire size/type	0.5mm ²



ELECTRICAL SPECIFICATION

Rated Voltage	30VAC-60VDC
Rated Current	Max 10A
Contact Resistance	≤0.005Ω
Insulating Resistance	≥500MΩ



MATERIALS

Material (Contact)	Nickel plated steel
Material (Insulator)	PVC
Material (Spring)	Nickel plated steel
Material (Cable Insulation)	PVC
Insulator or Body Colour	Red or black
Cable Colour	Red or black




ENVIRONMENTAL/OPERATING SPECIFICATION

Flame Retardancy (cable & plugs)	U1581L VW-1
Operating Temperature (cable & plugs)	-10°C - 80°C
RoHS	Yes



DIMENSIONS/DRAWINGS

Units	mm - unless stated otherwise
Length (cable)	See table
Length (overall)	See table
Length (crocodile clip)	36.5mm
Crocodile clip jaw width	6mm
Cable gauge	20 AWG
Cable outside diameter	2.3mm
Weight	See table

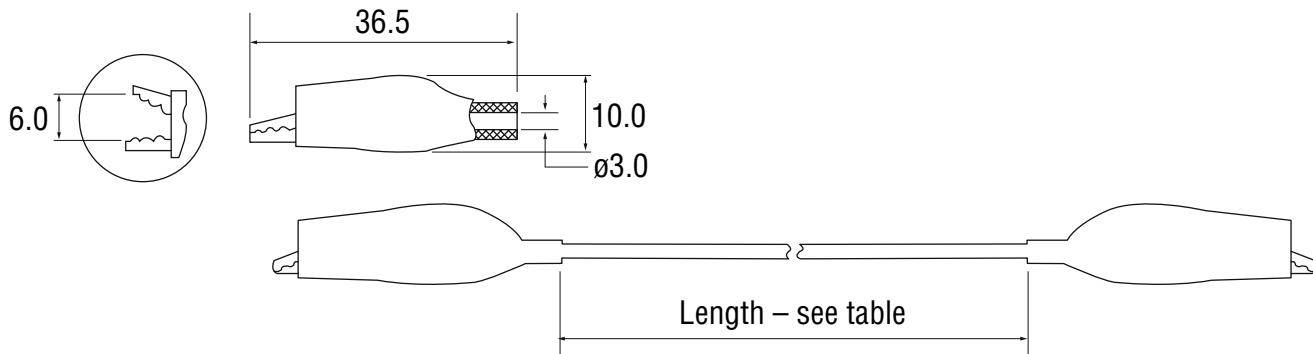

OPTIONS (MOQ may apply)

Yellow, blue & green colours	Available in lead lengths of 380mm & 460mm
------------------------------	--



PART NUMBER TABLE

Part number	Length (cable)	Length (overall)	Weight	EAN	UNSPSC	Country of Origin
52-4603	460	533	155g	5053556006151	39121421	China
52-4604	380	453	141g	5053556006168	39121421	China

R-TECH

Tried & trusted technology

Important Notice: This data sheet and its contents (the "Information") belong to Rapid Electronics Limited or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but Rapid Electronics Limited assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where Rapid Electronics Limited were aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict Rapid Electronics Limited's liability for death or personal injury resulting from its negligence.