

Crocodile Leads - Pack of 10



DESCRIPTION

Crocodile Test Leads with insulated crocodile clip connectors at each end.

DISTINCTIVE FEATURES

- · Insulated crocodile clips
- · Lead lengths of 380mm or 460mm
- Pack quantity of 10 (2 each of red, black, blue, green & yellow)

APPLICATIONS

Suitable for a wide range of applications, including Test, Measurement and Prototyping.













GENERAL SPECIFICATION

Series	Test leads			
Туре	Crocodile leads			
Quantity	10 pieces (2 red, black, blue, green & yellow)			
Wire size/type	0.5mm²			



ELECTRICAL SPECIFICATION

Rated Voltage	30VAC/60VDC		
Rated Current	Max 10A		
Contact resistance	≤0.005Ω		
Insulating resistance	≥500MΩ		



MATERIALS

Material (Contact)	Nickel plated steel			
Material (Insulator)	PVC			
Material (Spring)	Nickel plated steel			
Material (Cable Insulation)	PVC			
Insulator or Body Colour	Red, black, blue, green or yellow			
Cable Colour	Red, black, blue, green or yellow			



ENVIRONMENTAL/OPERATING SPECIFICATION


Flame Retardancy (cable & plugs)	U1581L VW-1
Operating Temperature (cable & plugs)	−10°C - 80°C
RoHS	Yes



DIMENSIONS/DRAWINGS

Units	mm - unless stated otherwise		
Length (cable)	See table		
Length (overall)	See table		
Length (crocodile clip)	36.5mm		
Crocodile clip jaw width	6mm		
Cable gauge	20 AWG		
Cable outside diameter	2.3mm		
Weight	See table		



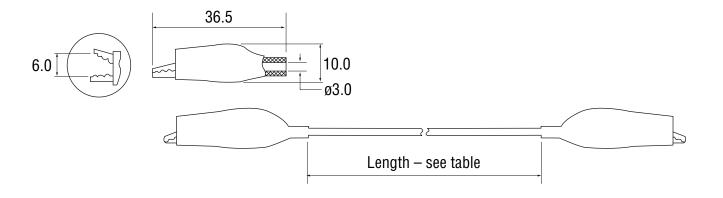

PART NUMBER TABLE

Part number	Length (cable)	Length (overall)	Weight	EAN	UNSPSC	Country of Origin
52-4613	460	533	79g	5053556006250	39121421	China
52-4614	380	453	72g	5053556006267	39121421	China



Important Notice: This data sheet and its contents (the "Information") belong to Rapid Electronics Limited or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but Rapid Electronics Limited assumes no responsibility for its accuracy or completeness, any error in or onission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where Rapid Electronics Limited were aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict Rapid Electronics Limited's liability for death or personal injury resulting from its negligence.

Datasheet 586603_v1.0 (06/22)Page 3 of 3