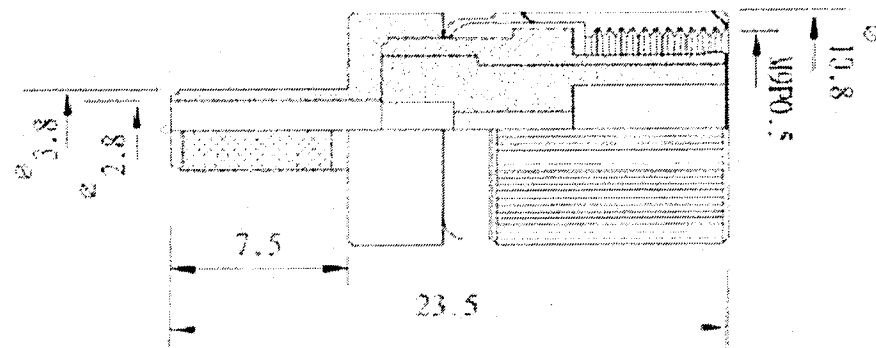
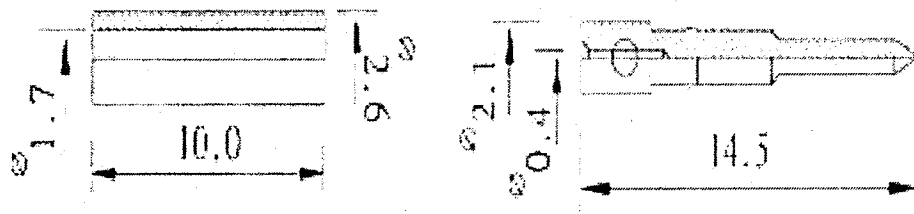


IMPEDANCE	75Ω
FREQUENCY RANGE	0 to 4.0 GHz
VSWR (STRAIGHT CONNECTORS)	• • • • •
INSULATION RESISTANCE	• • 10 ⁴ MΩ
CENTER CONTACT RESISTANCE	• • • • • Ω
OUTER CONTACT RESISTANCE	• • • • • Ω • • •
TEST VOLTAGE	1000V rms
WPRLOMG VOLTAGE	330V rms
RF-LEAKAGE (dB)	• • 90 dB

NO	DESCRIPTION	MATERIAL	FINISH
1	BODY	BRASS	NICKEL / GOLD
2	CONTACT	BRASS	GOLD
3	INSULATOR	TEFLON	WHITE
4	FERRULE	BRASS	NICKEL
5	SUPPORT	DELRIN	WHITE

DIMENSIONS ARE IN MILLIMETERS		530210		RoHS COMPLIANT	
UNLESS OTHERWISE SPECIFIED TOLERANCES 0.5-6=±0.2 6-30=±0.4 30-120=±0.6 120-315=±1.0 315-1000=±1.6 1000-2000=±2.4	PART NO.	0415100		TITLE: 1.6 / 5.6 CRIMP PLUG FOR RG179U CABLE	
	DATE	May / 03 / 2007			
	NOT SCALED DRAWING				DRAWING NO.

0.5-6=±0.2
6-30=±0.4
30-120=±0.6
120-315=±1.0
315-1000=±1.6
1000-2000=±2.4