

SIEMENS



Fuse Systems

SENTRON

Config-
ration
Manual

Edition
2014

Answers for infrastructure and cities.

Fuse Systems



2	Introduction
8	NEOZED fuse systems NEOZED fuse links, 5SE2
15	DIAZED fuse systems
24	Cylindrical fuse systems Cylindrical fuse links and cylindrical fuse holders
32	Compact cylindrical fuse holders in size 10 x 38 mm and Class CC
36	Class CC fuse systems
40	Busbar systems
45	3NA, 3ND LV HRC fuse systems LV HRC fuse links
67	LV HRC signal detectors
68	LV HRC fuse bases and accessories
79	SITOR semiconductor fuses SITOR, LV HRC design
129	SITOR, cylindrical fuse design
140	NEOZED, DIAZED, SILIZED design
145	Configuration
157	Photovoltaic fuses Introduction
158	PV cylindrical fuses
162	PV cumulative fuses
	For further technical product information:
	Service & Support Portal: www.siemens.com/lowvoltage/product-support
	→ Product List: Technical specifications
	→ Entry List: Certificates / Characteristics / Download / FAQ / Manuals / Updates

Fuse Systems

Introduction

Overview

Devices	Page	Application	Standards	Used in
				Non-residential buildings Residential buildings Industry
NEOZED fuse systems 	8	MINIZED switch disconnectors, bases, fuse links from 2 A to 63 A of operational class gG and accessories. Everything you need for a complete system.	Fuse system: IEC 60269-3; DIN VDE 0636-3; Safety switching devices IEC/EN 60947-3 DIN VDE 0638; EN 60947-3 (VDE 0660-107)	✓ ✓ ✓
DIAZED fuse systems 	15	Fuse links from 2 A to 100 A in various operational classes, base versions with classic screw base connections. A widely used fuse system.	IEC 60269-3; DIN VDE 0635; DIN VDE 0636-3; CEE 16	✓ ✓ ✓
Cylindrical fuse systems				
Cylindrical fuse links and cylindrical fuse holders 	24	Line protection or protection of switching devices. The fuse holders with touch protection ensure the safe "no-voltage" replacement of fuse links. Auxiliary switches can be retrofitted.	IEC 60269-1, -2, -3; NF C 60-200; NF C 63-210, -211; NBN C 63269-2, CEI 32-4, -12	✓ ✓ ✓
Compact cylindrical fuse holders in size 10 x 38 mm and Class CC 	32	For installing fused loaded motor starter combinations.	IEC 60269-1,-2; IEC 60947-4; UL 512; CSA	✓ -- ✓
Class CC fuse systems 	36	These comply with American standard and have UL and CSA approval, for customers exporting OEM products and mechanical engineers. Modern design with touch protection according to BGV A3 for use in "branch circuit protection".	Fuse holders: UL 512; CSA 22.2 Fuse links: UL 248-4; CSA 22.2	✓ ✓ ✓
Busbar systems 	40	Busbars for NEOZED fuse bases, NEOZED fuse disconnectors, MINIZED switch disconnectors, DIAZED fuse systems and for the cylindrical fuse systems.	EN 60439-1 (VDE 0660-500)	✓ ✓ ✓

Introduction

Devices	Page	Application	Standards	Used in
				Non-residential buildings Residential buildings Industry
3NA, 3ND LV HRC fuse systems				
	45	Fuse links from 2 A to 1250 A for selective line protection and system protection in non-residential buildings, industry and power utilities.	IEC 60269-1, -2; EN 60269-1; DIN VDE 0636-2	✓ ✓ ✓
	67	Signal detectors for when a fuse is tripped on all LV HRC fuse links with combination or front indicators with non-insulated grip lugs. Plus the comprehensive accessory range required for LV HRC fuse systems.	--	✓ ✓ ✓
	68	Fuse bases for screw or snap-on mounting onto standard mounting rails, available as 1-pole or 3-pole version	IEC 60269-1, -2; EN 60269-1; DIN VDE 0636-2	✓ ✓ ✓
SITOR semiconductor fuses				
	79	Fuse links in LV HRC design and a huge variety of models support a wide range of applications from 500 V to 1500 V and 150 A to 1600 A. Fuses with slotted blade contacts, bolt-on links or female thread and special designs.	--	-- -- ✓
	129	Fuse links, fuse holders – usable as fuse switch disconnectors and fuse bases up to 600/690 V AC and 400/700 V DC from 1 A to 100 A in the sizes 10 × 38 mm, 14 × 51 mm and 22 × 58 mm.	--	-- -- ✓
	140	NEOZED fuse links for 400 V AC and 250 V DC and DIAZED for 500 V AC and 500 V DC.	--	-- -- ✓
Photovoltaic fuses				
	157	Fuses with a rated voltage of 1000 V DC and operational class gPV for the protection of photovoltaic modules, their connecting cables and other components.	IEC 60269-6	✓ ✓ ✓
	162	Fuses with a rated voltage of 1000 V and 1500 V DC, a rated current of 63 A to 630 A and operational class gPV for the protection of connecting cables and other components.	IEC 60269-6	✓ ✓ ✓

Fuse Systems

Introduction

Overview

Rated voltage U_n

The rated voltage is the designated voltage of the fuse and is used to determine its test conditions and operational voltage limits.

For LV HRC and SITOR fuse links, the rated voltage is always the rms value of an AC voltage.

In the case of NEOZED and DIAZED fuse links, a distinction is made between AC and DC voltage values.

Rated current I_n

The rated current of a fuse link is the designated current of the fuse link and is the current up to which it can be continuously loaded under prescribed conditions without adverse affects.

Rated frequency

The rated frequency is the frequency for which the fuse link is rated with regard to power dissipation, current, voltage, characteristic curve and breaking capacity.

Selectivity

Several fuses are usually connected in series in a system. Selectivity ensures that only the faulty electric circuit and not all operating processes are interrupted in a system in serious cases.

Siemens fuses of operational class gG, at an operational voltage of up to 400 V AC and a ratio of 1:1.25, are interselective, i.e. from rated current level to rated current level. This is achieved by means of the considerably smaller band of scatter of $\pm 5\%$ of the time/current characteristics, which far exceeds the demand for a ratio of 1:1.6 specified in the standard.

It is therefore possible to use smaller conductor cross-sections due to the lower rated currents.


Breaking capacity

The rated breaking capacity is the highest prospective short-circuit current I_p that the fuse link can blow under prescribed conditions.

A key feature of these fuses is their high rated breaking capacity with the smallest footprint. The basic demands and circuit data for tests – voltage, power factor, actuating angle etc. – are specified in both national (DIN VDE 0636) and international (IEC 60269) regulations.

However, for a constant fail-safe breaking capacity, from the smallest non-permissible overload current through to the highest short-circuit current, a number of quality characteristics need to be taken into account when designing and manufacturing fuse links. These include the design of the fuse element with regard to dimensions and punch dimension and its position in the fuse body, as well as its compressive strength and the thermal resistance of the body. The chemical purity, particle size and the density of the quartz sand also play a key role.

The rated breaking capacity for AC voltage for NEOZED fuses - and the majority of DIAZED fuses - is 50 kA, and in the case of our LV HRC fuses (NH type), it is even 120 kA. The various type ranges of SITOR semiconductor fuses have different switching capacities ranging from 50 to 100 kA.

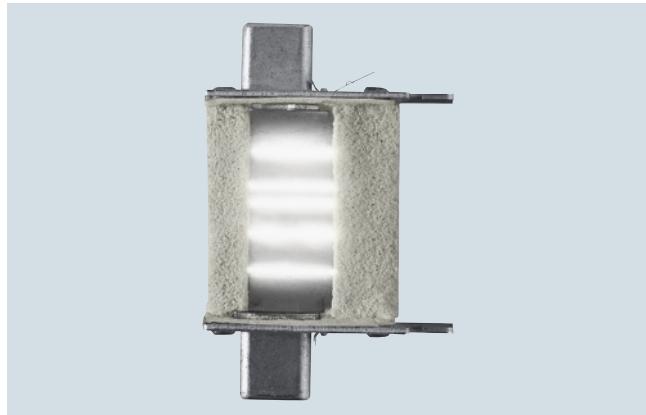

Faster arcing and precise arc quenching are the requirements for a reliable breaking capacity.

Operational classes

Fuses are categorized according to function and operational classes. The first letter defines the function class and the second the object to be protected:

1st letter

a = Partial range protection
(accompanied fuses):

Fuse links that carry currents at least up to their specified rated current and can switch currents above a specific multiple of their rated current up to their rated breaking current.

g = Full range protection
(general purpose fuses):

Fuse links that can continuously carry currents up to at least their specified rated current and can switch currents from the smallest melting current through to the breaking current. Overload and short-circuit protection.

2nd letter

G = Cable and line protection (general applications)

M = Switching device protection in motor circuits (for protection of motor circuits)

R, S = Semiconductor protection/thyristor protection (for protection of rectifiers)

L = Cable and line protection (in acc. with the old, no longer valid DIN VDE)

B = Mine equipment protection

Tr = Transformer protection

The designations "slow" and "quick" still apply to DIAZED fuses. These are defined in IEC/CEE/DIN VDE.

In the case of "quick" characteristics, the fuse blows in the breaking range faster than those of operational class gG.

In the case of DIAZED fuse links for DC railway network protection, the "slow" characteristic is particularly suitable for switching off direct currents with greater inductance. Both characteristics are also suitable for the protection of cables and lines.

Full range fuses (gG, gR, quick, slow) reliably break the current in the event of non-permissible overload and short-circuit currents.

Partial range fuses (aM, aR) exclusively serve short-circuit protection.

Introduction


The following operational classes are included in the product range:

- gG (DIN VDE/IEC) = Full range cable and line protection
- aM (DIN VFE/IEC) = Partial ranges switching device protection
- aR (DIN VDE/IEC) = Partial range semiconductor protection
- gR (DIN VDE/IEC) = Full range semiconductor protection
- gS (DIN VDE/IEC) = Full range semiconductor protection and cable and line protection
- quick (DIN VDE/IEC/CEE) = Full range cable and line protection
- slow (DIN VDE) = Full range cable and line protection

Characteristic curves (time/current characteristic curves)

The time/current characteristic curve specifies the virtual time (e.g. the melting time) as a function of the prospective current under specific operating conditions.

Melting times of fuse links are presented in the time/current diagrams with logarithmic subdivision as a function of their currents. The melting time characteristic curve extends from the lowest melting current, which still just causes the melting conductor to melt asymptotically to the I^2t line of equal Joulean heat values in the range of higher short-circuit currents, which specifies the constant melting heat value I^2t . For the sake of simplicity, the time/current characteristics diagrams omit the I^2t lines (c).

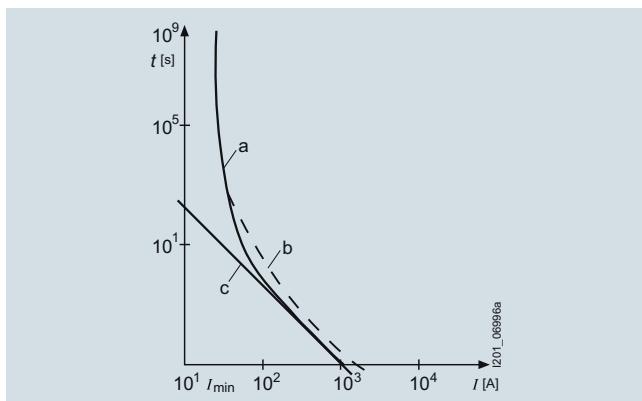

General representation of the time/current characteristic curve of a fuse link of operational class gG/gG

- I_{min} : Smallest melting current
- a: Melting time/current characteristic
- b: Breaking time characteristic curve
- c: I^2t line

The curve of the characteristic depends on the outward heat transfer from the fuse element. DIN VDE 0636 specifies tolerance-dependent time/current ranges within which the characteristic curves of the fuse must lie. Deviations of $\pm 10\%$ are permissible in the direction of the current axis. With Siemens LV HRC fuse links of operational class gG, the deviations work out at less than $\pm 5\%$, a mark of our outstanding production accuracy. For currents up to approx. $20 I_n$, the melting time/current characteristic curves are the same as the breaking time characteristic curves. In the case of higher short-circuit currents, the two characteristic curves move apart, influenced by the respective arc quenching time.

The difference between both lines (= arc quenching time) also depends on the power factor, the operational voltage and the breaking current.

The Siemens characteristic curves show the mean virtual melting time characteristic curves recorded at an ambient temperature of $(20 \pm 5)^\circ\text{C}$. They do not apply to preloaded fuse links.

Virtual time t_v

The virtual time is the time span calculated when a I^2t value is divided by the square of the prospective current:

$$t_v = \frac{\int i^2 dt}{I_p^2}$$

The time/current characteristic curve specifies the prospective current I_p and the virtual melting time t_{vs} .

Prospective short-circuit current I_p


The prospective short-circuit current is the rms value of the line-frequency AC component, or the value of direct current to be expected in the event of a short-circuit occurring downstream of the fuse, were the fuse to be replaced by a component of negligible impedance.

Let-through current characteristic curves

The let-through current characteristic curve specifies the value of the let-through current at 50 Hz as a function of the prospective current.

The let-through current I_c is the maximum instantaneous value of the current reached during a switching operation of a fuse.

The fuse element of the fuse links melts so quickly at very high currents that the surge short-circuit current I_p is prevented from occurring. The highest instantaneous value of the current reached during the breaking cycle is called the let-through current I_c . The current limits are specified in the current limiting diagrams, otherwise known as let-through current diagrams.

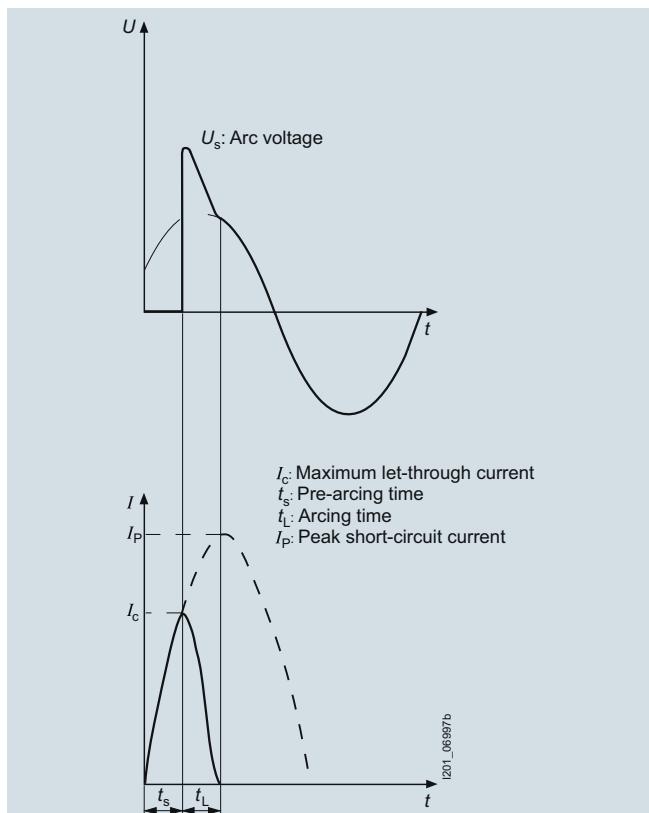

Oscillograph of a short-circuit current breaking operation through a fuse link


Fuse Systems

Introduction

Current limiting

As well as a fail-safe rated breaking capacity, the current-limiting effect of a fuse link is of key importance for the cost effectiveness of a system. In the event of short-circuit breaking by a fuse, the short-circuit current continues to flow through the network until the fuse link is switched off. However, the short-circuit current is only limited by the system impedance.

The simultaneous melting of all the bottlenecks of a fuse element produce a sequence of tiny partial arcs that ensure a fast breaking operation with strong current limitation. The current limitation is also strongly influenced by the production quality of the fuse - which in the case of Siemens fuses is extremely high. For example, an LV HRC fuse link, size 2 (224 A) limits a short-circuit current with a possible rms value of approximately 50 kA to a let-through current with a peak value of approx. 18 kA. This strong current limitation provides constant protection for the system against excessive loads.

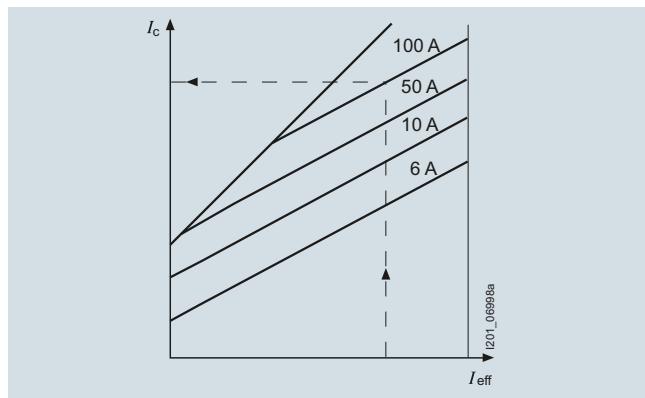

Current limitation diagram;
let-through current diagram of LV HRC fuse links, size 00,
operational class gL/gG,
rated currents, 6 A, 10 A, 50 A, 100 A

Legend

- t_{vs} = Virtual melting time
- I_c = Max. let-through current
- I_{rms} = rms value of the prospective short-circuit current
- I^2t_s = Melting I^2t value
- I^2t_a = Breaking I^2t value
- I_n = Rated current
- P_v = Rated power dissipation
- $\Delta\theta$ = Temperature rise
- k_A = Correction factor for I^2t value
- U_w = Recovery voltage
- \hat{U}_s = Peak arc voltage
- I_p = Peak short-circuit current
- ① = Peak short-circuit current with largest DC component
- ② = Peak short-circuit current without DC component
- U = Voltage
- i = Current
- t_s = Melting time
- t_q = Arc quenching time

Rated power dissipation

Rated power dissipation is the power loss during the load of a fuse link with its rated current under prescribed conditions.

The cost effectiveness of a fuse depends largely on the rated power dissipation (power loss). This should be as low as possible and have low self-heating. However, when assessing the power loss of a fuse, it must also be taken into account that there is a physical dependence between the rated breaking capacity and the rated power dissipation. On the one hand, fuse elements need to be very thick in order to achieve the lowest possible resistance value, on the other, a high rated breaking capacity requires the thinnest possible fuse elements in order to achieve reliable arc quenching.

Siemens fuses have the lowest possible rated power dissipation while also providing the highest possible load breaking reliability.

These values lie far below the limit values specified in the regulations. This means a low temperature rise, reliable breaking capacity and high cost effectiveness.

I^2t value

The I^2t value (joule integral) is the integral of the current squared over a specific time interval:

$$I^2t = \int_{t_0}^{t_1} i^2 dt$$

Specifies the I^2t values for the melting process (I^2t_s) and for the breaking cycle (I^2t_a , - sum of melting and quenching I^2t value). The melting I^2t value, also known as the total I^2t value or breaking I^2t value, is particularly important when dimensioning SITOR semiconductor fuses. This value depends on the voltage and is specified with the rated voltage.

Peak arc voltage \hat{U}_s

The peak arc voltage is the maximum value of the voltage that occurs at the connections of the fuse link during the arc quenching time.

Residual value factor RW

The residual value factor is a reduction factor for determining the permissible load period of the fuse link with currents that exceed the permissible load current I_n (see rated current I_n). This factor is applied when dimensioning SITOR semiconductor fuses.

Varying load factor WL

The varying load factor is a reduction factor for the rated current with varying load states. This factor is applied when dimensioning SITOR semiconductor fuses.


Recovery voltage U_w

The recovery voltage (rms value) is the voltage that occurs at the connections of a fuse link after the power is cut off.

More information

Load capability with increased ambient temperature

The time/current characteristic curve of the NEOZED/DIAZED and LV HRC fuse links is based on an ambient temperature of $20^{\circ}\text{C} \pm 5^{\circ}\text{C}$ in accordance with DIN VDE 0636. When used in higher ambient temperatures (see diagram) a reduced load-carrying capacity must be planned for. At an ambient temperature of 50°C , for example, an LV HRC fuse link should be dimensioned for only 90 % of the rated current. While the short-circuit behavior is not influenced by an increased ambient temperature, it is influenced by overload and operation at rated value.

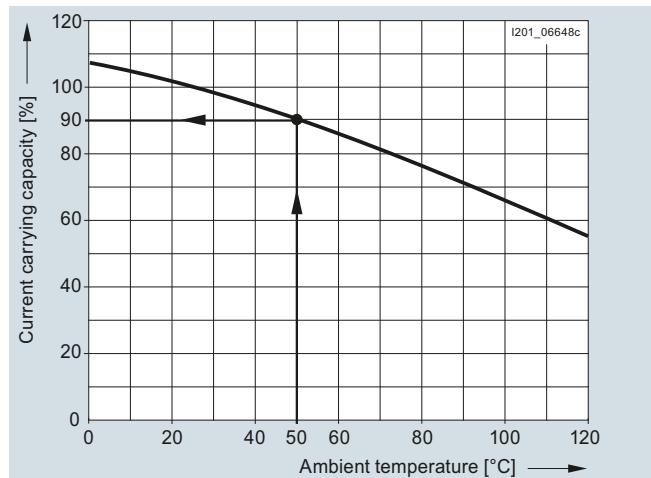

Influence of the ambient temperature on the load capability of NEOZED/DIAZED and LV HRC fuses of operational class gG with natural convection in the distribution board.

Assignment of cable and line protection

When gG fuses are assigned for cable and line protection against overloading, the following conditions must be met in order to comply with DIN VDE 0100 Part 430:

(1) $I_B = I_n = I_z$ (rated current rule)

(2) $I_2 = 1.45 \times I_z$ (tripping rule)

I_B : Operational current of electrical circuit

I_n : Rated current of selected protective device

I_z : Permissible current carrying capacity of the cable or line under specified operating conditions

I_2 : Tripping current of the protective device under specified operating conditions ("high test current").

These days, the factor 1.45 has become an internationally accepted compromise of the protection and utilization ratio of a line, taking into account the breaking response of the protective device (e.g. fuse).

In compliance with the supplementary requirements for DIN VDE 0636, Siemens fuse links of operational class gG comply with the following condition:

"Load breaking switching with $I_2=1.45 \times I_n$ during conventional test duration under special test conditions in accordance with the aforementioned supplementary requirements of DIN VDE 0636".

This therefore permits direct assignment.

Fuse Systems

NEOZED Fuse Systems

NEOZED fuse links, 5SE2

Overview

The NEOZED fuse system is primarily used in distribution technology and industrial switchgear assemblies. The system is easy to use and is also approved for domestic installation.

The MINIZED switch disconnectors are primarily used in switchgear assemblies and control engineering. They are approved for switching loads as well as for safe switching in the event of short circuits. The MINIZED D02 is also suitable for use upstream of the meter in household applications in compliance with the recommendations of the VDEW according to TAB 2007.

Due to its compact design, the MINIZED D01 fuse switch disconnector is primarily used in control engineering.

The NEOZED fuse bases are the most cost-effective solution for using NEOZED fuses. All NEOZED bases must be fed from the bottom to ensure that the threaded ring is insulated during removal of the fuse link. The terminals of the NEOZED bases are available in different versions and designs to support the various installation methods.



Fuse bases D01 with terminal version BB

- Incoming feeders, clamp-type terminal B
- Outgoing feeders, clamp-type terminal B



Fuse bases D02, with terminal version KS

- Incoming feeders, screw head contact K
- Outgoing feeders, saddle terminal S



Fuse bases D02, with terminal version SS

- Incoming feeders, saddle terminal S
- Outgoing feeders, saddle terminal S

Technical specifications

NEOZED fuse links 5SE2									
Standards	IEC 60269-3; DIN VDE 0636-3								
Operational class	gG								
Rated voltage U_n	V AC	400							
	V DC	250							
Rated current I_n	A	2 ... 100							
Rated breaking capacity	kA AC	50							
	kA DC	8							
Non-interchangeability	Using adapter sleeves								
Resistance to climate	°C	Up to 45 at 95 % rel. humidity							
Ambient temperature	°C	-5 ... +40, humidity 90 % at 20							
		MINIZED switch disconnectors	MINIZED fuse switch disconnectors	Fuse bases, made of ceramic			Comfort bases	Fuse bases	
		D02 5SG71	D01 5SG76	D01 5SG15 5SG55	D02 5SG16 5SG56	D03 5SG18	D01/02 5SG1.01 5SG5.01	5SG1.30 5SG1.31 5SG5.30	
Standards	DIN VDE 0638; EN 60947-3 (VDE 0660-107) IEC/EN 60947-3			IEC 60269-3; DIN VDE 0636-3					
Main switch characteristic, EN 60204-1	Yes	--	--						
Insulation characteristic , EN 60664-1	Yes	--	--						
Rated voltage U_n	V AC	230/400, 240/415		400					
• 1P	V DC	65	48	250					
• 2P in series	V DC	130	110	250					
Rated current I_n	A	63	16	16	63	100	16/63	16/63	
Rated insulation voltage	V AC	500	400	--					
Rated impulse withstand voltage	kV AC	6	2.5	--					
Overvoltage category	IV	IV	--						
Utilization category acc. to VDE 0638									
• AC-22	A	63	16	--					
Utilization category acc. to EN 60947-3									
• AC-22 A	A	--	16	--					
• AC-22 B	A	63	--	--					
• AC-23 B	A	35	--	--					
• DC-22 B	A	63	--	--					
Sealable when switched on	Yes	Yes, with sealable screw caps							
Mounting position	Any, but preferably vertical								
Reduction factor of I_n with 18 pole									
• Side-by-side mounting	0.9	--							
• On top of one another, with vertical standard mounting rail	0.87	--							
Degree of protection acc. to IEC 60529	IP20, with connected conductors								
Terminals with touch protection acc. to BGV A3	Yes		No				Yes		
Ambient temperature	°C	-5 ... +40, humidity 90 % at 20							
Terminal versions	--	--	B	K, S	K/S	--	--		
Conductor cross-sections									
• Solid and stranded	mm ²	1.5 ... 35	1.5 ... 16	1.5 ... 4	1.5 ... 25	10 ... 50	0.75 ... 35	1.5 ... 35	
• Flexible, with end sleeve	mm ²	1.5 ... 35	1.5	1.5	1.5	10	--	--	
• Finely stranded, with end sleeve	mm ²	--	--	0.75 ... 25	--	--	--	--	
Tightening torque	Nm	2.5 ... 3	2.5	1.2	2	3.5/2.5	3.5	3	


Fuse Systems

NEOZED Fuse Systems


NEOZED fuse links, 5SE2

Dimensional drawings


5SG71.3 MINIZED D02 switch disconnectors, with draw-out technology

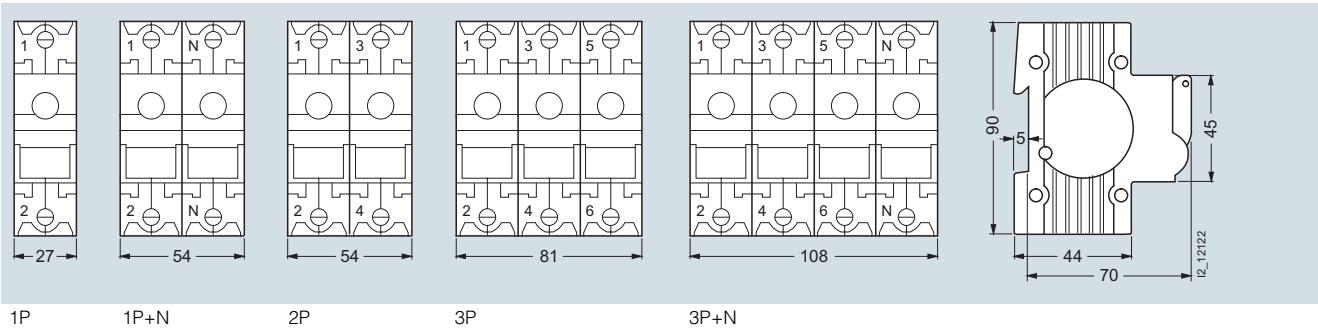

Locking cap for MINIZED D02 switch disconnectors

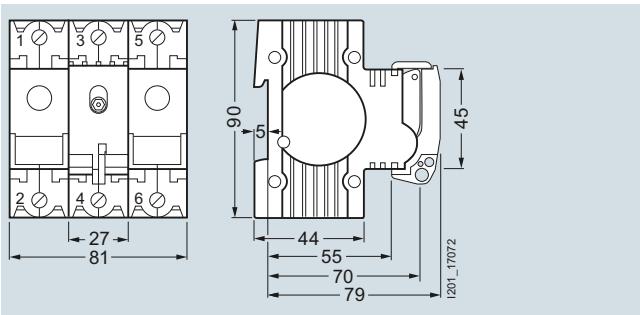


5SG76 MINIZED D01 fuse switch disconnectors, with draw-out technology

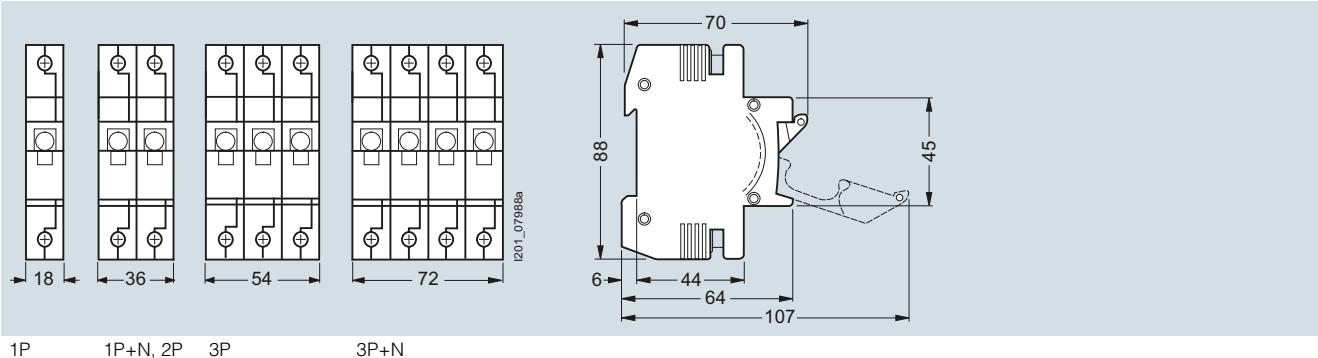


Fuse bases with touch protection BGV A3 (VBG4), molded plastic

Sizes D01/D02, with combined terminal, can be busbar mounted

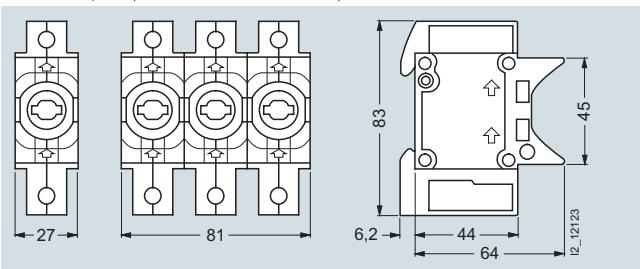

5SG1301,
5SG1701

With cover

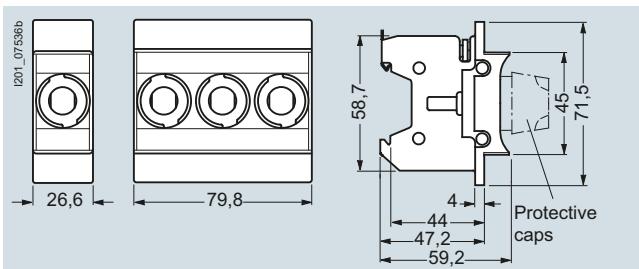


5SG1330,
5SG1331,
5SG1730,
5SG1731

NEOZED fuse links, 5SE2

NEOZED fuse bases made from ceramic

Sizes D01/D02/D03

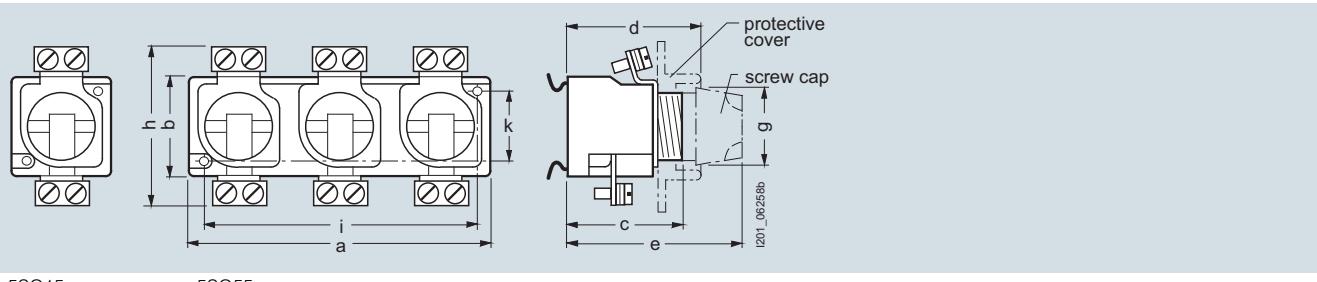

5SG15

5SG55


Type	Version	Size	Connection type	Dimensions								
				a	b	c	d	e	g not sealed/ sealed	h	i	k
Snap-on with cover												
5SG1553	1-pole	D01	BB	26.8	36	40	56	70	23/26.5	54	--	--
5SG1653		D02	SS	26.8	36	41	56	70	23/26.5	59	--	--
5SG1693		D02	KS	26.8	36	41	56	70	23/26.5	60	--	--
5SG5553	3-pole	D01	BB	80.8	36	40	56	70	23/26.5	54	--	--
5SG5653		D02	SS	80.8	36	41	56	70	23/26.5	59	--	--
5SG5693		D02	KS	80.8	36	41	56	70	23/26.5	60	--	--
Snap-on without cover												
5SG1595	1-pole	D01	BB	26.8	36	40	56	70	23/26.5	54	--	--
5SG1655		D02	SS	26.8	36	41	56	70	23/26.5	59	--	--
5SG1695		D02	KS	26.8	36	41	56	70	23/26.5	60	--	--
5SG1812		D03	KS	44.9	50	44	54.5	76	44	86	--	--
5SG5555	3-pole	D01	BB	80.8	36	40	56	70	23/26.5	54	--	--
5SG5655		D02	SS	80.8	36	41	56	70	23/26.5	59	--	--
5SG5695		D02	KS	80.8	36	41	56	70	23/26.5	60	--	--
Screw-on without cover												
5SG1590	1-pole	D01	BB	26.8	36	40	56	70	23/26.5	54	20	22
5SG1650		D02	SS	26.8	36	41	56	70	23/26.5	59	20	22
5SG1810		D03	KS	44.9	50	46	54.5	76	44	86	32	32
5SG5550	3-pole	D01	BB	80.8	36	40	56	70	23/26.5	54	74	22
5SG5650		D02	SS	80.8	36	41	56	70	23/26.5	59	74	22
5SG5690		D02	KS	80.8	36	41	56	70	23/26.5	60	74	22

Legend

Connection type:
 K = screw head contact
 B = clamp-type terminal
 S = saddle terminal


BB = clamp-type terminal at incoming feeder
 SS = saddle terminal at incoming feeder
 KS = screw head contact at incoming feeder
 K = screw head contact at outgoing feeder
 B = clamp-type terminal at outgoing feeder
 S = saddle terminal at outgoing feeder

NEOZED covers made of molded plastic

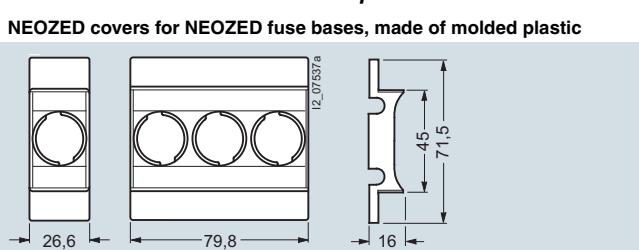


5SH5244 (A1) 5SH5245 (A2)


NEOZED covers for NEOZED fuse bases, made of ceramic

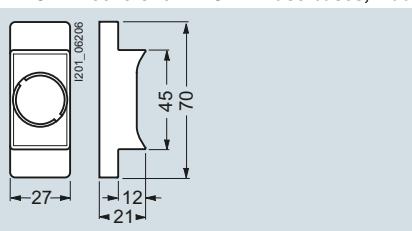

5SH5251 (A4) and 5SH5253 (A10)

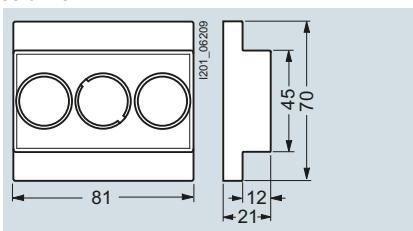

5SH5252 (A5) and 5SH5254 (A11)

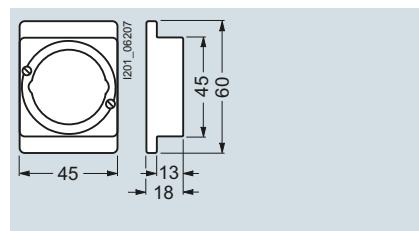


5SH5233 (A6)

Fuse Systems

NEOZED Fuse Systems


NEOZED fuse links, 5SE2

NEOZED screw caps

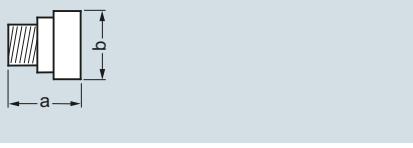5SH4	Type	Size	Sealable	For mounting depth	Dimensions
				a	b
	5SH4116	D01	--	70	27.5 24
	5SH4163	D02	--	70	27.5 24
	5SH4316	D01	✓	70	33 26.5
	5SH4363	D02	✓	76	33 26.5
	5SH4100	D03	--	70	37 44
	5SH4317	D01	--	70	29.5 25
	5SH4362	D02	--	70	30.5 25

NEOZED fuse links


Size/thread	Rated current in A	Dimension d ₂ min	Dimension d ₃	Dimension d ₄ max	Dimension h
D01/E14	2 ... 16	9.8	11	6	36
D02/E18	20 ... 63	13.8	15.3	10	36
D03/M30	80 ... 100	20.8	22.5	36	43

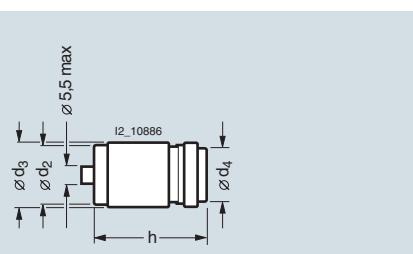

Circuit diagrams

Graphic symbols


5SG71.3 MINIZED D02 switch disconnectors, with draw-out technology





5SG7113



5SG7153



5SG7123

5SG7133
5SG7133-8BA25
5SG7133-8BA35
5SG7133-8BA50

5SG7163

1P

1P+N

2P

3P

3P+N

5SG76 MINIZED D01 fuse switch disconnectors, with draw-out technology




5SG7610




5SG7650



5SG7620



5SG7630



5SG7660

NEOZED fuse bases/fuses in general


5SG1
1P5SG5
3P

Characteristic curves

Series 5SE2

Sizes:
D01, D02, D03
Operational class:
gG
Rated voltage:
400 V AC/250 V DC
Rated current:
2 ... 100 A

Time/current characteristics diagram

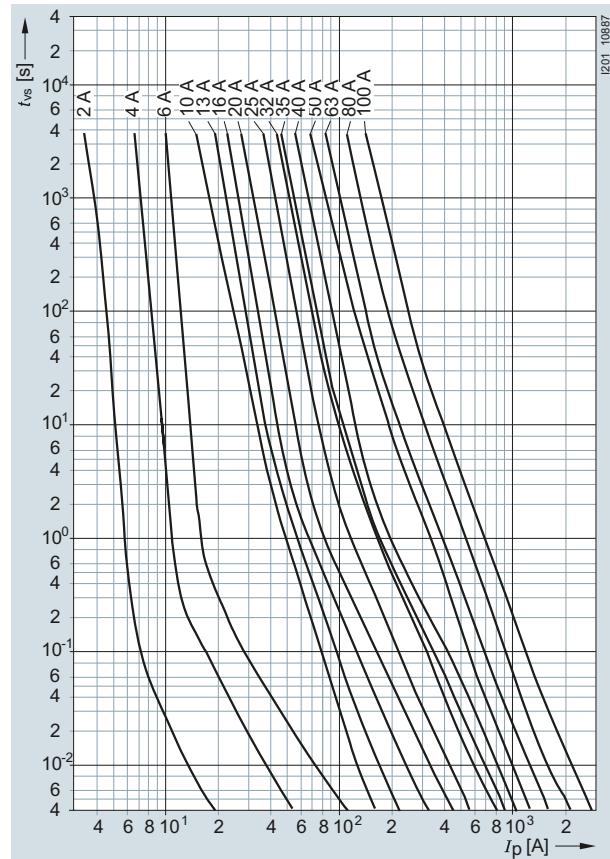

Melting I^2t values diagram


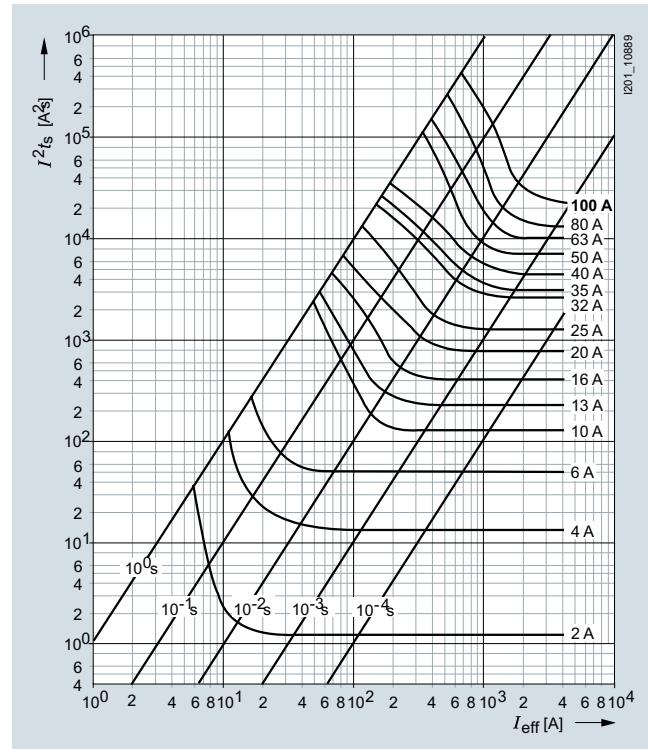


Table see page 14.

Current limitation diagram

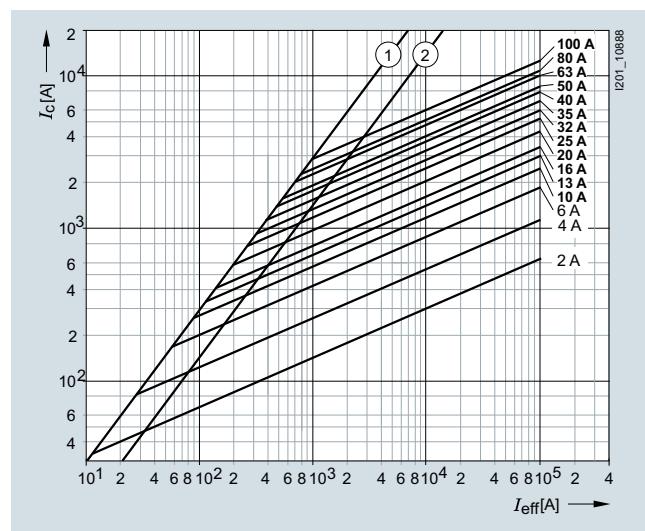

- ① Peak short-circuit current with largest DC component
- ② Peak short-circuit current without DC component

Fuse Systems

NEOZED Fuse Systems

NEOZED fuse links, 5SE2

Series 5SE2

Sizes: D01, D02, D03
 Operational class: gG
 Rated voltage: 400 V AC/250 V DC
 Rated current: 2 ... 100 A

Type	I_h A	P_v W	$\Delta\theta$ K	I^2t_s		I^2t_a 230 V AC ($t \leq 4$ ms) A ² s	400 V AC A ² s
				1 ms	4 ms		
5SE2302	2	1.6	19	1.2	1.4	2.9	3.9
5SE2304	4	1.3	14	12.5	13.6	22	30
5SE2306	6	1.7	19	46.7	48	58	75
5SE2310	10	1.3	16	120	136	220	280
5SE2013-2A	13	2.0	23	220	244	290	370
5SE2316	16	2.1	24	375	410	675	890
5SE2320	20	2.4	26	740	810	1250	1650
5SE2325	25	3.2	33	1210	1300	1900	2600
5SE2332	32	3.6	34	2560	2800	4300	5500
5SE2335	35	3.8	36	3060	3500	5100	6500
5SE2340	40	4.0	37	4320	4800	7900	9500
5SE2350	50	4.2	38	6750	7400	10500	13000
5SE2363	63	5.3	45	10000	10900	16000	20500
5SE2280	80	5.3	43	13000	15400	25000	34500
5SE2300	100	6.4	47	22100	30000	46000	60000

DIAZED fuse systems**Overview**

The DIAZED fuse system is one of the oldest fuse systems in the world. It was developed by Siemens as far back as 1906. It is still the standard fuse system in many countries to this day. It is particularly widely used in the harsh environments of industrial applications.


The series is available with rated voltages from 500 V to 750 V.

All DIAZED bases must be fed from the bottom to ensure an insulated threaded ring when the fuse link is being removed. Reliable contact of the fuse links is only ensured when used together with DIAZED screw adapters.

The terminals of the DIAZED bases are available in different versions and designs to support the various installation methods.

The high-performing EZR bus-mounting system for screw fixing is an outstanding feature. The busbars, which are particularly suited for bus-mounting bases, have a load capacity of up to 150 A with lateral infeed.

DIAZED stands for **Diametral gestuftes zweiteiliges Sicherungssystem mit Edisongewinde** (diametral two-step fuse system with Edison screw).

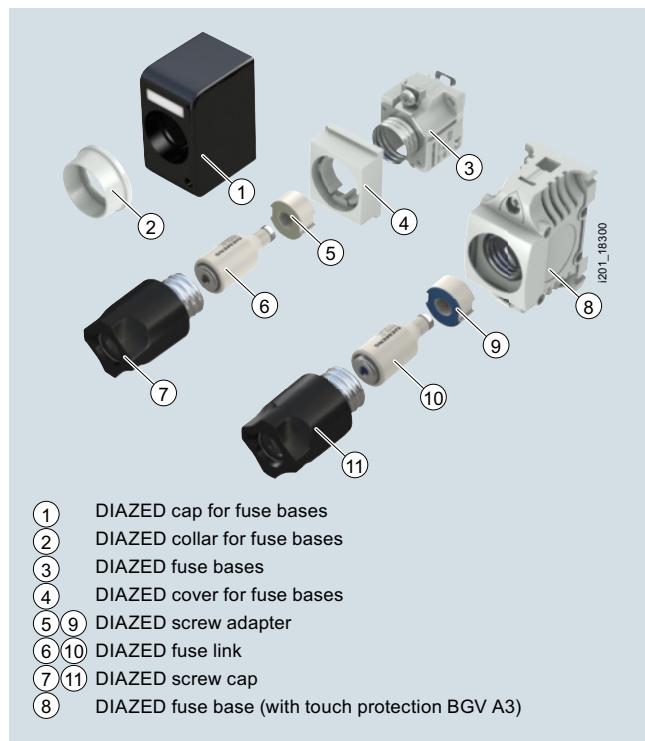Benefits

DIII fuse bases with terminal version BS

- Outgoing feeders (top), saddle terminal S
- Incoming feeders (bottom), clamp-type terminal B



NDZ fuse bases with terminal version KK

- Outgoing feeders (top), screw head contact K
- Incoming feeders (bottom), screw head contact K



DIII fuse bases with terminal version BB

- Outgoing feeders (top), clamp-type terminal B
- Incoming feeders (bottom), clamp-type terminal B



DIII fuse bases with terminal version SS

- Outgoing feeders (top), saddle terminal S
- Incoming feeders (bottom), saddle terminal S

Fuse Systems

DIAZED fuse systems

Technical specifications

		5SA, 5SB, 5SC, 5SD	
Standards		IEC 60269-3; DIN VDE 0635; DIN VDE 0636-3; CEE 16	
Operational class		gG	
Characteristic		Slow and quick	
Rated voltage U_n	V AC	500, 690, 750	
	V DC	500, 600, 750	
Rated current I_n	A	2 ... 100	
Rated breaking capacity	kA AC	50, 40 at E16	
	kA DC	8, 1.6 at E16	
Overvoltage category	III		
	II (DIAZED fuse bases made of molded plastic for use at 690 V AC / 600 V DC)		
Mounting position	Any, but preferably vertical		
Non-interchangeability	Using screw adapter or adapter sleeves		
Degree of protection	Acc. to IEC 60529		
Resistance to climate	°C	Up to 45, at 95 % rel. humidity	
Ambient temperature	°C	-5 ... +40, humidity 90 % at 20	


	Terminal version								
	B	K	S	R					
Size	DII	DIII	NDz	DII	DIII	DIII	DIV	DII	DIII
Conductor cross-sections									
• Rigid, min.	mm ²	1.5	2.5	1.0	1.5	2.5	2.5	10	1.5
• Rigid, max.	mm ²	10	25	6	10	25	25	50	35
• Flexible, with end sleeve	mm ²	10	25	6	10	25	25	50	35
Tightening torque								--	--
• Screw M4	Nm	1.2							
• Screw M5	Nm	2.0							
• Screw M6	Nm	2.5							3.0
• Screw M8	Nm	3.5							--

DIAZED fuse systems

Dimensional drawings


DIAZED fuse links

5SA1, 5SA2

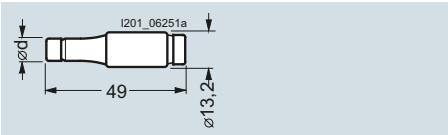


Size/thread	TNDz/E16, NDz/E16						
Rated current in A	2	4	6	10	16	20	25
Dimension d	6	6	6	8	10	12	14

5SB1, 5SB2

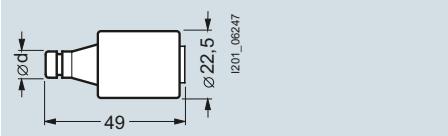


Size/thread	DII/E27						
Rated current in A	2	4	6	10	16	20	25
Dimension d	6	6	6	8	10	12	14

5SB3, 5SB4

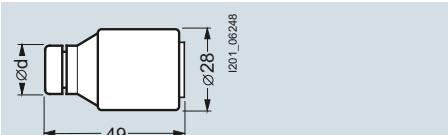


Size/thread	DIII/E33			
Rated current in A	32	35	50	63
Dimension d	16	16	18	20

5SC1, 5SC2

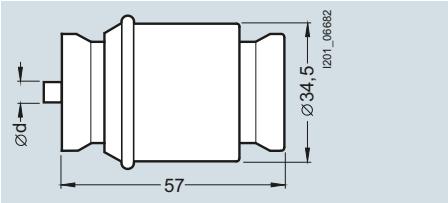

Size/thread	DIV/R1¼"	
Rated current in A	80	100
Dimension d	5	7

5SD6, 5SD8

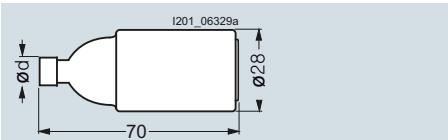


Size/thread	DIII/E33							
Rated current in A	2	4	6	10	16	20	25	35
Dimension d	6	6	6	8	10	12	14	16

Fuse Systems

DIAZED fuse systems


DIAZED fuse bases made of ceramic

5SF1

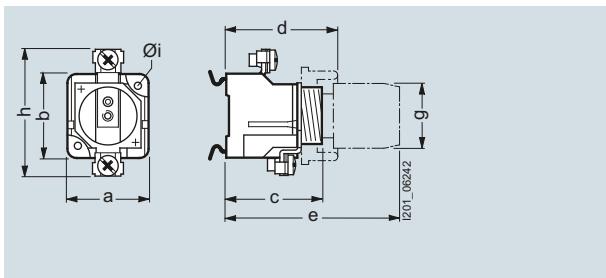


Version Type	Connection type	Dimensions							
		a	b	c	d	e	\varnothing g	h	\varnothing i
NDz/25 A 5SF1012	KK	29	49	44.6	55	75	32	49	--
DII/25 A 5SF1005	BB	38.4	41	46.6	53	83	34	63	--
5SF1024	BB	38.4	41	46.6	53	83	34	63	4.3
DIII/63 A 5SF1205	BS	45.5	46	47	54	83	43	78	--
5SF1215	SS	45.5	46	47	54	83	43	78	--
5SF1224	BS	45.5	46	47	54	83	43	78	4.3
DIV/100 A 5SF1401	Flat terminal	68	68	--	79	110	65	116	6.5

5SF4230

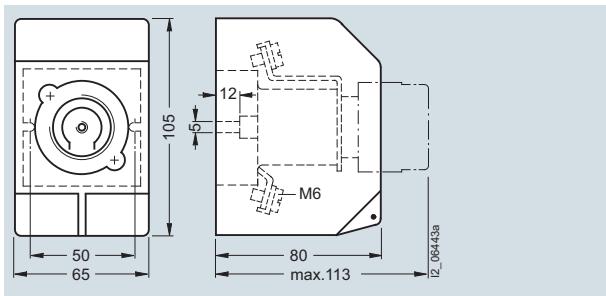

DIAZED fuse bases made of molded plastic

5SF1, 5SF5

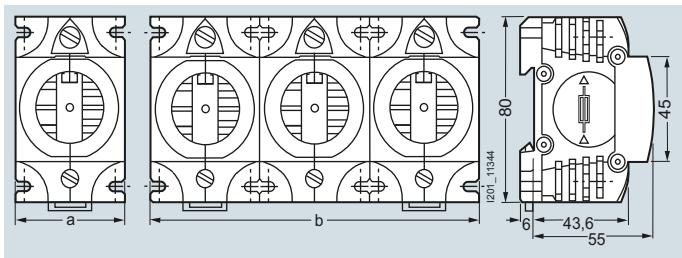


Type	Dimensions	a	b
5SF1060	40	--	
5SF1260	50	--	
5SF5068	--	120	
5SF5268	--	150	


DIAZED fuse systems

DIAZED EZR bus-mounting bases

5SF6005

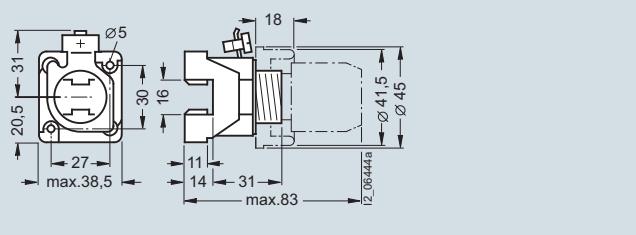


5SF6205

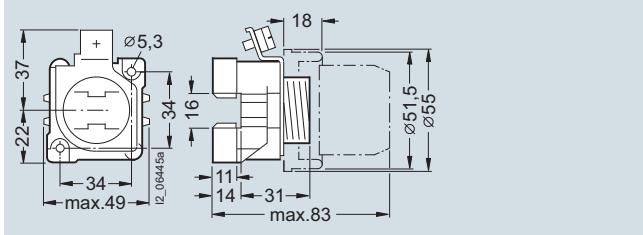

DIAZED screw caps/cover rings made of molded plastic/ceramic


Screw caps

5SH1

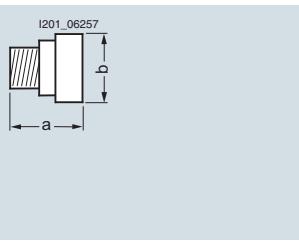

Cover rings


5SH3

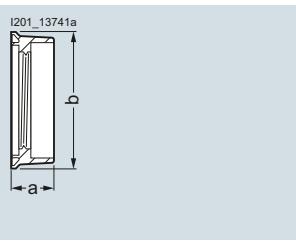

Size/thread	Screw caps		Cover rings			
	Type	Dimensions a	Øb	Type	Dimensions a	Øb
NDz/E16	5SH1112	36	24			
DII/E27	5SH1221	42	33	5SH3401	17.5	39.5
	5SH112	45.5	34	5SH332	17.5	41.5
	5SH122	43	39			
DIII/E33	5SH1231	42	40	5SH3411	17.5	49.5
	5SH113	45.5	43	5SH334	19	51.5
	5SH123	47	45			
	5SH1161	48	48			
	5SH1170	68	43			

DIAZED caps made of molded plastic

5SH2

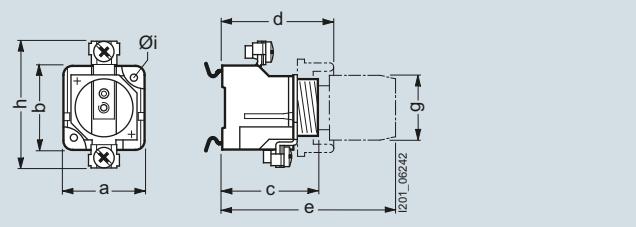

Size/thread	Type	Dimensions			
		a _{max}	b _{max}	c _{max}	d _{max}
NDz/E16	5SH201	33	68	51.7	75
DII/E27	5SH202	43	74.7	53.6	83
DIII/E33	5SH222	51	90.5	53.6	83

Fuse Systems


DIAZED fuse systems

Characteristic curves


Series 5SA2

Size: E16
 Characteristics: slow
 Rated voltage: 500 V AC/500 V DC
 Rated current: 2 ... 25 A

Time/current characteristics diagram

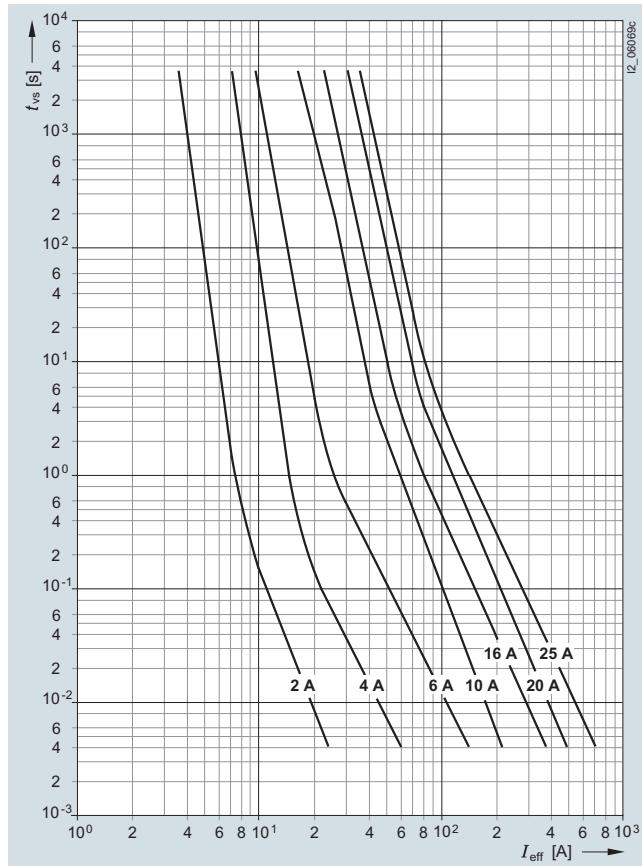


Current limitation diagram

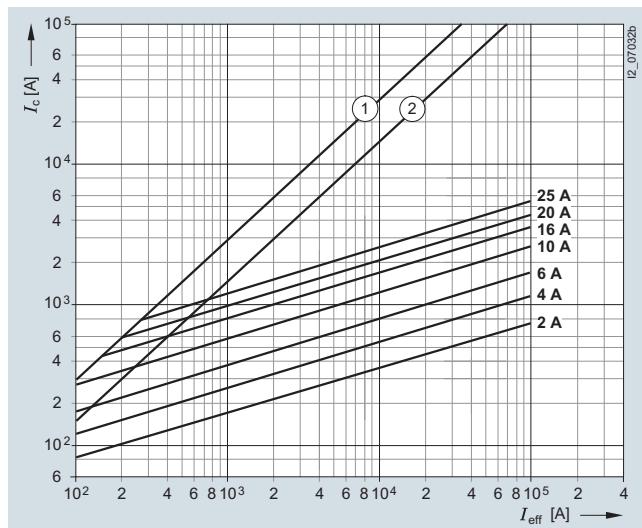

① Peak short-circuit current with largest DC component

② Peak short-circuit current without DC component

Melting I^2t values diagram

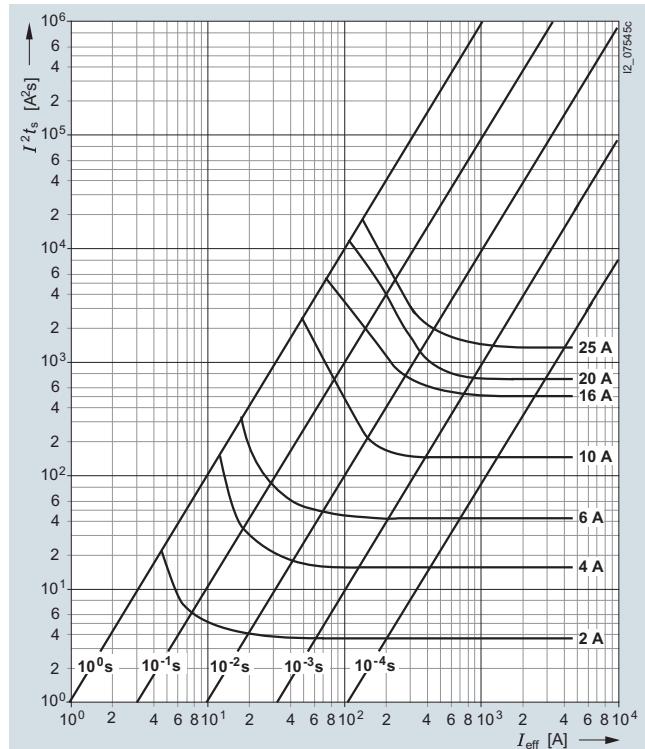



Type	I_n	P_v	$\Delta\vartheta$	I^2t_s 1 ms	4 ms
	A	W	K	A ² s	A ² s
5SA211	2	0.85	15	1.2	2.3
5SA221	4	1.3	17	8.5	13
5SA231	6	1.9	14	40	80
5SA251	10	1.4	17	200	190
5SA261	16	2.4	30	290	550
5SA271	20	2.6	36	470	1990
5SA281	25	3.4	34	1000	2090

Type	I^2t_a 230 V AC	I^2t_a 320 V AC	I^2t_a 500 V AC
	A ² s	A ² s	A ² s
5SA211	6.6	7.8	0.7
5SA221	22	26	34
5SA231	66	76	100
5SA251	240	270	340
5SA261	890	950	1090
5SA271	1200	1350	1620
5SA281	2400	2600	3450


DIAZED fuse systems

Series 5SB2, 5SB4, 5SC2

Size: DII, DIII, DIV
 Operational class: gG
 Rated voltage: 500 V AC/500 V DC
 Rated current: 2 ... 100 A

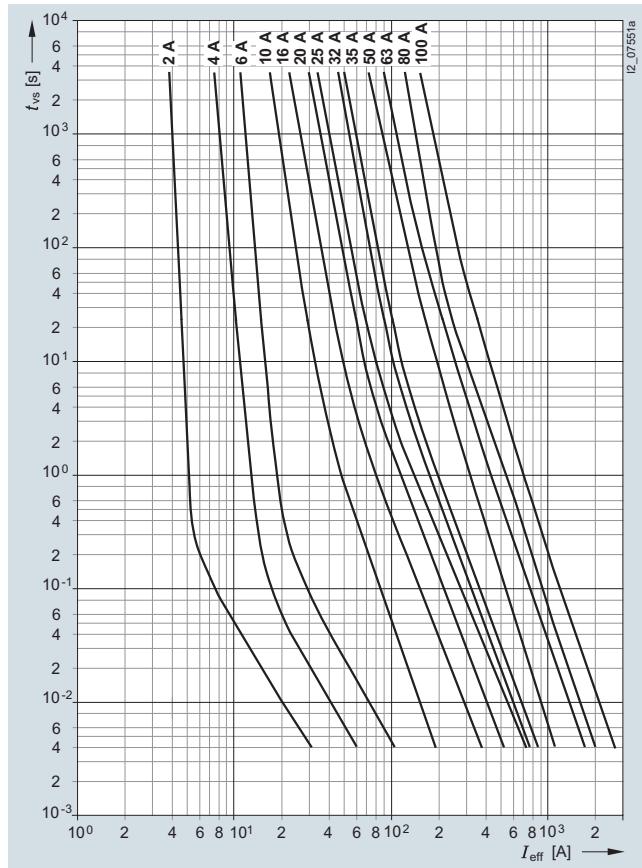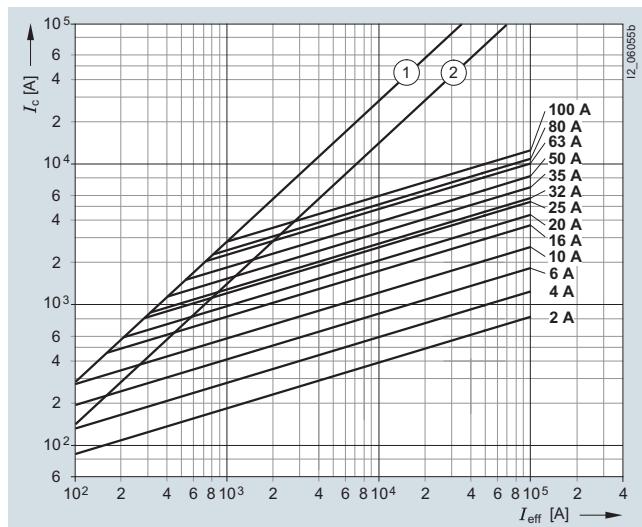Time/current characteristics diagram**Current limitation diagram**

- ① Peak short-circuit current with largest DC component
 ② Peak short-circuit current without DC component

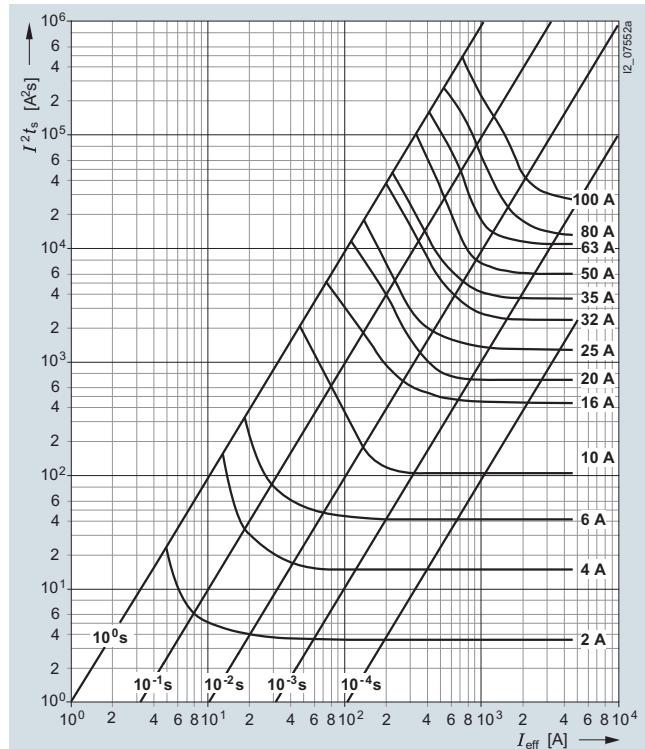Melting I^2t values diagram

Type	I_n A	P_v W	$\Delta\theta$ K	I^2t_s 1 ms A^2s	I^2t_s 4 ms A^2s
5SB211	2	2.6	15	3.7	3.9
5SB221	4	2.0	13	15	16
5SB231	6	2.2	14	42	45
5SB251	10	1.6	20	120	140
5SB261	16	2.4	23	500	580
5SB271	20	2.6	26	750	1100
5SB281	25	3.4	38	1600	2000
5SB4010	32	3.6	23	2300	2500
5SB411	35	3.7	25	3450	3000
5SB421	50	5.7	41	6500	5200
5SB431	63	6.9	48	11000	12000
5SC211	80	7.5	33	14600	16400
5SC221	100	8.8	46	28600	30000

Type	I^2t_a 230 V AC A^2s	I^2t_a 320 V AC A^2s	I^2t_a 500 V AC A^2s
5SB211	6.6	8.8	10.7
5SB221	22	28	34
5SB231	66	85	100
5SB251	240	300	340
5SB261	890	1060	1090
5SB271	1200	1450	1620
5SB281	2400	3150	3450
5SB4010	3450	4150	4850
5SB411	5200	6200	7200
5SB421	9750	12350	14500
5SB431	16500	22200	26500
5SC211	23000	28500	32500
5SC221	44000	56000	65000


Fuse Systems

DIAZED fuse systems


Series 5SD8

Size: DIII
 Operational class: gG
 Rated voltage: 690 V AC/600 V DC
 Rated current: 2 ... 63 A


Time/current characteristics diagram

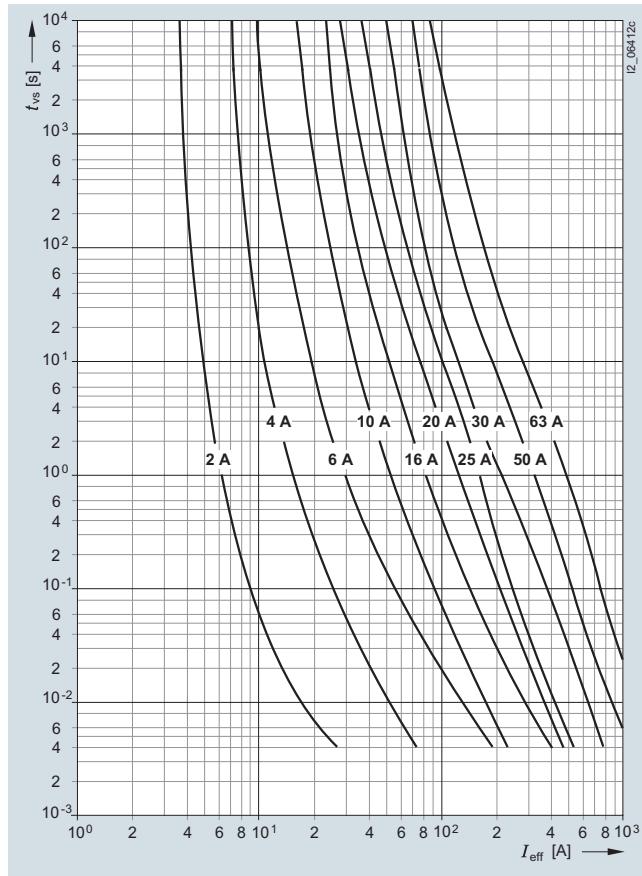

Melting I^2t values diagram

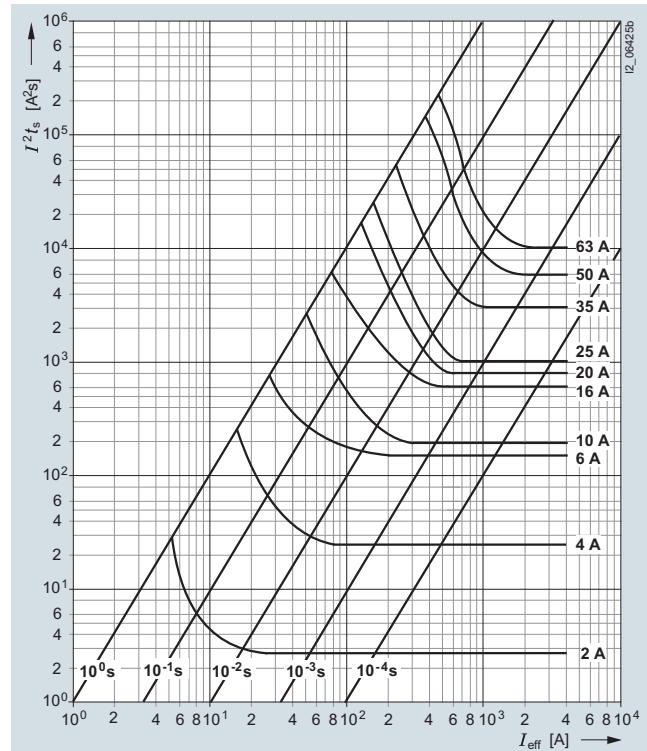

Current limitation diagram

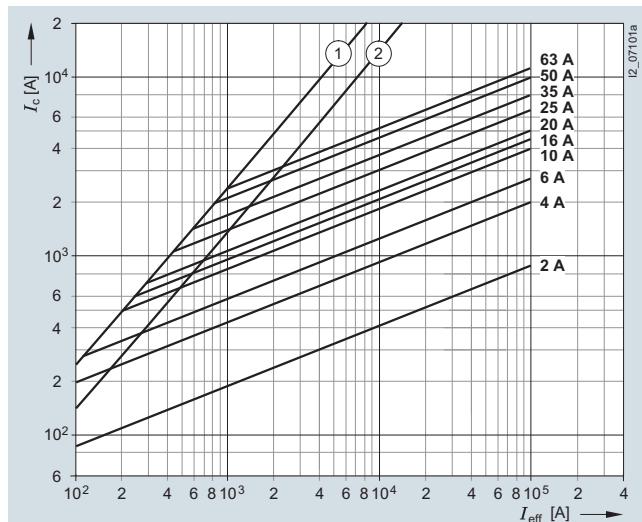



- (1) Peak short-circuit current with largest DC component
- (2) Peak short-circuit current without DC component

Type	I_n	P_v	I^2t_s 4 ms A^2s	I^2t_a 242 V AC A^2s
	A	W		
5SD8002	2	1	4.4	7
5SD8004	4	1.2	40	62
5SD8006	6	1.6	88	140
5SD8010	10	1.4	240	380
5SD8016	16	1.8	380	600
5SD8020	20	2	750	1200
5SD8025	25	2.3	2000	3200
5SD8035	35	3.1	3300	5100
5SD8050	50	4.6	7000	11000
5SD8063	63	5.5	9500	15000


DIAZED fuse systems

Series 5SD6

Size: DIII
 Operational class: quick (railway network protection)
 Rated voltage: 750 V AC/750 V DC
 Rated current: 2 ... 63 A

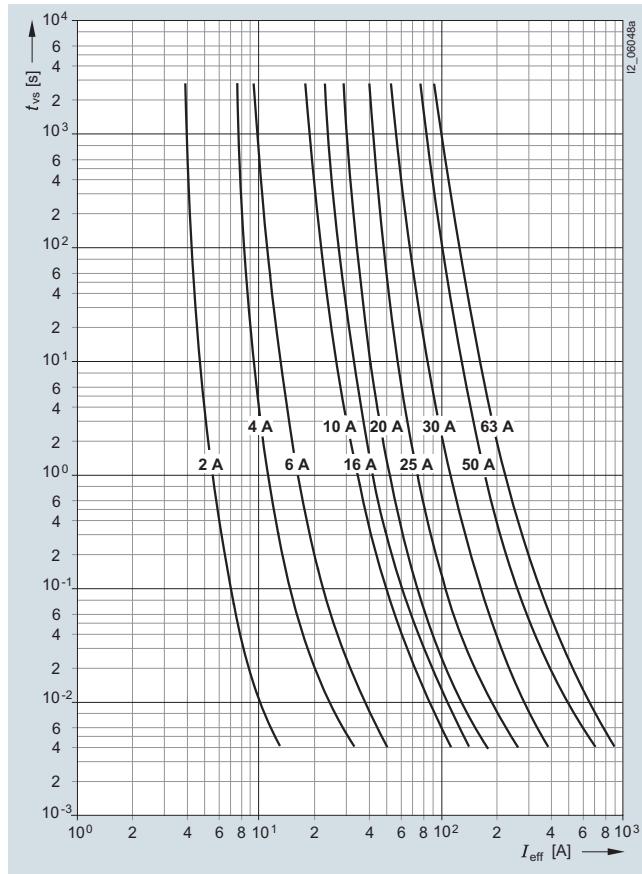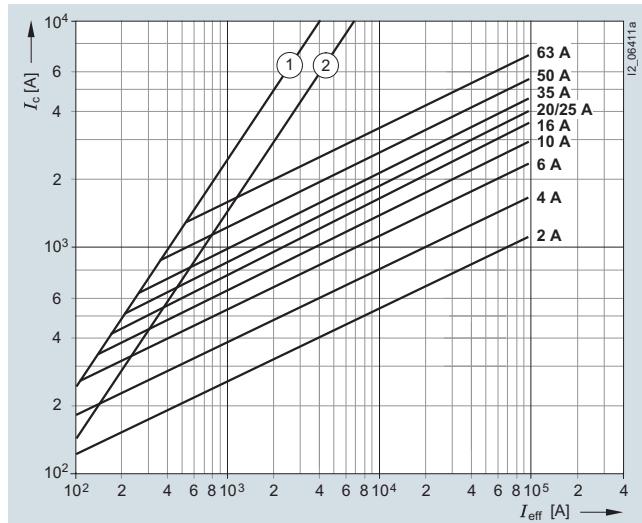Time/current characteristics diagram**Current limitation diagram**

- ① Peak short-circuit current with largest DC component
 ② Peak short-circuit current without DC component

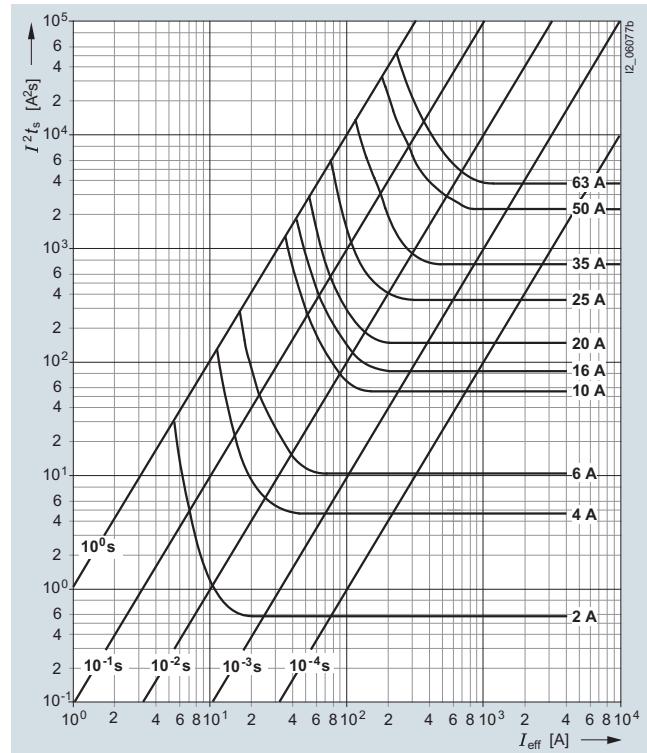Melting I^2t values diagram

Type	I_n A	P_v W	I^2t_s 4 ms A^2s	I^2t_a 500 V AC A^2s
5SD601	2	2.8	0.7	2
5SD602	4	4	4.5	13
5SD603	6	4.8	10	29
5SD604	10	4.8	50	135
5SD605	16	5.9	78	220
5SD606	20	6.3	125	380
5SD607	25	8.3	265	800
5SD608	35	13	550	1600
5SD610	50	16.5	1800	5500
5SD611	63	18	3100	9600

Fuse Systems

Cylindrical Fuse Systems

Cylindrical fuse links and cylindrical fuse holders

Overview

Cylindrical fuses are standard in Europe. There are a range of different cylindrical fuse links and holders that comply with the standards IEC 60269-1, -2 and -3, and which are suitable for use in industrial applications.

In South West Europe they are also approved for use in residential buildings.

The cylindrical fuse holders are also approved according to UL 512. The cylindrical fuse holders are tested and approved as fuse disconnectors according to the switching device standard IEC 60947-3. They are not suitable for switching loads.

Cylindrical fuse holders can be supplied with or without signal detectors. In the case of devices with signal detector, a small electronic device with LED is located behind an inspection window in the plug-in module. If the inserted fuse link is tripped, this is indicated by the LED flashing.

The switching state of the fuse holder can be signaled over a laterally retrofitted auxiliary switch, which enables the integration of the fuses in the automation process.

Benefits

- Devices with pole number 1P+N are available in a single modular width. This reduces the footprint by 50 %.
- The sliding catch for type ranges 8 x 32 mm and 10 x 38 mm enables the removal of individual devices from the assembly.
- Space for a spare fuse in the plug-in module enables the fast replacement of fuses. This saves time and money and increases system availability.
- A flashing LED signals that a fuse link has been tripped. This enables fast detection during runtime.

Technical specifications

	Cylindrical fuse links						
	3NW63..	3NW60..	3NW61..	3NW62..	3NW80..	3NW81..	3NW82..
Size	mm x mm	8 x 32	10 x 38	14 x 51	22 x 58	10 x 38	14 x 51
Standards		IEC 60269-1, -2, -3; NF C 60-200; NF C 63-210, -211; NBN C 63269-2, CEI 32-4, -12					
Operational class		gG		aM			
Rated voltages U_h	V AC	400	400 or 500				
Rated current I_n	A	2 ... 20	0.5 ... 32	4 ... 50	8 ... 100	0.5 ... 32	2 ... 50
Rated breaking capacity							
• 500 V version	kA AC	--	120	100	120	100	
• 400 V version	kA AC	20	120	20	120	20	
Mounting position		Any, but preferably vertical					
	Cylindrical fuse holders						
	3NW73..	3NW70..	3NW71..	3NW72..			
Size	mm x mm	8 x 32	10 x 38	14 x 51	22 x 58		
Standards		IEC 60269-1, -2, -3; NF C 60-200; NF C 63-210, -211; NBN C 63269-2-1, CEI 32-4, -12					
Approvals	Acc. to UL Acc. to CSA	-- --	 	 	-- --		
Rated voltage U_h	V AC Acc. to UL/CSA	400 400	690 600				
Rated current I_n	A AC	20	32	50	100		
Rated breaking capacity	kA	20	100				
Switching capacity		AC-20B (switching without load), DC-20B					
• Utilization category							
No-voltage changing of fuse links		Yes					
Sealable when installed		Yes					
Mounting position		Any, but preferably vertical					
Degree of protection	Acc. to IEC 60529		IP20, with connected conductors				
Terminals with touch protection according to BGV A3 at incoming and outgoing feeder			Yes				
Ambient temperature	°C	-5 ... +40, humidity 90 % at +20					
Conductor cross-sections							
• Rigid	mm ²	0.5 ... 10		2.5 ... 10		4 ... 10	
• Stranded	mm ²	0.5 ... 10		2.5 ... 25		4 ... 50	
• Finely stranded, with end sleeve	mm ²	0.5 ... 10 ¹⁾		2.5 ... 16		4 ... 35	
• AWG (American Wire Gauge)	AWG	--	10 ... 20	6 ... 10		--	
Tightening torque	Nm	1.2		2.0		2.5	


¹⁾ Max. cross-section 10 mm² with K28 crimper from Klauke.

Fuse Systems


Cylindrical Fuse Systems

Cylindrical fuse links and cylindrical fuse holders


Dimensional drawings

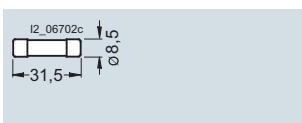


Size
8 x 32 mm

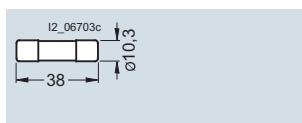


10 x 38 mm

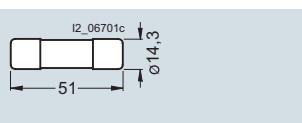


14 x 51 mm

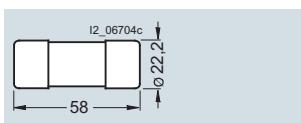


22 x 58 mm

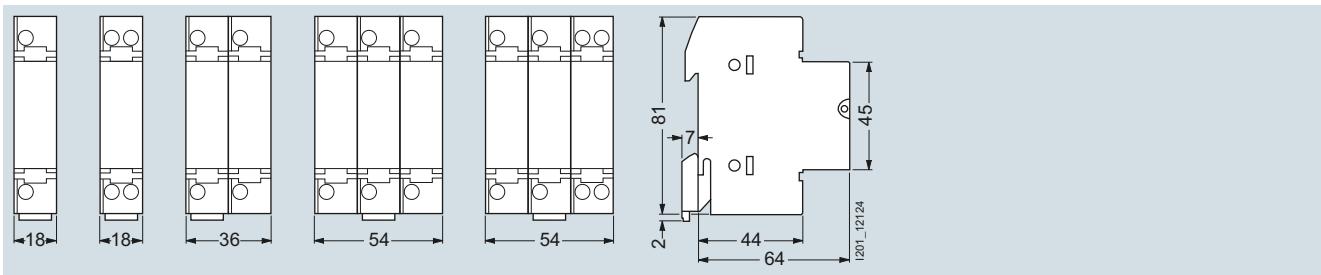

3NW70, 3NW73
1P 1P + N 2P 3P 3P+N

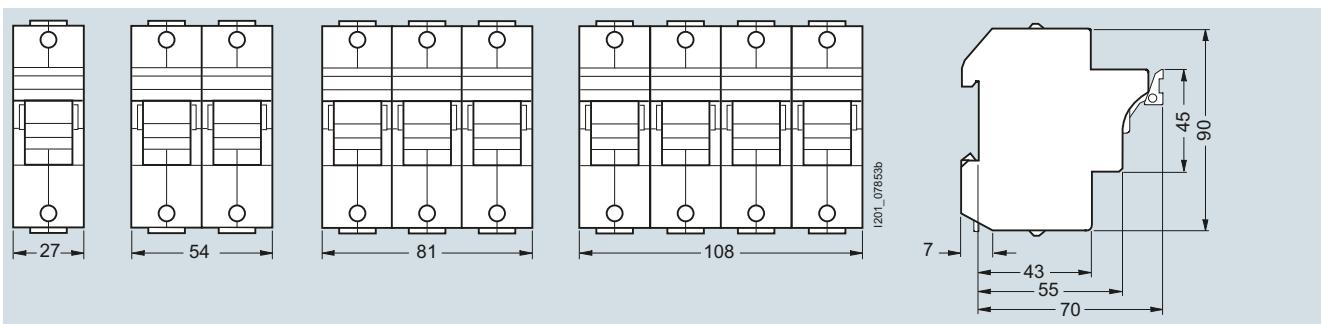


3NW71
1P 1P+N/2P 3P 3P+N

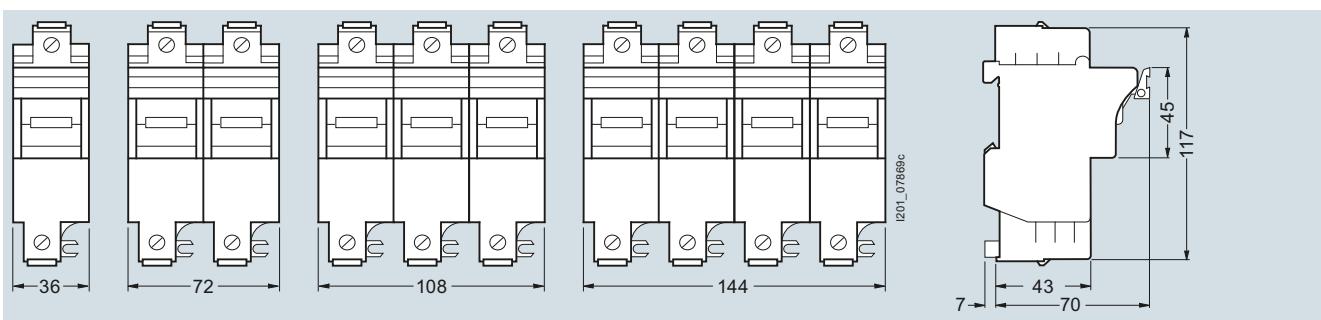


3NW72
1P 1P+N/2P 3P 3P+N

Auxiliary switches

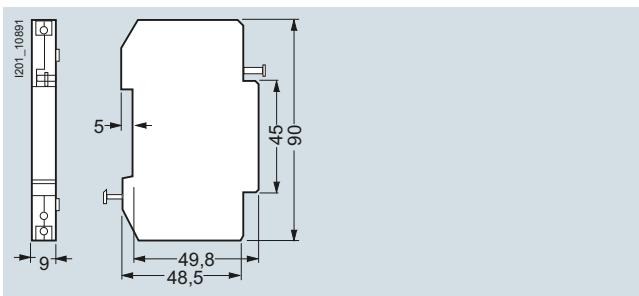

3NW7901
3NW7902

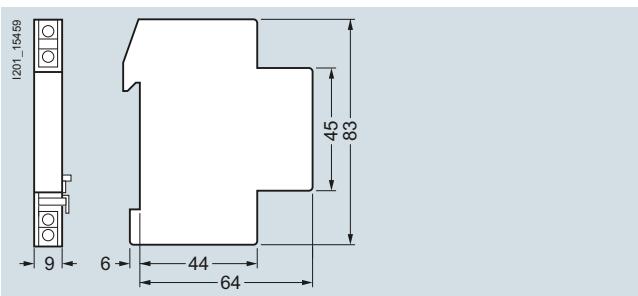

3NW7903





Fuse Systems

Cylindrical Fuse Systems


Cylindrical fuse links and cylindrical fuse holders

Circuit diagrams

Graphic symbols



Auxiliary switches




Characteristic curves


3NW60 series

Size: 10×38 mm
 Operational class: gG
 Rated voltage: 500 V AC (2 ... 25 A),
 400 V AC (32 A)
 Rated current: 2 ... 32 A

Time/current characteristics diagram

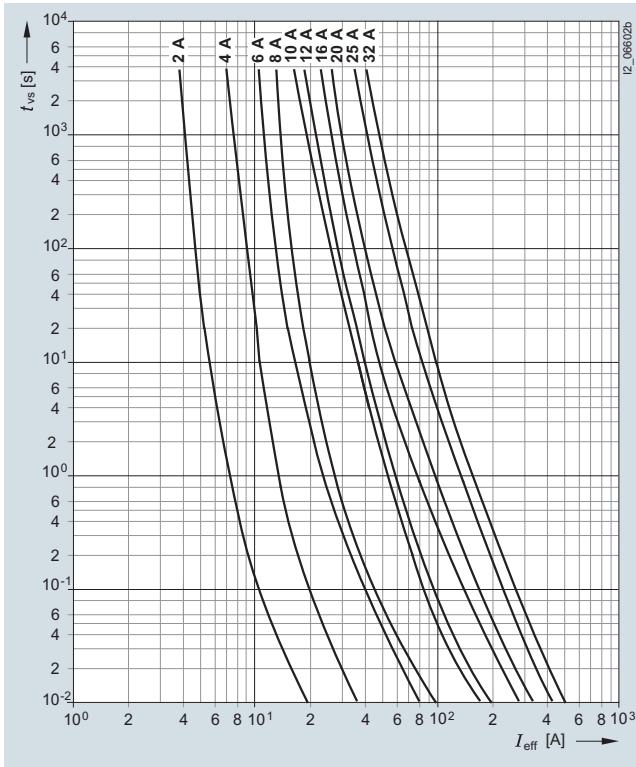


Current limitation diagram

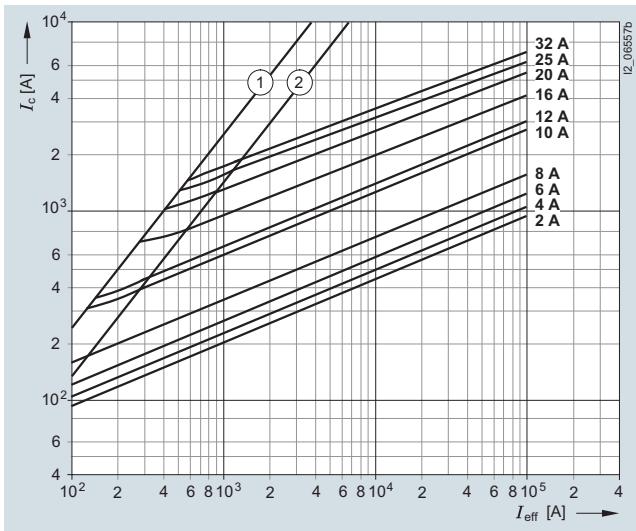

① Peak short-circuit current with largest DC component

② Peak short-circuit current without DC component

Melting I^2t values diagram

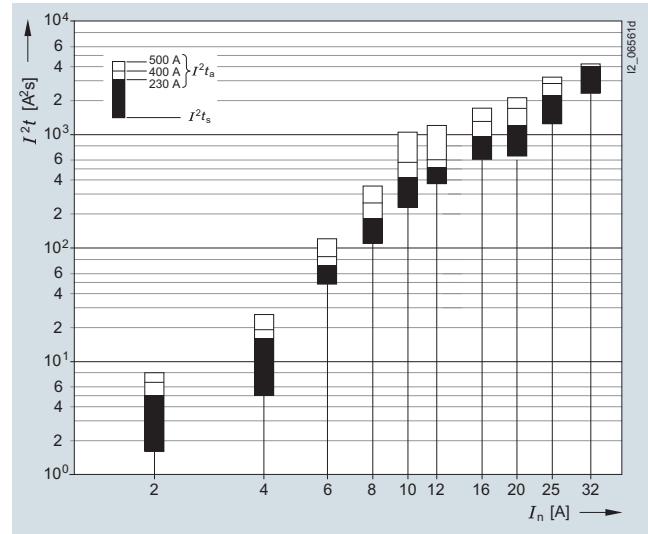

Type	I_n	P_V	$\Delta\theta$	I^2t_s		I^2t_a		
				1 ms	A^2s	230 V AC	400 V AC	500 V AC
3NW6002-1	2	2.2	32		1.6	5	6.5	8
3NW6004-1	4	1.2	16.5		5	16	19	26
3NW6001-1	6	1.6	23	48		70	84	120
3NW6008-1	8	2.3	35	110		180	140	350
3NW6003-1	10	0.7	16	230		420	570	1050
3NW6006-1	12	0.9	33	390		510	600	1200
3NW6005-1	16	1.3	38	600		950	1300	1700
3NW6007-1	20	2.1	51.5	640		1200	1700	2100
3NW6010-1	25	2.1	54	1300		2200	2800	3200
3NW6012-1	32	2.5	51	2360		4000	4200	--

Fuse Systems


Cylindrical Fuse Systems

Cylindrical fuse links and cylindrical fuse holders


3NW61series

Size: 14×51 mm
 Operational class: gG
 Rated voltage: 500 V AC (4 ... 40 A),
 400 V AC (50 A)
 Rated current: 4 ... 50 A

Time/current characteristics diagram

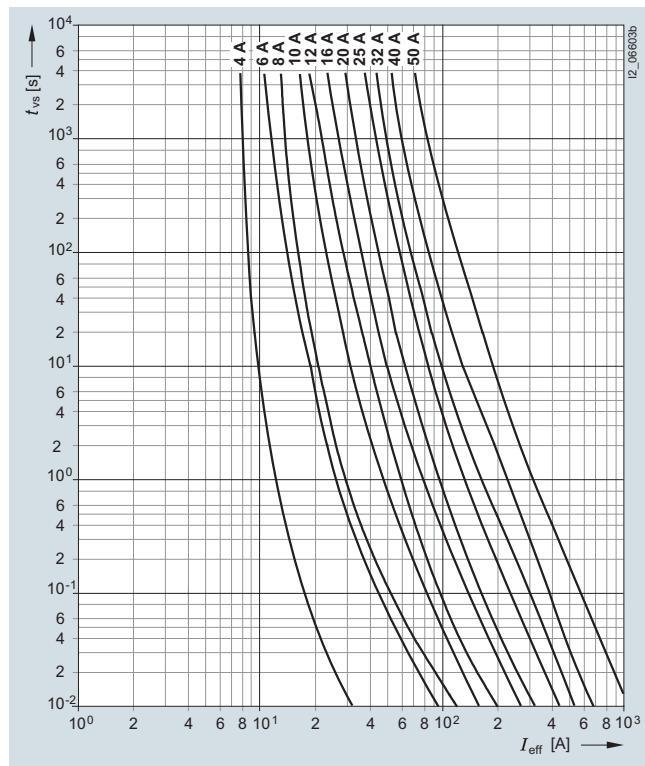


Current limitation diagram

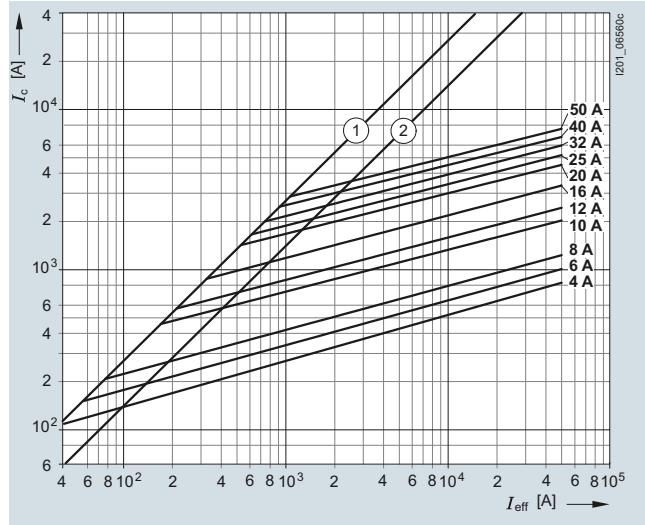

- ① Peak short-circuit current with largest DC component
- ② Peak short-circuit current without DC component

Melting I^2t values diagram

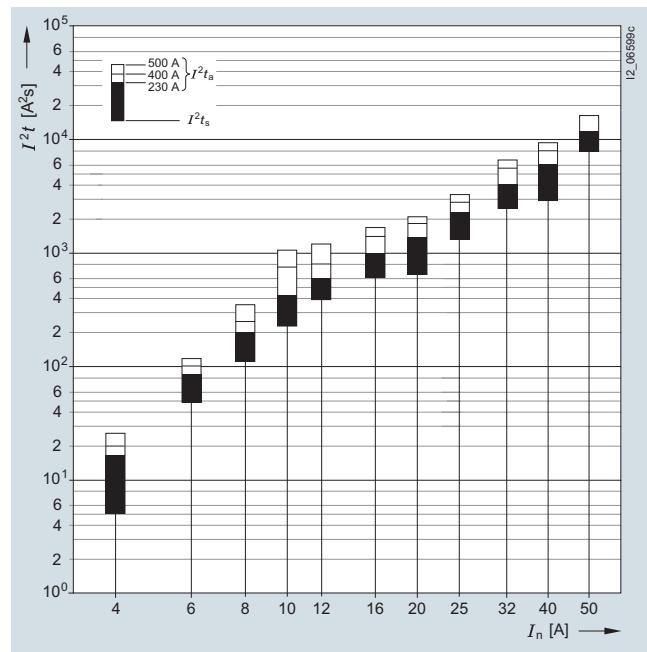

Type	I_n	P_V	$\Delta\theta$	I^2t_s	I^2t_a			
				1 ms	230 V AC	400 V AC	500 V AC	
	A	W	K	A^2s	A^2s	A^2s	A^2s	A^2s
3NW6104-1	4	1.9	19	5	16	20	26	
3NW6101-1	6	2.5	25	48	85	100	120	
3NW6108-1	8	2.4	18	110	200	250	350	
3NW6103-1	10	0.8	12	230	420	750	1050	
3NW6106-1	12	1.0	16	390	600	800	1200	
3NW6105-1	16	1.6	27	600	1000	1400	1700	
3NW6107-1	20	2.3	32.5	670	1400	1800	2100	
3NW6110-1	25	2.2	31.5	1300	2300	2800	3200	
3NW6112-1	32	3.2	39.5	2500	4100	5500	6500	
3NW6117-1	40	4.5	48	3600	6100	8000	9200	
3NW6120-1	50	4.8	55	8000	12200	16000	--	

Fuse Systems


Cylindrical Fuse Systems

Cylindrical fuse links and cylindrical fuse holders


3NW62 series

Size: 22×58 mm
 Operational class: gG
 Rated voltage: 500 V AC (8 ... 80 A),
 400 V AC (100 A)
 Rated current: 8 ... 100 A

Time/current characteristics diagram

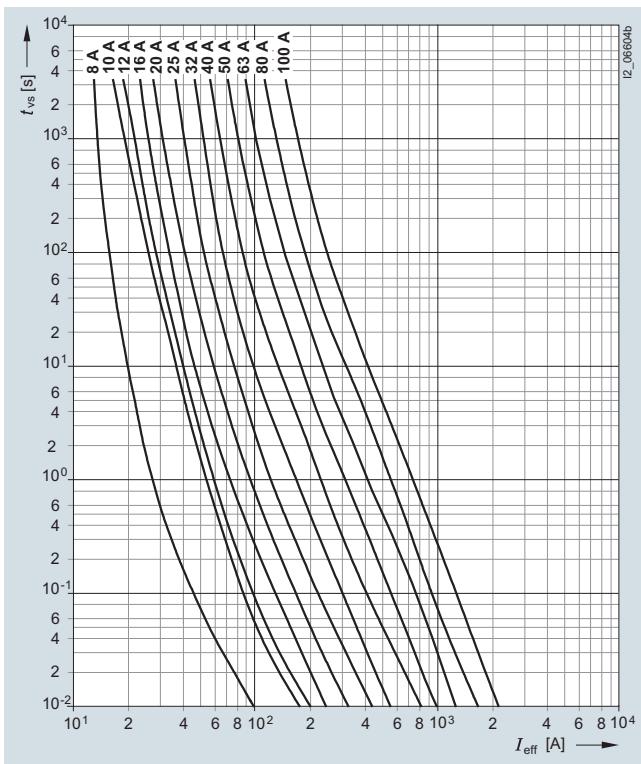


Current limitation diagram

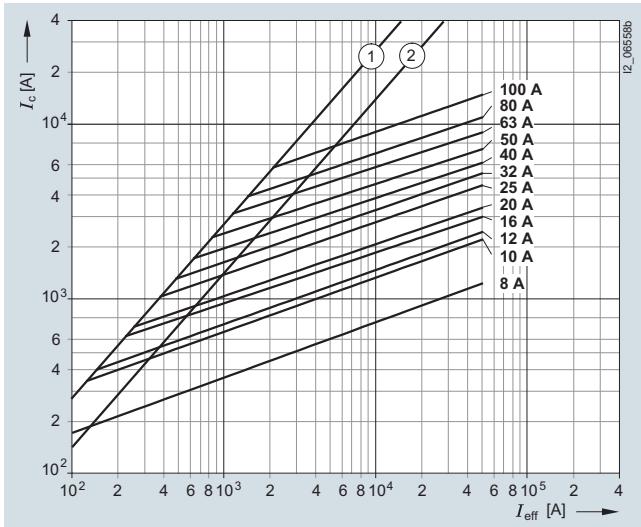

- ① Peak short-circuit current with largest DC component
- ② Peak short-circuit current without DC component

Melting I^2t values diagram

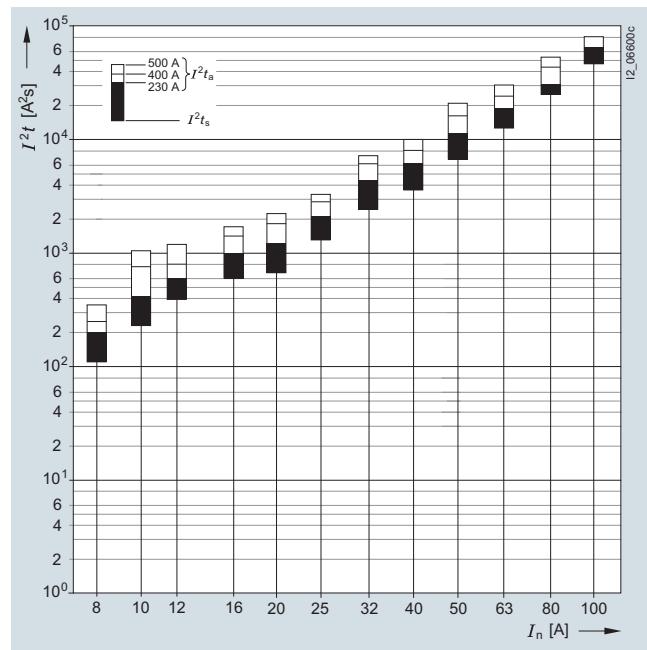

Type	I_n A	P_V W	$\Delta\vartheta$ K	I^2t_s			I^2t_a		
				1 ms A^2s	230 V AC A^2s	400 V AC A^2s	500 V AC A^2s		
3NW6208-1	8	2.5	15	110	200	170	350		
3NW6203-1	10	0.9	10.5	230	420	760	1050		
3NW6206-1	12	1.1	12	390	600	800	1200		
3NW6205-1	16	1.6	14.5	600	1000	1400	1700		
3NW6207-1	20	2.4	22.5	670	1200	1800	2200		
3NW6210-1	25	2.7	24	1300	2100	2800	3300		
3NW6212-1	32	3.2	28	2450	4400	6100	7200		
3NW6217-1	40	4.9	35	3600	6200	8000	10000		
3NW6220-1	50	5.9	46	6800	11400	16200	20600		
3NW6222-1	63	6.8	48	12500	18800	24000	30000		
3NW6224-1	80	7.5	48	24700	30500	43000	52500		
3NW6230-1	100	8.4	55	46000	64700	80000	--		

Fuse Systems


Cylindrical Fuse Systems

Cylindrical fuse links and cylindrical fuse holders


3NW630.-1 series

Size: 8×32 mm
 Operational class: gG
 Rated voltage: 400 V AC
 Rated current: 2 ... 20 A

Time/current characteristics diagram

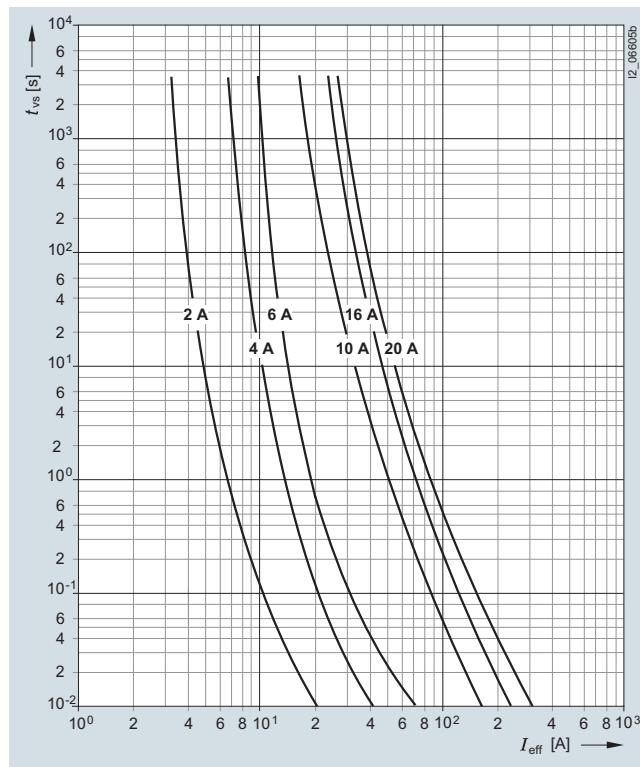


Current limitation diagram

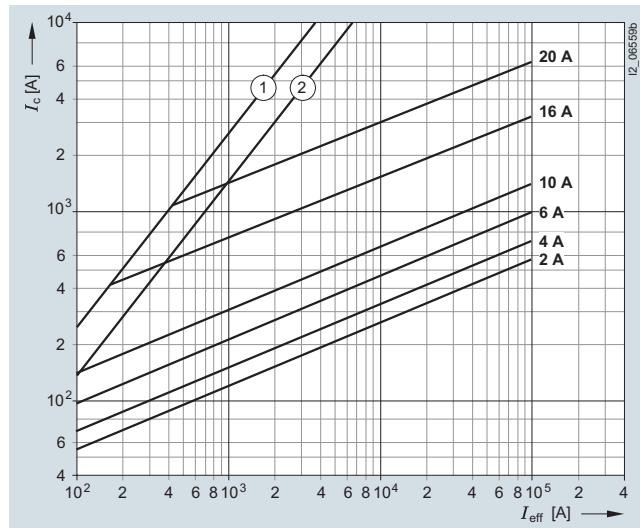

- ① Peak short-circuit current with largest DC component
- ② Peak short-circuit current without DC component

Melting I^2t values diagram

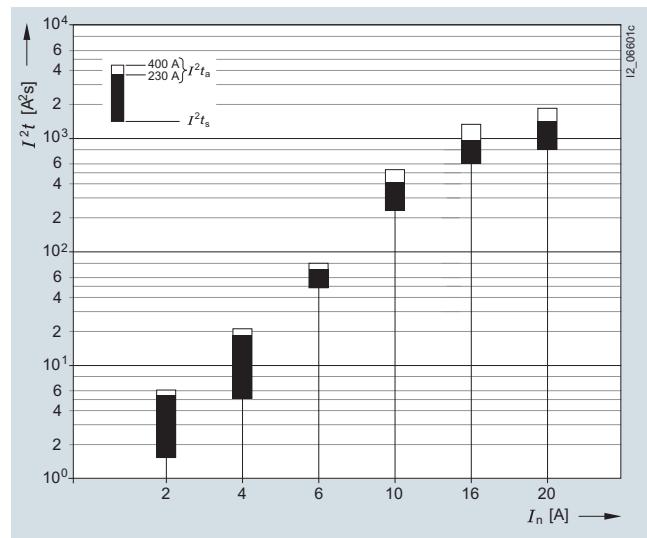


Type	I_n	P_v	$\Delta\vartheta$	I^2t_s 1 ms A^2s	I^2t_a 400 V AC A^2s
	A	W	K		
3NW6302-1	2	2	27	1.6	6
3NW6304-1	4	1.5	19	5	21
3NW6301-1	6	1.5	20.5	48	85
3NW6303-1	10	0.7	15	230	530
3NW6305-1	16	1.1	29	600	1400
3NW6307-1	20	1.7	34.5	790	1800


Series 3NW8

Size:
 10 × 38 mm
 14 × 51 mm
 22 × 58 mm
 Operational class:
 aM
 Rated voltage:
 500 V AC,
 400 V AC (3NW8120-1, 3NW8230-1)
 Rated current:
 0.5 ... 100 A


Time/current characteristics diagram

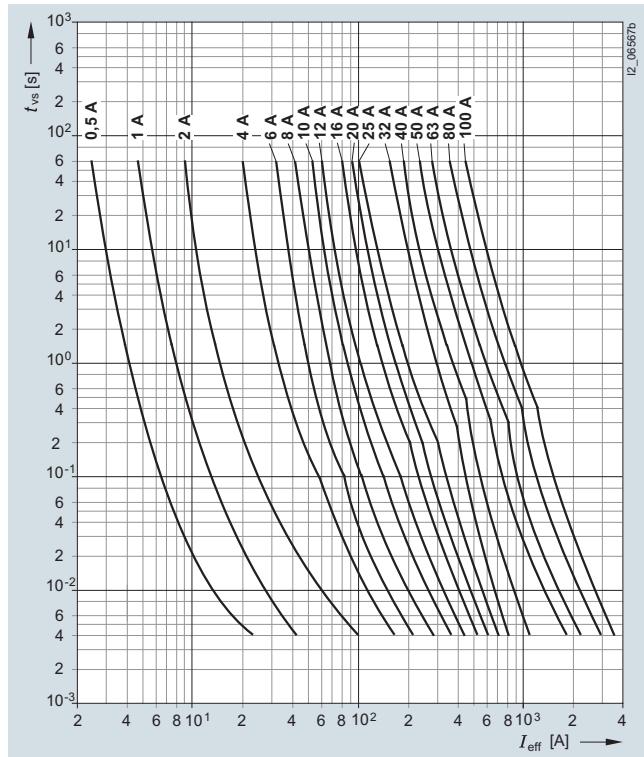

Melting I^2t values diagram

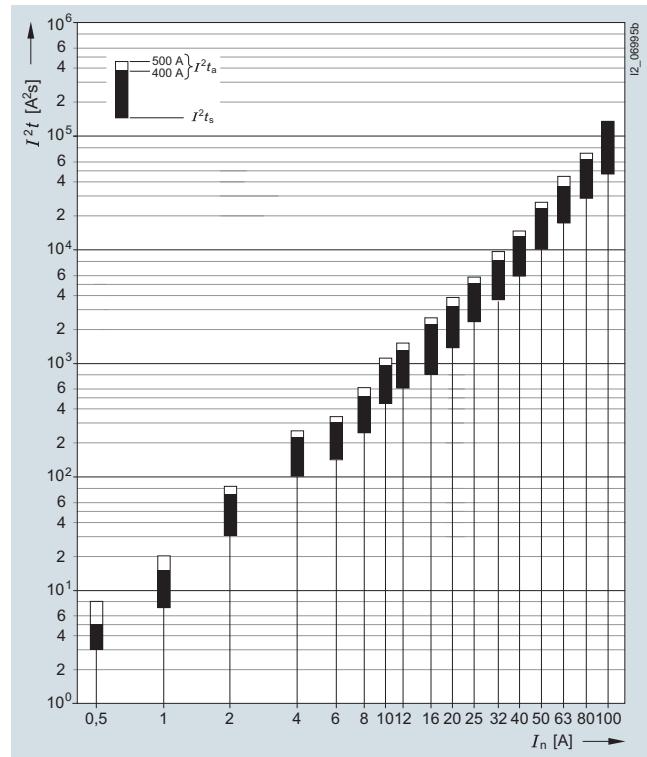

Current limitation diagram

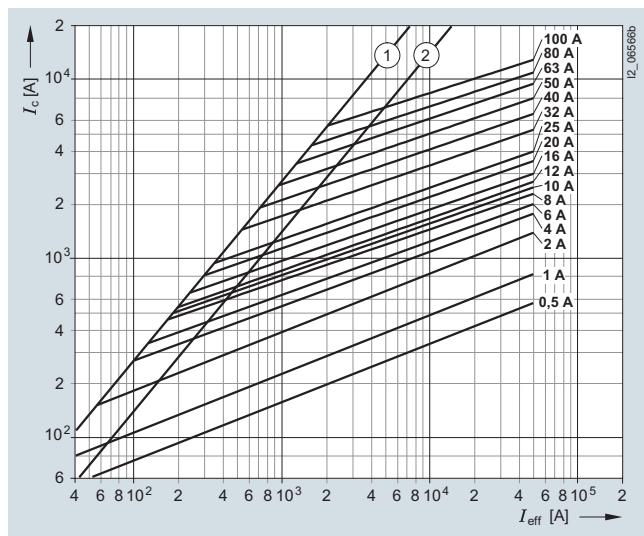

① Peak short-circuit current with largest DC component

② Peak short-circuit current without DC component

Fuse Systems

Cylindrical Fuse Systems

Compact cylindrical fuse holders in size 10 x 38 mm and Class CC

Overview

A key feature of our three-pole fuse holders is their ultra compact design. With a width of only 45 mm, they are ideal for use with fused motor starter combinations. Because the contactor and the fuse holder have the same 45 mm width, they are easy to mount on top of one another. The strong current-limiting fuses ensure a type 2 protection level (coordination according to IEC 60947-4, no damage protection) for the contactor.

The UL version has an SCCR value of 200 kA. The accessories are generally UL-certified.

Customers can mount an auxiliary switch which signals the switching state or prevents the fuse holder from switching off under load by interrupting the contactor control, thus increasing safety for the operator and process. Busbars and a matching three-phase feeder terminal complete the product range.



Compact cylindrical fuse holder Class CC with signal detector and mounted auxiliary switch

Benefits

- Compact design, especially for motor starter combinations
- For IEC fuses of size 10 x 38 mm up to 32 A and Class CC UL fuses up to 30 A
- Meets the requirements of UL 508 with regard to clearances
- UL-approved microswitches, busbars and adapters for 60 mm busbar systems
- Optical signal detector for fast fault locating



Installation configuration of a cylindrical fuse holder and a SIRIUS contactor on busbar device adapter for the 60 mm busbar system

Fuse Systems

Cylindrical Fuse Systems

Compact cylindrical fuse holders
in size 10 x 38 mm and Class CC

Technical specifications

	Cylindrical fuse holders 3NW70..-1		Fuse holders 3NW75..-1HG	
Size	mm x mm	10 x 38		Class CC
Standards		IEC 60269; UL 512; CSA		UL 512; CSA
Approvals		UL, UL File Number E171267 CSA		UL, UL File Number E171267 CSA
Rated voltage U_n	V AC	690		600
Rated current I_n	A AC	32		30
Rated short-circuit strength	kA	120 (at 500 V) 80 (at 690 V)		200
Switching capacity		AC-20B (switching without load)	--	
• Utilization category				
Rated impulse withstand voltage	kV	6		
Overshoot category		III		
Pollution degree		2		
Max. power dissipation of the fuse link	W	3		
No-voltage changing of fuse links	°C	-5 ... +40, humidity 90 % at +20		
Sealable when installed		Yes		
Lockable with padlock		Yes		
Mounting position		Any, but preferably vertical		
Current direction		Any		
Degree of protection	Acc. to IEC 60529	IP20, with connected conductors		
Terminals with touch protection according to BGV A3 at incoming and outgoing feeder		Yes		
Ambient temperature	°C	-5 ... +40, humidity 90 % at +20		
Conductor cross-sections				
• Finely stranded, with end sleeve	mm ²	1 ... 4		
• AWG cables (American Wire Gauge)	AWG	18 ... 10		
Tightening torque	Nm	1.5		
	lb.in	13		
• Terminal screws		PZ2		

	Auxiliary switches 3NW7903-1							
Standards	IEC 60947							
Approvals	UL, CSA, UL 508, UL File Number E334003							
Utilization category	AC-12 DC-13 AC-15 Acc. to UL							
Rated voltage U_n	V AC	250	--	--	--	24	120	240
	V DC	--	24	120	240	--	--	--
Rated current I_n	A	5	2	0.5	0.25	4	3	1.5
								5

	Busbars 5ST260.							
For cylindrical fuse holders	3NW70..-1 3NW75..-1HG							
Pin spacing	mm	15						
Standards	EN 609741 (VDE 0660-100), IEC 60947-1:2004, UL 508, CSA 22.2							
Approvals	UL, UL 4248-1, UL File Number E337131							
Busbar material	E-Cu 58 F25							
Partition material	PA66-V0							
Lamp wire resistance /1.5 mm²	°C	960						
Insulation coordination	Overshoot category III, degree of pollution 2							
Rated voltage U_n	V AC	--				600		
• Acc. to UL	V AC	690				--		
• Acc. to IEC								
Maximum busbar current I_n	A	--			65			
• Acc. to UL	A	80			--			
• Acc. to IEC								

Fuse Systems

Cylindrical Fuse Systems

**Compact cylindrical fuse holders
in size 10 x 38 mm and Class CC**


Terminals		
5ST2600		
For cylindrical fuse holders		3NW70..-1
Pin spacing	mm	15
Standards		IEC 60999:2000, UL 508
Approvals		Q, UL 4248-1, UL File Number E337131
Enclosure/cover material		PA66-V0
Lamp wire resistance /1 mm²	°C	960
Temperature resistance PA66-V0, HDT B ISO 179, UL 94-V0/1.5	°C	200
Insulation coordination		Overvoltage category III, degree of pollution 2
Max. operational voltage U_{max}	V AC	600
• Acc. to UL	--	--
• Acc. to IEC	690	--
Maximum electrical load I_{max}	A	65
• Acc. to UL	--	--
• Acc. to IEC	80	--
Rated current I_n	A	63
Conductor cross-sections		
• solid/stranded	mm ²	2.5 ... 35
• Finely stranded, with end sleeve	mm ²	2.5 ... 25
Tightening torque of clamping screw	Nm	2.5 ... 3.5

Fuse Systems

Cylindrical Fuse Systems

Compact cylindrical fuse holders
in size 10 x 38 mm and Class CC

Dimensional drawings

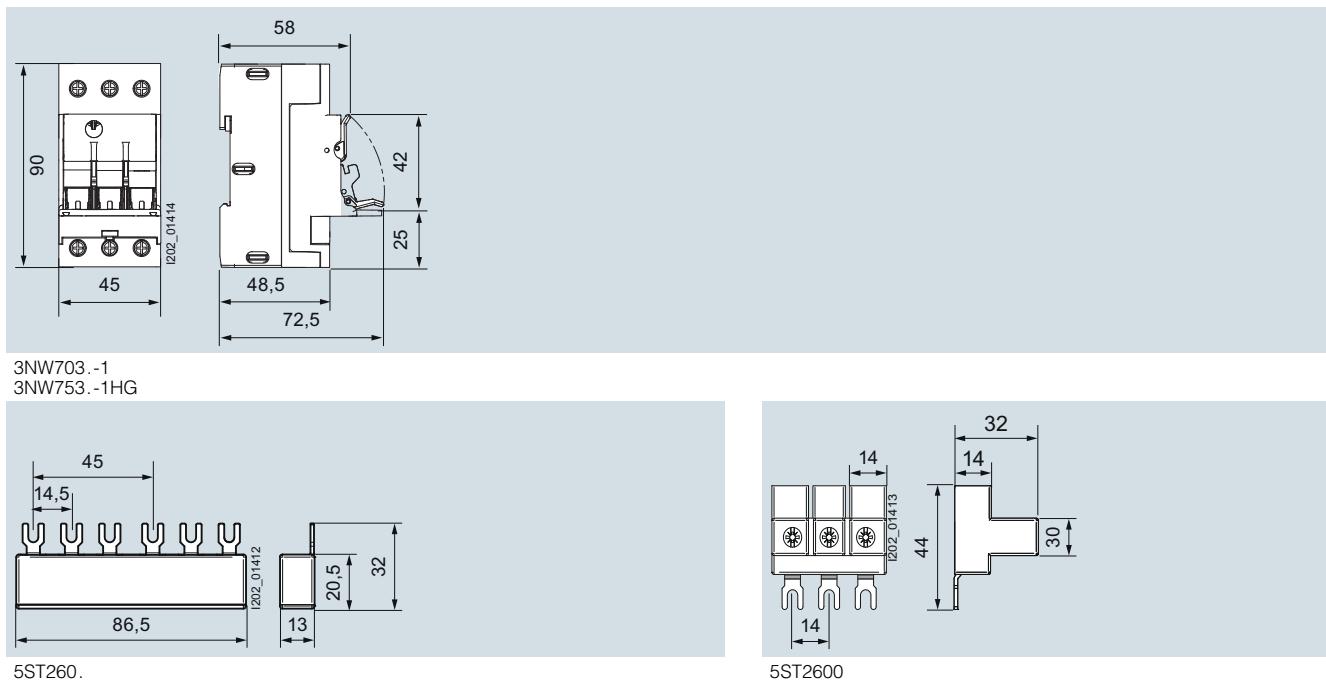

Circuit diagrams

Circuit diagrams



3NW703.-1
3NW753.-1HG



3NW7903-1

Fuse Systems

Class CC fuse systems

Overview

Class CC fuses are used for "branch circuit protection".

The enclosed fuse holders are designed and tested to comply with the US National Electrical Code NEC 210.20(A). This means that when subject to continuous operation, only 80 % of the rated current is permissible as operational current.

An operational current of 100 % of the rated current (30 A) is only permissible short-time.

The devices are prepared for the labels of the ALPHA FIX terminal blocks 8WH8120-7AA15 and 8WH8120-7XA05.

There are three different series:

- Characteristic: slow 3NW1...-0HG
For the protection of control transformers, reactors, inductances. Significantly slower than the minimum requirements specified by UL for Class CC Fuses of 12 s at $2 \times I_n$.

- Characteristic: quick 3NW2...-0HG
For a wide range of applications, for the protection of lighting installations, heating, control systems.

- Characteristic: slow, current-limiting, 3NW3...-0HG
Slow for overloads and quick for short circuits. High current limitation for the protection of motor circuits.

Note:

For class CC compact fuse holders for motor starter combinations, [see page 32](#).


Benefits

- For switchgear assemblies and machine manufacturers who export their systems to the USA or Canada.
- Easier export due to UL and CSA approvals for typical applications
- Modern design with touch protection to BGV A3 ensures safe installation.


Technical specifications

	Class CC fuse holders 3NW75.3-0HG	
Standards Approvals	UL 512; CSA C22.2 UL512; UL File No. E171267; CSA C22.2	
Rated voltage U_n	V AC	600
Rated current I_n	A	30
Rated conditional short-circuit current	KA	200
Switching capacity		
• Utilization category	AC-20B (switching without load)	
Max. power dissipation of fuse links		
• With cable, 6 mm ²	W	3
• With cable, 10 mm ²	W	4.3
Rated impulse withstand voltage	kV	6
Overvoltage category	II	
Pollution degree	2	
No-voltage changing of fuse links	Yes	
Sealable when installed	Yes	
Mounting position	Any	
Current direction	Any	
Degree of protection acc. to IEC 60529	IP20	
Terminals with touch protection according to BGV A3 at incoming and outgoing feeder	Yes	
Ambient temperature	°C	45
Conductor cross-sections		
• Solid and stranded	mm ²	1.5 ... 16
• AWG conductor cross-section, solid and stranded	AWG	15 ... 5
Tightening torque	Nm	2.5 (22 lb.in)

	Class CC fuse links		
	3NW1...-0HG	3NW2...-0HG	3NW3...-0HG
Standards Approvals	UL 248-4; CSA C22.2 UL 248-4; UL File Number E258218; CSA C22.2		
Characteristic	Slow	Quick	Slow, current limiting
Rated voltage	V AC	600	600
	V DC	--	150 (3 15 A) 300 (< 3 A, > 15 A)
Rated breaking capacity	kA AC	200	

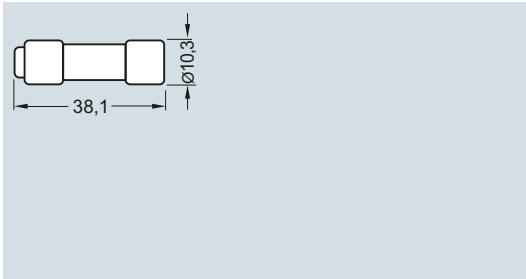Class CC fuse systems**Dimensional drawings**

3NW1...-0HG
3NW2...-0HG
3NW3...-0HG

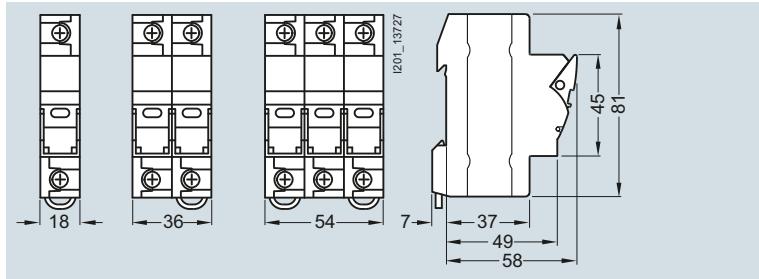

3NW75.3-0HG


Fuse Systems

Class CC fuse systems

Characteristic curves


3NW1...-0HG series

Time/current characteristics diagram

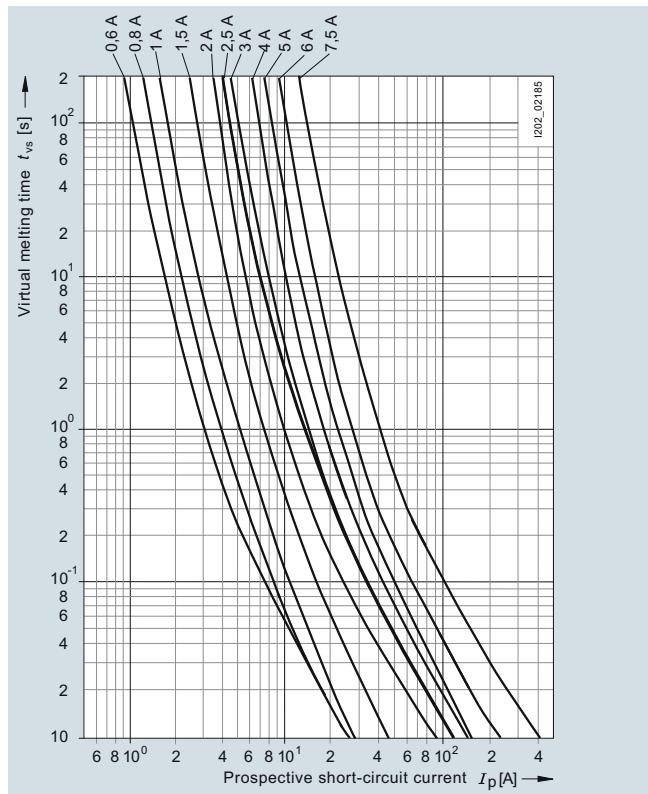


3NW1...-0HG series

Time/current characteristics diagram

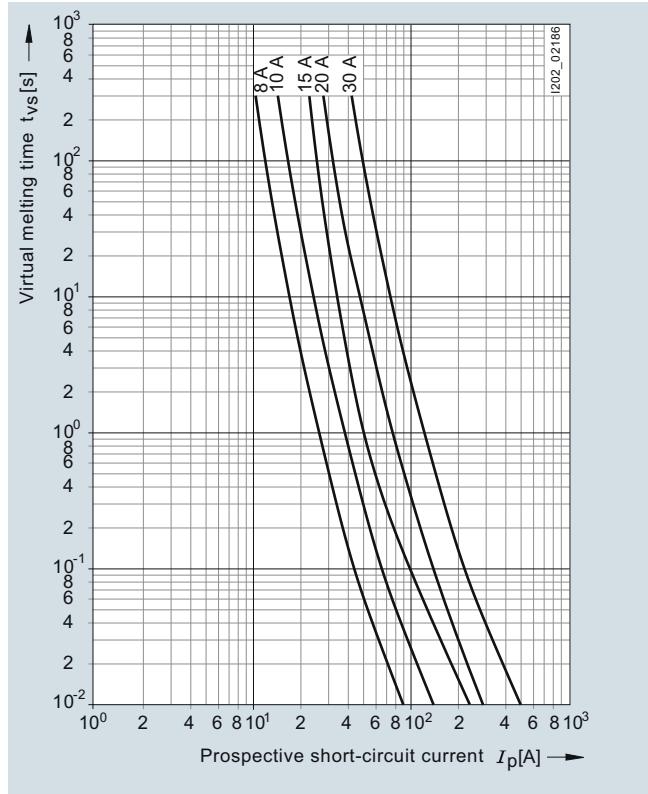


3NW2...-0HG series

Time/current characteristics diagram

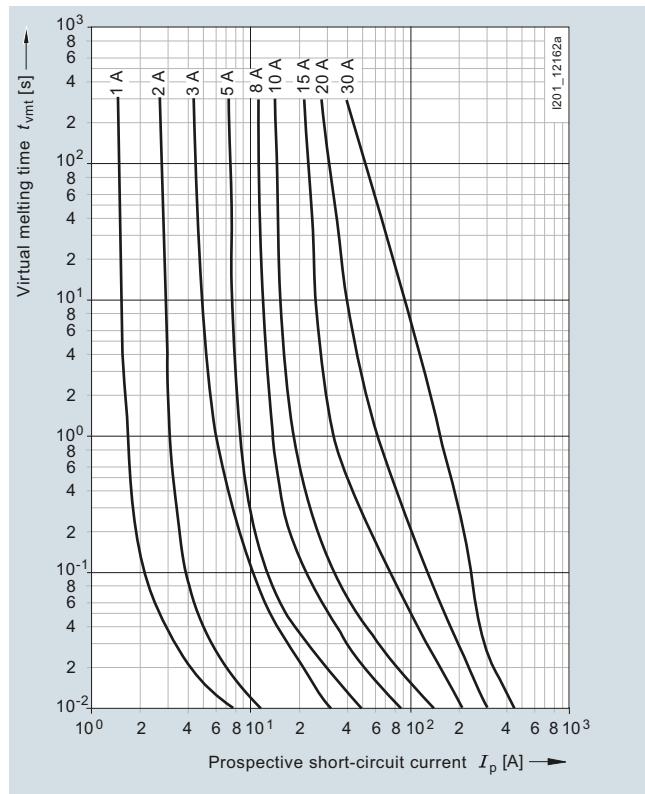


3NW3...-0HG series

Time/current characteristics diagram

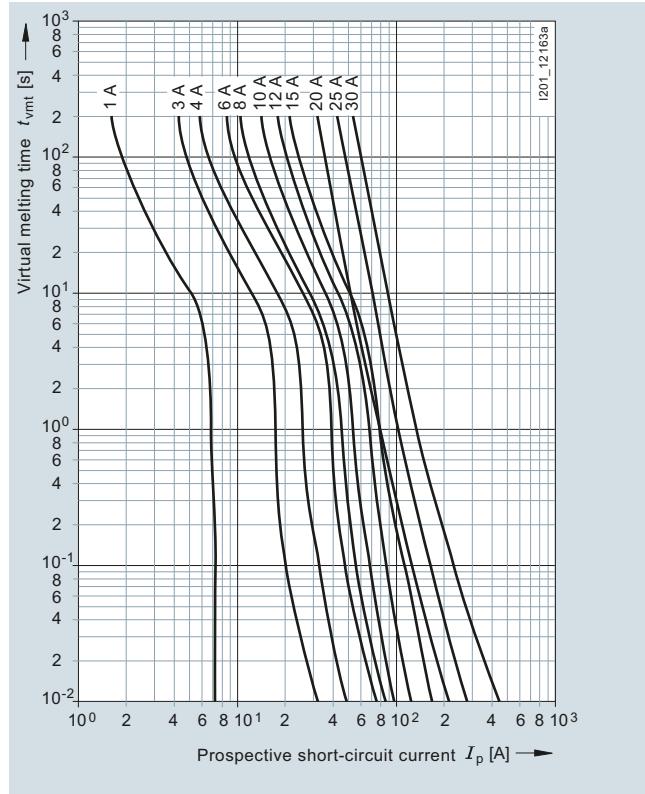

Class CC fuse systems

3NW3...-0HG series
Current limitation diagram

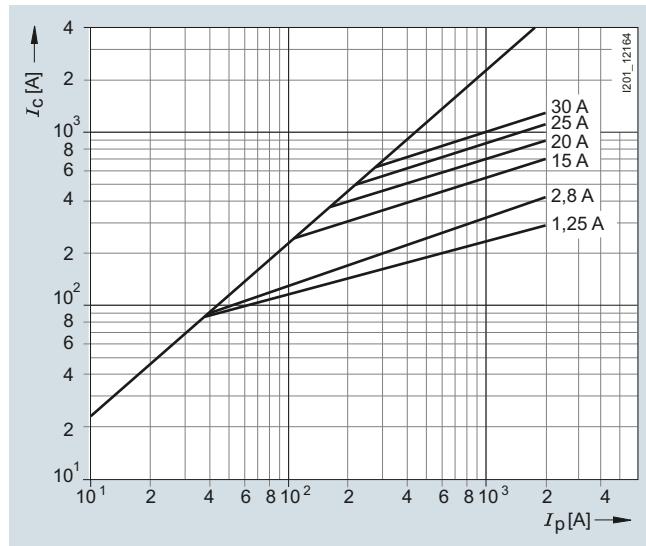

Fuse Systems


Busbar systems

Overview


Busbars with pin-type connections can be used for NEOZED safety switching devices and fuse bases. Busbars in 10 mm² and 16 mm² versions are available.

Busbars with fork plugs are used for the most frequently used NEOZED fuse bases made of ceramic.

Benefits

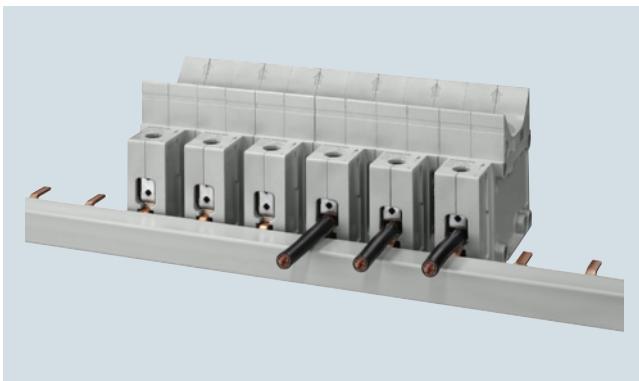


- Clear and visible conductor connection that can be easily checked when using the NEOZED D02 comfort base and which facilitates cable entry

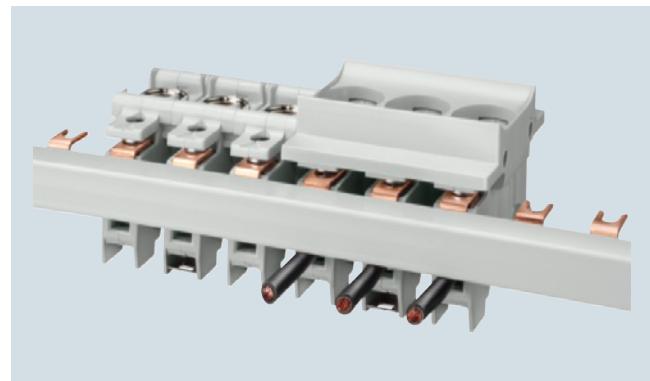


- Bus-mounting of NEOZED fuse bases made of molded plastic on 3-phase busbar with fork plug, which can be cut to length.




- Bus-mounting of NEOZED fuse bases made of ceramic on 3-phase busbar with fork plug, which can be cut to length.

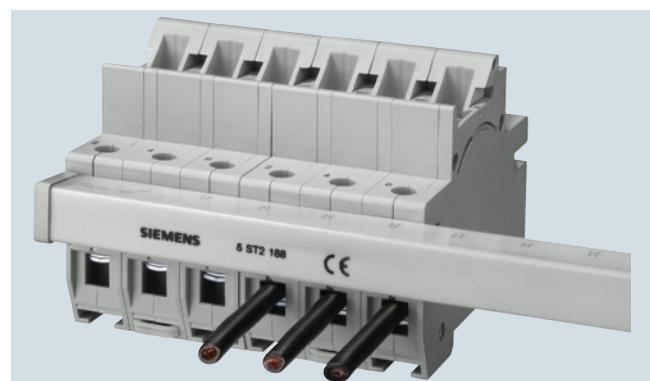

- Bus-mounting of MINIZED D01 fuse switch disconnectors on 3-phase busbar with fork plug, can be cut to length.

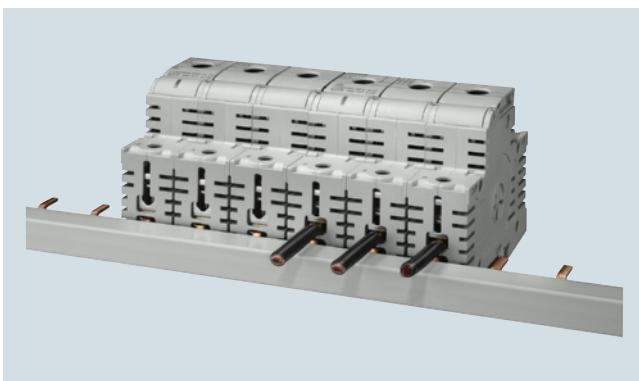


- Clear and visible conductor connection that can be easily checked when using MINIZED D02 switch disconnectors. This facilitates cable entry and saves time

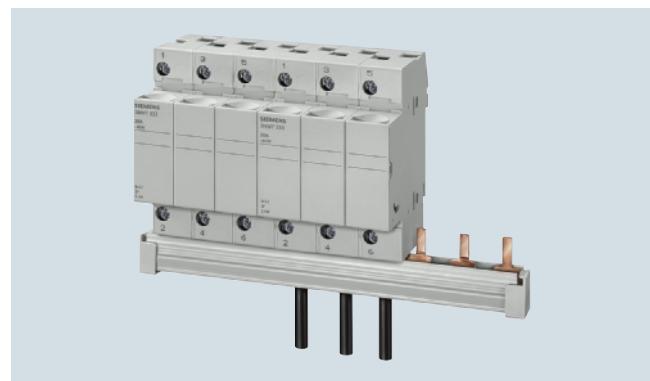


- Bus-mounting of cylindrical fuse holders 8 × 32 mm and 10 × 38 mm with three-phase pin busbar which can be cut to length

Busbar systems

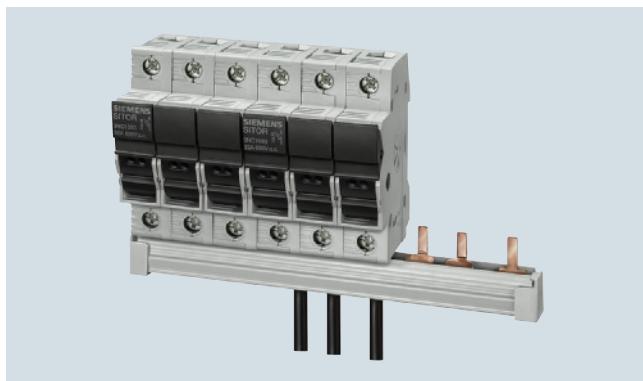

- Bus-mounting of SITOR cylindrical fuse holders 10 mm x 38 mm with the same terminal connection as Class CC fuse holders with 3-phase pin busbar which can be cut to length.

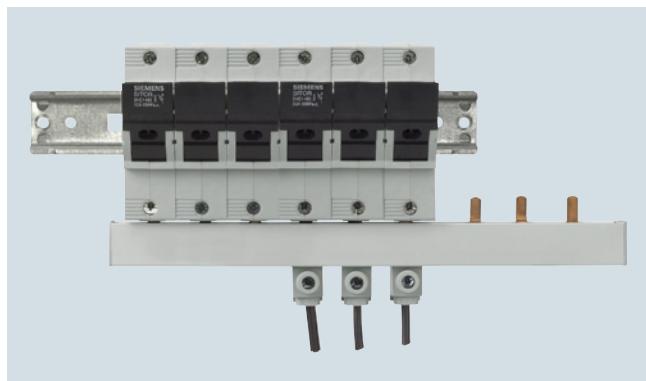

- Bus mounting with infeed through a connection terminal directly on the fuse holder up to a conductor cross-section of 25 mm²

Technical specifications

	5ST, 5SH	
Standards	EN 60439-1 (VDE 0660-500): 2005-01	
Busbar material	SF-Cu F 24	
Partition material	Plastic, Cyclooy 3600, Heat-resistant over 90 °C, flame-retardant, self-extinguishing, dioxin and halogen-free	
Rated operational voltage U_c	V AC	400
Rated current I_n		
• Cross-section 10 mm ²	A	63
• Cross-section 16 mm ²	A	80
Rated impulse withstand voltage U_{imp}	kV	4
Test pulse voltage (1.2/50)	kV	6.2
Rated conditional short-circuit current I_{cc}	kA	25
Resistance to climate		
• Constant atmosphere	Acc. to DIN 50015	23/83; 40/92; 55/20
• Humid heat	Acc. to IEC 60068-2-30	28 cycles
Insulation coordination		
• Overvoltage category	III	
• Pollution degree	2	
Maximum busbar current I_S/phase		
• Infeed at the start of the busbar		
- Cross-section 10 mm ²	A	63
- Cross-section 16 mm ²	A	80
• Infeed at the center of the busbar		
- Cross-section 10 mm ²	A	100
- Cross-section 16 mm ²	A	130

Fuse Systems

Busbar systems


5ST37...-HG busbars acc. to UL 508

	5ST37...-0HG	5ST37...-2HG	5ST3770-0HG	5ST3770-1HG
Standards	UL 508, CSA C22.2 No. 14-M 95			
Approvals	UL 508 File No. E328403 CSA			
Operational voltage				
• Acc. to IEC	V AC	690		
• Acc. to UL 489	V AC	600		
Rated conditional short-circuit current	kA	10 (RMS symmetrical 600 V for three cycles)		
• Dielectric strength	kV/mm	25		
• Surge strength	kV	> 9.5		
Rated current	A	--	--	115
Maximum busbar current I_S/phase				
• Infeed at the start of the busbar	A	80	100	--
• Infeed at the center of the busbar	A	160	200	--
Insulation coordination				
• Overvoltage category	III			
• Pollution degree	2			
Busbar cross-section	mm ² Cu	18	25	--
Infeed		Any		
Conductor cross-sections	AWG mm ²	--	--	10 ... 1/0 6 ... 35
Terminals				
• Terminal tightening torque	Nm lbs/in	--	--	5
		--	--	3.5
			50	35

Infeed at the start of the busbar



Infeed along the busbar or midpoint infeed

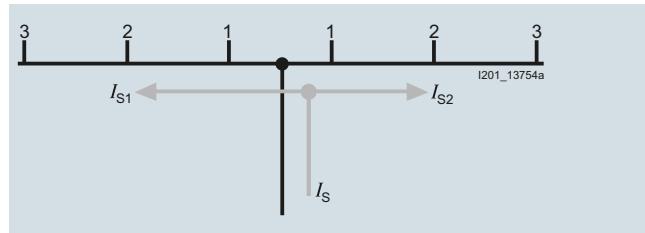


The sum of the output current per branch must not be greater than the busbar current $I_{S1,2}$ / phase.

Dimensional drawings

5ST37

Pin spacing in MW (modular width; 1 MW = 18 mm)


Dimensions of side views in mm (approx.)

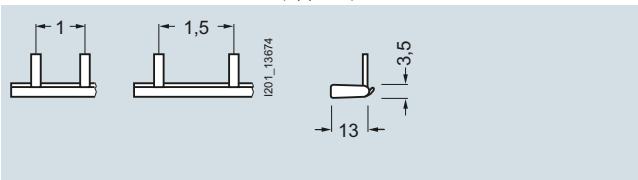

5ST3700 5ST3703
5ST3701 Single-phase Single-phase



5ST3704
5ST3705
Two-phase

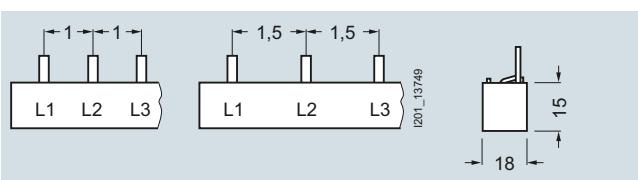


5ST3708 5ST3714
5ST3710 Three-phase Three-phase

5ST2


Fork spacing in MW (modular width; 1 MW = 18 mm)

Dimensions of side views in mm (approx.)

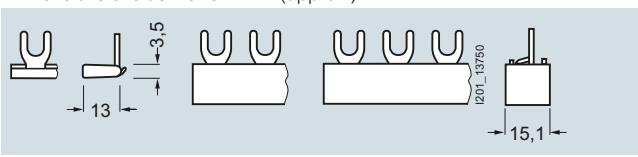


5ST2186 5ST2187 5ST2188
5ST2190 5ST2191 5ST2192
Single-phase Two-phase Three-phase

Busbars for DIAZED EZR fuse bases

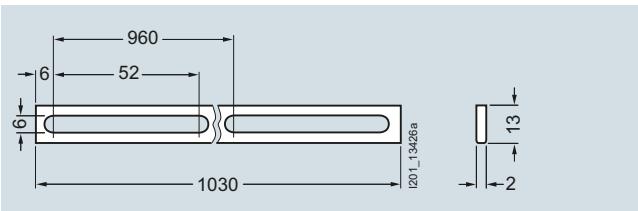


5SH3500

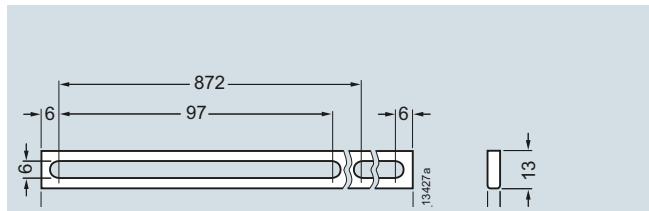


5SH3501

5SH5


Fork spacing in MW (modular width; 1 MW = 18 mm), dimensions of side views in mm (approx.)

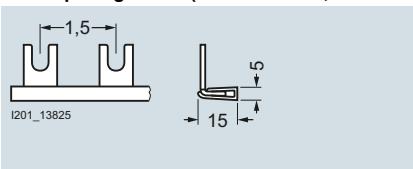

5SH5517

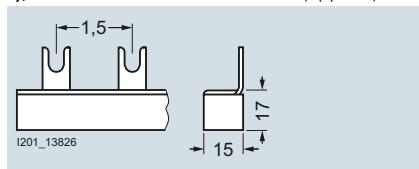

5SH5320

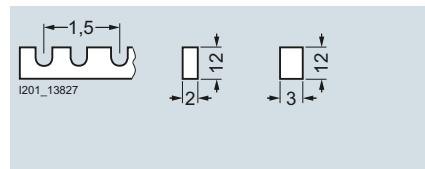

5SH5321 5SH5322

Fuse Systems


Busbar systems

5ST37. . . HG busbars acc. to UL 508


5ST37

Pin spacing in MW (modular width; 1 MW = 18 mm)


Dimensions of side views in mm (approx.)

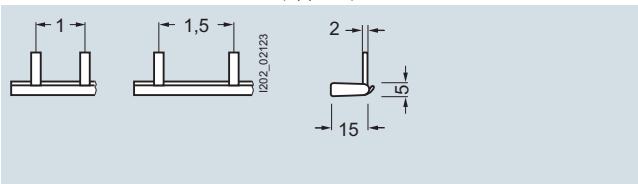


5ST3701-0HG 5ST3703-0HG

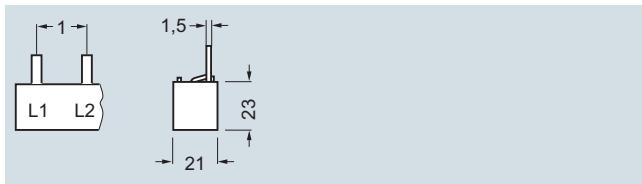

5ST3705-0HG

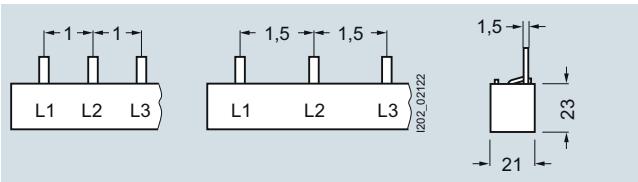


5ST3710-0HG 5ST3714-0HG

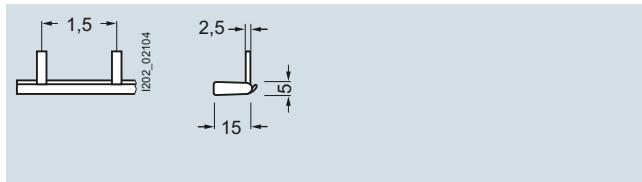


5ST3701-2HG




5ST3705-2HG

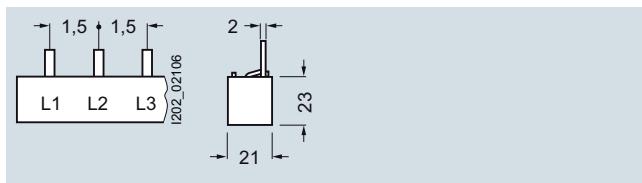


5ST3710-2HG

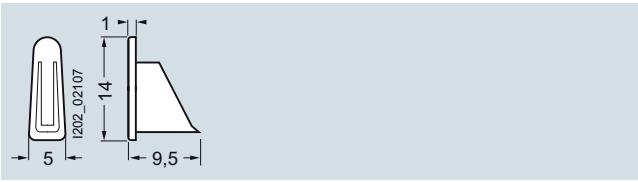


5ST3748-0HG

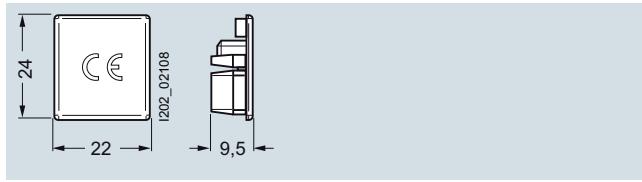

5ST3750-0HG

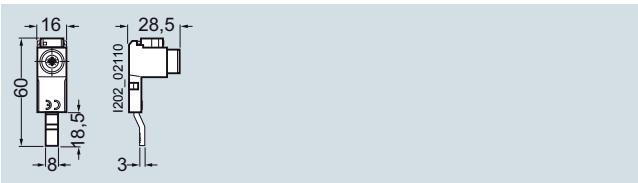

5ST3770-0HG

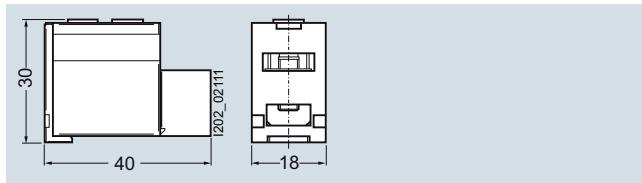


5ST3770-1HG

5ST36 touch protection covers

Pin spacing in MW (modular width; 1 MW = 18 mm)

Dimensions of side views in mm (approx.)

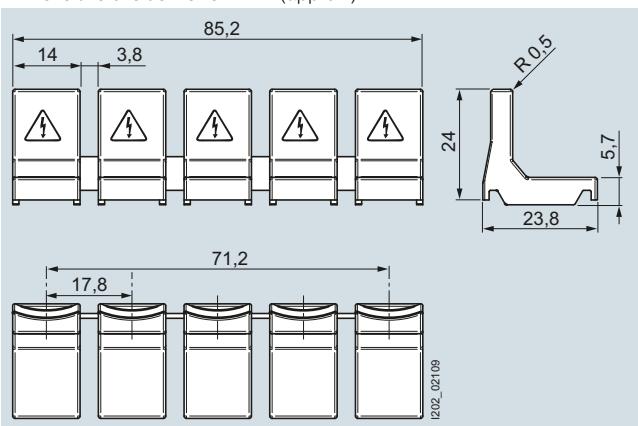

5ST3655-0HG

Fuse Systems

3NA, 3ND LV HRC Fuse Systems

LV HRC fuse links

Overview

LV HRC fuse systems (NH type) are used for installation systems in non-residential, commercial and industrial buildings as well as in switchgear assemblies of power utilities. They therefore protect essential building parts and systems.

LV HRC fuse systems (NH type) are fuse systems designed for operation by experts. There are no constructional requirements for non-interchangeability of rated current and touch protection.

The components and auxiliary equipment are designed in such a way as to ensure the safe replacement of LV HRC fuse systems or isolation of systems.

LV HRC fuse links are available in the sizes 000, 00, 0, 1, 2, 3, 4 and 4a.


LV HRC fuse links are available in the following operational classes:

- gG for cable and line protection
- aM for short-circuit protection of switching devices in motor circuits
- gR or aR for protection of power semiconductors
- gS: The new gS operational class combines cable and line protection with semiconductor protection.

LV HRC fuse links of size 000 can also be used in LV HRC fuse bases, LV HRC fuse switch disconnectors, LV HRC fuse strips as well as LV HRC in-line fuse switch disconnectors of size 00.

The fuse links 300 A, 355 A and 425 A comply with the standard but do not have the VDE mark.

LV HRC components:

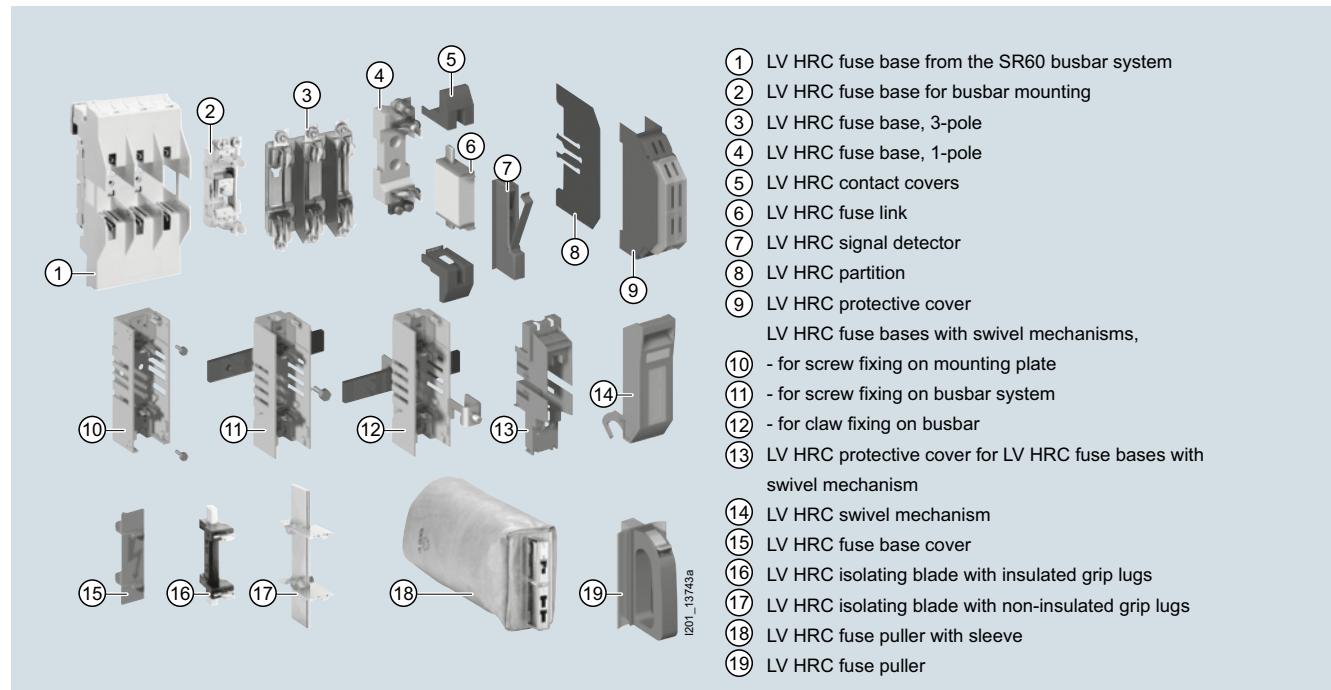

Fuse Systems

3NA, 3ND LV HRC Fuse Systems

LV HRC fuse links

Technical specifications

	LV HRC fuse links							
	Operational class							
	gG						Operational class aM	
	3NA6...-4	3NA6...	3NA3...	3NA6...-6	3NA3...-6		3ND1	
	3NA6...-4KK	3NA6...-7	3NA3...-7	3NA7...-6			3ND2	
	3NA383-8	3NA7...	3NA7...-7					
Standards Approvals	IEC 60269-1, -2; EN 60269-1; DIN VDE 0636 DIN VDE 0636-2; CSA 22.2 No.106, File Number 016325_0_00 (CSA approval of fuses 500 V for 600 V)							
Rated voltage U_n	V AC	400	500	500	690	690	500	
	V DC	--	250	250	250	250	--	
• Sizes n 1 and 2	V AC	400	500	500	690	690	690	
	V DC	--	440	440	440	440	--	
• Size 3	V AC	--	--	500	--	690	690	
	V DC	--	--	440	--	440	--	
• Sizes 4 and 4a (IEC design)	V AC	--	--	500	--	--	--	
	V DC	--	--	440	--	--	--	
Rated current I_n	A	10 ... 400	2 ... 400	2 ... 1250	2 ... 315	2 ... 500	6 ... 630	
Rated breaking capacity	kA AC	120						
	kA DC	--	25					
Contact pins	Non-corroding, silver-plated							
Resistance to climate	°C	-20 ... +50 at 95 % relative humidity						

Fuse Systems

3NA, 3ND LV HRC Fuse Systems


LV HRC fuse links

Characteristic curves


3NA30 series

Size: 0
 Operational class: gG
 Rated voltage: 500 V AC/440 V DC
 Rated current: 6 ... 160 A

Time/current characteristics diagram

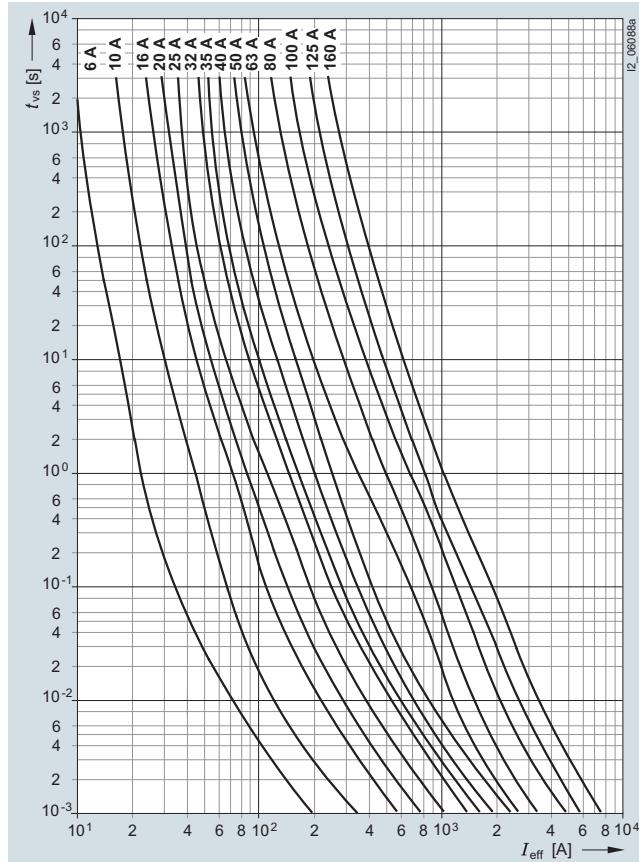


Current limitation diagram

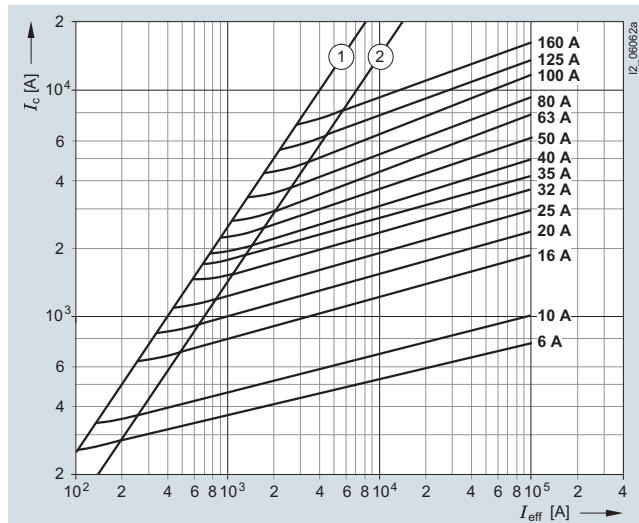

- ① Peak short-circuit current with largest DC component
- ② Peak short-circuit current without DC component

Melting I^2t values diagram

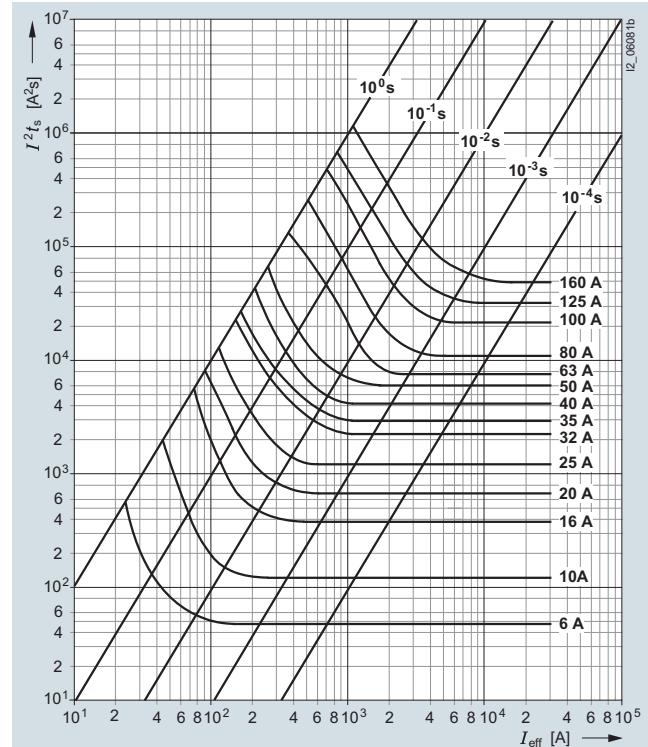

Type	I_n A	P_V W	$\Delta\vartheta$ K	I^2t_s 1 ms A ² s	I^2t_s 4 ms A ² s
3NA3001	6	1.5	6	46	50
3NA3003	10	1	9	120	130
3NA3005	16	1.9	11	370	420
3NA3007	20	2.3	13	670	750
3NA3010	25	2.7	15	1200	1380
3NA3012	32	3	13	2200	2400
3NA3014	35	3	17	3000	3300
3NA3017	40	3.4	17	4000	4500
3NA3020	50	4.5	24	6000	6800
3NA3022	63	5.8	27	7700	9800
3NA3024	80	7	34	12000	16000
3NA3030	100	8.2	37	24000	30600
3NA3032	125	10.2	38	36000	50000
3NA3036	160	13.5	44	58000	85000

Type	I^2t_s 230 V AC A ² s	I^2t_s 400 V AC A ² s	I^2t_s 500 V AC A ² s
3NA3001	80	110	150
3NA3003	180	265	370
3NA3005	580	750	1000
3NA3007	1000	1370	1900
3NA3010	1800	2340	3300
3NA3012	3400	4550	6400
3NA3014	4900	6750	9300
3NA3017	6100	8700	12100
3NA3020	9100	11600	16000
3NA3022	14200	19000	26500
3NA3024	23100	30700	43000
3NA3030	40800	56200	80000
3NA3032	70000	91300	130000
3NA3036	120000	158000	223000

Fuse Systems


3NA, 3ND LV HRC Fuse Systems

LV HRC fuse links


3NA31, 3NA61, 3NA71 series

Size: 1
 Operational class: gG
 Rated voltage: 500 V AC/440 V DC
 Rated current: 16 ... 250 A

Time/current characteristics diagram

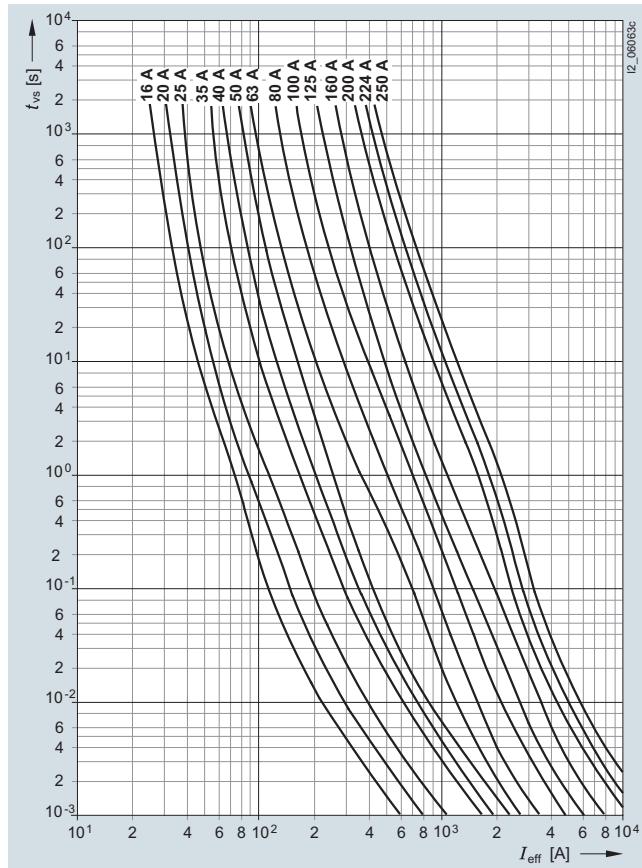


Current limitation diagram

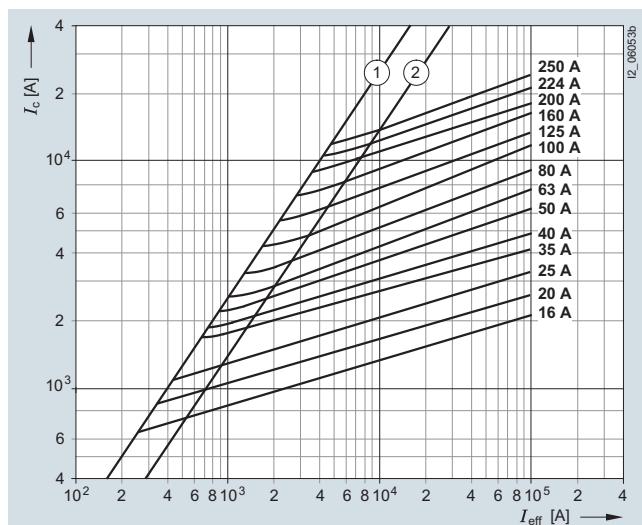

- ① Peak short-circuit current with largest DC component
 ② Peak short-circuit current without DC component

Melting I^2t values diagram

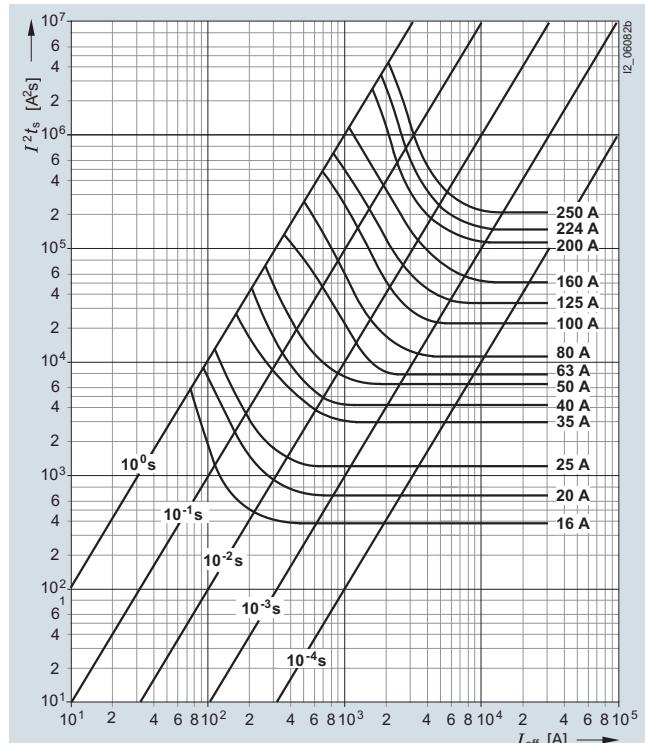

Type	I_n	P_V	$\Delta\vartheta$	I^2t_s	1 ms	4 ms
	A	W	K	A^2s	A^2s	A^2s
3NA3105, 3NA6105, 3NA7105	16	2.1	8	370	420	
3NA3107, 3NA6107, 3NA7107	20	2.4	10	670	750	
3NA3110, 3NA6110, 3NA7110	25	2.8	11	1200	1380	
3NA3114, 3NA6114, 3NA7114	35	3.2	16	3000	3300	
3NA3117, 3NA6117, 3NA7117	40	3.6	16	4000	4500	
3NA3120, 3NA6120, 3NA7120	50	4.6	20	6000	6800	
3NA3122, 3NA6122, 3NA7122	63	6	21	7700	9800	
3NA3124, 3NA6124, 3NA7124	80	7.5	29	12000	16000	
3NA3130, 3NA6130, 3NA7130	100	8.9	30	24000	30600	
3NA3132, 3NA6132, 3NA7132	125	10.7	31	36000	50000	
3NA3136, 3NA6136, 3NA7136	160	13.9	34	58000	85000	
3NA3140, 3NA6140, 3NA7140	200	15	36	115000	135000	
3NA3142, 3NA6142, 3NA7142	224	16.1	37	145000	170000	
3NA3144, 3NA6144, 3NA7144	250	17.3	39	205000	230000	

Type	I^2t_a	230 V AC	400 V AC	500 V AC
	A^2s	A^2s	A^2s	A^2s
3NA3105, 3NA6105, 3NA7105	580	750	1000	
3NA3107, 3NA6107, 3NA7107	1000	1370	1900	
3NA3110, 3NA6110, 3NA7110	1800	2340	3300	
3NA3114, 3NA6114, 3NA7114	4900	6750	9300	
3NA3117, 3NA6117, 3NA7117	6100	8700	12100	
3NA3120, 3NA6120, 3NA7120	9100	11600	16000	
3NA3122, 3NA6122, 3NA7122	14200	19000	26500	
3NA3124, 3NA6124, 3NA7124	23100	30700	43000	
3NA3130, 3NA6130, 3NA7130	40800	56200	80000	
3NA3132, 3NA6132, 3NA7132	70000	91300	130000	
3NA3136, 3NA6136, 3NA7136	120000	158000	223000	
3NA3140, 3NA6140, 3NA7140	218000	285000	400000	
3NA3142, 3NA6142, 3NA7142	299000	392000	550000	
3NA3144, 3NA6144, 3NA7144	420000	551000	780000	

Fuse Systems


3NA, 3ND LV HRC Fuse Systems

LV HRC fuse links


3NA31..-6, 3NA61..-6, 3NA71..-6 series

Size: 1
 Operational class: gG
 Rated voltage: 690 V AC/440 V DC
 Rated current: 50 ... 200 A

Time/current characteristics diagram

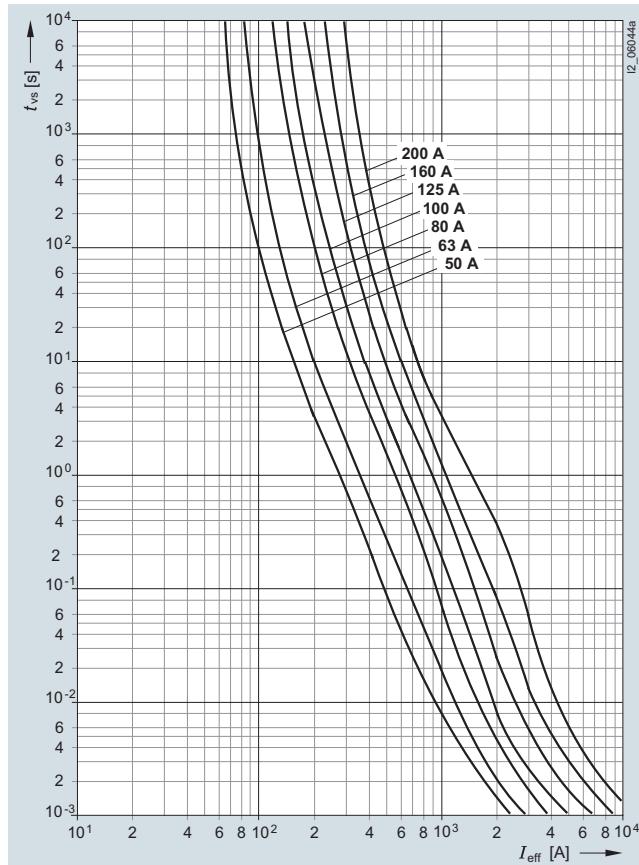


Current limitation diagram

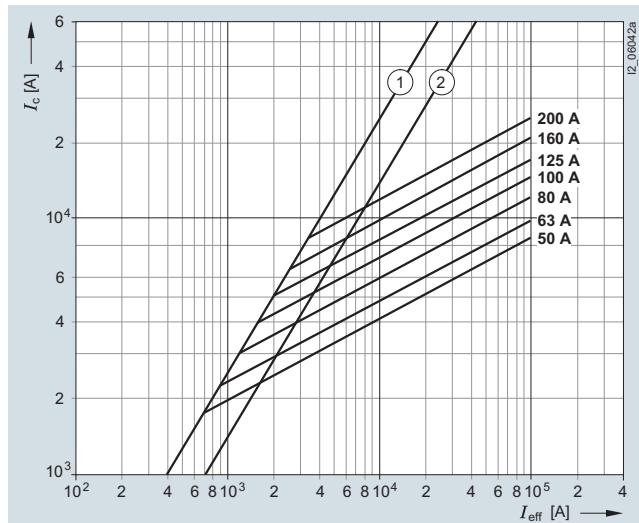

① Peak short-circuit current with largest DC component

② Peak short-circuit current without DC component

Melting I^2t_s values diagram

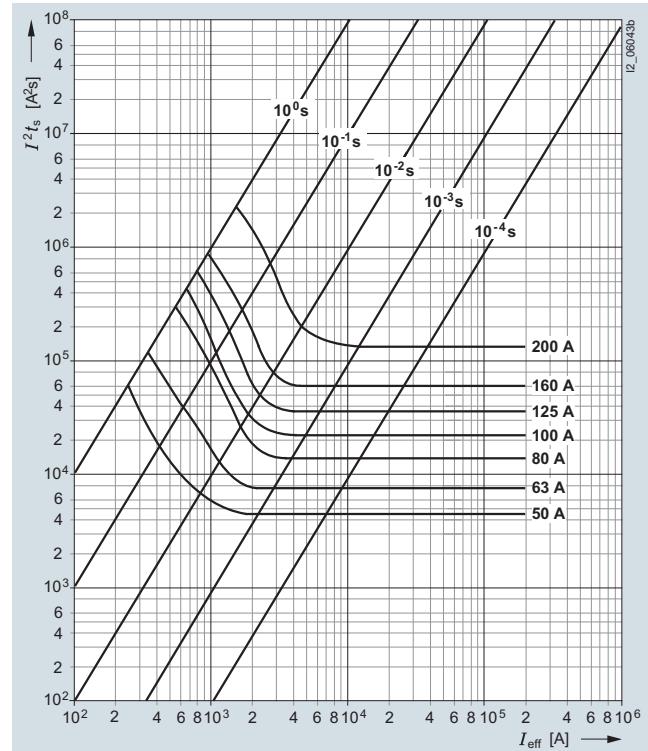

Type	I_n	P_V	$\Delta\vartheta$	I^2t_s	1 ms	4 ms
	A	W	K	A^2s	A^2s	A^2s
3NA3120-6, 3NA6120-6, 3NA7120-6	50	6.7	21	440	7400	
3NA3122-6, 3NA6122-6, 3NA7122-6	63	7.6	22	7600	10100	
3NA3124-6, 3NA6124-6, 3NA7124-6	80	6.7	22	13500	17000	
3NA3130-6, 3NA6130-6, 3NA7130-6	100	8.7	28	21200	30500	
3NA3132-6, 3NA6132-6, 3NA7132-6	125	10.5	29	36000	50000	
3NA3136-6, 3NA6136-6, 3NA7136-6	160	13.8	33	58000	85000	
3NA3140-6, 3NA6140-6, 3NA7140-6	200	16.6	35	132000	144000	

Type	I^2t_a	230 V AC	400 V AC	690 V AC
	A^2s	A^2s	A^2s	A^2s
3NA3120-6, 3NA6120-6, 3NA7120-6	9100	11200	1900	
3NA3122-6, 3NA6122-6, 3NA7122-6	13600	17000	24000	
3NA3124-6, 3NA6124-6, 3NA7124-6	24300	32000	55000	
3NA3130-6, 3NA6130-6, 3NA7130-6	42400	52000	75000	
3NA3132-6, 3NA6132-6, 3NA7132-6	69500	82200	130000	
3NA3136-6, 3NA6136-6, 3NA7136-6	120000	155000	223000	
3NA3140-6, 3NA6140-6, 3NA7140-6	211000	240000	360000	

Fuse Systems


3NA, 3ND LV HRC Fuse Systems

LV HRC fuse links


3NA32, 3NA62, 3NA72 series

Size: 2
 Operational class: gG
 Rated voltage: 500 V AC/440 V DC
 Rated current: 35 ... 400 A

Time/current characteristics diagram

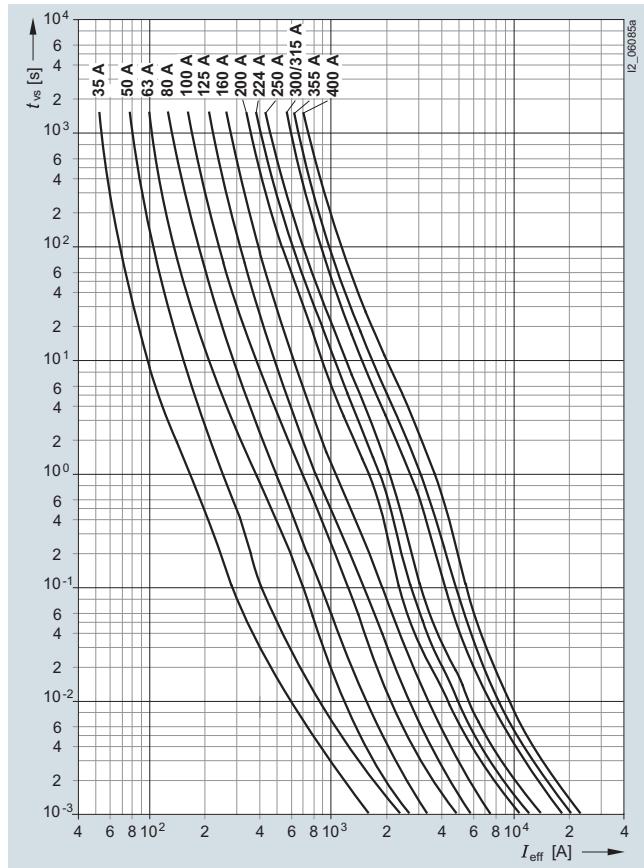


Current limitation diagram

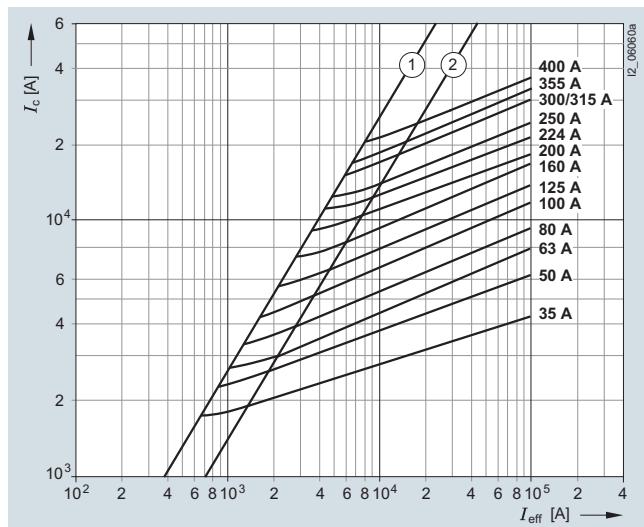

- ① Peak short-circuit current with largest DC component
- ② Peak short-circuit current without DC component

Melting I^2t values diagram

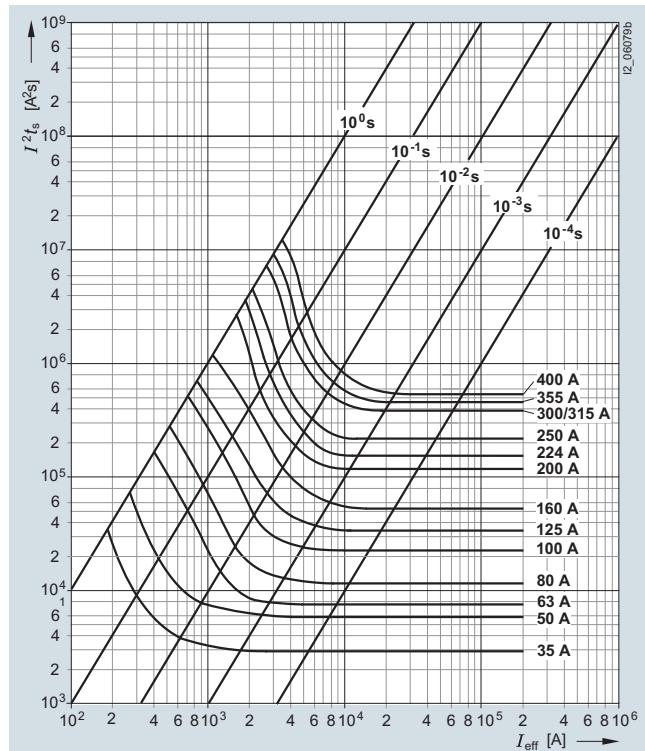

Type	I_n	P_v	$\Delta\theta$	I^2t_s	1 ms	4 ms
	A	W	K	A^2s	A^2s	
3NA3214, 3NA6214, 3NA7214	35	3.2	12	3000	3300	
3NA3220, 3NA6220, 3NA7220	50	4.7	16	6000	6800	
3NA3222, 3NA6222, 3NA7222	63	5.9	16	7700	9800	
3NA3224, 3NA6224, 3NA7224	80	6.8	21	12000	16000	
3NA3230, 3NA6230, 3NA7230	100	7.4	22	24000	30600	
3NA3232, 3NA6232, 3NA7232	125	9.8	27	36000	50000	
3NA3236, 3NA6236, 3NA7236	160	12.6	34	58000	85000	
3NA3240, 3NA6240, 3NA7240	200	14.9	33	115000	135000	
3NA3242, 3NA6242, 3NA7242	224	15.4	31	145000	170000	
3NA3244, 3NA6244, 3NA7244	250	17.9	38	205000	230000	
3NA3250, 3NA6250	300	19.4	34	361000	433000	
3NA3252, 3NA6252, 3NA7252	315	21.4	35	361000	433000	
3NA3254, 3NA6254	355	26.0	49	441000	538000	
3NA3260, 3NA6260, 3NA7260	400	27.5	52	529000	676000	

Type	I^2t_a	230 V AC	400 V AC	500 V AC
	A^2s	A^2s	A^2s	A^2s
3NA3214, 3NA6214, 3NA7214	4900	6750	9300	
3NA3220, 3NA6220, 3NA7220	9100	11600	16000	
3NA3222, 3NA6222, 3NA7222	14200	19000	26500	
3NA3224, 3NA6224, 3NA7224	23100	30700	43000	
3NA3230, 3NA6230, 3NA7230	40800	56200	80000	
3NA3232, 3NA6232, 3NA7232	70000	91300	130000	
3NA3236, 3NA6236, 3NA7236	120000	158000	223000	
3NA3240, 3NA6240, 3NA7240	218000	285000	400000	
3NA3242, 3NA6242, 3NA7242	299000	392000	550000	
3NA3244, 3NA6244, 3NA7244	420000	551000	780000	
3NA3250, 3NA6250	670000	901000	1275000	
3NA3252, 3NA6252, 3NA7252	670000	901000	1275000	
3NA3254, 3NA6254	800000	1060000	1500000	
3NA3260, 3NA6260, 3NA7260	1155000	1515000	2150000	

Fuse Systems


3NA, 3ND LV HRC Fuse Systems

LV HRC fuse links


3NA32..-6, 3NA62..-6, 3NA72..-6 series

Size: 2
 Operational class: gG
 Rated voltage: 690 V AC/440 V DC
 Rated current: 80 ... 315 A

Time/current characteristics diagram

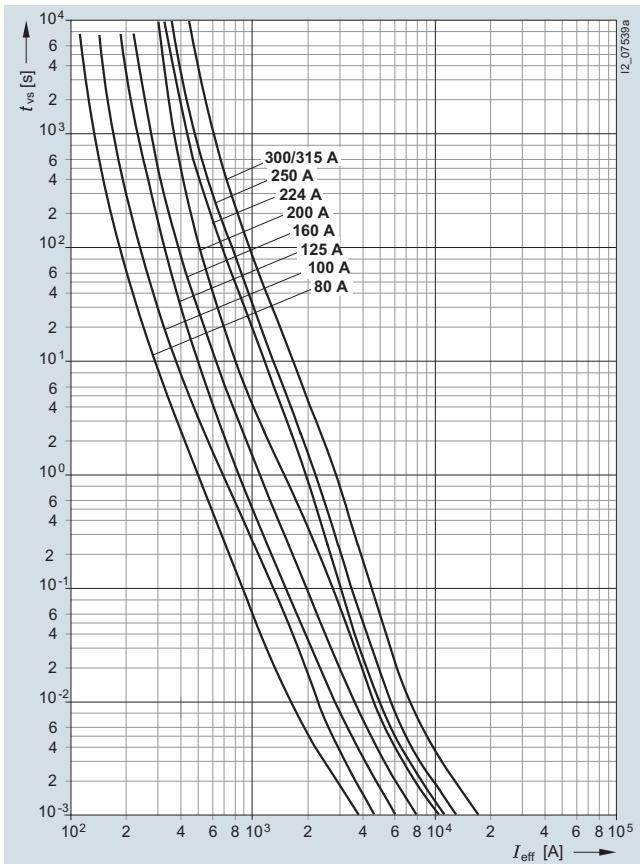


Current limitation diagram

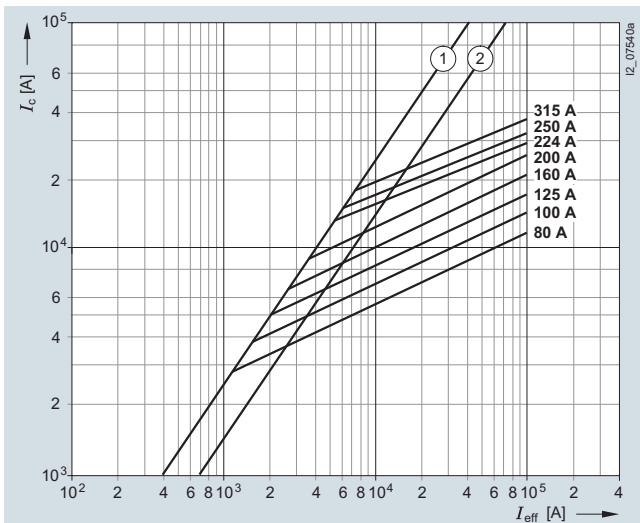

- (1) Peak short-circuit current with largest DC component
 (2) Peak short-circuit current without DC component

Melting I^2t values diagram

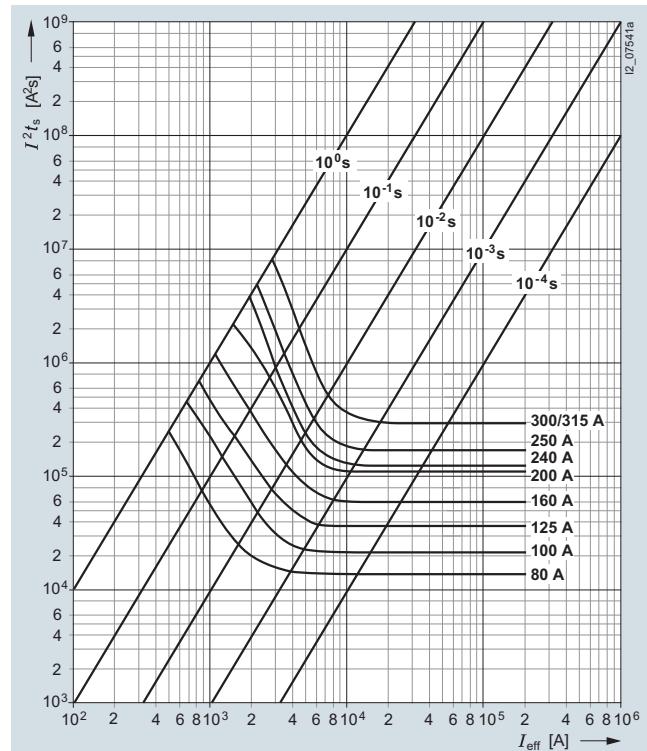

Type	I_n	P_v	$\Delta\vartheta$	I^2t_s	1 ms	4 ms
	A	W	K	A^2s	A^2s	A^2s
3NA3224-6, 3NA6224-6, 3NA7224-6	80	6.6	22	13500	17000	
3NA3230-6, 3NA6230-6, 3NA7230-6	100	8.5	26	21200	30500	
3NA3232-6, 3NA6232-6, 3NA7232-6	125	9.8	29	36000	50000	
3NA3236-6, 3NA6236-6, 3NA7236-6	160	13.3	31	58000	85000	
3NA3240-6, 3NA6240-6, 3NA7240-6	200	16.1	33	132000	144000	
3NA3242-6, 3NA6242-6, 3NA7242-6	224	19.9	38	125000	162000	
3NA3244-6, 3NA6244-6, 3NA7244-6	250	23	44	180000	215000	
3NA3250-6, 3NA6250-6, 3NA7250-6	300	25.6	38	300000	380000	
3NA3252-6, 3NA6252-6, 3NA7252-6	315	28.2	42	300000	380000	

Type	I^2t_a	I^2t_a		
		230 V AC	400 V AC	690 V AC
	A^2s	A^2s	A^2s	A^2s
3NA3224-6, 3NA6224-6, 3NA7224-6	24300	32000	55000	
3NA3230-6, 3NA6230-6, 3NA7230-6	42400	52000	75000	
3NA3232-6, 3NA6232-6, 3NA7232-6	69500	82200	130000	
3NA3236-6, 3NA6236-6, 3NA7236-6	120000	155000	223000	
3NA3240-6, 3NA6240-6, 3NA7240-6	211000	240000	360000	
3NA3242-6, 3NA6242-6, 3NA7242-6	300000	300000	450000	
3NA3244-6, 3NA6244-6, 3NA7244-6	453000	350000	525000	
3NA3250-6, 3NA6250-6, 3NA7250-6	480000	625000	940000	
3NA3252-6, 3NA6252-6, 3NA7252-6	480000	625000	940000	

Fuse Systems


3NA, 3ND LV HRC Fuse Systems

LV HRC fuse links


3NA33 series

Size: 3
 Operational class: gG
 Rated voltage: 500 V AC/440 V DC
 Rated current: 200 ... 630 A

Time/current characteristics diagram

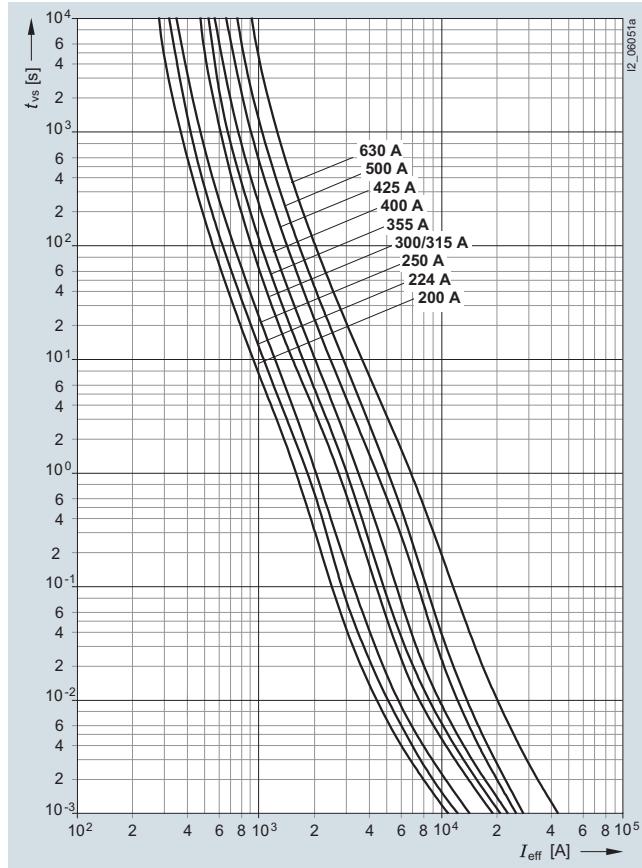


Current limitation diagram

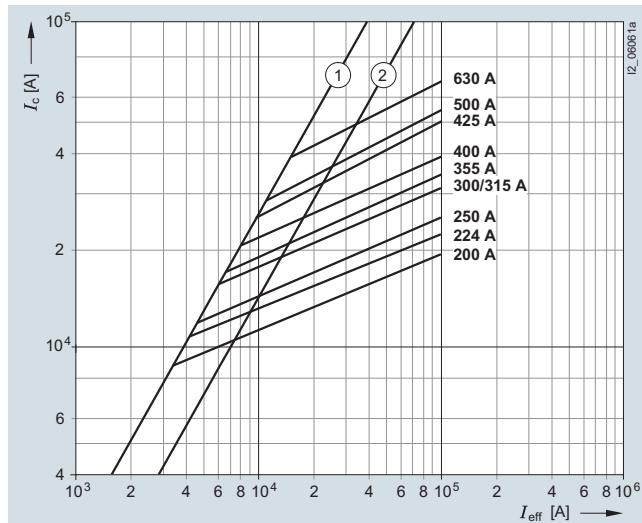

① Peak short-circuit current with largest DC component

② Peak short-circuit current without DC component

Melting I^2t values diagram

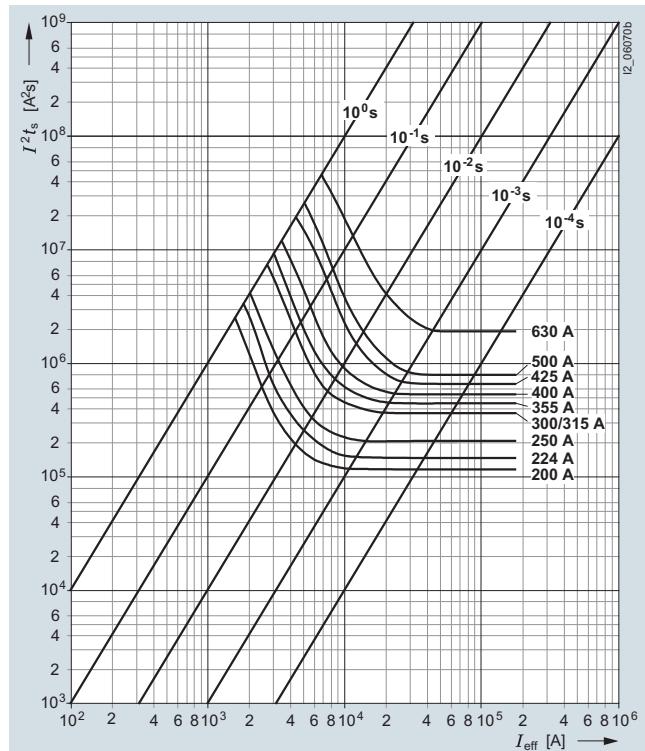

Type	I_n A	P_v W	$\Delta\theta$ K	I^2t_s	
				1 ms A^2s	4 ms A^2s
3NA3340	200	14.9	32	115000	135000
3NA3342	224	15.4	31	145000	170000
3NA3344	250	17.9	36	205000	230000
3NA3350	300	19.4	19	361000	433000
3NA3352	315	21.4	22	361000	433000
3NA3354	355	26.0	26	441000	538000
3NA3360	400	27.5	28	529000	676000
3NA3362	425	26.5	34	650000	970000
3NA3365	500	36.5	41	785000	1270000
3NA3372	630	44.0	50	1900000	2700000

Type	I^2t_a		
	230 V AC A^2s	400 V AC A^2s	500 V AC A^2s
3NA3340	218000	285000	400000
3NA3342	299000	392000	550000
3NA3344	420000	551000	780000
3NA3350	670000	901000	1275000
3NA3352	670000	901000	1275000
3NA3354	800000	1060000	1500000
3NA3360	1155000	1515000	2150000
3NA3362	1515000	1856000	2270000
3NA3365	1915000	2260000	2700000
3NA3372	3630000	4340000	5400000

Fuse Systems


3NA, 3ND LV HRC Fuse Systems

LV HRC fuse links


3NA33..-6 series

Size: 3
 Operational class: gG
 Rated voltage: 690 V AC/440 V DC
 Rated current: 250 ... 500 A

Time/current characteristics diagram

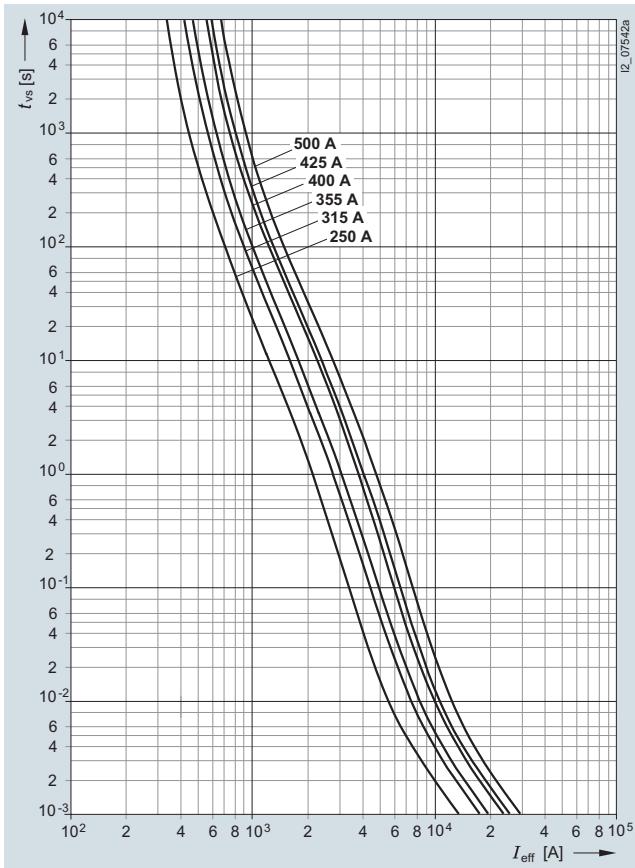


Current limitation diagram

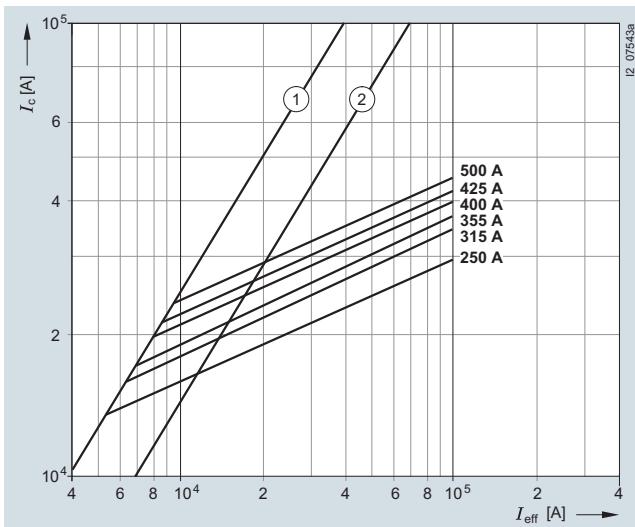

- ① Peak short-circuit current with largest DC component
- ② Peak short-circuit current without DC component

Melting I^2t values diagram

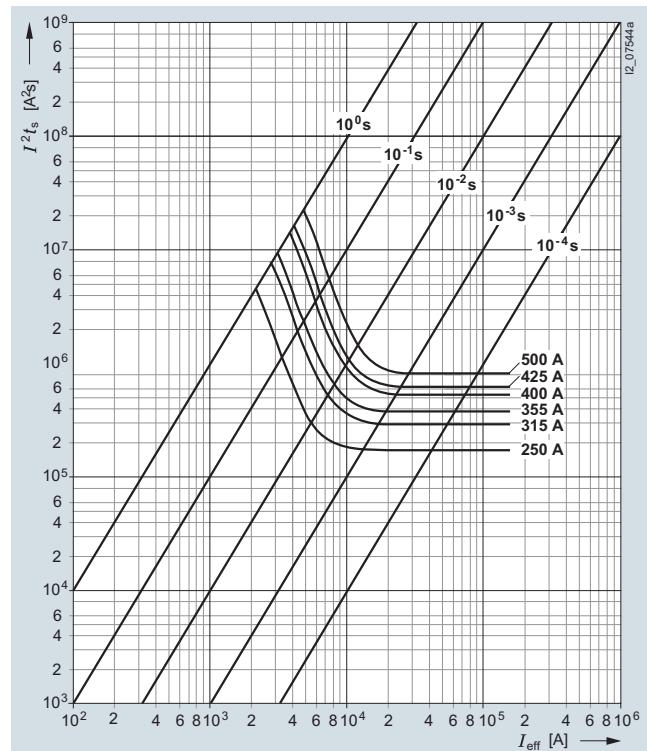

Type	I_n	P_v	$\Delta\theta$	I^2t_s	4 ms A^2s
	A	W	K	1 ms A^2s	
3NA3344-6	250	23	44	180000	215000
3NA3352-6	315	28.2	42	300000	380000
3NA3354-6	355	32.5	40	380000	470000
3NA3360-6	400	33.2	42	540000	675000
3NA3362-6	425	35.3	44	625000	765000
3NA3365-6	500	43.5	52	810000	1000000

Type	I^2t_a	400 V AC A^2s	690 V AC A^2s
	230 V AC A^2s		
3NA3344-6	453000	350000	525000
3NA3352-6	480000	625000	940000
3NA3354-6	585000	760000	1150000
3NA3360-6	847000	1100000	1650000
3NA3362-6	925000	1200000	1800000
3NA3365-6	1300000	1700000	2500000

Fuse Systems


3NA, 3ND LV HRC Fuse Systems

LV HRC fuse links


3NA34 series

Size: 4 (IEC design)
 Operational class: gG
 Rated voltage: 500 V AC/440 V DC
 Rated current: 630 ... 1250 A

Time/current characteristics diagram

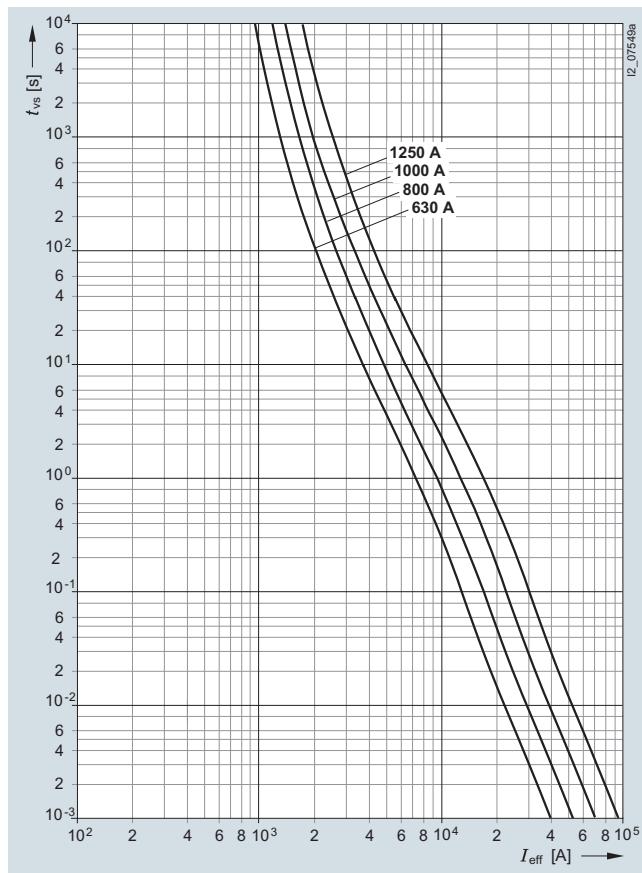


Current limitation diagram

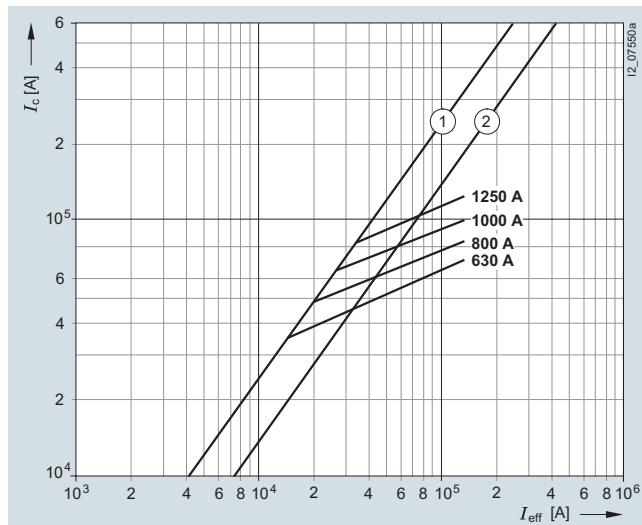

① Peak short-circuit current with largest DC component

② Peak short-circuit current without DC component

Melting I^2t values diagram

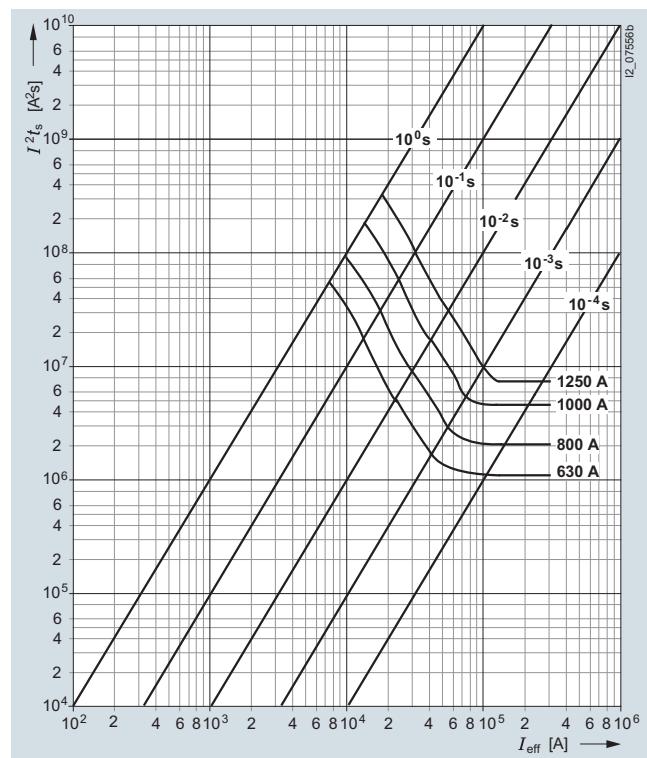

Type	I_n A	P_v W	$\Delta\vartheta$ K	I^2t_s	1 ms $A^2\text{s}$	4 ms $A^2\text{s}$
				1 ms $A^2\text{s}$		
3NA3472	630	47	37	1900000	2700000	
3NA3475	800	59	43	3480000	5620000	
3NA3480	1000	74	56	7920000	10400000	
3NA3482	1250	99	65	11880000	18200000	

Type	I^2t_a		
	230 V AC $A^2\text{s}$	400 V AC $A^2\text{s}$	500 V AC $A^2\text{s}$
3NA3472	3630000	4340000	5400000
3NA3475	7210000	8510000	10400000
3NA3480	13600000	16200000	19000000
3NA3482	23900000	29100000	34800080

Fuse Systems


3NA, 3ND LV HRC Fuse Systems

LV HRC fuse links


3NA36 series

Size: 4a
 Operational class: gG
 Rated voltage: 500 V AC/440 V DC
 Rated current: 500 ... 1250 A

Time/current characteristics diagram

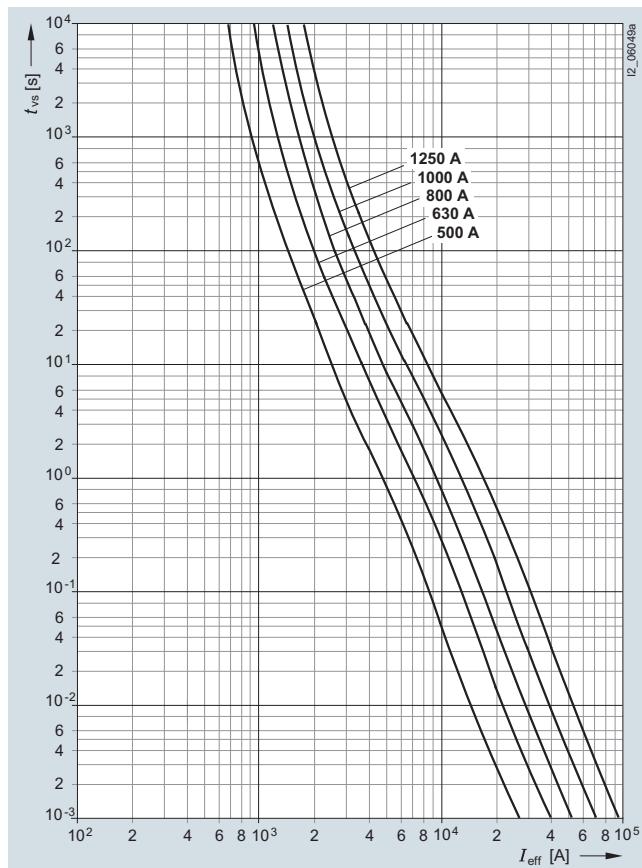


Current limitation diagram

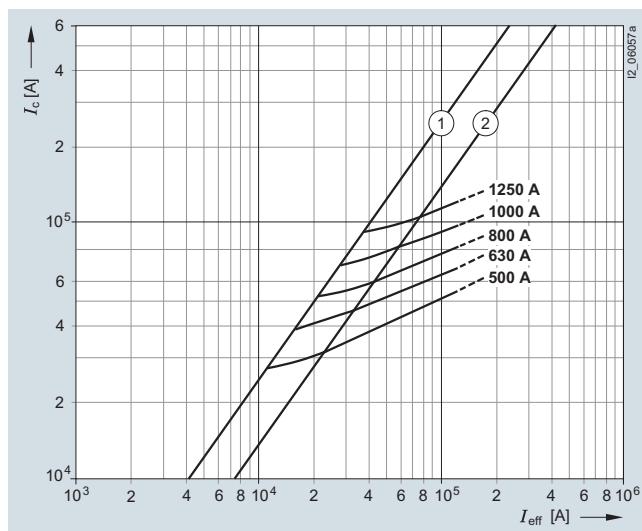

- ① Peak short-circuit current with largest DC component
- ② Peak short-circuit current without DC component

Melting I^2t values diagram

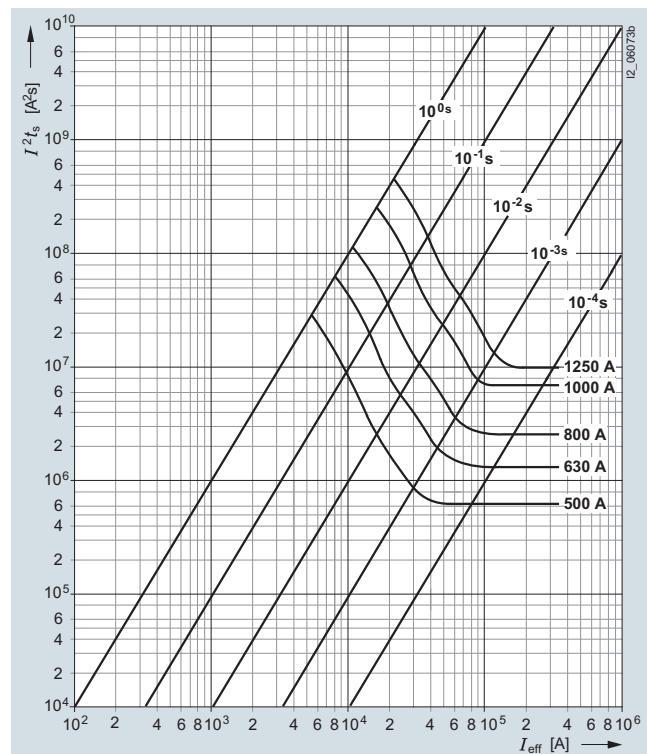

Type	I_n	P_v	$\Delta\theta$	I^2t_s	4 ms $A^2\text{s}$
	A	W	K	1 ms $A^2\text{s}$	
3NA3665	500	43	30	785000	1270000
3NA3672	630	47	37	1900000	2700000
3NA3675	800	59	43	3480000	5620000
3NA3680	1000	74	56	7920000	10400000
3NA3682	1250	99	65	11880000	18200000

Type	I^2t_a	230 V AC		400 V AC		500 V AC	
	$A^2\text{s}$						
3NA3665	1915000			2260000		2700000	
3NA3672	3630000			4340000		5400000	
3NA3675	7210000			8510000		10400000	
3NA3680	13600000			16200000		19000000	
3NA3682	23900000			29100000		34800000	

Fuse Systems


3NA, 3ND LV HRC Fuse Systems

LV HRC fuse links

3NA38, 3NA68, 3NA78 series

Size: 000, 00
 Operational class: gG
 Rated voltage: 500 V AC/250 V DC
 Rated current: 2 ... 160 A

Time/current characteristics diagram

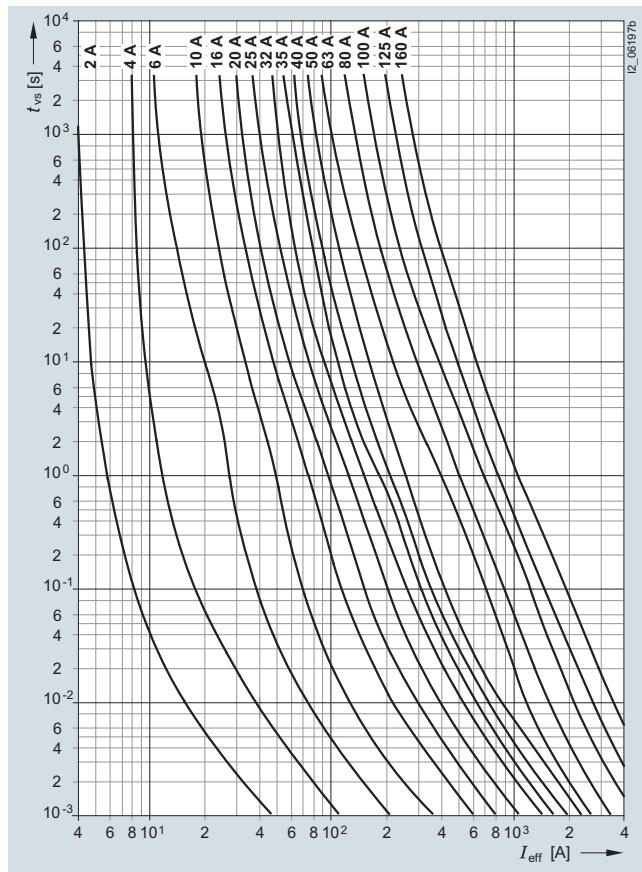

Melting I^2t values diagram


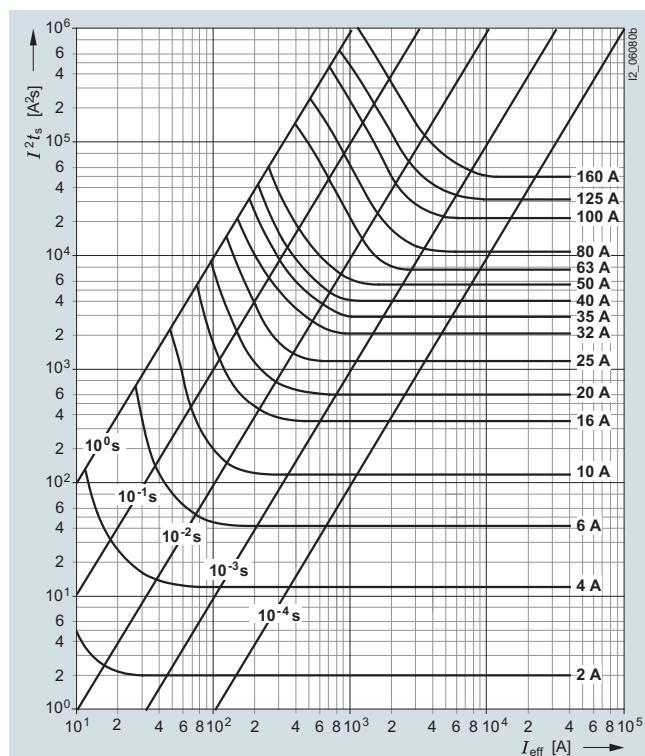


Table see page 57.

Current limitation diagram

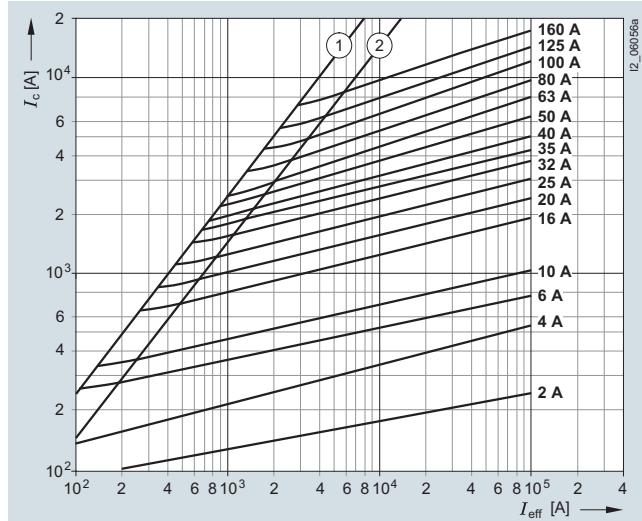

- ① Peak short-circuit current with largest DC component
- ② Peak short-circuit current without DC component

Fuse Systems

3NA, 3ND LV HRC Fuse Systems

LV HRC fuse links

3NA38, 3NA68, 3NA78 series

Size: 000, 00
 Operational class: gG
 Rated voltage: 500 V AC/250 V DC
 Rated current: 2 ... 160 A

Type	I_n A	P_v W	$\Delta\vartheta$ K	I^2t_s		I^2t_a		
				1 ms A^2s	4 ms A^2s	230 V AC A^2s	400 V AC A^2s	500 V AC A^2s
3NA3802, 3NA6802, 3NA7802	2	1.3	8	2	2	4	6	9
3NA3804, 3NA6804, 3NA7804	4	0.9	6	11	13	18	22	27
3NA3801, 3NA6801, 3NA7801	6	1.3	8	46	50	80	110	150
3NA3803, 3NA6803, 3NA7803	10	1	8	120	130	180	265	370
3NA3805, 3NA6805, 3NA7805	16	1.7	11	370	420	580	750	1000
3NA3807, 3NA6807, 3NA7807	20	2	15	670	750	1000	1370	1900
3NA3810, 3NA6810, 3NA7810	25	2.3	17	1200	1380	1800	2340	3300
3NA3812, 3NA6812, 3NA7812	32	2.6	18	2200	2400	3400	4550	6400
3NA3814, 3NA3814-7, 3NA6814, 3NA7814	35	2.7	21	3000	3300	4900	6750	9300
3NA3817, 3NA6817, 3NA7817	40	3.1	24	4000	4500	6100	8700	12100
3NA3820, 3NA3820-7, 3NA6820, 3NA7820	50	3.8	25	6000	6800	9100	11600	16000
3NA3822, 3NA3822-7, 3NA6822, 3NA7822	63	4.6	28	7700	9800	14200	19000	26500
3NA3824, 3NA3824-7, 3NA6824,	80	5.8	33	12000	16000	23100	30700	43000
3NA6824-7, 3NA7824, 3NA7824-7								
3NA3830, 3NA3830-7, 3NA6830,	100	6.6	34	24000	30600	40800	56200	80000
3NA6830-7, 3NA7830, 3NA7830-7								
3NA3832, 3NA6832, 3NA7832	125	8.9	44	36000	50000	70000	91300	130000
3NA3832-8	125	7.2	30	46000	45000	97000	117000	134000
3NA3836, 3NA6836, 3NA7836	160	11.3	52	58000	85000	120000	158000	223000
3NA3836-8	160	9	34	89000	84800	137000	166000	--

Fuse Systems


3NA, 3ND LV HRC Fuse Systems

LV HRC fuse links


3NA38..-6, 3NA68..-6, 3NA78..-6 series

Size: 000, 00
 Operational class: gG
 Rated voltage: 690 V AC/250 V DC
 Rated current: 2 ... 100 A

Time/current characteristics diagram

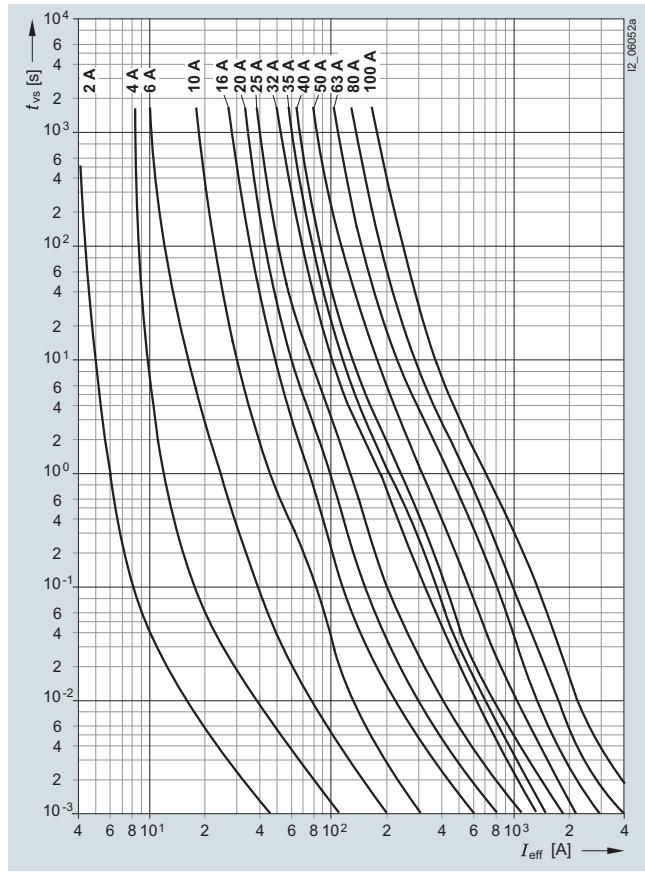


Current limitation diagram

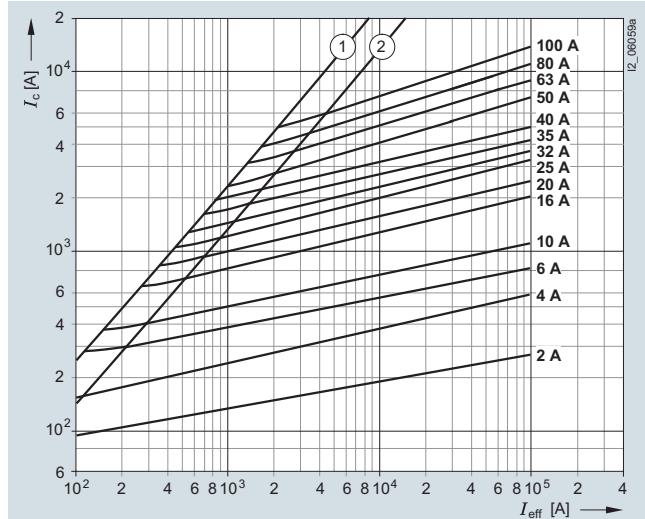

- ① Peak short-circuit current with largest DC component
- ② Peak short-circuit current without DC component

Melting I^2t values diagram

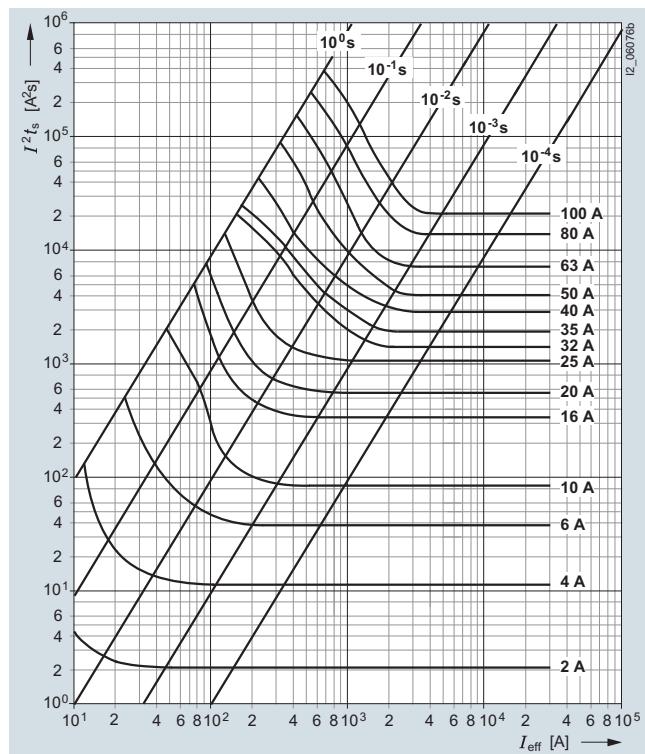

Type	I_n	P_v	$\Delta\vartheta$	I^2t_s	4 ms
	A	W	K	1 ms	
3NA3802-6, 3NA6802-6, 3NA7802-6	2	1.3	8	2	2
3NA3804-6, 3NA6804-6, 3NA7804-6	4	0.9	6	11	13
3NA3801-6, 3NA6801-6, 3NA7801-6	6	1.3	8	36	44
3NA3803-6, 3NA6803-6, 3NA7803-6	10	1	8	90	120
3NA3805-6, 3NA6805-6, 3NA7805-6	16	1.7	11	330	360
3NA3807-6, 3NA6807-6, 3NA7807-6	20	2	15	570	690
3NA3810-6, 3NA6810-6, 3NA7810-6	25	2.3	17	1200	1380
3NA3812-6, 3NA6812-6, 3NA7812-6	32	3.1	19	1600	2600
3NA3814-6, 3NA6814-6, 3NA7814-6	35	3.6	23	2100	3100
3NA3817-6, 3NA6817-6, 3NA7817-6	40	3.6	18	3200	4700
3NA3820-6, 3NA6820-6, 3NA7820-6	50	4.9	28	4400	7400
3NA3822-6, 3NA6822-6, 3NA7822-6	63	5.7	33	7600	10100
3NA3824-6, 3NA6824-6, 3NA7824-6	80	6.7	38	13500	17000
3NA3830-6, 3NA6830-6, 3NA7830-6	100	9.1	40	21200	30500

Type	I^2t_a	230 V AC	400 V AC	690 V AC
	A^2s			
3NA3802-6, 3NA6802-6, 3NA7802-6	4	6	9	
3NA3804-6, 3NA6804-6, 3NA7804-6	18	22	27	
3NA3801-6, 3NA6801-6, 3NA7801-6	80	110	150	
3NA3803-6, 3NA6803-6, 3NA7803-6	180	265	370	
3NA3805-6, 3NA6805-6, 3NA7805-6	580	750	1000	
3NA3807-6, 3NA6807-6, 3NA7807-6	1000	1370	1900	
3NA3810-6, 3NA6810-6, 3NA7810-6	1800	2340	3300	
3NA3812-6, 3NA6812-6, 3NA7812-6	3100	4100	5800	
3NA3814-6, 3NA6814-6, 3NA7814-6	4000	5000	7800	
3NA3817-6, 3NA6817-6, 3NA7817-6	6000	8600	12000	
3NA3820-6, 3NA6820-6, 3NA7820-6	9100	11200	19000	
3NA3822-6, 3NA6822-6, 3NA7822-6	13600	17000	24000	
3NA3824-6, 3NA6824-6, 3NA7824-6	24300	32000	55000	
3NA3830-6, 3NA6830-6, 3NA7830-6	42400	52000	75000	

Fuse Systems


3NA, 3ND LV HRC Fuse Systems

LV HRC fuse links


3NA61..-4 series

Size: 1
 Operational class: gG
 Rated voltage: 400 V AC
 Rated current: 35 ... 250 A

Time/current characteristics diagram

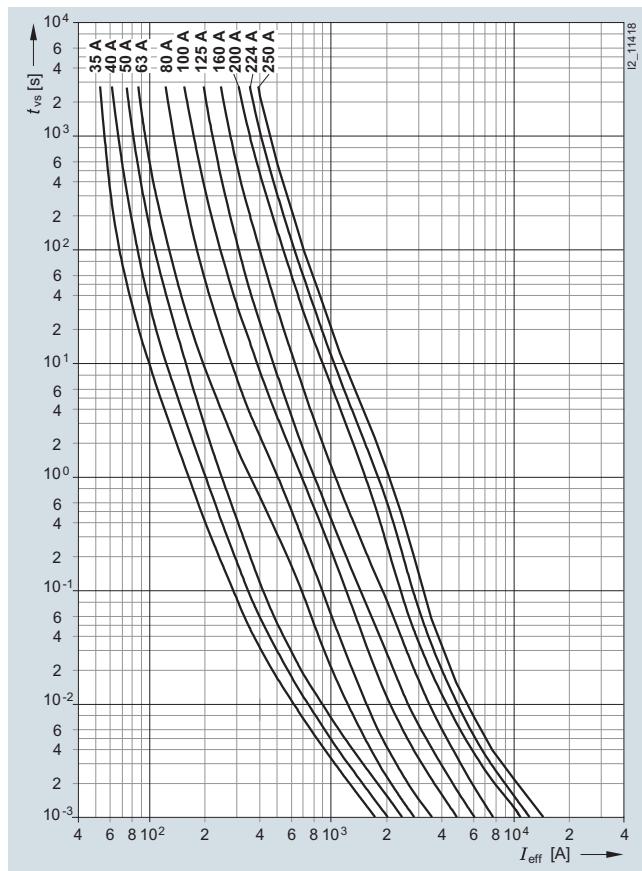


Current limitation diagram

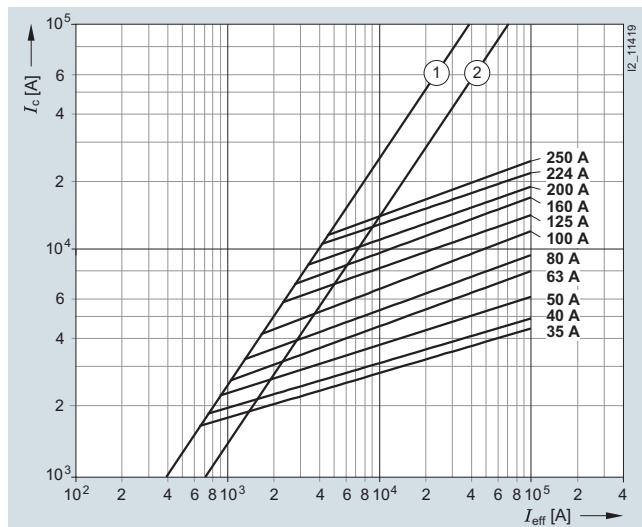

- ① Peak short-circuit current with largest DC component
- ② Peak short-circuit current without DC component

Melting I^2t values diagram

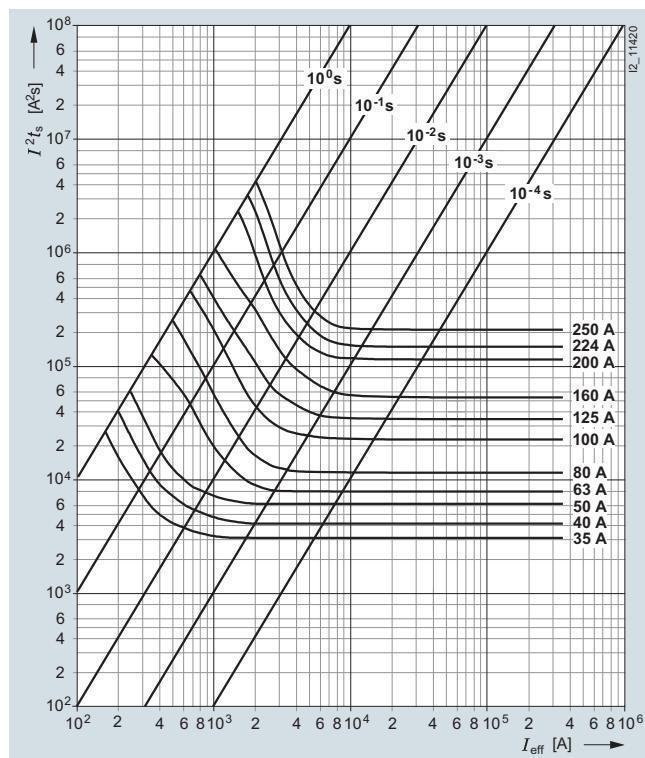

Type	I_n	P_v	$\Delta\vartheta$
	A	W	K
3NA6114-4	35	3.2	16
3NA6117-4	40	3.6	16
3NA6120-4	50	4.6	20
3NA6122-4	63	6.0	21
3NA6124-4	80	7.5	29
3NA6130-4	100	8.9	30
3NA6132-4	125	10.7	31
3NA6136-4	160	13.9	34
3NA6140-4	200	15.0	36
3NA6142-4	224	16.1	37
3NA6144-4	250	17.3	39

Type	I^2t_s	I^2t_a		
	1 ms A ² s	4 ms A ² s	230 V AC A ² s	400 V AC A ² s
3NA6114-4	3000	3300	4900	6750
3NA6117-4	4000	4500	6100	8700
3NA6120-4	6000	6800	9100	11600
3NA6122-4	7700	9800	14200	19000
3NA6124-4	12000	16000	23100	30700
3NA6130-4	24000	30600	40800	56200
3NA6132-4	36000	50000	70000	91300
3NA6136-4	58000	85000	120000	158000
3NA6140-4	115000	135000	218000	285000
3NA6142-4	145000	170000	299000	392000
3NA6144-4	205000	230000	420000	551000

Fuse Systems


3NA, 3ND LV HRC Fuse Systems

LV HRC fuse links


3NA62..-4 series

Size: 2
 Operational class: gG
 Rated voltage: 400 V AC
 Rated current: 50 ... 400 A

Time/current characteristics diagram

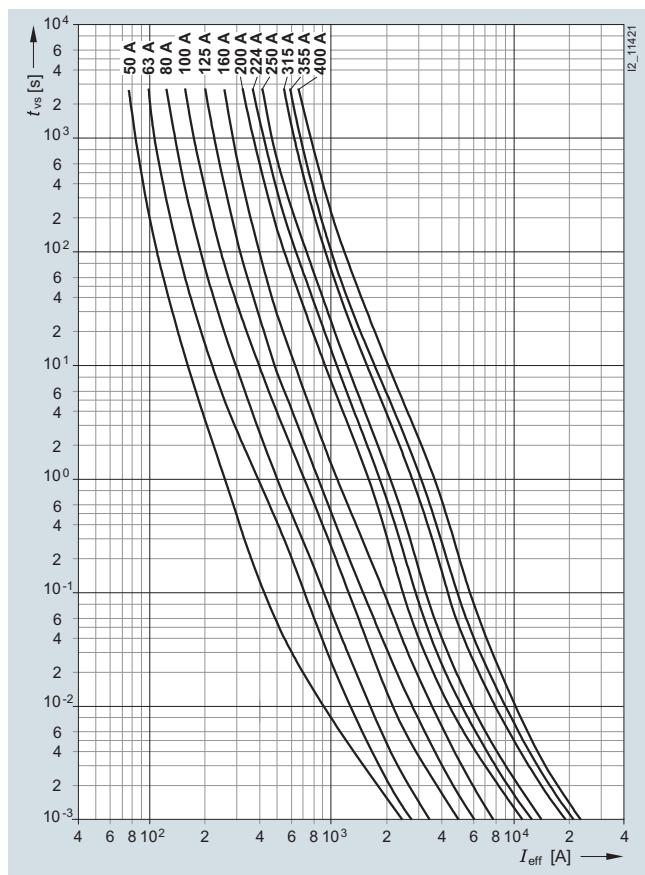


Current limitation diagram

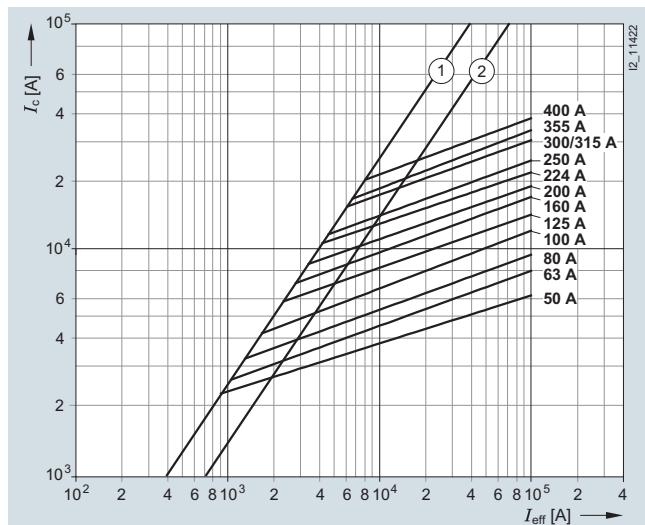

- ① Peak short-circuit current with largest DC component
- ② Peak short-circuit current without DC component

Melting I^2t values diagram

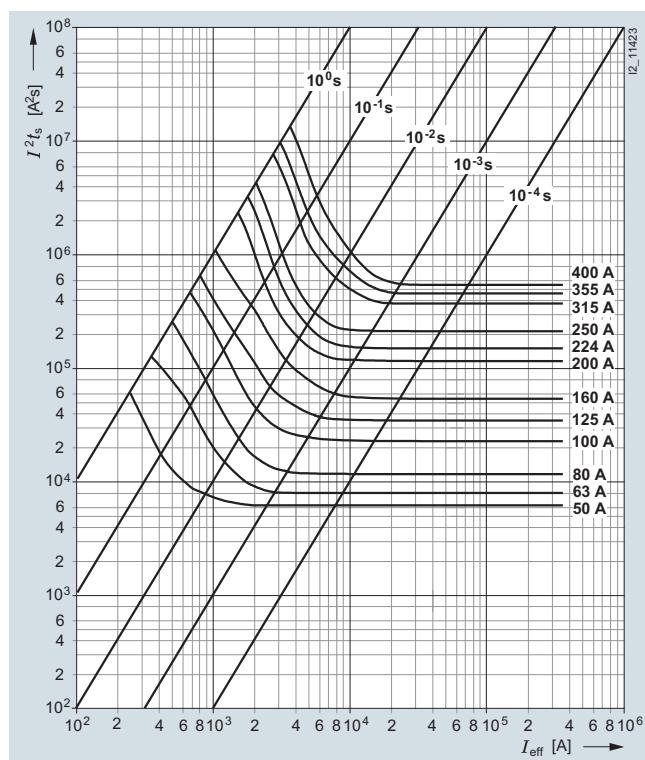

Type	I_n	P_v	$\Delta\vartheta$
	A	W	K
3NA6220-4	50	4.7	16
3NA6222-4	63	5.9	16
3NA6224-4	80	6.8	21
3NA6230-4	100	7.4	22
3NA6232-4	125	9.8	27
3NA6236-4	160	12.6	34
3NA6240-4	200	14.9	33
3NA6242-4	224	15.4	31
3NA6244-4	250	17.9	38
3NA6250-4	300	19.4	34
3NA6252-4	315	21.4	35
3NA6254-4	355	26.0	49
3NA6260-4	400	27.5	52

Type	I^2t_s	I^2t_a		
	1 ms A ² s	4 ms A ² s	230 V AC A ² s	400 V AC A ² s
3NA6220-4	6000	6800	9100	11600
3NA6222-4	7700	9800	14200	19000
3NA6224-4	12000	16000	23100	30700
3NA6230-4	24000	30600	40800	56200
3NA6232-4	36000	50000	70000	91300
3NA6236-4	58000	85000	120000	158000
3NA6240-4	115000	135000	218000	285000
3NA6242-4	145000	170000	299000	392000
3NA6244-4	205000	230000	420000	551000
3NA6250-4	361000	433000	670000	901000
3NA6252-4	361000	433000	670000	901000
3NA6254-4	441000	538000	800000	1060000
3NA6260-4	529000	676000	1155000	1515000

Fuse Systems


3NA, 3ND LV HRC Fuse Systems

LV HRC fuse links


3NA68..-4/-4KK series

Size: 000, 00
 Operational class: gG
 Rated voltage: 400 V AC
 Rated current: 10 ... 160 A

Time/current characteristics diagram

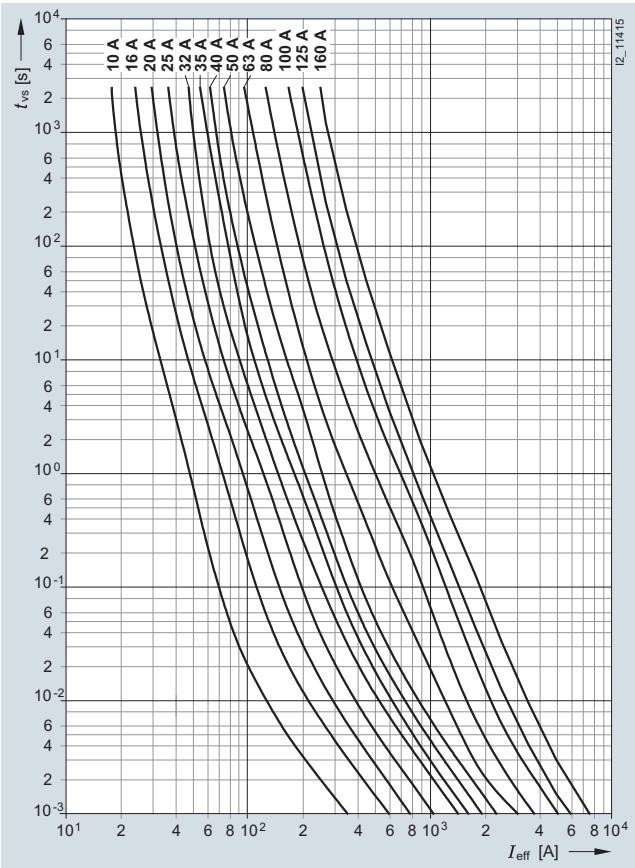


Current limitation diagram

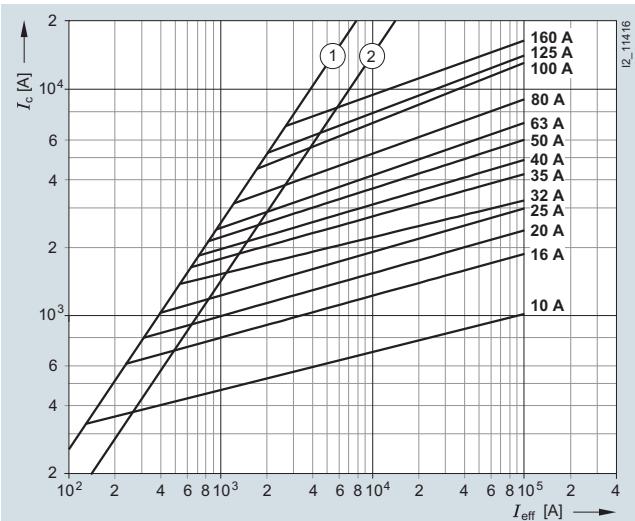

- ① Peak short-circuit current with largest DC component
- ② Peak short-circuit current without DC component

Melting I^2t values diagram

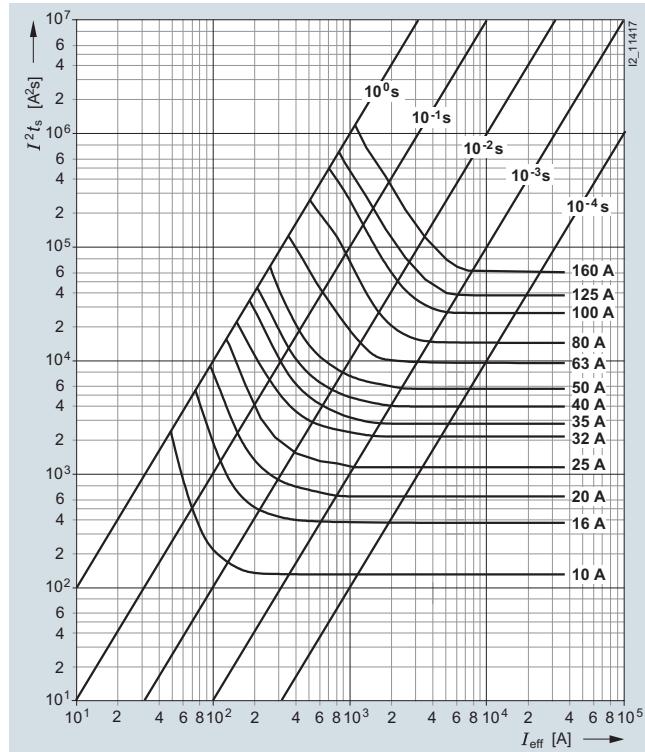

Type	I_n	P_V	$\Delta\vartheta$	I^2t_s	1 ms A^2s	4 ms A^2s
	A	W	K			
3NA6803-4	10	1.0	8	120	130	
3NA6805-4	16	1.7	11	370	420	
3NA6807-4	20	2.0	15	670	750	
3NA6810-4	25	2.3	17	1200	1380	
3NA6812-4	32	2.6	18	2200	2500	
3NA6814-4	35	2.7	21	3000	3300	
3NA6817-4	40	3.1	24	4000	4500	
3NA6820-4	50	3.8	25	6000	6800	
3NA6822-4	63	3.9	23	9300	10250	
3NA6824-4, 3NA6824-4KK	80	4.9	26	14200	18300	
3NA6830-4, 3NA6830-4KK	100	5.4	29	25600	33600	
3NA6832-4	125	8.9	44	36000	50000	
3NA6836-4	160	11.3	52	58000	85000	

Type	I^2t_a	400 V AC A^2s
	230 V AC A^2s	
3NA6803-4	180	265
3NA6805-4	580	750
3NA6807-4	1000	1370
3NA6810-4	1800	2340
3NA6812-4	3400	4550
3NA6814-4	4900	6750
3NA6817-4	6100	8700
3NA6820-4	9100	11600
3NA6822-4	12400	17900
3NA6824-4, 3NA6824-4KK	27000	38000
3NA6830-4, 3NA6830-4KK	48300	69200
3NA6832-4	70000	91300
3NA6836-4	120000	158000

Fuse Systems


3NA, 3ND LV HRC Fuse Systems

LV HRC fuse links


3ND18 series

Size: 000, 00
 Operational class: aM
 Rated voltage: 500 V AC
 Rated current: 6 ... 160 A


Time/current characteristics diagram

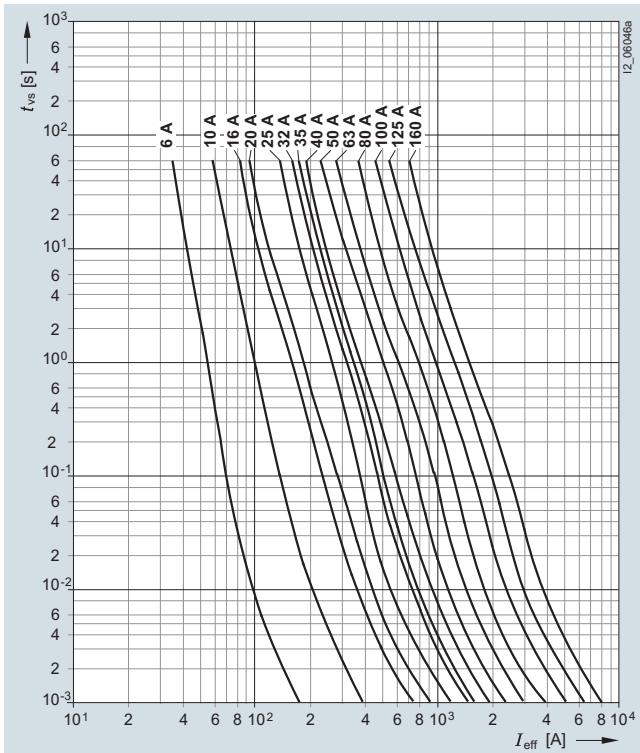

Melting I^2t values diagram

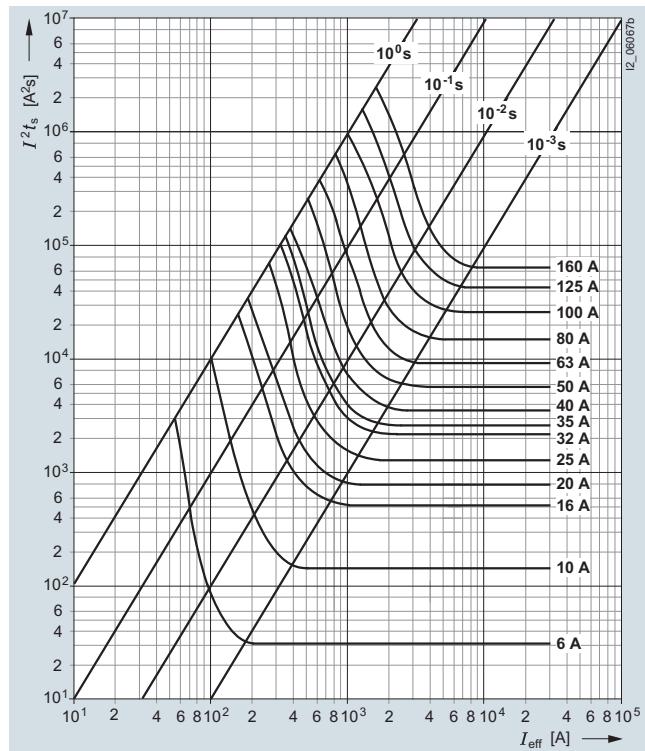

Current limitation diagram

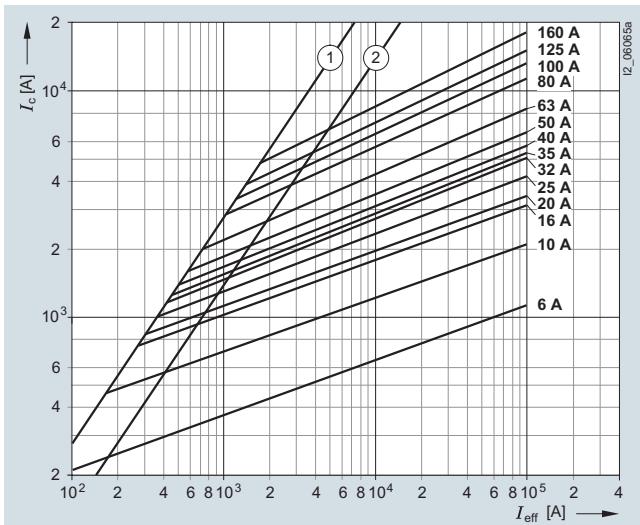




- ① Peak short-circuit current with largest DC component
- ② Peak short-circuit current without DC component

Type	I_n	P_v	$\Delta\theta$	I^2t_s	
	A	W	K	1 ms	4 ms
				A^2s	A^2s
3ND1801	6	0.8	7	32	55
3ND1803	10	0.5	5	150	260
3ND1805	16	0.8	7	570	800
3ND1807	20	1	8	830	1200
3ND1810	25	1.2	9	1400	2000
3ND1812	32	1.5	10	2300	3300
3ND1814	35	1.8	11	2600	3800
3ND1817	40	2	12	3700	5500
3ND1820	50	2.4	14	5800	8400
3ND1822	63	3.3	17	9300	13000
3ND1824	80	4.5	20	15000	21000
3ND1830	100	4.9	18	26000	37000
3ND1832	125	6.3	22	41000	60000
3ND1836	160	9.3	31	64000	92000

Type	I^2t_a		
	230 V AC	400 V AC	500 V AC
	A^2s	A^2s	A^2s
3ND1801	60	75	110
3ND1803	280	320	430
3ND1805	1000	1300	1600
3ND1807	1300	1600	2200
3ND1810	2200	2800	3300
3ND1812	3800	4500	5400
3ND1814	4200	5100	6300
3ND1817	5700	7200	9300
3ND1820	5200	10500	12500
3ND1822	15000	16500	21000
3ND1824	21500	27000	34000
3ND1830	44000	56000	76000
3ND1832	76000	98000	135000
3ND1836	105000	130000	170000

3ND13.., 3ND2 series

Size: 1, 2, 3
 Operational class: aM
 Rated voltage: 690 V AC
 Rated current: 63 ... 630 A

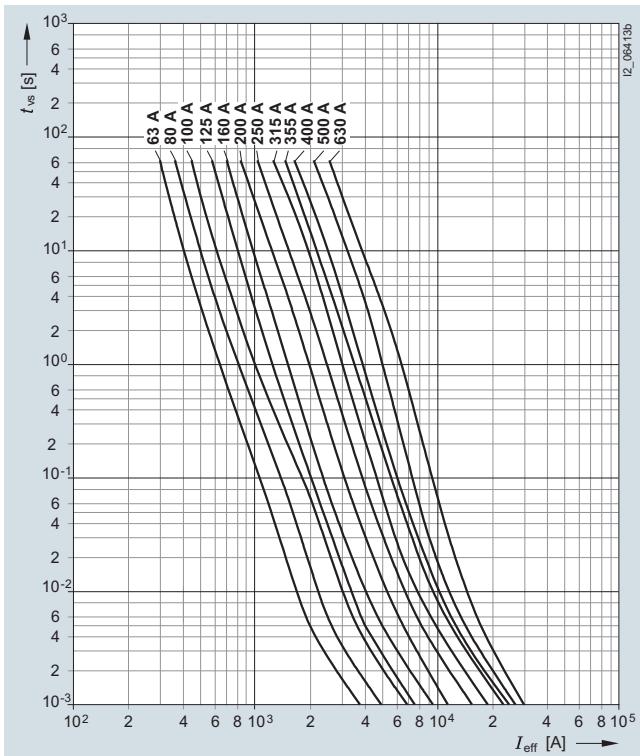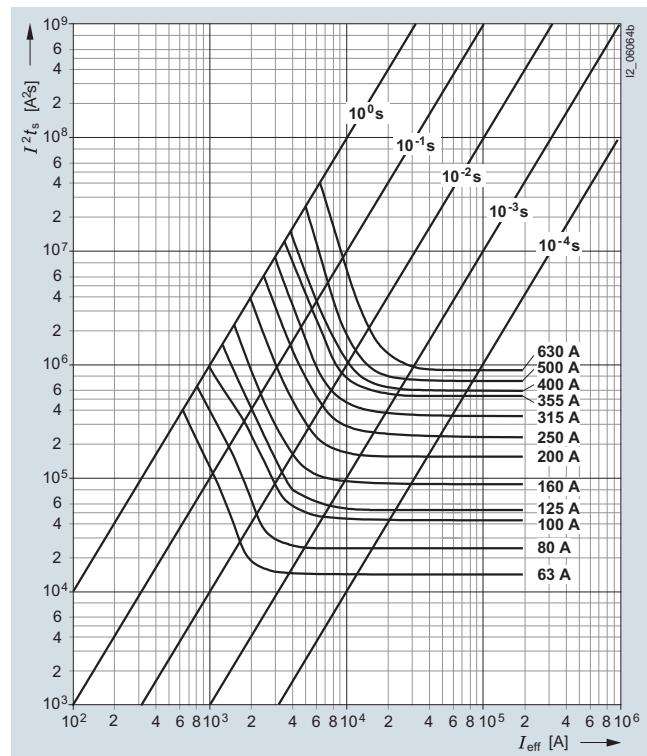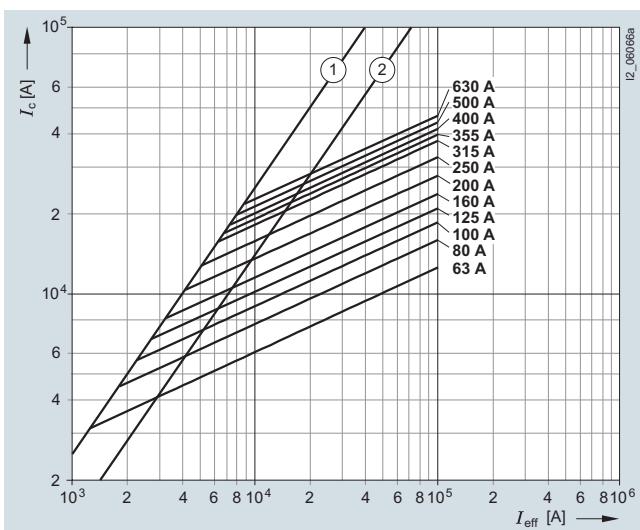Time/current characteristics diagram**Melting I^2t values diagram****Current limitation diagram**

- ① Peak short-circuit current with largest DC component
- ② Peak short-circuit current without DC component

Table see page 64.

Fuse Systems

3NA, 3ND LV HRC Fuse Systems

LV HRC fuse links

3ND13.., 3ND2 series

Size: 1, 2, 3
 Operational class: aM
 Rated voltage: 690 V AC
 Rated current: 63 ... 630 A

Type	I_n A	P_v W	$\Delta\theta$ K	I^2t_s		I^2t_a 230 V AC A ² s	400 V AC A ² s	690 V AC A ² s
				1 ms A ² s	4 ms A ² s			
3ND2122	63	4	12.2	14000	17700	19300	25600	42000
3ND2124	80	4.9	13	24200	30800	36500	48000	80000
3ND2130	100	5.8	15	45600	59000	65000	85000	140000
3ND2132	125	8.1	16.5	57000	74300	73000	97000	160000
3ND2136	160	11.4	18	90000	114000	107000	142000	235000
3ND2140	200	14.1	19.5	150000	198000	172000	228000	375000
3ND2144	250	18	22	250000	313000	260000	340000	565000
3ND2232	125	8.1	16.5	57000	74300	73000	97000	160000
3ND2236	160	11.4	18	90000	114000	107000	142000	235000
3ND2240	200	14.1	19.5	150000	198000	172000	228000	375000
3ND2244	250	18	22	250000	313000	260000	340000	565000
3ND2252	315	22.6	30	370000	450000	460000	610000	1000000
3ND2254	355	24.7	29	540000	643000	645000	855000	1400000
3ND2260	400	30.8	35	615000	750000	688000	910000	1500000
3ND2352	315	22.6	30	370000	450000	460000	610000	1000000
3ND2354	355	24.7	29	540000	643000	645000	855000	1400000
3ND2360	400	30.8	26	615000	750000	688000	910000	1500000
3ND1365	500	47	40	730000	933000	876000	1095000	1825000
3ND1372	630	50	43	920000	1375000	1300000	1800000	2600000

Fuse Systems


3NA, 3ND LV HRC Fuse Systems

LV HRC fuse links


Dimensional drawings

LV HRC fuse links, operational class gG

Sizes 000 to 3 and 4a

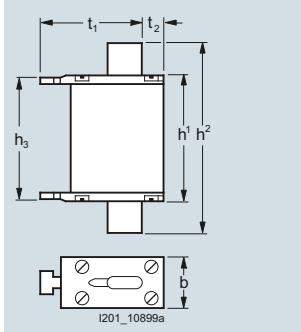

Size 4 (IEC design)

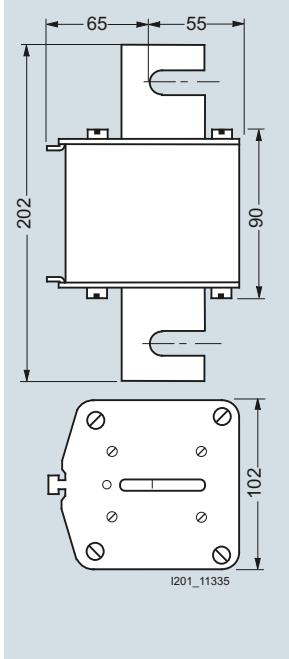

Size	I_n A	U_n V	Type	Dimensions				
				b	h_1	h_2	t_1	t_2
000	2 ... 35	690 AC/250 DC	3NA38..-6	21	54	80	45	8
	2 ... 160	AC500	3NA38..-8					
	2 ... 100	500 AC/250 DC	3NA68..					
	10 ... 100	AC400	3NA68..-4					
	2 ... 35	690 AC/250 DC	3NA68..-6					
	10 ... 100	500 AC/250 DC	3NA78..					
	2 ... 35	690 AC/250 DC	3NA78..-6					
00	35 ... 160	500 AC/250 DC	3NA38..	30	54	80	45	14
	40 ... 100	690 AC/250 DC	3NA38..-6					
	80 ... 160	500 AC/250 DC	3NA68..-7					
	80 ... 160	AC400	3NA68..-4 (KK)					
	40 ... 100	690 AC/250 DC	3NA68..-6					
	80 ... 160	500 AC/250 DC	3NA78..-7					
	40 ... 100	690 AC/250 DC	3NA78..-6					
0	6 ... 160	500 AC/440 DC	3NA30..	30	67	126	45	14
1	16 ... 160	500 AC/440 DC	3NA31..					
	50 ... 160	690 AC/440 DC	3NA31..-6					
	16 ... 160	500 AC/440 DC	3NA61..					
	35 ... 160	AC400	3NA61..-4					
	50 ... 160	690 AC/440 DC	3NA61..-6					
	16 ... 160	500 AC/440 DC	3NA71..					
	50 ... 160	690 AC/440 DC	3NA71..-6					
2	200 ... 250	500 AC/440 DC	3NA31..	47	75	137	51	9
	200	690 AC/440 DC	3NA31..-6					
	200 ... 250	500 AC/440 DC	3NA61..					
	200 ... 250	AC400	3NA61..-4					
	200	690 AC/440 DC	3NA61..-6					
	200 ... 250	500 AC/440 DC	3NA71..					
	200	690 AC/440 DC	3NA71..-6					
	35 ... 250	500 AC/440 DC	3NA32..					
	80 ... 200	690 AC/440 DC	3NA32..-6					
	35 ... 250	500 AC/440 DC	3NA62..					
	50 ... 250	AC400	3NA62..-4					
3	80 ... 200	690 AC/440 DC	3NA62..-6					
	35 ... 250	500 AC/440 DC	3NA72..					
	80 ... 200	690 AC/440 DC	3NA72..-6					
	300 ... 400	500 AC/440 DC	3NA32..	58	74	151	59	13
	224 ... 250	690 AC/440 DC	3NA32..-6					
	300 ... 400	500 AC/440 DC	3NA62..					
	300 ... 400	AC400	3NA62..-4					
4	224 ... 315	690 AC/440 DC	3NA62..-6					
	300 ... 400	500 AC/440 DC	3NA72..					
	224 ... 315	690 AC/440 DC	3NA72..-6					
	200 ... 400	500 AC/440 DC	3NA33..	58	74	151	71	13
4a	250, 315	690 AC/440 DC	3NA33..-6					
	425 ... 630	500 AC/440 DC	3NA33..					
	355 ... 500	690 AC/440 DC	3NA33..-6					
4	630 ... 1250	500 AC/440 DC	3NA34..	See adjacent drawing				
4a	500 ... 1250	500 AC/440 DC	3NA36..	102	97	201	95	20


Fuse Systems

3NA, 3ND LV HRC Fuse Systems

LV HRC fuse links

LV HRC fuse links, operational class aM

Sizes 000 to 3

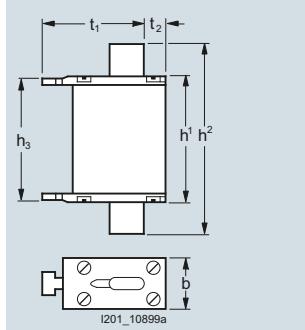

Size	I_n A	U_n V	Type	Dimensions				
				b	h_1	h_2	t_1	t_2
000	6 ... 80	AC500	3ND18..	21	54	80	45	8
00	100 ... 160			30	54	80	45	14
1	63 ... 100	AC690	3ND21..	30	75	137	50	15
	125 ... 250			47	75	137	51	9
2	125 ... 250	AC690	3ND22..	47	75	151	58	10
	315 ... 400			58	74	151	59	13
3	315 ... 400	AC690	3ND23..	58	74	151	71	13
	500, 630		3ND13..	71	74	151	70	13

Fuse Systems

3NA, 3ND LV HRC Fuse Systems

LV HRC signal detectors

Overview


LV HRC signal detectors are used for remotely indicating that the LV HRC fuse links have been tripped. Three different solutions are available:

- 3NX1021 signal detectors with signal detector link
The LV HRC signal detectors with signal detector link support monitoring of LV HRC fuse links with non-insulated grip lugs of sizes 000 to 4 at 10 A or more. The signal detector link is connected in parallel to the fuse link. In the event of a fault, the LV HRC fuse links are released simultaneously with the LV HRC fuse detector link. A trip pin switches a floating microswitch.

- 3NX1024 signal detector top
The signal detector top can be used with LV HRC fuse links, sizes 000, 00, 1 and 2, which are equipped with non-insulated grip lugs and have a front indicator or combination alarm. It is simply plugged into the grip lugs
- 5TT3170 fuse monitors
If a fuse is tripped, the front indicator springs open and switches a floating microswitch. This solution should not be used for safety-relevant systems. For this purpose, we recommend our electronic fuse monitors.


Dimensional drawings

LV HRC signal detectors

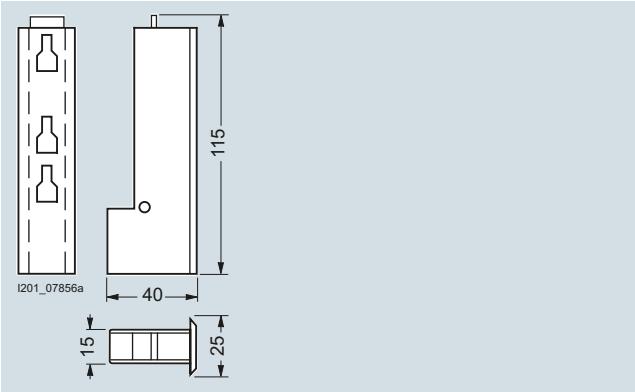


3NX1021

Signal detector links

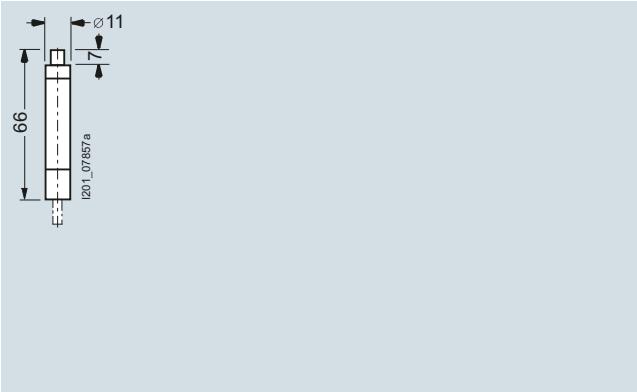


3NX1022, 3NX1023

Signal detector tops

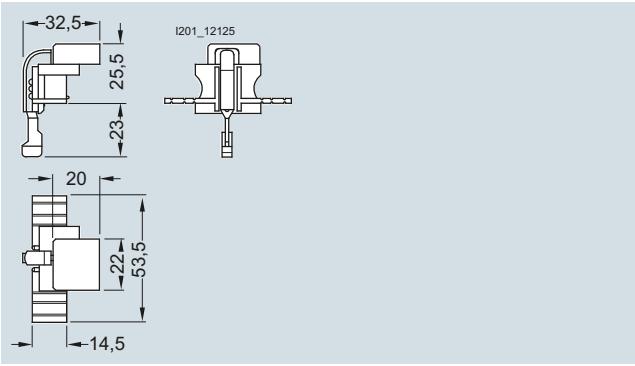

3NX1024

Fuse monitors

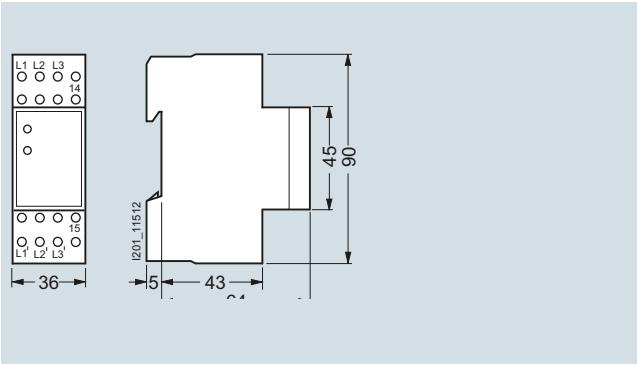


5TT3170


Circuit diagrams

Graphic symbols

LV HRC signal detectors Signal detector tops

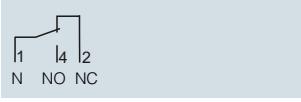3NX1021
3NX1024

Fuse monitors

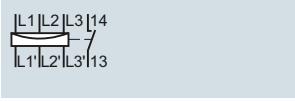

5TT3170

Fuse Systems

3NA, 3ND LV HRC Fuse Systems

LV HRC fuse bases and accessories

Overview

Terminals for all applications



Flat terminals with screws are suitable for connecting busbars or cable lugs. They have a torsion-proof screw connection with shim, spring washer and nut. When tightening the nut, always ensure compliance with the specified torque due to the considerable leverage effect.


The double busbar terminal differs from the flat terminal in that it supports connection of two busbars, one on the top and one at the bottom of the flat terminal.



With the flat terminal with nut, terminal lug of the nut is torsion-proof. When tightening the nut, the torque must be observed because of the considerable leverage effect.



The plug-in terminal is equipped for connecting two conductors.

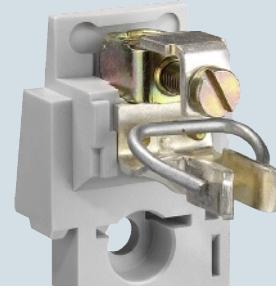

The modern box terminal ensures efficient and reliable connection to the conductors. They support connection of conductors with or without end sleeves.



Up to three conductors can be clamped to the terminal strip.



One conductor can be clamped to the saddle-type terminal.

Fuse Systems

3NA, 3ND LV HRC Fuse Systems

LV HRC fuse bases and accessories

Technical specifications

Size	LV HRC fuse bases, LV HRC bus-mounting bases					
	000/00	0	1	2	3	4
Standards	IEC 60269-1, -2; EN 60269-1; DIN VDE 0636-2					
Rated current I_n	A	160	160	250	400	630
Rated voltage U_n	V AC	690 ¹⁾	690 ¹⁾			1250
	V DC	250	440			690
						440
Rated short-circuit strength	kA AC	120				
	kA DC	25				
Max. power dissipation of fuse links	W	12	25	32	45	60
Flat terminal						
Screw		M8		M10		
Nut		M8	--		M12	
Max. tightening torque	Nm	14		38		65
Plug-in terminal						
Conductor cross-section	mm ²	2.5 ... 50		--		
Saddle-type terminal						
Conductor cross-section	mm ²	6 ... 70	--			
Box terminals						
Conductor cross-section	mm ²	2.5 ... 50				
Terminal strips						
Conductor cross-section, 3-wire	mm ²	1.5 ... 16	--			
Max. torque for attachment of LV HRC fuse base	Nm	2		2.5		--

¹⁾ Extended rated voltage up to 1000 V (except LV HRC bus-mounting bases).

Size	LV HRC fuse bases with swivel mechanism			
	000/00	1	3	4a
Rated voltage U_n	V AC	690		
	V DC	440		
Max. power dissipation of fuse links	W	12	32	48
Flat terminal				
Screw		M8		M12
Nut		M8	--	M16
Max. tightening torque	Nm	14	38	65

Fuse Systems


3NA, 3ND LV HRC Fuse Systems

LV HRC fuse bases and accessories

Dimensional drawings

LV HRC fuse bases made of molded plastic



Size 000/00, 1P

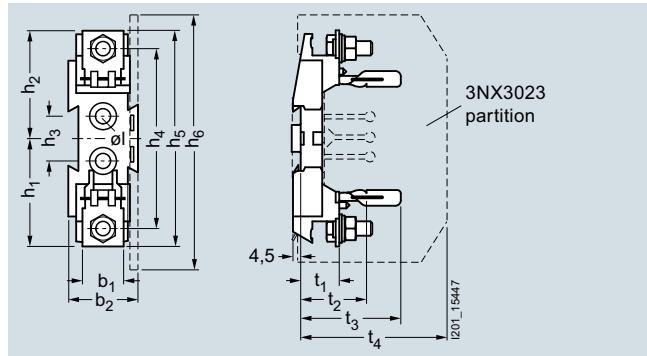

Size	I_n A	Poles	Connections	Type	b_1	b_2	h_1	h_2	h_3	h_4	h_5	h_6	$\varnothing l$	t_1	t_2	t_3	t_4
000/00	160	1P	M8 flat terminal, screw	3NH3051	23	39	61	61	25	101	121	139	7.5	26	42	61	86
			Saddle-type terminal	3NH3052	--	39	60	60	25	108	120	139	7.5	26	42	61	86
	125		Box terminals	3NH3053	--	39	59	50	25	99	117	139	7.5	23	39	61	86

LV HRC fuse bases made of ceramic

Size 000/00
1P

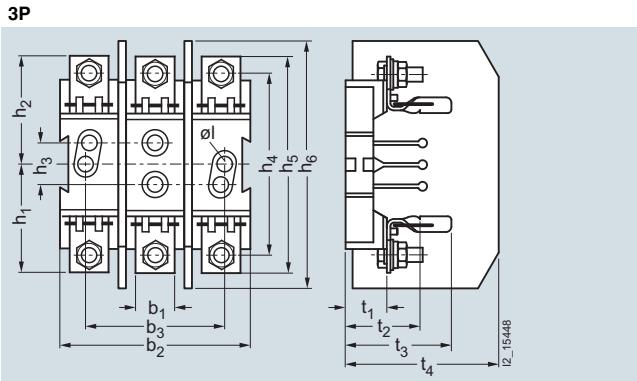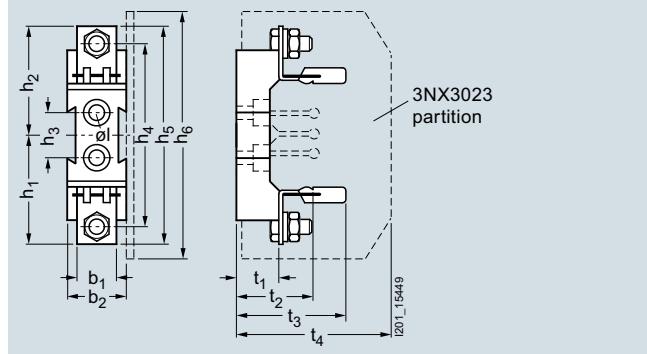


Size	I_n A	Poles	Connections	Type	b_1	b_2	b_3	h_1	h_2	h_3	h_4	h_5	h_6	$\varnothing l$	t_1	t_2	t_3	t_4
000/00	160	1P	Flat terminal, screw	3NH3030	23	34	--	61	61	25	102	122	139	7.5	24	40	60	86
			M8 plug-in terminal	3NH3031	31	34	--	64	64	25	102	128	139	7.5	24	40	60	86
			Saddle-type terminal	3NH3032	29	34	--	61	61	25	109	122	139	7.5	24	40	60	86
			Flat terminal, terminal strip	3NH3035	26	34	--	61	70	25	113	130	139	7.5	24	40	60	86
			Flat terminal, nut	3NH3038	23	34	--	61	61	25	102	122	139	7.5	24	40	60	86
			Flat and saddle-type terminals	3NH3050	29	34	--	61	61	25	102	122	139	7.5	24	40	60	86
	3P	Flat terminal	3NH4030	23	102	70	61	61	25	102	122	139	7.5	24	40	60	86	
		M8 plug-in terminal	3NH4031	31	102	70	64	64	25	102	128	139	7.5	24	40	60	86	
		Saddle-type terminal	3NH4032	29	102	70	61	61	25	102	122	139	7.5	24	40	60	86	
		Flat terminal, terminal strip	3NH4035	26	102	70	61	70	25	113	130	139	7.5	24	40	60	86	

Fuse Systems

3NA, 3ND LV HRC Fuse Systems


LV HRC fuse bases and accessories

Size 0, 1P

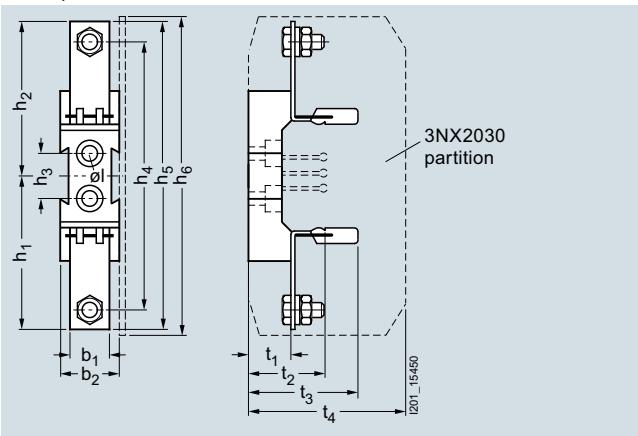


3NH312.

Size	I_n A	Poles	Connections	Type	b_1	b_2	h_1	h_2	h_3	h_4	h_5	h_6	$\emptyset I$	t_1	t_2	t_3	t_4
0	160	1P	Flat terminal	3NH3120	23	38	87	87	25	150	173	179	7.5	24	40	60	88
			Plug-in terminal	3NH3122	31	38	87	87	25	150	173	179	7.5	24	40	60	88

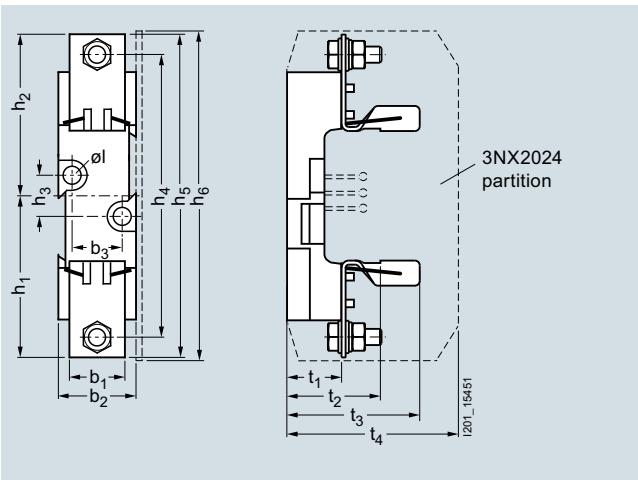Size 1
1P

3NH320.

3P

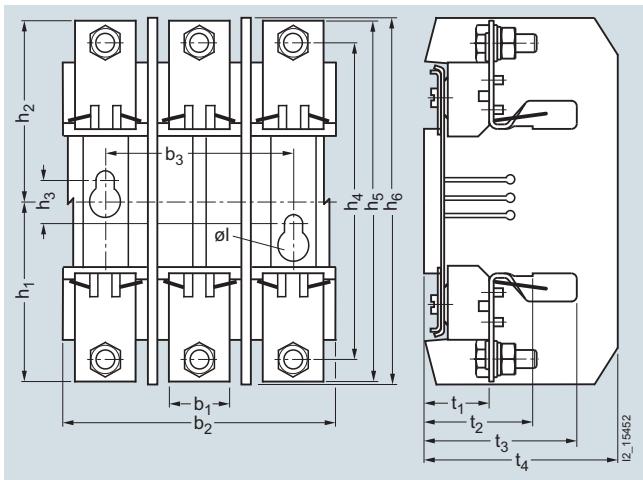

3NH4230


Size	I_n A	Poles	Connections	Type	b_1	b_2	b_3	h_1	h_2	h_3	h_4	h_5	h_6	$\emptyset I$	t_1	t_2	t_3	t_4
1	250	1P	M10 flat terminal	3NH3230	35	49	30	101	101	25	177	202	203	10.5	35	55	84	107
			Double busbar terminal	3NH3220	35	49	30	101	101	25	177	202	203	10.5	35	55	84	107
	3P	M10 flat terminal	3NH4230	35	146	111	101	101	25	177	202	203	10.5	35	55	84	107	

Fuse Systems

3NA, 3ND LV HRC Fuse Systems


LV HRC fuse bases and accessories

Size 2
1P

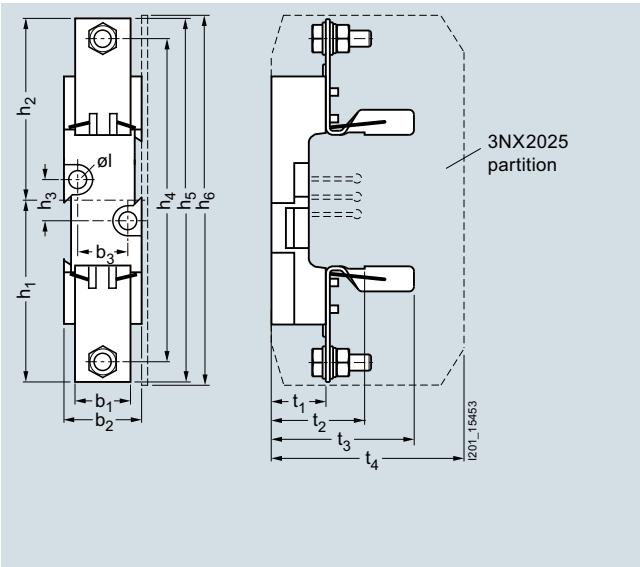

3NH33.0


Size 3
1P

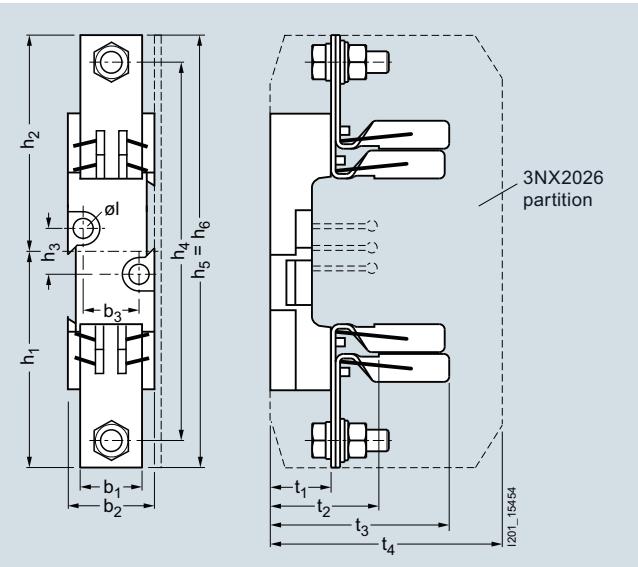

3NH34.0

Size	I_n A	Poles	Connections	Type	b_1	b_2	b_3	h_1	h_2	h_3	h_4	h_5	h_6	$\varnothing l$	t_1	t_2	t_3	t_4
2	400	1P	M10 flat terminal	3NH3330	35	49	30	113	113	25	202	227	228	10.5	35	55	90	115
			Double busbar terminal	3NH3320	35	49	30	113	113	25	202	227	228	10.5	35	55	90	115
3	630	1P	M12 flat terminal	3NH3430	35	49	30	121	121	25	212	242	242	10.5	35	57	101	130
			Double busbar terminal	3NH3420	35	49	30	121	121	25	212	242	242	10.5	35	57	101	130

Size 4, 1P

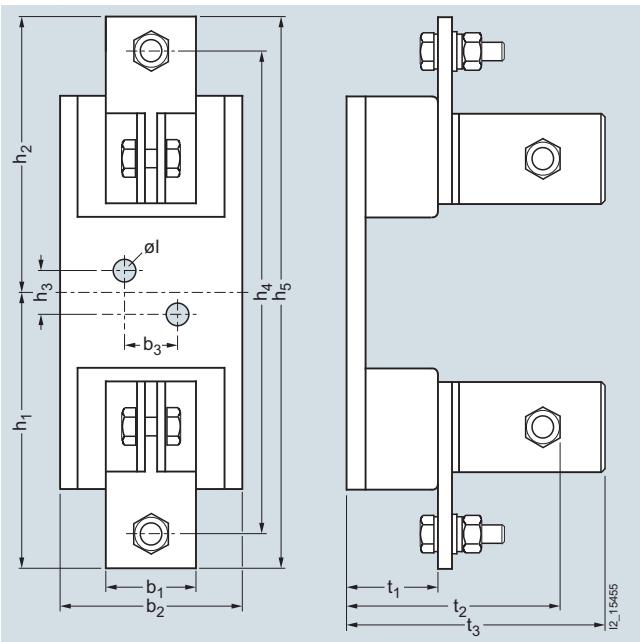

3NH3530

Size	I_n A	Poles	Connections	Type	b_1	b_2	b_3	h_1	h_2	h_3	h_4	h_5	$\varnothing l$	t_1	t_2	t_3
4 ¹⁾	1250	1P	M12 flat terminal	3NH3530	50	102	30	156	156	25	270	312	13	51	116	144
4a			Can only be used in bases with swivel mechanism													

¹⁾ Size 4 LV HRC fuse links are also screwed onto the base.


Fuse Systems

3NA, 3ND LV HRC Fuse Systems

LV HRC fuse bases and accessories

LV HRC fuse bases with swivel mechanism

Sizes 000/00, 1, 3 and 4a

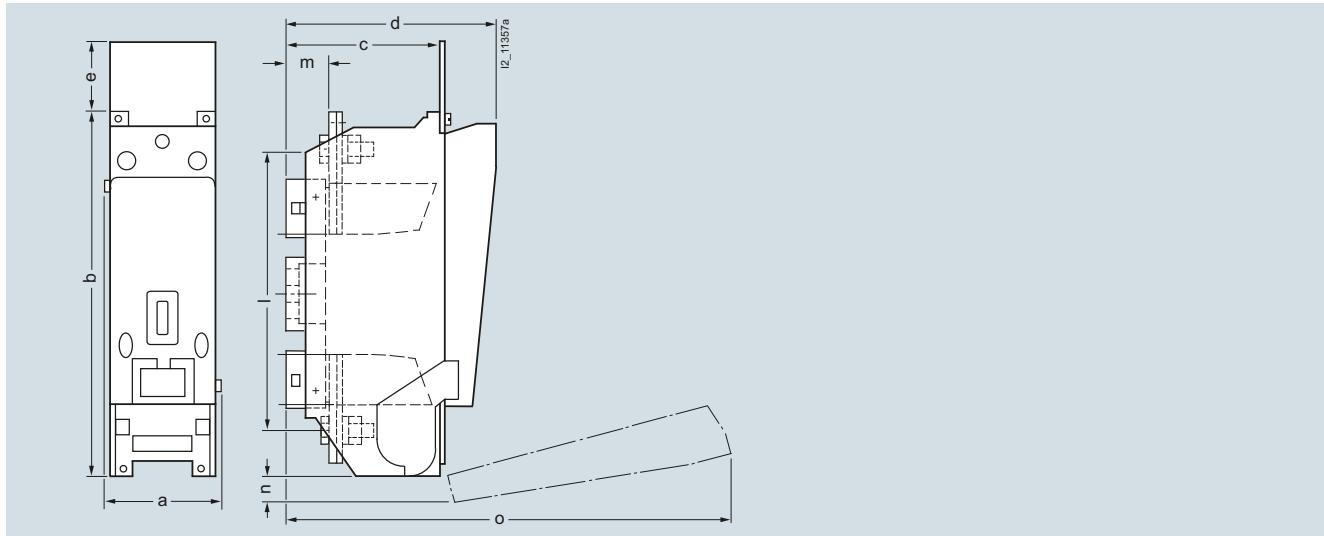


3NH703., 3NH723., 3NH733., 3NH7520

Size	I_n A	Type	a	b	c	d	e	I	m	n	o
000/00	160	3NH7030	49	149	45	88.5	22.5	120	17	18	200
1	250	3NH7230	68	230	68	123.5	23	177	25	40	300
3	630	3NH7330	90	270	96	153.5	15.5	220.5	30.5	35	350
4a	1250	3NH7520	116	350	154.5	217.5	69	270	40	26	440

LV HRC contact covers for LV HRC fuse bases and LV HRC bus-mounting bases¹⁾

Sizes 000/00 to 3

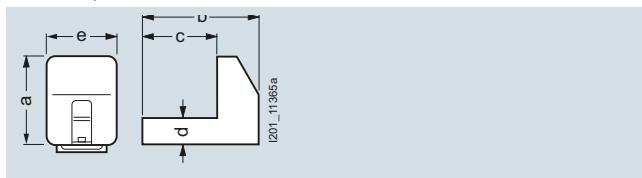


3NX3105 to 3NX3108, 3NX3114

Size	Type	a	b	c	d	e
000/00	3NX3105 ¹⁾	38	47.5	34	11.5	30
0	3NX3114	51.5	47.5	34	11.5	30
1	3NX3106	61.5	57	42.5	35	46
2	3NX3107	74	65	51	35	46
3	3NX3108	81.5	77.5	57.5	35	46

¹⁾ The 3NX3105 LV HRC contact covers can be used for both LV HRC fuse bases and LV HRC bus-mounting bases.


LV HRC contact covers for LV HRC bus-mounting bases



3NX3113 for the incoming terminal, dimensional drawing 3NX3105 for the outgoing terminal see dimensional drawing above

3NX3115 LV HRC protective covers, with 3NX3116 LV HRC covers

Size 000/00, degree of protection IP2X

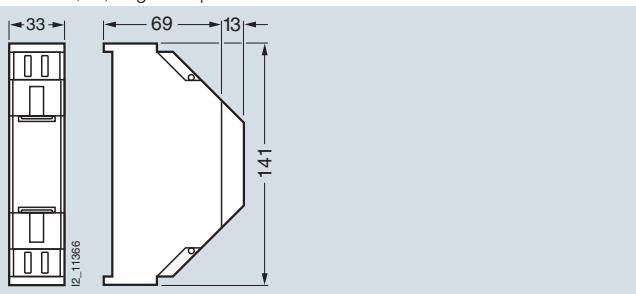


Fuse Systems

3NA, 3ND LV HRC Fuse Systems

LV HRC fuse bases and accessories


LV HRC partitions for LV HRC fuse bases

Size 000/00

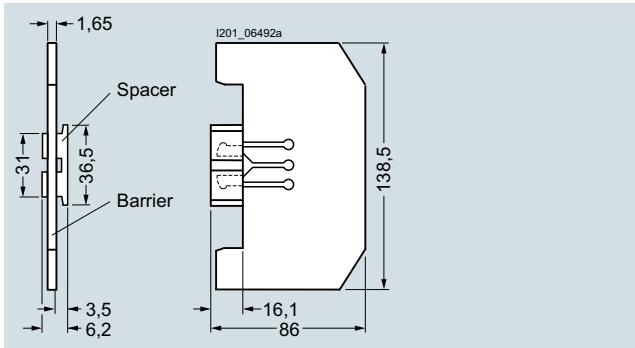

3NX2023

Sizes 0 to 3

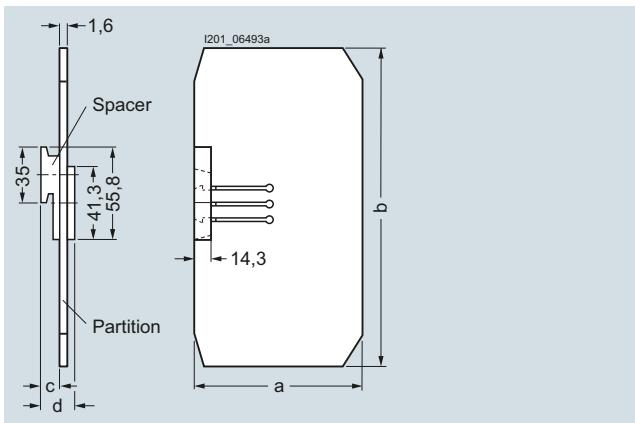


3NX2030, 3NX2024 to 3NX2026

Size	Type	a	b	c	d
0	3NX2030	87,6	178,5	7,7	12,3
1	3NX2024	107,3	202,5	7,7	12,3
2	3NX2025	115,3	227,5	14,2	25,1
3	3NX2026	129,8	242	20,2	37,2


LV HRC partitions for LV HRC bus-mounting bases

Size 000/00

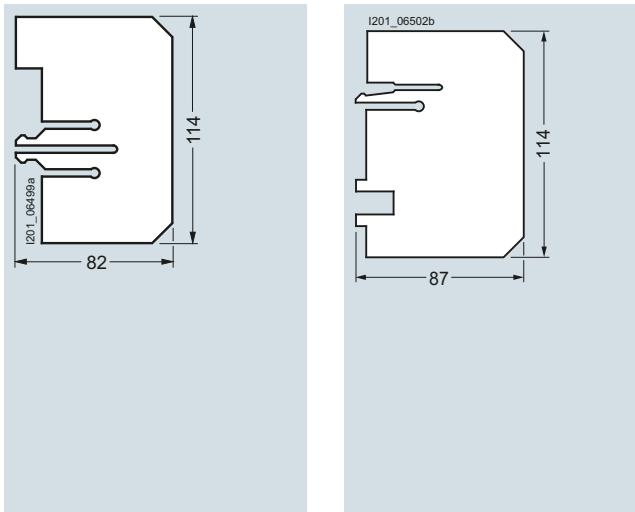

Phase barrier
3NX2027

End barrier
3NX2028

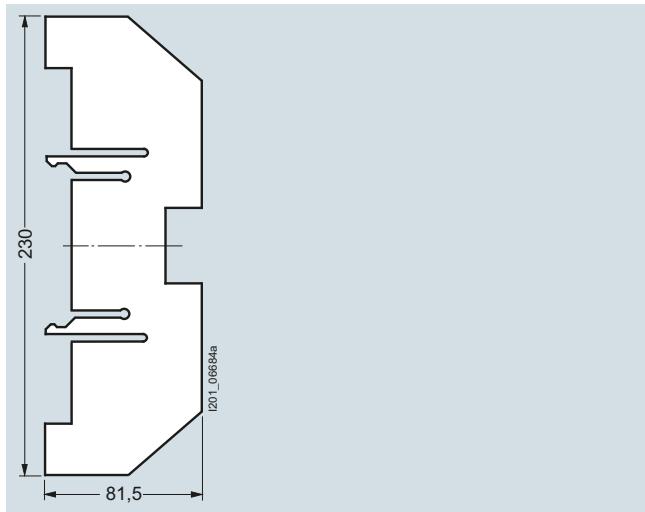

For LV HRC bus-mounting bases in tandem design
3NX2031


Fuse Systems

3NA, 3ND LV HRC Fuse Systems

LV HRC fuse bases and accessories


Fuse pullers

Sizes 000 to 4

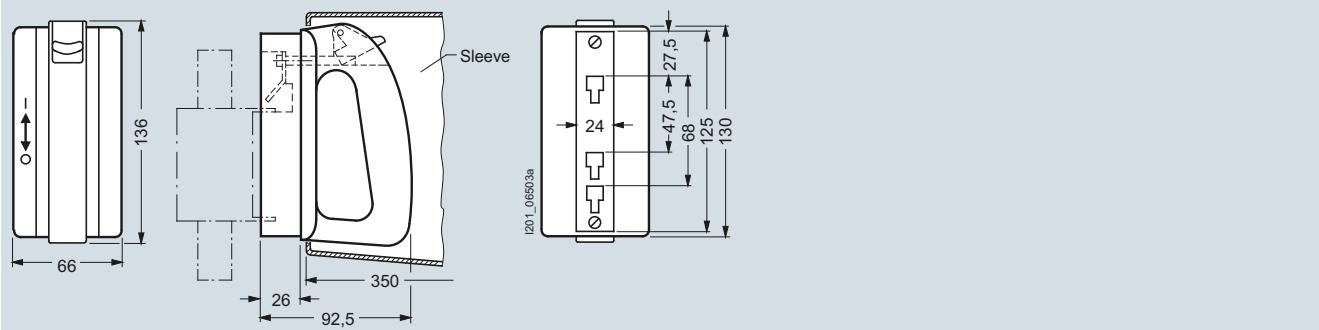

Isolating blades with insulated grip lugs


Sizes 000/00 to 3

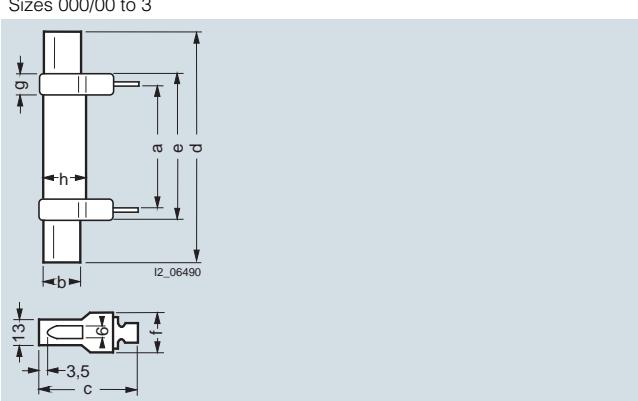


Size	Type	a	b	c	d	e	f	g	h
000/00	3NG1002	44	15	48	78	54	20.5	8	19
0	3NG1102	60.5	15	48	125	68	20.5	8	19
1	3NG1202	61	20	53	135	72	23	9	24
2	3NG1302	61	26	61	150	72	23	9	29
3	3NG1402	61	32	73	150	72	23	9	36

Isolating blades with non-insulated grip lugs

Size 4

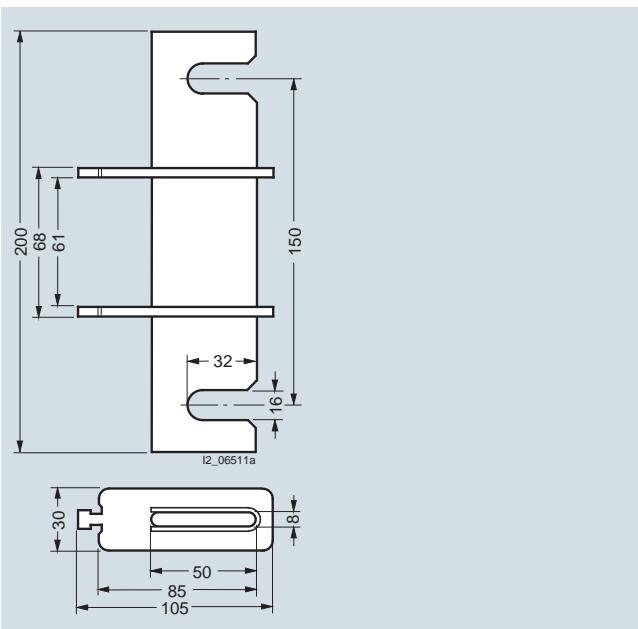

Size 4a

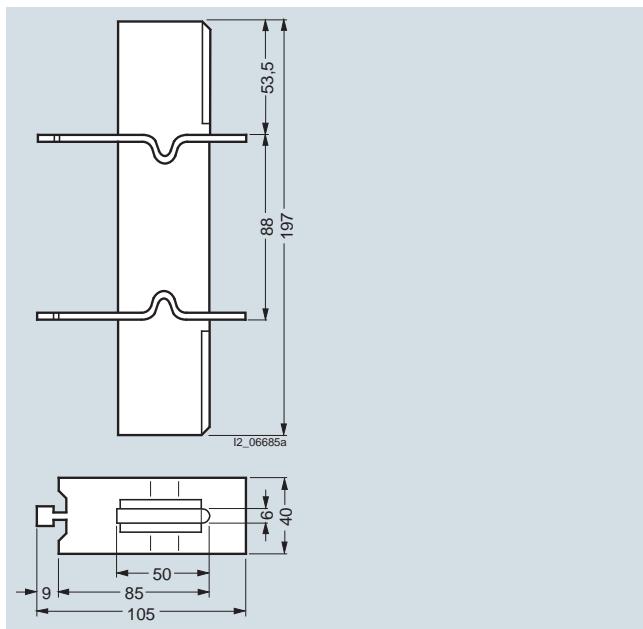

Fuse Systems


3NA, 3ND LV HRC Fuse Systems

LV HRC fuse bases and accessories


More information

Space requirements when installing LV HRC fuse bases


1 LV HRC fuse base, 3P

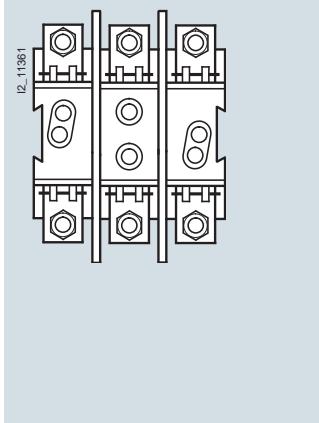

3 LV HRC fuse bases, 1P

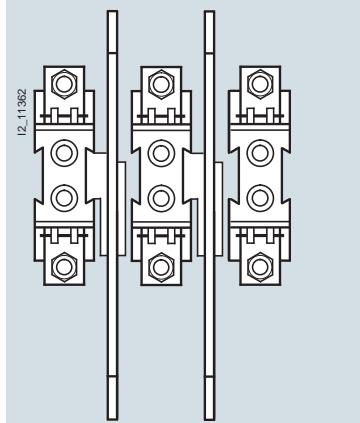

LV HRC partition

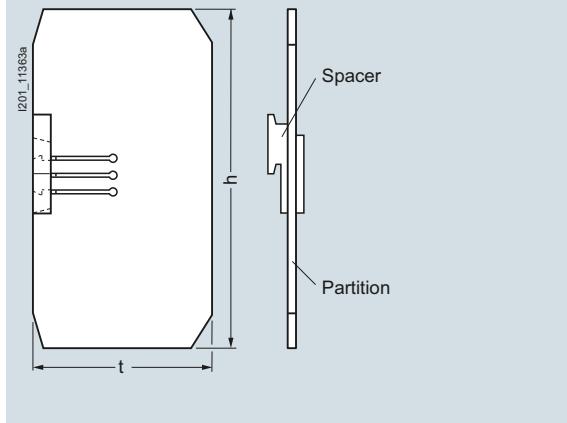

Size	Mounting width (mm) of LV HRC fuse bases				Distance through spacer	Mounting height (mm) 3NX20.. partitions with matching bases ¹⁾	Mounting depth (mm) ²⁾			
	1 unit, 3P		3 units, 1P							
	Bases with phase barrier, without end barrier	Bases with phase barrier and 2 end barriers	Bases with phase barrier, without end barrier	Bases with phase barrier and 2 end barriers						
000/00	102	106	100	104 ²⁾	2	138	86			
0	--	--	128	142	7	178	90			
1	163	177	158	172	7	202	110			
2	--	--	184	224	20 ³⁾	227	118			
3	--	--	208	272	32 ³⁾	242	132			
4	Installation without barriers; for mounting see page 74				Not available					
4a	Can only be used in bases with swivel mechanism				Not available					

¹⁾ This measurement specifies the required overall mounting depth with base d and the overall mounting height h.

²⁾ Placing an additional base on the barrier and plug-on part does not increase the distance, rather the bases lie flat directly on top of one another.

³⁾ If the bases are installed directly on a side wall in the distribution board, one spacer part can be broken off. This would reduce the distance measurement.

Fuse Systems

3NA, 3ND LV HRC Fuse Systems

LV HRC fuse bases and accessories

SITOR semiconductor fuses for 3NH bases: Assignment table

3NH bases are generally suitable for all LV HRC type fuses. SITOR semiconductor fuses in LV HRC design can also be used, although it must be noted that, compared to cable and line protection fuses, these get much hotter during operation. The following table contains the permissible load currents of the SITOR semiconductor fuses for installation in 3NH.

For installation in a base, it may therefore be necessary to operate the fuse under I_n (derating)

The values were determined using the conductor cross-sections specified in the table. If using smaller cross-sections, a considerably higher derating is required due to the lower heat dissipation.

SITOR semiconductor fuse data						Permissible load currents of fuse when installed in: 3NH		
Type	Rated current I_n	Rated voltage U_n	Operational class	Size	Required conductor cross-section Cu	Type	Size	Permissible load current ¹⁾
--	A	V AC	--	--	mm ² Cu	--	--	A
3NC2423-0C/3C	150	500	gR	3	70	3NH3430/20	3	150
3NC2425-0C/3C	200	500	gR	3	95	3NH3430/20	3	190
3NC2427-0C/3C	250	500	gR	3	120	3NH3430/20	3	240
3NC2428-0C/3C	300	500	gR	3	185	3NH3430/20	3	285
3NC2431-0C/3C	350	500	gR	3	240	3NH3430/20	3	330
3NC2432-0C/3C	400	500	aR	3	240	3NH3430/20	3	400
3NC3336-1	630	1000	aR	3	2 x (40 x 5)	3NH3430/20	3	560
3NC3337-1	710	1000	aR	3	2 x (50 x 5)	3NH3430/20	3	600
3NC3338-1	800	1000	aR	3	2 x (40 x 8)	3NH3430/20	3	660
3NC3340-1	900	1000	aR	3	2 x (40 x 8)	3NH3430/20	3	750
3NC3341-1	1000	1000	aR	3	2 x (50 x 8)	3NH3430/20	3	850
3NC3342-1	1100	800	aR	3	2 x (50 x 8)	3NH3430/20	3	900
3NC3343-1	1250	800	aR	3	2 x (50 x 8)	3NH3430/20	3	950
3NC3430-1	315	1250	aR	3	2 x 95	3NH3430/20	3	310
3NC3432-1	400	1250	aR	3	2 x 120	3NH3430/20	3	390
3NC3434-1	500	1250	aR	3	2 x 150	3NH3430/20	3	460
3NC3436-1	630	1250	aR	3	2 x (40 x 5)	3NH3430/20	3	560
3NC3438-1	800	1100	aR	3	2 x (40 x 8)	3NH3430/20	3	690
3NC8423-0C/3C	150	690	gR	3	70	3NH3430/20	3	135
3NC8425-0C/3C	200	690	gR	3	95	3NH3430/20	3	180
3NC8427-0C/3C	250	690	gR	3	120	3NH3430/20	3	250
3NC8431-0C/3C	350	690	gR	3	240	3NH3430/20	3	315
3NC8434-0C/3C	500	690	gR	3	2 x 150	3NH3430/20	3	450
3NC8444-3C	1000	600	aR	3	2 x (60 x 6)	3NH3430/20	3	800
3NE1020-2	80	690	gR	00	25	3NH3030/4030	00	80
3NE1021-0	100	690	gS	00	35	3NH3030/4030	00	100
3NE1021-2	100	690	gR	00	35	3NH3030/4030	00	100
3NE1022-0	125	690	gS	00	50	3NH3030/4030	00	125
3NE1022-2	125	690	gR	00	50	3NH3030/4030	00	125
3NE1224-0	160	690	gS	1	70	3NH3230/4230	1	160
3NE1224-2/-3	160	690	gR	1	70	3NH3230/4230	1	160
3NE1225-0	200	690	gS	1	95	3NH3230/4230	1	200
3NE1225-2/-3	200	690	gR	1	95	3NH3230/4230	1	200/190
3NE1227-0	250	690	gS	1	120	3NH3230/4230	1	250
3NE1227-2/-3	250	690	gR	1	120	3NH3230/4230	1	250/235
3NE1230-0	315	690	gS	1	2 x 70	3NH3330/20	2	315
3NE1230-2/-3	315	690	gR	1	2 x 70	3NH3330/20	2	315
3NE1331-0	350	690	gS	2	2 x 95	3NH3330/20	2	350
3NE1331-2/-3	350	690	gR	2	2 x 95	3NH3330/20	2	350
3NE1332-0	400	690	gS	2	2 x 95	3NH3330/20	2	400
3NE1332-2/-3	400	690	gR	2	2 x 95	3NH3330/20	2	400
3NE1333-0	450	690	gS	2	2 x 120	3NH3430/20	3	450
3NE1333-2/-3	450	690	gR	2	2 x 120	3NH3430/20	3	450
3NE1334-0	500	690	gS	2	2 x 120	3NH3430/20	3	500
3NE1334-2/-3	500	690	gR	2	2 x 120	3NH3430/20	3	500
3NE1435-0	560	690	gS	3	2 x 150	3NH3430/20	3	560
3NE1435-2/-3	560	690	gR	3	2 x 150	3NH3430/20	3	560
3NE1436-0	630	690	gS	3	2 x 185	3NH3430/20	3	630
3NE1436-2/-3	630	690	gR	3	2 x 185	3NH3430/20	3	630
3NE1437-0	710	690	gS	3	2 x (40 x 5)	3NH3430/20	3	710
3NE1437-1	710	600	gR	3	2 x (40 x 5)	3NH3430/20	3	690
3NE1437-2/-3	710	690	gR	3	2 x (40 x 5)	3NH3430/20	3	710
3NE1438-0	800	690	gS	3	2 x (50 x 5)	3NH3430/20	3	800
3NE1438-1	800	600	gR	3	2 x (50 x 5)	3NH3430/20	3	750
3NE1438-2/-3	800	690	gR	3	2 x (50 x 5)	3NH3430/20	3	800
3NE1447-2/-3	670	690	gR	3	2 x (40 x 5)	3NH3430/20	3	670
3NE1448-2/-3	850	690	gR	3	2 x (40 x 8)	3NH3430/20	3	850
3NE1802-0	40	690	gS	000	10	3NH3030/4030	00	40

¹⁾ In the case of cyclic loads, the currents may have to be further reduced (precise values on request).

Fuse Systems

3NA, 3ND LV HRC Fuse Systems

LV HRC fuse bases and accessories

SITOR semiconductor fuse data						Permissible load currents of fuse when installed in: 3NH		
Type	Rated current I_n	Rated voltage U_n	Operational class	Size	Required conductor cross-section Cu mm ² Cu	Type	Size	Permissible load current ¹⁾
--	A	V AC	--	--	--	--	--	A
3NE1803-0	35	690	gS	000	6	3NH3030/4030	00	35
3NE1813-0	16	690	gS	000	1.5	3NH3030/4030	00	16
3NE1814-0	20	690	gS	000	2.5	3NH3030/4030	00	20
3NE1815-0	25	690	gS	000	4	3NH3030/4030	00	25
3NE1817-0	50	690	gS	000	10	3NH3030/4030	00	50
3NE1818-0	63	690	gS	000	16	3NH3030/4030	00	63
3NE1820-0	80	690	gS	000	25	3NH3030/4030	00	80
3NE3221	100	1000	aR	1	35	3NH3230/4230	1	100
3NE3222	125	1000	aR	1	50	3NH3230/4230	1	125
3NE3224	160	1000	aR	1	70	3NH3230/4230	1	160
3NE3225	200	1000	aR	1	95	3NH3230/4230	1	200
3NE3227	250	1000	aR	1	120	3NH3230/4230	1	250
3NE3230-0B	315	1000	aR	1	185	3NH3330/20	2	305
3NE3231	350	1000	aR	1	240	3NH3330/20	2	335
3NE3232-0B	400	1000	aR	1	240	3NH3330/20	2	380
3NE3233	450	1000	aR	1	2 x 150	3NH3330/20	2	425
3NE3332-0B	400	1000	aR	2	240	3NH3430/20	3	400
3NE3333	450	1000	aR	2	2 x 150	3NH3430/20	3	450
3NE3334-0B	500	1000	aR	2	2 x 150	3NH3430/20	3	500
3NE3335	560	1000	aR	2	2 x 185	3NH3430/20	3	560
3NE3336	630	1000	aR	2	2 x 185	3NH3430/20	3	630
3NE3337-8	710	900	aR	2	2 x (40 x 5)	3NH3430/20	3	680
3NE3338-8	800	800	aR	2	2 x 240	3NH3430/20	3	700
3NE3340-8	900	690	aR	2	2 x (40 x 8)	3NH3430/20	3	750
3NE4101	32	1000	gR	0	6	3NH3120/4230	0/1	32
3NE4102	40	1000	gR	0	10	3NH3120/4230	0/1	40
3NE4117	50	1000	gR	0	10	3NH3120/4230	0/1	50
3NE4118	63	1000	aR	0	16	3NH3120/4230	0/1	63
3NE4120	80	1000	aR	0	25	3NH3120/4230	0/1	80
3NE4121	100	1000	aR	0	35	3NH3120/4230	0/1	100
3NE4122	125	1000	aR	0	50	3NH3120/4230	0/1	125
3NE4124	160	1000	aR	0	70	3NH3120/4230	0/1	160
3NE4327-0B	250	800	aR	2	150	3NH3330/20	2	240
3NE4330-0B	315	800	aR	2	240	3NH3330/20	2	300
3NE4333-0B	450	800	aR	2	2 x (30 x 5)	3NH3430/20	3	425
3NE4334-0B	500	800	aR	2	2 x (30 x 5)	3NH3430/20	3	475
3NE4337	710	800	aR	2	2 x (50 x 5)	3NH3430/20	3	630
3NE8015-1	25	690	gR	00	4	3NH3030/4030	00	25
3NE8003-1	35	690	gR	00	6	3NH3030/4030	00	35
3NE8017-1	50	690	gR	00	10	3NH3030/4030	00	50
3NE8018-1	63	690	gR	00	16	3NH3030/4030	00	63
3NE8020-1	80	690	aR	00	25	3NH3030/4030	00	80
3NE8021-1	100	690	aR	00	35	3NH3030/4030	00	100
3NE8022-1	125	690	aR	00	50	3NH3030/4030	00	125
3NE8024-1	160	690	aR	00	70	3NH3030/4030	00	160

¹⁾ In the case of cyclic loads, the currents may have to be further reduced (precise values on request).

Overview

SITOR semiconductor fuses protect power semiconductors from the effects of short circuits because the super quick-response disconnect characteristic is far quicker than with conventional LV HRC fuses. They protect high-quality devices and system components, such as converters with fuses in the input and the DC link, UPS systems and soft starters for motors.

Panel mounting requirements have given rise to various connection versions and designs.

The fuses with blade contacts comply with IEC 60269-2 and are suitable for installation in LV HRC fuse bases, in LV HRC fuse switch disconnectors and switch disconnectors with fuses. They also include fuses with slotted blade contacts for screw fixing with 110 mm mounting dimension, whose sizes are according to IEC 60269-4.

Fuses with slotted blade contacts for screw fixing with 80 mm or 110 mm mounting dimension are often screwed directly onto busbars for optimum heat dissipation. Even better heat transmission is provided by the compact fuses with M10 or M12 female thread, which are also mounted directly onto busbars.

Bolt-on links with 80 mm mounting dimension are another panel-mounting version for direct busbar mounting.

The fuses for SITOR thyristor sets, railway rectifiers or electrolysis systems were developed specially for these applications.

The new size 3 type ranges have a round ceramic body instead of a square one. These series are characterized by small I^2t values with low power dissipation and high capability under alternating load. The dimensions and functional values correspond to the current standards IEC 60269-4/ EN 60269-4.

Note:

The ordering data of the fuses are listed in ascending order of the rated voltage in the selection tables.

Benefits

- SITOR semiconductor fuses have a high varying load factor, which ensures a high level of operational safety and plant availability - even when subject to constant load change.
- The use of SITOR semiconductor fuses in LV HRC bases or Siemens switch disconnectors has been tested with regard to heat dissipation and maximum current loading. This makes planning and dimensioning easier and prevents consequential damage.
- Our high standard of quality ensures good compliance with the characteristic curve and accuracy. This ensures long-term protection of devices.

Operational classes

Fuses are categorized according to function and operational classes. SITOR semiconductor fuses, in LV HRC design, are available in the following operational classes:

- aR: for the short-circuit protection of power semiconductors (partial range protection)
- gR: for the protection of power semiconductors (full range protection)
- gS: The operational class gS combines cable and line protection (full range protection).

Fuse Systems

SITOR Semiconductor Fuses

SITOR, LV HRC design

Application

Properties

SITOR fuse links protect converter equipment against short circuits.

The power semiconductors used in these devices (diodes, thyristors, GTOs and others) require fast-switching elements for protection due to their low thermal capacity. SITOR fuse links (super quick-response fuse links for semiconductor protection) are ideal for this type of application.

The following types of short-circuit faults can occur:


- Internal short circuit:
A faulty semiconductor device causes a short circuit within the power converter.
- External short circuit:
A fault in the load causes a short circuit on the output side of the power converter.
- Inverter shoot-through:
In the event of a failure of the chassis converter control system during inverter operation (commutation failure), the converter connection forms a short-circuit type connection between the DC and AC power supply system.

Fuse links can be arranged in a number of ways within the converter connection. A distinction is made between phase fuses in three-phase incoming feeders and, if applicable, DC fuses and branch fuses in the branches of the converter circuit ([see adjacent diagrams](#)). In the case of center tap connections, fuse links can only be arranged as phase fuses in three-phase incoming feeders.




When using SITOR fuse links of operational class aR, the overload protection of converter equipment, up to approx. 3.5 times the rated current of the fuse link, is taken from conventional protective devices (for example, thermally-delayed overload relays) or, in the case of controlled power converters, from the current limiter (exception: full range fuses).

SITOR fuse links of the 3NE1...-0 series with operational class gS are also suitable for the overload and short-circuit protection of cables, lines and busbars. All other dual-function fuses of the SITOR series have a gR characteristic. Overload protection is ensured as long as the rated current of the SITOR fuse links of the series 3NE1...-0 is selected as $I_n \leq I_z$ (DIN VDE 0100 Part 430).

The rules of DIN VDE 0100 Part 430 must be applied when rating short-circuit protection for cables, lines and busbars.

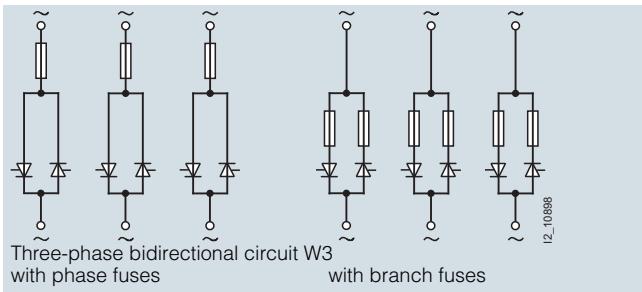

Configuration options

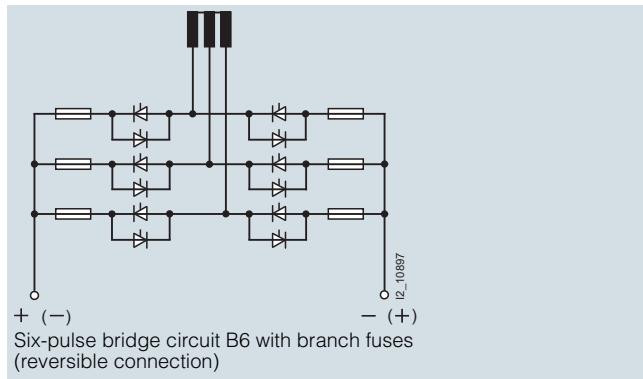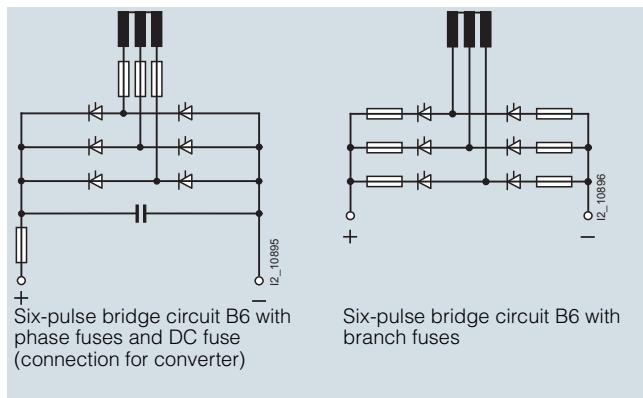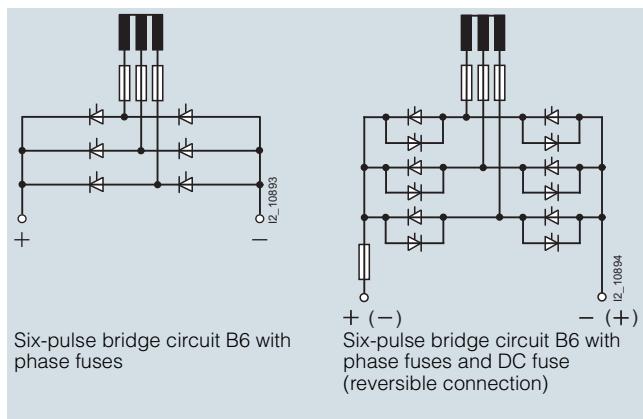

Fuse Systems

SITOR Semiconductor Fuses

SITOR, LV HRC design

Use in switch disconnectors

When using SITOR semiconductor fuses in 3KL and 3KM switch disconnectors with fuses and 3NP fuse switch disconnectors, the rated current of the fuse must sometimes be reduced due to the higher power loss compared to LV HRC fuses for line protection. Sometimes when using SITOR semiconductor fuses in switch disconnectors, the currents designated can be higher than the rated currents of the switches. These higher currents only apply when using SITOR switch disconnectors with semiconductor fuses and cannot be used when using switch disconnectors with standard LV HRC fuses. You will find further details in the following selection tables.

When using SITOR semiconductor fuses of the 3NC24, 3NC84, 3NE33 and 3NE43 series, the standard switching capacity of the fuse must not be used as the blades of these fuses (in contrast to LV HRC fuses) are slit. Occasional switching of currents up to the rated current of the fuses is permissible.

Due to the mechanical strain on the comparatively long fuse blade, SITOR semiconductor fuses of the 3NE41 series may only be occasionally switched, and only without load. If only switching without load is permissible, this must be clearly stated on the switch itself.

The use of SITOR semiconductor fuses > 63 A for overload protection is not permitted - even if gR fuses are used (exception: 3NE1).

The operational voltage is limited by the rated voltage of the switch disconnector or the fuse. If switching without load, the limit value is the rated insulation voltage of the switch disconnector.

The 3NE1 "double protection fuses" can be used as full range fuses (gS) both for semiconductor and line protection.

For further information on the assignment of SITOR semiconductor fuses to the fuse bases and safety switching devices, please refer to the tables on [pages 85 ff.](#)

Technical specifications

MLFB	Operational class (IEC 60269)	Rated voltage U_n V AC / V DC	Rated breaking capacity I_{1n} kA	Rated current I_n 1) A	Melting I^2t value I^2t_s (t _{vs} = 1 ms) A ² s	Breaking I^2t value I^2t_a at U_n A ² s	Temperature rise at I_n body center 2) K	Power dissipation at I_n 2) W	Varying load factor WL
3NC2423-0C	gR	500/ ¹³⁾	50 ¹⁴⁾	150 ³⁾	7000	33000	26	35	0.85
3NC2423-3C	gR	500/ ¹³⁾	50 ¹⁴⁾	150 ³⁾	7000	33000	26	35	0.85
3NC2425-0C	gR	500/ ¹³⁾	50 ¹⁴⁾	200 ³⁾	13600	64000	25	40	0.85
3NC2425-3C	gR	500/ ¹³⁾	50 ¹⁴⁾	200 ³⁾	13600	64000	25	40	0.85
3NC2427-0C	gR	500/ ¹³⁾	50 ¹⁴⁾	250 ³⁾	21000	99000	30	50	0.85
3NC2427-3C	gR	500/ ¹³⁾	50 ¹⁴⁾	250 ³⁾	21000	99000	30	50	0.85
3NC2428-0C	gR	500/ ¹³⁾	50 ¹⁴⁾	300 ³⁾	28000	132000	40	65	0.85
3NC2428-3C	gR	500/ ¹³⁾	50 ¹⁴⁾	300 ³⁾	28000	132000	40	65	0.85
3NC2431-0C	gR	500/ ¹³⁾	50 ¹⁴⁾	350 ³⁾	53000	249000	35	60	0.85
3NC2431-3C	gR	500/ ¹³⁾	50 ¹⁴⁾	350 ³⁾	53000	249000	35	60	0.85
3NC2432-0C	aR	500/ ¹³⁾	50 ¹⁴⁾	400 ³⁾	83000	390000	30	50	0.85
3NC2432-3C	aR	500/ ¹³⁾	50 ¹⁴⁾	400 ³⁾	83000	390000	30	50	0.85
3NC3236-1	aR	690/ ¹³⁾	100	630	32500	244000	120	120	0.85
3NC3236-6	aR	690/ ¹³⁾	100	630	32500	244000	125	125	0.9
3NC3237-1	aR	690/ ¹³⁾	100	710	46100	346000	125	130	0.85
3NC3237-6	aR	690/ ¹³⁾	100	710	46100	346000	125	130	0.9
3NC3238-1	aR	690/ ¹³⁾	100	800	66400	498000	125	135	0.9
3NC3238-6	aR	690/ ¹³⁾	100	800	66400	498000	120	135	0.95
3NC3240-1	aR	690/ ¹³⁾	100	900	90300	677000	130	145	0.9
3NC3240-6	aR	690/ ¹³⁾	100	900	90300	677000	125	140	0.95
3NC3241-1	aR	690/ ¹³⁾	100	1000	130000	975000	125	155	0.95
3NC3241-6	aR	690/ ¹³⁾	100	1000	130000	975000	120	145	1
3NC3242-1	aR	690/ ¹³⁾	100	1100	184000	1382000	125	165	0.95
3NC3242-6	aR	690/ ¹³⁾	100	1100	184000	1382000	115	150	1
3NC3243-1	aR	690/ ¹³⁾	100	1250	265000	1990000	130	175	0.95
3NC3243-6	aR	690/ ¹³⁾	100	1250	265000	1990000	110	155	1
3NC3244-1	aR	500/ ¹³⁾	100	1400	382000	2100000	140	200	0.95
3NC3244-6	aR	500/ ¹³⁾	100	1400	382000	2100000	115	175	1
3NC3245-1	aR	500/ ¹³⁾	100	1600	520000	2860000	160	240	0.9
3NC3245-6	aR	500/ ¹³⁾	100	1600	520000	2860000	120	195	0.95
3NC3336-1	aR	1000/ ¹³⁾	100	630	66400	418000	160	145	0.85
3NC3336-6	aR	1000/ ¹³⁾	100	630	66400	418000	140	130	0.9
3NC3337-1	aR	1000/ ¹³⁾	100	710	90300	569000	160	150	0.85
3NC3337-6	aR	1000/ ¹³⁾	100	710	90300	569000	140	140	0.9
3NC3338-1	aR	1000/ ¹³⁾	100	800	130000	819000	150	155	0.85
3NC3338-6	aR	1000/ ¹³⁾	100	800	130000	819000	130	150	0.9
3NC3340-1	aR	1000/ ¹³⁾	100	900	184000	1160000	145	165	0.9
3NC3340-6	aR	1000/ ¹³⁾	100	900	184000	1160000	130	160	0.95
3NC3341-1	aR	1000/ ¹³⁾	100	1000	265000	1670000	140	170	0.9
3NC3341-6	aR	1000/ ¹³⁾	100	1000	265000	1670000	125	165	0.95
3NC3342-1	aR	800/ ¹³⁾	100	1100	382000	1910000	150	185	0.9
3NC3342-6	aR	800/ ¹³⁾	100	1100	382000	1910000	130	175	0.95
3NC3343-1	aR	800/ ¹³⁾	100	1250	520000	2600000	165	210	0.9
3NC3343-6	aR	800/ ¹³⁾	100	1250	520000	2600000	135	185	0.95

Footnotes see page 84.

Fuse Systems

SITOR Semiconductor Fuses

SITOR, LV HRC design

MLFB	Operational class (IEC 60269)	Rated voltage U_n	Rated breaking capacity I_{1n}	Rated current I_n 1) A	Melting I^2t value I^2t_s ($t_{vs} = 1 \text{ ms}$)	Breaking I^2t value I^2t_a at U_n	Temperature rise at I_n body center 2) K	Power dissipation at I_n 2) W	Varying load factor WL
				V AC / V DC	kA	A ² s	A ² s		
3NC3430-1	aR	1250/ ¹³⁾	100	315	10600	72500	60	80	0.95
3NC3430-6	aR	1250/ ¹³⁾	100	315	10600	72500	60	80	0.95
3NC3432-1	aR	1250/ ¹³⁾	100	400	23900	163000	95	95	0.95
3NC3432-6	aR	1250/ ¹³⁾	100	400	23900	163000	95	95	0.95
3NC3434-1	aR	1250/ ¹³⁾	100	500	42500	290000	115	115	0.9
3NC3434-6	aR	1250/ ¹³⁾	100	500	42500	290000	115	115	0.9
3NC3436-1	aR	1250/ ¹³⁾	100	630	96600	650000	120	120	0.95
3NC3436-6	aR	1250/ ¹³⁾	100	630	96600	650000	120	120	0.95
3NC3438-1	aR	1100/ ¹³⁾	100	800	184000	985000	115	145	0.90
3NC3438-6	aR	1100/ ¹³⁾	100	800	184000	985000	109	145	0.95
3NC5531 ⁴⁾	aR	800/ ¹³⁾	50 ¹⁴⁾	350 ⁵⁾	66000	260000	200	80	0.9
3NC5838 ⁴⁾	aR	1000/ ¹³⁾	50 ¹⁴⁾	800 ⁵⁾	360000	1728000	130	170	0.9
3NC5840 ⁴⁾	aR	1000/ ¹³⁾	50 ¹⁴⁾	600 ⁵⁾	185000	888000	110	150	0.9
3NC5841 ⁴⁾	aR	800/ ¹³⁾	50 ¹⁴⁾	630 ⁵⁾	185000	888000	110	145	0.9
3NC7327-2	aR	680/ ¹³⁾	50 ¹⁴⁾	250	244000	635000	45	25	0.9
3NC7331-2	aR	680/ ¹³⁾	50 ¹⁴⁾	350	550000	1430000	66	32	0.9
3NC8423-0C	gR	690/ ¹³⁾	50 ¹⁴⁾	150 ³⁾	1100	17600	33	40	0.85
3NC8423-3C	gR	690/ ¹³⁾	50 ¹⁴⁾	150 ³⁾	1100	17600	33	40	0.85
3NC8425-0C	gR	690/ ¹³⁾	50 ¹⁴⁾	200 ³⁾	2400	38400	46	55	0.85
3NC8425-3C	gR	690/ ¹³⁾	50 ¹⁴⁾	200 ³⁾	2400	38400	46	55	0.85
3NC8427-0C	gR	690/ ¹³⁾	50 ¹⁴⁾	250 ³⁾	4400	70400	95	72	0.85
3NC8427-3C	gR	690/ ¹³⁾	50 ¹⁴⁾	250 ³⁾	4400	70400	95	72	0.85
3NC8431-0C	gR	690/ ¹³⁾	50 ¹⁴⁾	350 ³⁾	11000	176000	65	95	0.85
3NC8431-3C	gR	690/ ¹³⁾	50 ¹⁴⁾	350 ³⁾	11000	176000	65	95	0.85
3NC8434-0C	gR	690/ ¹³⁾	50 ¹⁴⁾	500 ³⁾	28000	448000	75	130	0.85
3NC8434-3C	gR	690/ ¹³⁾	50 ¹⁴⁾	500 ³⁾	28000	448000	75	130	0.85
3NC8444-3C	aR	600/ ¹³⁾	50 ¹⁴⁾	1000	400000	2480000	110	140	0.9
3NE1020-2	gS	690/ ¹³⁾	100	80	780	5800	45	10	1
3NE1021-0	gS	690/ ¹³⁾	100	100	3100	33000	36	10	1
3NE1021-2	gR	690/ ¹³⁾	100	100	1490	11000	49	12	1
3NE1022-0	gS	690/ ¹³⁾	100	125	6000	63000	40	11	1
3NE1022-2	gR	690/ ¹³⁾	100	125	3115	23000	55	13	1
3NE1224-0	gS	690/ ¹³⁾	100	160	7400	60000	60	24	1
3NE1224-2	gR	690/ ¹³⁾	100	160	2650	18600	70	32	1
3NE1224-3	gR	690/ ¹³⁾	100	160	2650	18600	70	32	1
3NE1225-0	gS	690/ ¹³⁾	100	200	14500	100000	65	27	1
3NE1225-2	gR	690/ ¹³⁾	100	200	5645	51800	62	35	1
3NE1225-3	gR	690/ ¹³⁾	100	200	5645	51800	62	35	1
3NE1227-0	gS	690/ ¹³⁾	100	250	29500	200000	75	30	1
3NE1227-2	gR	690/ ¹³⁾	100	250	11520	80900	70	37	1
3NE1227-3	gR	690/ ¹³⁾	100	250	11520	80900	70	37	1
3NE1230-0	gS	690/ ¹³⁾	100	315	46100	310000	80	38	1
3NE1230-2	gR	690/ ¹³⁾	100	315	22580	168000	75	40	1
3NE1230-3	gR	690/ ¹³⁾	100	315	22580	168000	75	40	1
3NE1331-0	gS	690/ ¹³⁾	100	350	58000	430000	75	42	1
3NE1331-2	gR	690/ ¹³⁾	100	350	29500	177000	82	43	1
3NE1331-3	gR	690/ ¹³⁾	100	350	29500	177000	82	43	1
3NE1332-0	gS	690/ ¹³⁾	100	400	84000	590000	85	45	1
3NE1332-2	gR	690/ ¹³⁾	100	400	37300	177000	100	50	1
3NE1332-3	gR	690/ ¹³⁾	100	400	37300	177000	100	50	1
3NE1333-0	gS	690/ ¹³⁾	100	450	104000	750000	85	53	1
3NE1333-2	gR	690/ ¹³⁾	100	450	46100	276500	100	58	1
3NE1333-3	gR	690/ ¹³⁾	100	450	46100	276500	100	58	1
3NE1334-0	gS	690/ ¹³⁾	100	500	149000	950000	90	56	1
3NE1334-2	gR	690/ ¹³⁾	100	500	66400	398000	100	64	1
3NE1334-3	gR	690/ ¹³⁾	100	500	66400	398000	100	64	1
3NE1435-0	gS	690/ ¹³⁾	100	560	215000	1700000	65	50	1
3NE1435-2	gR	690/ ¹³⁾	100	560	130000	890000	80	60	1
3NE1436-3	gR	690/ ¹³⁾	100	560	130000	890000	80	60	1
3NE1436-0	gS	690/ ¹³⁾	100	630	293000	2350000	70	55	1
3NE1436-2	gR	690/ ¹³⁾	100	630	203000	1390000	82	60	1
3NE1436-3	gR	690/ ¹³⁾	100	630	203000	1390000	82	60	1
3NE1437-0	gS	690/ ¹³⁾	100	710	437000	3400000	68	58	1
3NE1437-1	gR	600/ ¹³⁾	100	710	321000	2460000	85	65	1
3NE1437-2	gR	690/ ¹³⁾	100	710	265000	1818000	90	72	1
3NE1437-3	gR	690/ ¹³⁾	100	710	265000	1818000	90	72	1

Footnotes see page 84.

Fuse Systems

SITOR Semiconductor Fuses

SITOR, LV HRC design

MLFB	Operational class (IEC 60269)	Rated voltage U_n	Rated breaking capacity I_{1n}	Rated current I_n 1)	Melting I^2t value I^2t_s ($t_{vs} = 1 \text{ ms}$)	Breaking I^2t value I^2t_a at U_n	Temperature rise at I_n body center 2)	Power dissipation at I_n 2)	Varying load factor WL
				V AC / V DC	kA	A	A ² s	A ² s	
3NE1438-0	gS	690/ ¹³⁾	100	800	723000	5000000	70	58	1
3NE1438-1	gR	600/ ¹³⁾	100	800	437000	3350000	95	72	1
3NE1438-2	gR	690/ ¹³⁾	100	800	361000	2475000	95	84	1
3NE1438-3	gR	690/ ¹³⁾	100	800	361000	2475000	95	84	1
3NE1447-2	gR	690/ ¹³⁾	100	670	240000	1640000	90	64	1
3NE1447-3	gR	690/ ¹³⁾	100	670	240000	1640000	90	64	1
3NE1448-2	gR	690/ ¹³⁾	100	850	520000	3640000	95	76	1
3NE1448-3	gR	690/ ¹³⁾	100	850	520000	3640000	95	76	1
3NE1802-0	gS	690/ ¹³⁾	100	40	295	3000	30	3	1
3NE1803-0	gS	690/ ¹³⁾	100	35	166	1700	35	3.5	1
3NE1813-0	gS	690/ ¹³⁾	100	16	18	200	25	4	1
3NE1814-0	gS	690/ ¹³⁾	100	20	41	430	25	5	1
3NE1815-0	gS	690/ ¹³⁾	100	25	74	780	30	5	1
3NE1817-0	gS	690/ ¹³⁾	100	50	461	4400	35	6	1
3NE1818-0	gS	690/ ¹³⁾	100	63	903	9000	40	7	1
3NE1820-0	gS	690/ ¹³⁾	100	80	1843	18000	40	8	1
3NE3221	aR	1000/ ¹³⁾	100	100	665	4800	65	28	0.95
3NE3222	aR	1000/ ¹³⁾	100	125	1040	7200	70	36	0.95
3NE3224	aR	1000/ ¹³⁾	100	160	1850	13000	90	42	1
3NE3225	aR	1000/ ¹³⁾	100	200	4150	30000	80	42	1
3NE3227	aR	1000/ ¹³⁾	100	250	6650	48000	90	50	1
3NE3230-0B	aR	1000/ ¹³⁾	100	315	13400	80000	100	60	0.95
3NE3231	aR	1000/ ¹³⁾	100	350	16600	100000	120	75	0.9
3NE3232-0B	aR	1000/ ¹³⁾	100	400	22600	135000	140	85	0.9
3NE3233	aR	1000/ ¹³⁾	100	450	29500	175000	130	95	0.9
3NE3332-0B	aR	1000/ ¹³⁾	100	400	22600	135000	120	80	1
3NE3333	aR	1000/ ¹³⁾	100	450	29500	175000	125	90	1
3NE3334-0B	aR	1000/ ¹³⁾	100	500	46100	260000	115	90	1
3NE3335	aR	1000/ ¹³⁾	100	560	66500	360000	120	95	1
3NE3336	aR	1000/ ¹³⁾	100	630	104000	600000	110	100	1
3NE3337-8	aR	900/ ¹³⁾	100	710	149000	800000	125	105	1
3NE3338-8	aR	800/ ¹³⁾	100	800	184000	850000	140	130	0.95
3NE3340-8	aR	690/ ¹³⁾	100	900	223000	920000	160	165	0.95
3NE3421-0C	aR	1000/ ¹³⁾	50 ¹⁴⁾	100	1800	13500	45	25	1
3NE3430-0C	aR	1000/ ¹³⁾	50 ¹⁴⁾	315	29000	218000	120	80	1
3NE3432-0C	aR	1000/ ¹³⁾	50 ¹⁴⁾	400	48500	364000	130	110	1
3NE3434-0C	aR	1000/ ¹³⁾	50 ¹⁴⁾	500	116000	870000	120	95	1
3NE3525-5 ⁶⁾	aR	1000/ ¹³⁾	50 ¹⁴⁾	200 ⁷⁾	7150	44000	75	50	0.85
3NE3535-5 ⁶⁾	aR	1000/ ¹³⁾	50 ¹⁴⁾	450 ⁷⁾	64500	395000	130	90	0.85
3NE3626-0C	aR	1000/ ¹³⁾	50 ¹⁴⁾	224	7200	54000	140	85	1
3NE3635-0C	aR	1000/ ¹³⁾	50 ¹⁴⁾	450	65000	488000	150	110	1
3NE3635-6	aR	1000/ ¹³⁾	50 ¹⁴⁾	450	65000	488000	150	110	1
3NE3636-0C	aR	1000/ ¹³⁾	50 ¹⁴⁾	630	170000	1280000	136	132	1
3NE3637-0C	aR	1000/ ¹³⁾	50 ¹⁴⁾	710	260000	1950000	170	145	1
3NE3637-1C ⁸⁾	aR	1000/ ¹³⁾	50 ¹⁴⁾	710	260000	1950000	170	145	1
3NE4101	gR	1000/ ¹³⁾	100	32	40	280	45	12	0.9
3NE4102	gR	1000/ ¹³⁾	100	40	75	500	50	13	0.9
3NE4117	gR	1000/ ¹³⁾	100	50	120	800	65	16	0.9
3NE4117-5	gR	1000/ ¹³⁾	50 ¹⁴⁾	50	135	1100	95	20	0.85
3NE4118	aR	1000/ ¹³⁾	100	63	230	1500	78	20	0.9
3NE4120	aR	1000/ ¹³⁾	100	80	450	3000	82	22	0.9
3NE4121	aR	1000/ ¹³⁾	100	100	900	6000	85	24	0.9
3NE4121-5	aR	1000/ ¹³⁾	50 ¹⁴⁾	100	900	7400	135	35	0.85
3NE4122	aR	1000/ ¹³⁾	100	125	1800	14000	100	30	0.9
3NE4124	aR	1000/ ¹³⁾	100	160	3600	29000	120	35	0.9
3NE4146-5	aR	800/ ¹³⁾	50 ¹⁴⁾	170	7370	60500	142	43	0.85
3NE4327-0B	aR	800/ ¹³⁾	50 ¹⁴⁾	250	3600	29700	175	105	0.85
3NE4327-6B ⁶⁾	aR	800/ ¹³⁾	50 ¹⁴⁾	250	3600	29700	175	105	0.85
3NE4330-0B	aR	800/ ¹³⁾	50 ¹⁴⁾	315	7400	60700	170	120	0.85
3NE4330-6B ⁶⁾	aR	800/ ¹³⁾	50 ¹⁴⁾	315	7400	60700	170	120	0.85
3NE4333-0B ⁶⁾	aR	800/ ¹³⁾	50 ¹⁴⁾	450	29400	191000	190	140	0.85
3NE4333-6B ⁶⁾	aR	800/ ¹³⁾	50 ¹⁴⁾	450	29400	191000	190	140	0.85
3NE4334-0B	aR	800/ ¹³⁾	50 ¹⁴⁾	500	42500	276000	195	155	0.85
3NE4334-6B ⁶⁾	aR	800/ ¹³⁾	50 ¹⁴⁾	500	42500	276000	195	155	0.85
3NE4337	aR	800/ ¹³⁾	50 ¹⁴⁾	710	142000	923000	170	155	0.95
3NE4337-6 ⁶⁾	aR	800/ ¹³⁾	50 ¹⁴⁾	710	142000	923000	170	155	0.95

Footnotes see page 84.

Fuse Systems

SITOR Semiconductor Fuses

SITOR, LV HRC design

MLFB	Operational class (IEC 60269)	Rated voltage U_n	Rated breaking capacity I_{1n}	Rated current I_n 1) A	Melting I^2t value I^2t_s ($t_{vs} = 1 \text{ ms}$) A ² s	Breaking I^2t value I^2t_a at U_n A ² s	Temperature rise at I_n body center 2) K	Power dissipation at I_n 2) W	Varying load factor WL
3NE5424-0C	aR	1500 ⁽¹³⁾	50 ⁽¹⁴⁾	160	7200	54000	75	56	1
3NE5426-0C	aR	1500 ⁽¹³⁾	50 ⁽¹⁴⁾	224	18400	138000	100	80	1
3NE5430-0C	aR	1500 ⁽¹³⁾	50 ⁽¹⁴⁾	315	41500	311000	125	115	1
3NE5431-0C	aR	1500 ⁽¹³⁾	50 ⁽¹⁴⁾	350	57000	428000	150	135	1
3NE5433-0C	aR84	1500 ⁽¹³⁾	50 ⁽¹⁴⁾	450	116000	870000	150	145	0.95
3NE5433-1C	aR	1500 ⁽¹³⁾	50 ⁽¹⁴⁾	450	116000	870000	150	145	0.95
3NE5627-0C	aR	1500 ⁽¹³⁾	50 ⁽¹⁴⁾	250	11200	84000	170	130	1
3NE5633-0C	aR	1500 ⁽¹³⁾	50 ⁽¹⁴⁾	450	78500	590000	170	160	1
3NE5643-0C	aR	1500 ⁽¹³⁾	50 ⁽¹⁴⁾	600	260000	1950000	160	145	1
3NE6437	aR	900 ⁽¹³⁾	50 ⁽¹⁴⁾	710 ⁽⁹⁾	100000	620000	80	150	0.9
3NE6437-7	aR	900 ⁽¹³⁾	50 ⁽¹⁴⁾	710 ⁽¹⁰⁾	100000	620000	110	150	0.9
3NE6444	aR	900 ⁽¹³⁾	50 ⁽¹⁴⁾	900 ⁽⁹⁾	400000	1920000	80	170	0.9
3NE7425-0C	aR	2000 ⁽¹³⁾	100	200	18400	138000	85	75	1
3NE7427-0C	aR	2000 ⁽¹³⁾	100	250	29000	218000	110	110	1
3NE7431-0C	aR	2000 ⁽¹³⁾	100	350	74000	555000	105	120	1
3NE7432-0C	aR	2000 ⁽¹³⁾	100	400	116000	870000	130	150	1
3NE7633-0C	aR	2000 ⁽¹³⁾	100	450	128000	960000	165	160	1
3NE7633-1C ⁽¹¹⁾	aR	2000 ⁽¹³⁾	100	450	128000	960000	165	160	1
3NE7636-0C	aR	2000 ⁽¹³⁾	100	630	260000	1950000	200	220	1
3NE7636-1C ⁽¹¹⁾	aR	2000 ⁽¹³⁾	100	630	260000	1950000	200	220	1
3NE7637-1C ⁽¹¹⁾	aR	2000 ⁽¹³⁾	100	710	415000	3110000	230	275	1
3NE7648-1C ⁽¹¹⁾	aR	2000 ⁽¹³⁾	100	525	149000	1120000	210	210	1
3NE8003-1	gR	690 ⁽¹³⁾	100	35	70	400	45	9	0.95
3NE8015-1	gR	690 ⁽¹³⁾	100	25	30	180	35	7	0.95
3NE8017-1	gR	690 ⁽¹³⁾	100	50	120	700	65	14	0.9
3NE8018-1	gR	690 ⁽¹³⁾	100	63	260	1400	70	16	0.95
3NE8020-1	aR	690 ⁽¹³⁾	100	80	450	2400	80	19	0.95
3NE8021-1	aR	690 ⁽¹³⁾	100	100	850	4200	90	22	0.95
3NE8022-1	aR	690 ⁽¹³⁾	100	125	1400	6500	110	28	0.95
3NE8024-1	aR	690 ⁽¹³⁾	100	160	2800	13000	130	38	0.95
3NE8701-1	gR	690/700 ⁽¹²⁾	50 ⁽¹⁴⁾	32	40	285	45	10	0.9
3NE8702-1	gR	690/700 ⁽¹²⁾	50 ⁽¹⁴⁾	40	69	490	55	12	0.9
3NE8714-1	gR	690/700 ⁽¹²⁾	50 ⁽¹⁴⁾	20	12	83	40	7	0.9
3NE8715-1	gR	690/700 ⁽¹²⁾	50 ⁽¹⁴⁾	25	19	140	40	9	0.9
3NE8717-1	gR	690/700 ⁽¹²⁾	50 ⁽¹⁴⁾	50	115	815	60	15	0.9
3NE8718-1	aR	690/700 ⁽¹²⁾	50 ⁽¹⁴⁾	63	215	1550	70	16	0.95
3NE8720-1	aR	690/700 ⁽¹²⁾	50 ⁽¹⁴⁾	80	380	2700	80	18	0.9
3NE8721-1	aR	690/700 ⁽¹²⁾	50 ⁽¹⁴⁾	100	695	4950	75	19	0.95
3NE8722-1	aR	690/700 ⁽¹²⁾	50 ⁽¹⁴⁾	125	1250	9100	80	23	0.95
3NE8724-1	aR	690/700 ⁽¹²⁾	50 ⁽¹⁴⁾	160	2350	17000	100	31	0.9
3NE8725-1	aR	690/700 ⁽¹²⁾	50 ⁽¹⁴⁾	200	4200	30000	120	36	0.9
3NE8727-1	aR	690/700 ⁽¹²⁾	50 ⁽¹⁴⁾	250	7750	55000	125	42	0.9
3NE8731-1	aR	690/700 ⁽¹²⁾	50 ⁽¹⁴⁾	315	12000	85500	150	54	0.85
3NE9440-6	gR	600 ⁽¹³⁾	50 ⁽¹⁴⁾	850	400000	2480000	74	85	1
3NE9450	aR	600 ⁽¹³⁾	50 ⁽¹⁴⁾	1250 ⁽⁹⁾	400000	2480000	80	210	0.9
3NE9450-7	aR	600 ⁽¹³⁾	50 ⁽¹⁴⁾	1250 ⁽¹⁰⁾	400000	2480000	105	210	0.9
3NE9632-1C	aR	2500 ⁽¹³⁾	50 ⁽¹⁴⁾	400	81000	620000	160	205	1
3NE9634-1C	aR	2500 ⁽¹³⁾	50 ⁽¹⁴⁾	500	170000	1270000	180	235	1
3NE9636-1C	aR	2500 ⁽¹³⁾	50 ⁽¹⁴⁾	630	385000	2800000	198	275	1

1) Maximum tightening torque: M10 capped thread: 35 Nm, screw penetration depth $\geq 9 \text{ mm}$.

2) Temperature rise and power dissipation for operation in LV HRC fuse base.

3) Cooling air speed 1 m/s. In the case of natural air cooling, reduction of 5 %.

4) Maximum tightening torque:

- M10 thread (with indicator): 40 Nm
- M10 capped thread: 50 Nm, screw penetration depth $\geq 9 \text{ mm}$
- M24 \times 1.5 thread: 60 Nm.

5) Temperature of water-cooled busbar max. +45 C.

6) Maximum tightening torque: M10 capped thread: 35 Nm, screw penetration depth $\geq 9 \text{ mm}$.

7) Cooling air speed $\geq 0.5 \text{ m/s}$. In the case of natural air cooling, reduction of 5 %.

8) Gauge 140 mm, M12 screw connection.

9) Cooling air speed $\geq 2 \text{ m/s}$.

10) Bottom (cooled) connection max. +60 °C, top connection (M10) max. +110 °C.

11) M12 screw connection.

12) Rated voltage according to UL.

13) DC rated voltage: See page 152, "Use with direct current".

14) Minimum 50 kA, higher values on request.

Fuse Systems

SITOR Semiconductor Fuses

SITOR, LV HRC design

Load rating of SITOR fuse links with 3NH LV HRC fuse bases

SITOR fuse links							3NH LV HRC fuse bases			
Article No.	I_n A	U_n V AC	Operational class	BG	WL	\emptyset min Cu mm ²	Article No.	BG	I_{max} A	I_{WL}
3NC2423-0C/3C	150	500	gR	3	0.85	70	3NH3430/20	3	150	128
3NC2425-0C/3C	200	500	gR	3	0.85	95		3	190	162
3NC2427-0C/3C	250	500	gR	3	0.85	120		3	240	204
3NC2428-0C/3C	300	500	gR	3	0.85	185		3	285	242
3NC2431-0C/3C	350	500	gR	3	0.85	240		3	330	281
3NC2432-0C/3C	400	500	aR	3	0.85	240		3	400	340
3NC3336-1	630	1000	aR	3	0.85	2 x (40 x 5)	3NH3430/20	3	560	476
3NC3337-1	710	1000	aR	3	0.85	2 x (50 x 5)		3	600	510
3NC3338-1	800	1000	aR	3	0.85	2 x (40 x 8)		3	660	561
3NC3340-1	900	1000	aR	3	0.90	2 x (40 x 8)		3	750	675
3NC3341-1	1000	1000	aR	3	0.90	2 x (50 x 8)		3	850	765
3NC3342-1	1100	800	aR	3	0.90	2 x (50 x 8)		3	900	810
3NC3343-1	1250	800	aR	3	0.90	2 x (50 x 8)		3	950	855
3NC3430-1	315	1250	aR	3	0.95	2 x 95	3NH3430/20	3	310	295
3NC3432-1	400	1250	aR	3	0.95	2 x 120		3	390	371
3NC3434-1	500	1250	aR	3	0.90	2 x 150		3	460	414
3NC3436-1	630	1250	aR	3	0.95	2 x (40 x 5)		3	560	532
3NC3438-1	800	1100	aR	3	0.90	2 x (40 x 8)		3	690	656
3NC8423-0C/-3C	150	690	gR	3	0.85	70	3NH3430/20	3	135	115
3NC8425-0C/-3C	200	690	gR	3	0.85	95		3	180	153
3NC8427-0C/-3C	250	690	gR	3	0.85	120		3	250	213
3NC8431-0C/-3C	350	690	gR	3	0.85	240		3	315	268
3NC8434-0C/-3C	500	690	gR	3	0.85	2 x 150		3	450	383
3NC8444-3C	1000	600	aR	3	0.95	2 x (60 x 6)		3	800	800
3NE1020-2	80	690	gR	00	1.0	25	3NH3030/4030	00	80	80
3NE1021-0	100	690	gS	00	1.0	35		00	100	100
3NE1021-2	100	690	gR	00	1.0	35		00	100	100
3NE1022-0	125	690	gS	00	1.0	50		00	125	125
3NE1022-2	125	690	gR	00	1.0	50		00	125	125
3NE1224-0	160	690	gS	1	1.0	70	3NH3230/4230	1	160	160
3NE1224-2/-3	160	690	gR	1	1.0	70		1	160	160
3NE1225-0	200	690	gS	1	1.0	95		1	200	200
3NE1225-2/-3	200	690	gR	1	1.0	95		1	200	200
3NE1227-0	250	690	gS	1	1.0	120		1	250	250
3NE1227-2/-3	250	690	gR	1	1.0	120		1	250	250
3NE1230-0	315	690	gS	1	1.0	2 x 70	3NH3330/20	2	315	315
3NE1230-2/-3	315	690	gR	1	1.0	2 x 70		2	315	315
3NE1331-0	350	690	gS	2	1.0	2 x 95	3NH3330/20	2	350	350
3NE1331-2/-3	350	690	gR	2	1.0	2 x 95		2	350	350
3NE1332-0	400	690	gS	2	1.0	2 x 95		2	400	400
3NE1332-2/-3	400	690	gR	2	1.0	2 x 95		2	400	400
3NE1333-0	450	690	gS	2	1.0	2 x 120	3NH3430/20	3	450	450
3NE1333-2/-3	450	690	gR	2	1.0	2 x 120		3	450	450
3NE1334-0	500	690	gS	2	1.0	2 x 120		3	500	500
3NE1334-2/-3	500	690	gR	2	1.0	2 x 120		3	500	500
3NE1435-0	560	690	gS	3	1.0	2 x 150		3	560	560
3NE1435-2/-3	560	690	gR	3	1.0	2 x 150		3	560	560
3NE1436-0	630	690	gS	3	1.0	2 x 185		3	630	630
3NE1436-2/-3	630	690	gR	3	1.0	2 x 185		3	630	630
3NE1437-0	710	690	gS	3	1.0	2 x (40 x 5)		3	710	710
3NE1437-1	710	600	gR	3	1.0	2 x (40 x 5)		3	690	690
3NE1437-2/-3	710	690	gR	3	1.0	2 x (40 x 5)		3	710	710
3NE1438-0	800	690	gS	3	1.0	2 x (50 x 5)	3NH3430/20	3	800	800
3NE1438-1	800	600	gR	3	1.0	2 x (50 x 5)		3	750	750
3NE1438-2/-3	800	690	gR	3	1.0	2 x (50 x 5)		3	800	800
3NE1447-2/-3	670	690	gR	3	1.0	2 x (40 x 5)		3	670	670
3NE1448-2/-3	850	690	gR	3	1.0	2 x (40 x 8)		3	850	850
3NE1802-0	40	690	gS	000	1.0	10	3NH3030/4030	00	40	40
3NE1803-0	35	690	gS	000	1.0	6		00	35	35
3NE1813-0	16	690	gS	000	1.0	1.5		00	16	16
3NE1814-0	20	690	gS	000	1.0	2.5		00	20	20
3NE1815-0	25	690	gS	000	1.0	4		00	25	25
3NE1817-0	50	690	gS	000	1.0	10		00	50	50
3NE1818-0	63	690	gS	000	1.0	16		00	63	63
3NE1820-0	80	690	gS	000	1.0	25		00	80	80
3NE3221	100	1000	aR	1	0.95	35	3NH3230/4230	1	100	95
3NE3222	125	1000	aR	1	0.95	50		1	125	119
3NE3224	160	1000	aR	1	1.0	70		1	160	160
3NE3225	200	1000	aR	1	1.0	95		1	200	200
3NE3227	250	1000	aR	1	1.0	120		1	250	250
3NE3230-0B	315	1000	aR	1	0.95	185	3NH3330/20	2	305	290

Fuse Systems

SITOR Semiconductor Fuses

SITOR, LV HRC design

SITOR fuse links						\emptyset min Cu	3NH LV HRC fuse bases			
Article No.	I_n A	U_n V AC	Operational class	BG	WL	mm ²	Article No.	BG	I_{max} A	I_{WL}
3NE3231	350	1000	aR	1	0.95	240	3NH3330/20	2	335	318
3NE3232-0B	400	1000	aR	1	0.90	240		2	380	342
3NE3233	450	1000	aR	1	0.90	2x 150		2	425	383
3NE3332-0B	400	1000	aR	2	1.0	240	3NH3430/20	3	400	400
3NE3333	450	1000	aR	2	1.0	2 x 150		3	450	450
3NE3334-0B	500	1000	aR	2	1.0	2 x 150		3	500	500
3NE3335	560	1000	aR	2	1.0	2 x 185		3	560	560
3NE3336	630	1000	aR	2	1.0	2 x 185		3	630	630
3NE3337-8	710	900	aR	2	1.0	2 x (40 x 5)		3	680	680
3NE3338-8	800	800	aR	2	0.95	2 x 240		3	700	665
3NE3340-8	900	690	aR	2	0.95	2 x (40 x 8)		3	750	713
3NE4101	32	1000	gR	0	0.9	6	3NH3120/4230	0/1	32	29
3NE4102	40	1000	gR	0	0.9	10		0/1	40	36
3NE4117	50	1000	gR	0	0.9	10		0/1	50	45
3NE4118	63	1000	aR	0	0.9	16		0/1	63	57
3NE4120	80	1000	aR	0	0.9	25		0/1	80	72
3NE4121	100	1000	aR	0	0.9	35		0/1	100	90
3NE4122	125	1000	aR	0	0.9	50		0/1	125	113
3NE4124	160	1000	aR	0	0.9	70		0/1	160	144
3NE4327-0B	250	800	aR	2	0.85	150	3NH3330/20	2	240	204
3NE4330-0B	315	800	aR	2	0.85	240		2	300	255
3NE4333-0B	450	800	aR	2	0.85	2 x (30 x 5)	3NH3430/20	3	425	361
3NE4334-0B	500	800	aR	2	0.85	2 x (30 x 5)		3	475	404
3NE4337	710	800	aR	2	0.95	2 x (50 x 5)		3	630	599
3NE8015-1	25	690	gR	00	0.95	4	3NH3030/4030	00	25	24
3NE8003-1	35	690	gR	00	0.95	6		00	35	33
3NE8017-1	50	690	gR	00	0.90	10		00	50	45
3NE8018-1	63	690	gR	00	0.95	16		00	63	60
3NE8020-1	80	690	aR	00	0.95	25		00	80	76
3NE8021-1	100	690	aR	00	0.95	35	3NH3030/4030	00	100	95
3NE8022-1	125	690	aR	00	0.95	50		00	125	119
3NE8024-1	160	690	aR	00	0.95	70		00	160	152

 U_n = Rated voltage

BG = Size

 I_n = Rated current

WL = Varying load factor

 \emptyset min Cu = Required conductor cross-section Cu I_{max} = Maximum permissible current I_{WL} = Maximum permissible current with varying load

Load rating of SITOR fuse links with 3NP LV HRC fuse switch disconnectors

SITOR fuse links					Ø min Cu	3NP LV HRC fuse switch disconnectors											
Article No.	I _n A	U _n V AC	BG	WL	mm ²	Add-on units											
						Article No.	BG	I _{max} A	I _{WL}	Article No.	BG	I _{max} A	I _{WL}	Article No.	BG	I _{max} A	I _{WL}
3NC2423-0C/	150	500	3	0.85	70	3NP54	3	145	125	3NP4470	3	140	120	3NP1163	3	140	119
3NC2423-3C																	
3NC2425-0C/	200	500	3	0.85	95												
3NC2425-3C																	
3NC2427-0C/	250	500	3	0.85	120												
3NC2427-3C																	
3NC2428-0C/	300	500	3	0.85	185												
3NC2428-3C																	
3NC2431-0C/	350	500	3	0.85	240												
3NC2431-3C																	
3NC2432-0C/	400	500	3	0.85	240												
3NC2432-3C																	
3NC3336-1	630	1000	3	0.85	2 x (40 x 5)	3NP54	3	530	451	3NP4470	3	500	425	3NP1163	3	500	425
3NC3337-1	710	1000	3	0.85	2 x (50 x 5)												
3NC3338-1	800	1000	3	0.85	2 x (40 x 8)												
3NC3340-1	900	1000	3	0.90	2 x (40 x 8)												
3NC3341-1	1000	1000	3	0.90	2 x (50 x 8)												
3NC3342-1	1100	800	3	0.90	2 x (50 x 8)												
3NC3343-1	1250	800	3	0.90	2 x (50 x 8)												
3NC3430-1	315	1250	3	0.95	2 x 95	3NP54	3	295	280	3NP4470	3	280	266	3NP1163	3	280	266
3NC3432-1	400	1250	3	0.95	2 x 120												
3NC3434-1	500	1250	3	0.90	2 x 150												
3NC3436-1	630	1250	3	0.95	2 x (40 x 5)												
3NC3438-1	800	1100	3	0.90	2 x (40 x 8)												
3NC8423-0C/	150	690	3	0.85	70	3NP54	3	135	125	3NP4470	3	120	120	3NP1163	3	120	102
3NC8423-3C																	
3NC8425-0C/	200	690	3	0.85	95												
3NC8425-3C																	
3NC8427-0C/	250	690	3	0.85	120												
3NC8427-3C																	
3NC8431-0C	350	690	3	0.85	240												
3NC8431-3C																	
3NC8434-0C/	500	690	3	0.85	2 x 150												
3NC8434-3C																	
3NC8444-3C	1000	600	3	0.95	2 x (60 x 6)												
3NE1020-2	80	690	00	1.0	25	3NP50	00	80	80	3NP4070	00	80	80	3NP1133	00	80	80
3NE1021-0	100	690	00	1.0	35												
3NE1021-2	100	690	00	1.0	35												
3NE1022-0	125	690	00	1.0	50												
3NE1022-2	125	690	00	1.0	50												
3NE1224-0	160	690	1	1.0	70	3NP52/42	1	160	160	3NP53/43	2	160	160	3NP1143	1	160	160
3NE1224-2/-3	160	690	1	1.0	70												
3NE1225-0	200	690	1	1.0	95												
3NE1225-2/-3	200	690	1	1.0	95												
3NE1227-0	250	690	1	1.0	120												
3NE1227-2/-3	250	690	1	1.0	120												
3NE1230-0	315	690	1	1.0	2 x 70	3NP53/43	2	315	315					3NP1153	2	290	290
3NE1230-2/-3	315	690	1	1.0	2 x 70										2	278	278
3NE1331-0	350	690	2	1.0	2 x 95	3NP53/43	2	350	350	3NP54/44	3	350	350	3NP1153	2	315	315
3NE1331-2/-3	350	690	2	1.0	2 x 95										2	300	300
3NE1332-0	400	690	2	1.0	2 x 95										2	340	340
3NE1332-2/-3	400	690	2	1.0	2 x 95										2	328	328
3NE1333-0	450	690	2	1.0	2 x 120	3NP54/44	3	450	450					3NP1163	3	450	450
3NE1333-2/-3	450	690	2	1.0	2 x 120	3NP54	3	450	450	3NP4470	3	425	425		3	430	430
3NE1334-0	500	690	2	1.0	2 x 120	3NP54/44	3	500	500						3	500	500
3NE1334-2/-3	500	690	2	1.0	2 x 120	3NP54	3	500	500	3NP4470	3	465	465		3	475	475
3NE1435-0	560	690	3	1.0	2 x 150	3NP54/44	3	560	560					3NP1163	3	560	560
3NE1435-2/-3	560	690	3	1.0	2 x 150	3NP54	3	560	560	3NP4470	3	540	540		3	555	555
3NE1436-0	630	690	3	1.0	2 x 185										3	620	620
3NE1436-2/-3	630	690	3	1.0	2 x 185										3	630	630
3NE1437-0	710	690	3	1.0	2 x (40 x 5)										3	690	650
3NE1437-1	710	600	3	1.0	2 x (40 x 5)										3	670	630
3NE1437-2/-3	710	690	3	1.0	2 x (40 x 5)										-	-	-
3NE1438-0	800	690	3	1.0	2 x (50 x 5)	3NP54	3	800	800	3NP4470	3	750	700		-	-	-
3NE1438-1	800	600	3	1.0	2 x (50 x 5)										3	750	750
3NE1438-2/-3	800	690	3	1.0	2 x (50 x 5)										3	770	770
3NE1447-2/-3	670	690	3	1.0	2 x (40 x 5)										-	-	-
3NE1448-2/-3	850	690	3	1.0	2 x (40 x 8)										-	-	-

Fuse Systems

SITOR Semiconductor Fuses

SITOR, LV HRC design

SITOR fuse links					Ø min Cu	3NP LV HRC fuse switch disconnectors																
					Add-on units																	
Article No.	I _n A	U _n V AC	BG	WL	mm ²	Article No.	BG	I _{max} A	I _{WL}	Article No.	BG	I _{max} A	I _{WL}	Article No.	BG	I _{max} A	I _{WL}	Article No.	BG	I _{max} A	I _{WL}	
3NE1802-0	40	690	000	1.0	10	3NP35/ 3NP4010	000	40	40	3NP50/ 3NP4070	00	40	40	3NP1123	000	40	40	3NP1133	00	40	40	
3NE1803-0	35	690	000	1.0	6		000	35	35		00	35	35		000	35	35		00	35	35	
3NE1813-0	16	690	000	1.0	1.5		000	16	16		00	16	16		000	16	16		00	16	16	
3NE1814-0	20	690	000	1.0	2.5		000	20	20		00	20	20		000	20	20		00	20	20	
3NE1815-0	25	690	000	1.0	4		000	25	25		00	25	25		000	25	25		00	25	25	
3NE1817-0	50	690	000	1.0	10		000	50	50		00	50	50		000	50	50		00	50	50	
3NE1818-0	63	690	000	1.0	16		000	63	63		00	63	63		000	63	63		00	63	63	
3NE1820-0	80	690	000	1.0	25		000	80	80		00	80	80		000	80	80		00	80	80	
3NE3221	100	1000	1	0.95	35	3NP52/42	1	95	90	3NP53/ 3NP43	2	100	95	3NP1143	1	88	84	3NP1153	2	95	90	
3NE3222	125	1000	1	0.95	50		1	110	110		2	120	114		1	102	97		2	110	105	
3NE3224	160	1000	1	1.0	70		1	140	140		2	150	150		1	130	130		2	140	140	
3NE3225	200	1000	1	1.0	95		1	175	175		2	190	190		1	163	163		2	175	175	
3NE3227	250	1000	1	1.0	120		1	210	210		2	230	230		1	195	195		2	210	210	
3NE3230-0B	315	1000	1	0.95	185	3NP53	2	285	280	3NP4370	2	270	270						2	270	257	
3NE3231	350	1000	1	0.95	240		2	310	300		2	290	290						2	290	276	
3NE3232-0B	400	1000	1	0.90	240		2	330	320		2	310	310						2	320	288	
3NE3233	450	1000	1	0.90	2 x 150		2	360	340		2	330	330						2	360	324	
3NE3332-0B	400	1000	2	1.0	240	3NP54	3	360	345	3NP4470	3	345	345	3NP1153	2	330	330	3NP1163	3	360	360	
3NE3333	450	1000	2	1.0	2 x 150		3	400	385		3	385	385						3	375	375	
3NE3334-0B	500	1000	2	1.0	2 x 150		3	450	450		3	430	430						3	420	420	
3NE3335	560	1000	2	1.0	2 x 185		3	510	510		3	490	490						3	475	475	
3NE3336	630	1000	2	1.0	2 x 185		3	580	580		3	560	560						3	540	540	
3NE3337-8	710	900	2	1.0	2 x (40 x 5)		3	630	630		3	590	590						3	580	580	
3NE3338-8	800	800	2	0.95	2 x 240		3	630	630		3	605	605						3	605	575	
3NE3340-8	900	690	2	0.95	2 x (40 x 8)		3	630	630		3	630	630						3	630	599	
3NE4101	32	1000	0	0.9	6	3NP52	1	32	29	3NP4270	1	32	29						3NP1143	1	30	27
3NE4102	40	1000	0	0.9	10		1	40	36		1	38	34							1	35	32
3NE4117	50	1000	0	0.9	10		1	50	45		1	45	41							1	42	38
3NE4118	63	1000	0	0.9	16		1	63	57		1	59	53							1	55	50
3NE4120	80	1000	0	0.9	25		1	80	72		1	76	68							1	71	64
3NE4121	100	1000	0	0.9	35		1	95	86		1	90	81							1	84	76
3NE4122	125	1000	0	0.9	50		1	120	108		1	115	104							1	107	96
3NE4124	160	1000	0	0.9	70		1	150	135		1	144	130							1	134	121
3NE4327-0B	250	800	2	0.85	150	3NP53/54	2/3	210/	205/	3NP4470	3	205	200	3NP1153	2	195	166	3NP1163	3	215	183	
3NE4330-0B	315	800	2	0.85	240		2/3	270/	255/		3	260	250		2	240	204		3	270	230	
3NE4333-0B	450	800	2	0.85	2 x (30 x 5)		2/3	400/	370/		3	375	360						3	370	315	
3NE4334-0B	500	800	2	0.85	2 x (30 x 5)	3NP54	3	450	400		3	410	395						3	410	349	
3NE4337	710	800	2	0.95	2 x (50 x 5)		3	600	570		3	540	540						3	540	513	
3NE8015-1	25	690	00	0.95	4	3NP50/ 3NP4070	00	25	24					3NP1133	00	25	24					
3NE8003-1	35	690	00	0.95	6		00	33	31						00	32	30					
3NE8017-1	50	690	00	0.90	10		00	45	41						00	43	39					
3NE8018-1	63	690	00	0.95	16		00	54	51						00	52	49					
3NE8020-1	80	690	00	0.95	25		00	68	65						00	65	62					
3NE8021-1	100	690	00	0.95	35	3NP50/ 3NP4070	00	89	85					3NP1133	00	85	81					
3NE8022-1	125	690	00	0.95	50		00	106	101						00	100	95					
3NE8024-1	160	690	00	0.95	70		00	130	124						00	120	114					

U_n = Rated voltage

BG = Size

I_n = Rated current

WL = Varying load factor

Ø_{min} Cu = Required conductor cross-section Cu*I_{max}* = Maximum permissible current*I_{WL}* = Maximum permissible current with varying load

SITOR fuse links					Ø min Cu	3NP LV HRC fuse switch disconnectors															
						Busbar devices															
Article No.	I _n A	U _n V AC	BG	WL	mm ²	Article No.	BG	I _{max} A	I _{WL}	Article No.	BG	I _{max} A	I _{WL}	Article No.	BG	I _{max} A	I _{WL}	Article No.	BG	I _{max} A	I _{WL}
3NC2423-0C/	150	500	3	0.85	70	3NP4476	3	140	120					3NP1163	3	150	128				
3NC2423-3C							3	175	160						3	190	162				
3NC2425-0C/	200	500	3	0.85	95																
3NC2425-3C							3	215	195						3	237	201				
3NC2427-0C/	250	500	3	0.85	120																
3NC2427-3C							3	245	230						3	285	242				
3NC2428-0C/	300	500	3	0.85	185																
3NC2428-3C							3	315	285						3	332	282				
3NC2431-0C	350	500	3	0.85	240																
3NC2431-3C							3	360	360						3	380	323				
3NC2432-0C/	400	500	3	0.85	240																
3NC2432-3C																					
3NC3336-1	630	1000	3	0.85	2 x (40 x 5)									3NP1163	3	500	425				
3NC3337-1	710	1000	3	0.85	2 x (50 x 5)										3	560	476				
3NC3338-1	800	1000	3	0.85	2 x (40 x 8)										3	630	536				
3NC3340-1	900	1000	3	0.90	2 x (40 x 8)										3	630	567				
3NC3341-1	1000	1000	3	0.90	2 x (50 x 8)										3	630	567				
3NC3342-1	1100	800	3	0.90	2 x (50 x 8)										3	630	567				
3NC3343-1	1250	800	3	0.90	2 x (50 x 8)										3	630	567				
3NC3430-1	315	1250	3	0.95	2 x 95	3NP4476	3	280	266					3NP1163	3	285	271				
3NC3432-1	400	1250	3	0.95	2 x 120		3	340	323						3	340	323				
3NC3434-1	500	1250	3	0.90	2 x 150		3	400	360						3	425	383				
3NC3436-1	630	1250	3	0.95	2 x (40 x 5)		3	460	437						3	535	508				
3NC3438-1	800	1100	3	0.90	2 x (40 x 8)										3	520	494				
3NC8423-0C/	150	690	3	0.85	70	3NP4476	3	120	120					3NP1163	3	140	120				
3NC8423-3C							3	155	155						3	190	155				
3NC8425-0C/	200	690	3	0.85	95																
3NC8425-3C							3	195	195												
3NC8427-0C/	250	690	3	0.85	120																
3NC8427-3C																					
3NC8431-0C/	350	690	3	0.85	240																
3NC8431-3C																					
3NC8434-0C/	500	690	3	0.85	2 x 150																
3NC8434-3C																					
3NC8444-3C	1000	600	3	0.95	2 x (60 x 6)																
3NE1020-2	80	690	00	1.0	25	3NP4076	00	80	80					3NP1133	00	80	80				
3NE1021-0	100	690	00	1.0	35		00	100	100						00	100	100				
3NE1021-2	100	690	00	1.0	35		00	98	98						00	95	95				
3NE1022-0	125	690	00	1.0	50		00	125	125						00	120	120				
3NE1022-2	125	690	00	1.0	50		00	120	120						00	115	115				
3NE1224-0	160	690	1	1.0	70	3NP4276	1	160	160	3NP4376	2	160	160	3NP1143	1	160	160	3NP1153	2	160	160
3NE1224-2/-3	160	690	1	1.0	70		1	160	160		2	160	160		1	152	152		2	160	160
3NE1225-0	200	690	1	1.0	95		1	200	200		2	200	200		1	200	200		2	200	200
3NE1225-2/-3	200	690	1	1.0	95		1	190	190		2	200	200		1	180	180		2	190	190
3NE1227-0	250	690	1	1.0	120		1	250	250		2	250	250		1	238	238		2	250	250
3NE1227-2/-3	250	690	1	1.0	120		1	235	235		2	250	250		1	213	213		2	235	235
3NE1230-0	315	690	1	1.0	2 x 70						2	315	315						2	315	315
3NE1230-2/-3	315	690	1	1.0	2 x 70						2	315	315						2	315	315
3NE1331-0	350	690	2	1.0	2 x 95	3NP4376	2	350	350	3NP4476	3	350	350	3NP1153	2	350	350	3NP1163	3	350	350
3NE1331-2/-3	350	690	2	1.0	2 x 95		2	350	350		3	350	350		2	330	330		3	350	350
3NE1332-0	400	690	2	1.0	2 x 95		2	400	400		3	400	400		2	380	380		3	400	400
3NE1332-2/-3	400	690	2	1.0	2 x 95		2	400	400		3	400	400		2	360	360		3	400	400
3NE1333-0	450	690	2	1.0	2 x 120						3	450	450						3	430	430
3NE1333-2/-3	450	690	2	1.0	2 x 120						3	425	425						3	420	420
3NE1334-0	500	690	2	1.0	2 x 120						3	480	480						3	450	450
3NE1334-2/-3	500	690	2	1.0	2 x 120						3	450	450						3	450	450
3NE1435-0	560	690	3	1.0	2 x 150	3NP4476	3	510	510					3NP1163	3	520	520				
3NE1435-2/-3	560	690	3	1.0	2 x 150		3	500	500						3	510	510				
3NE1436-0	630	690	3	1.0	2 x 185		3	535	535						3	585	585				
3NE1436-2/-3	630	690	3	1.0	2 x 185		3	520	520						3	570	570				
3NE1437-0	710	690	3	1.0	2 x (40 x 5)		3	600	600						3	605	605				
3NE1437-1	710	600	3	1.0	2 x (40 x 5)		3	570	570						3	590	590				
3NE1437-2/-3	710	690	3	1.0	2 x (40 x 5)		3	540	540						3	580	580				
3NE1438-0	800	690	3	1.0	2 x (50 x 5)	3NP4476	3	640	630					3NP1163	3	630	630				
3NE1438-1	800	600	3	1.0	2 x (50 x 5)		3	600	600						3	610	610				
3NE1438-2/-3	800	690	3	1.0	2 x (50 x 5)		3	580	580						3	600	600				
3NE1447-2/-3	670	690	3	1.0	2 x (40 x 5)		3	530	530						3	575	575				
3NE1448-2/-3	850	690	3	1.0	2 x (40 x 8)		3	630	630						3	630	630				

Fuse Systems

SITOR Semiconductor Fuses

SITOR, LV HRC design

SITOR fuse links					Ø min Cu	3NP LV HRC fuse switch disconnectors																				
						Busbar devices																				
Article No.	I _n A	U _n V AC	BG	WL	mm ²	Article No.	BG	I _{max} A	I _{WL}	Article No.	BG	I _{max} A	I _{WL}	Article No.	BG	I _{max} A	I _{WL}	Article No.	BG	I _{max} A	I _{WL}					
3NE1802-0	40	690	000	1.0	10	3NP4015/	000	40	40	3NP4075/	000	40	40	3NP1123	000	40	40	3NP1133	00	40	40					
3NE1803-0	35	690	000	1.0	6	3NP4016	000	35	35	3NP4076	000	35	35		000	35	35		00	35	35					
3NE1813-0	16	690	000	1.0	1.5			000	16	16		000	16	16			000	16	16		00	16	16			
3NE1814-0	20	690	000	1.0	2.5			000	20	20		000	20	20			000	20	20		00	20	20			
3NE1815-0	25	690	000	1.0	4			000	25	25		000	25	25			000	25	25		00	25	25			
3NE1817-0	50	690	000	1.0	10			000	50	50		000	50	50			000	50	50		00	50	50			
3NE1818-0	63	690	000	1.0	16			000	63	63		000	63	63			000	63	63		00	63	63			
3NE1820-0	80	690	000	1.0	25			000	80	80		000	80	80			000	80	80		00	80	80			
3NE3221	100	1000	1	0.95	35	3NP4276	1	95	90	3NP4376	2	100	95	3NP1143	1	95	90	3NP1153	2	100	95					
3NE3222	125	1000	1	0.95	50			1	115	109		2	125	119		1	113	107		2	125	119				
3NE3224	160	1000	1	1.0	70			1	150	150		2	160	160		1	140	140		2	150	150				
3NE3225	200	1000	1	1.0	95			1	185	185		2	200	200		1	170	170		2	180	180				
3NE3227	250	1000	1	1.0	120			1	225	225		2	250	250		1	200	200		2	215	215				
3NE3230-0B	315	1000	1	0.95	185							2	285	285						2	265	252				
3NE3231	350	1000	1	0.95	240							2	310	310						2	280	266				
3NE3232-0B	400	1000	1	0.90	240							2	330	330						2	310	279				
3NE3233	450	1000	1	0.90	2 x 150							2	360	360						2	330	297				
3NE3332-0B	400	1000	2	1.0	240							3NP4476	3	340	340						3NP1163	3	360	360		
3NE3333	450	1000	2	1.0	2 x 150								3	370	370							3	390	390		
3NE3334-0B	500	1000	2	1.0	2 x 150								3	410	410							3	415	415		
3NE3335	560	1000	2	1.0	2 x 185								3	450	450							3	460	460		
3NE3336	630	1000	2	1.0	2 x 185								3	500	500							3	500	500		
3NE3337-8	710	900	2	1.0	2 x (40 x 5)								3	510	510							3	500	500		
3NE3338-8	800	800	2	0.95	2 x 240								3	520	520							3	500	475		
3NE3340-8	900	690	2	0.95	2 x (40 x 8)								3	530	530							3	500	475		
3NE4101	32	1000	0	0.9	6							3NP4276	1	32	29						3NP1143	1	32	29		
3NE4102	40	1000	0	0.9	10								1	38	34							1	40	36		
3NE4117	50	1000	0	0.9	10								1	45	41							1	50	45		
3NE4118	63	1000	0	0.9	16								1	59	53							1	60	54		
3NE4120	80	1000	0	0.9	25								1	76	68							1	76	68		
3NE4121	100	1000	0	0.9	35								1	90	81							1	93	84		
3NE4122	125	1000	0	0.9	50								1	115	104							1	115	104		
3NE4124	160	1000	0	0.9	70								1	144	130							1	144	130		
3NE4327-0B	250	800	2	0.85	150							3NP4476	3	235	210						3NP1163	3	220	187		
3NE4330-0B	315	800	2	0.85	240								3	280	260							3	255	217		
3NE4333-0B	450	800	2	0.85	2 x (30 x 5)								3	390	370							3	355	302		
3NE4334-0B	500	800	2	0.85	2 x (30 x 5)								3	415	400							3	390	332		
3NE4337	710	800	2	0.95	2 x (50 x 5)								3	480	480							3	500	475		
3NE8015-1	25	690	00	0.95	4	3NP4075/	00	25	24				3NP1133	00	25	24										
3NE8003-1	35	690	00	0.95	6	3NP4076	00	33	31					00	35	33										
3NE8017-1	50	690	00	0.90	10			00	45	41					00	50	45									
3NE8018-1	63	690	00	0.95	16				00	53	50					00	60	57								
3NE8020-1	80	690	00	0.95	25				00	68	65					00	72	68								
3NE8021-1	100	690	00	0.95	35	3NP4075/	00	85	81				3NP1133	00	85	81										
3NE8022-1	125	690	00	0.95	50	3NP4076	00	100	95					00	100	95										
3NE80s24-1	160	690	00	0.95	70				00	125	120					00	115	109								

U_n = Rated voltage

BG = Size

I_n = Rated current

WL = Varying load factor

Ø_{min} Cu = Required conductor cross-section Cu*I_{max}* = Maximum permissible current*I_{WL}* = Maximum permissible current with varying load

Fuse Systems

SITOR Semiconductor Fuses

SITOR, LV HRC design

Load rating of SITOR fuse links with 3KL/3KM LV HRC fuse switch disconnectors

SITOR fuse links					Ø min Cu	3KL/3KM switch disconnectors with fuses						3KM... busbar devices											
Article No.	I_n A	U_n V AC	BG	WL	mm ²	3KL... add-on devices			Article No.	BG	I_{max} A	I_{WL}	Article No.	BG	I_{max} A	I_{WL}	Article No.	BG	I_{max} A	I_{WL}			
						3KL61	3KL62	3KL61															
3NC2423-0C/	150	500	3	0.85	70				3KL61	3	145	123	3KL62	3	150	128							
3NC2423-3C										3	180	153		3	190	162							
3NC2425-0C/	200	500	3	0.85	95																		
3NC2425-3C																							
3NC2427-0C/	250	500	3	0.85	120					3	225	191		3	240	204							
3NC2427-3C																							
3NC2428-0C/	300	500	3	0.85	185					3	255	217		3	270	230							
3NC2428-3C																							
3NC2431-0C/	350	500	3	0.85	240					3	330	281		3	345	293							
3NC2431-3C																							
3NC2432-0C/	400	500	3	0.85	240					3	400	340		3	400	340							
3NC2432-3C																							
3NC3336-1	630	1000	3	0.85	2 x (40 x 5)	3KL62			3	500	425	3KL61	3	480	408								
3NC3337-1	710	1000	3	0.85	2 x (50 x 5)				3	540	459												
3NC3338-1	800	1000	3	0.85	2 x (40 x 8)				3	600	510												
3NC3340-1	900	1000	3	0.90	2 x (40 x 8)				3	650	585												
3NC3341-1	1000	1000	3	0.90	2 x (50 x 8)				3	720	648												
3NC3342-1	1100	800	3	0.90	2 x (50 x 8)				3	800	720												
3NC3343-1	1250	800	3	0.90	2 x (50 x 8)	3KL62			3	800	720												
3NC3430-1	315	1250	3	0.95	2 x 95	3KL61			3	285	271	3KL62	3	300	285								
3NC3432-1	400	1250	3	0.95	2 x 120				3	365	347		3	380	361								
3NC3434-1	500	1250	3	0.90	2 x 150				3	425	383		3	450	405								
3NC3436-1	630	1250	3	0.95	2 x (40 x 5)				3	500	475		3	540	513								
3NC3438-1	800	1100	3	0.90	2 x (40 x 8)	3KL62			3	650	618												
3NC8423-0C/	150	690	3	0.85	70	3KL61			3	135	115	3KL62	3	140	119								
3NC8423-3C																							
3NC8425-0C/	200	690	3	0.85	95				3	180	153		3	190	162								
3NC8425-3C																							
3NC8427-0C/	250	690	3	0.85	120				3	225	191		3	240	204								
3NC8427-3C																							
3NC8431-0C/	350	690	3	0.85	240				3	300	255		3	315	268								
3NC8431-3C																							
3NC8434-0C/	500	690	3	0.85	2 x 150				3	425	361		3	450	383								
3NC8434-3C																							
3NC8444-3C	1000	600	3	0.95	2 x (60 x 6)	3KL62			3	800	760	3KL61	3	630	630								
3NE1020-2	80	690	00	1.0	25	3KL52			00	80	80	3KL53	00	80	80	3KM52	00	80	80	3KM53	00	80	80
3NE1021-0	100	690	00	1.0	35				00	100	100		00	100	100	3KM53	00	100	100		00	100	100
3NE1021-2	100	690	00	1.0	35				00	100	100		00	100	100		00	100	100		00	100	100
3NE1022-0	125	690	00	1.0	50				00	125	125		00	125	125		00	125	125		00	100	100
3NE1022-2	125	690	00	1.0	50				00	125	125		00	125	125		00	125	125		00	125	125
3NE1224-0	160	690	1	1.0	70	3KL55			1	160	160	3KL57	2	160	160	3KM55	1	160	160	3KM53	00	125	125
3NE1224-2/-3	160	690	1	1.0	70				1	160	160		2	160	160	3KM57	2	160	160				
3NE1225-0	200	690	1	1.0	95				1	200	200		2	200	200		1	200	200		2	160	160
3NE1225-2/-3	200	690	1	1.0	95				1	200	200		2	200	200		1	200	200		2	200	200
3NE1227-0	250	690	1	1.0	120				1	250	250		2	250	250		1	250	250		2	200	200
3NE1227-2/-3	250	690	1	1.0	120				1	245	245		2	250	250		1	245	245		2	250	250
3NE1230-0	315	690	1	1.0	2 x 70	3KL57			2	315	315					3KM57	2	315	315		2	250	250
3NE1230-2/-3	315	690	1	1.0	2 x 70				2	280	280						2	280	280				
3NE1331-0	350	690	2	1.0	2 x 95	3KL57			2	330	330	3KL61	3	350	350	3KM57	2	330	330				
3NE1331-2/-3	350	690	2	1.0	2 x 95				2	300	300		3	350	350		2	300	300				
3NE1332-0	400	690	2	1.0	2 x 95				2	375	375		3	400	400		2	375	375				
3NE1332-2/-3	400	690	2	1.0	2 x 95				2	340	340		3	400	400		2	315	315				
3NE1333-0	450	690	2	1.0	2 x 120	3KL61			3	450	450	3KL62	3	450	450		2	400	400				
3NE1333-2/-3	450	690	2	1.0	2 x 120				3	450	450		3	450	500		2	325	325				
3NE1334-0	500	690	2	1.0	2 x 120				3	500	500		3	500	500		2	400	400				
3NE1334-2/-3	500	690	2	1.0	2 x 120				3	500	500		3	500	500		2	350	350				
3NE1435-0	560	690	3	1.0	2 x 150	3KL61			3	560	560	3KL62	3	560	560								
3NE1435-2/-3	560	690	3	1.0	2 x 150				3	560	560		3	560	560								
3NE1436-0	630	690	3	1.0	2 x 185				3	630	630		3	630	630								
3NE1436-2/-3	630	690	3	1.0	2 x 185				3	615	615		3	630	630								
3NE1437-0	710	690	3	1.0	2 x (40 x 5)				3	630	630		3	710	710								
3NE1437-1	710	600	3	1.0	2 x (40 x 5)				3	630	630		3	710	710								
3NE1437-2/-3	710	690	3	1.0	2 x (40 x 5)				3	630	630		3	700	700								
3NE1438-0	800	690	3	1.0	2 x (50 x 5)	3KL61			3	630	630	3KL62	3	800	800								
3NE1438-1	800	600	3	1.0	2 x (50 x 5)				3	630	630		3	800	800								
3NE1438-2/-3	800	690	3	1.0	2 x (50 x 5)				3	630	630		3	760	760								

Fuse Systems

SITOR Semiconductor Fuses

SITOR, LV HRC design

SITOR fuse links					Ø min Cu	3KL/3KM switch disconnectors with fuses						3KM... busbar devices									
Article No.	I _n A	U _n V AC	BG	WL	mm ²	3KL... add-on devices			Article No.	BG	I _{max} A	I _{WL}	Article No.	BG	I _{max} A	I _{WL}	Article No.	BG	I _{max} A	I _{WL}	
3NE1802-0	40	690	000	1.0	10	3KL50	00	40	40	3KL52	00	40	40	3KM50	00	40	40	3KM52	00	40	40
3NE1803-0	35	690	000	1.0	6		00	35	35		00	35	35		00	35	35	3KM52	00	35	35
3NE1813-0	16	690	000	1.0	1.5		00	16	16		00	16	16		00	16	16		00	16	16
3NE1814-0	20	690	000	1.0	2.5		00	20	20		00	20	20		00	25	25		00	20	20
3NE1815-0	25	690	000	1.0	4		00	25	25		00	25	25		00	25	25		00	20	20
3NE1817-0	50	690	000	1.0	10		00	50	50		00	50	50		00	50	50		00	25	25
3NE1818-0	63	690	000	1.0	16		00	63	63		00	63	63		00	63	63		00	50	50
3NE1820-0	80	690	000	1.0	25	3KL52	00	80	80					3KM52	00	80	80		00	63	63
3NE3221	100	1000	1	0.95	35	3KL55	1	90	86	3KL57	2	95	90	3KM55	1	90	86	3KM57	2	95	90
3NE3222	125	1000	1	0.95	50		1	110	105		2	115	109		1	110	105	3KM57	2	115	109
3NE3224	160	1000	1	1.0	70		1	140	140		2	150	150		1	140	140		2	150	150
3NE3225	200	1000	1	1.0	95		1	175	175		2	180	180		1	175	175		2	180	180
3NE3227	250	1000	1	1.0	120		1	210	210		2	220	220		1	210	210		2	220	220
3NE3230-0B	315	1000	1	0.95	185						2	240	228								
3NE3231	350	1000	1	0.95	240						2	265	252								
3NE3232-0B	400	1000	1	0.90	240						2	290	261								
3NE3233	450	1000	1	0.90	2 x 150						2	320	288								
3NE3332-0B	400	1000	2	1.0	240	3KL61	3	340	340	3KL62	3	360	360	3KM57	2	290	290	3KM57	2	320	288
3NE3333	450	1000	2	1.0	2 x 150		3	380	380		3	400	400		2	320	320				
3NE3334-0B	500	1000	2	1.0	2 x 150		3	440	440		3	470	470		2	360	360				
3NE3335	560	1000	2	1.0	2 x 185		3	500	500		3	530	530		2	400	400				
3NE3336	630	1000	2	1.0	2 x 185		3	540	540		3	580	580		2	400	400				
3NE3337-8	710	900	2	1.0	2 x (40 x 5)		3	600	600		3	640	640		2	400	400				
3NE3338-8	800	800	2	0.95	2 x 240		3	630	630		3	720	680		2	400	400				
3NE3340-8	900	690	2	0.95	2 x (40 x 8)		3	630	630		3	800	750		2	400	400				
3NE4101	32	1000	0	0.9	6					3KL55	1	32	29	3KM55	1	32	29				
3NE4102	40	1000	0	0.9	10						1	40	36		1	40	36				
3NE4117	50	1000	0	0.9	10						1	50	45		1	50	45				
3NE4118	63	1000	0	0.9	16						1	63	57		1	63	57				
3NE4120	80	1000	0	0.9	25						1	80	72		1	80	72				
3NE4121	100	1000	0	0.9	35						1	95	86		1	95	86				
3NE4122	125	1000	0	0.9	50						1	120	108		1	120	108				
3NE4124	160	1000	0	0.9	70						1	150	135		1	150	135				
3NE4327-0B	250	800	2	0.85	150	3KL57	2	175	149	3KL61	3	200	170	3KM57	2	175	149				
3NE4330-0B	315	800	2	0.85	240		2	230	196		3	260	221		2	230	196				
3NE4333-0B	450	800	2	0.85	2 x (30 x 5)		2	340	289		3	370	315		2	340	289				
3NE4334-0B	500	800	2	0.85	2 x (30x5)	3KL61	3	425	361	3KL62	3	450	375		2	380	323				
3NE4337	710	800	2	0.95	2 x (50 x 5)		3	600	570		3	630	600		2	400	400				
3NE8015-1	25	690	00	0.95	4	3KL50	00	25	24	3KL52	00	25	24	3KM50	00	25	24	3KM52	00	25	24
3NE8003-1	35	690	00	0.95	6		00	33	31		00	35	33		00	33	31	3KM52	00	35	33
3NE8017-1	50	690	00	0.90	10		00	45	41		00	50	45		00	45	41				
3NE8018-1	63	690	00	0.95	16		00	54	51		00	60	57		00	54	51		00	50	45
3NE8020-1	80	690	00	0.95	25	3KL52	00	68	65	3KL53	00	68	65	3KM52	00	68	65		00	60	57
3NE8021-1	100	690	00	0.95	35	3KL52	00	89	85	3KL53	00	89	85	3KM52	00	89	85	3KM53	00	68	65
3NE8022-1	125	690	00	0.95	50		00	106	101		00	106	101		00	106	101		00	89	85
3NE8024-1	160	690	00	0.95	70		00	130	124		00	130	124		00	130	124		00	106	101

U_n = Rated voltage


BG = Size

I_n = Rated current


WL = Varying load factor

Ø_{min} Cu = Required conductor cross-section Cu*I_{max}* = Maximum permissible current*I_{WL}* = Maximum permissible current with varying load


Dimensional drawings

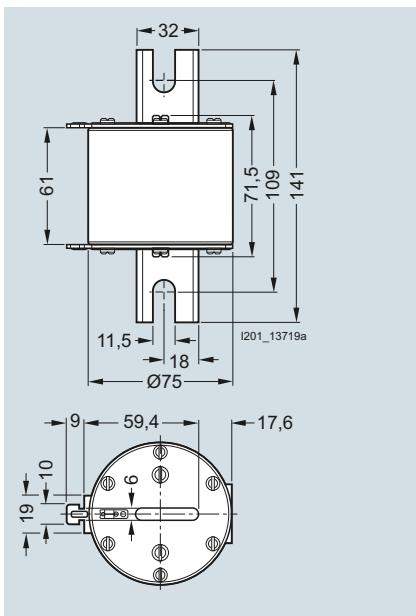


3NC24..-0C, 3NC84..-0C

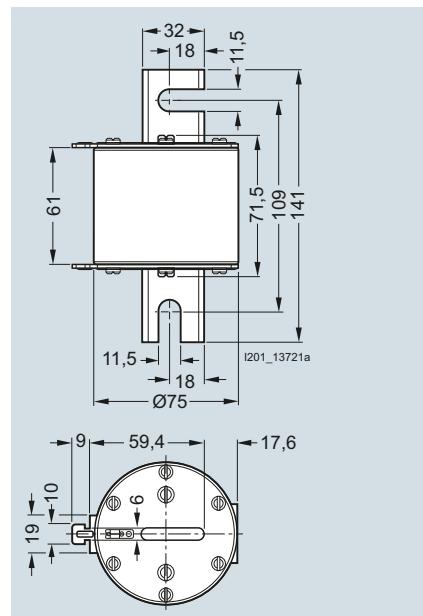


3NC24..-3C, 3NC84..-3C

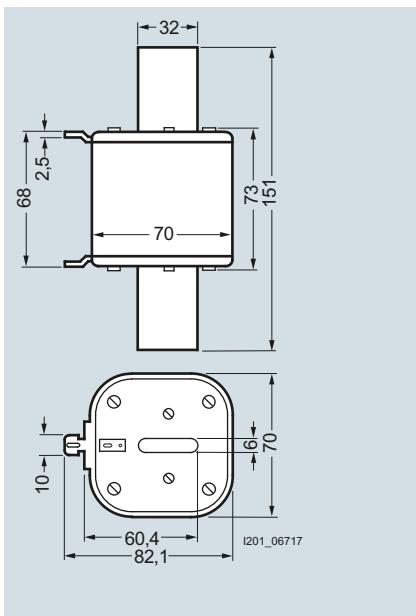

3NE143..-0, 3NE143..-1

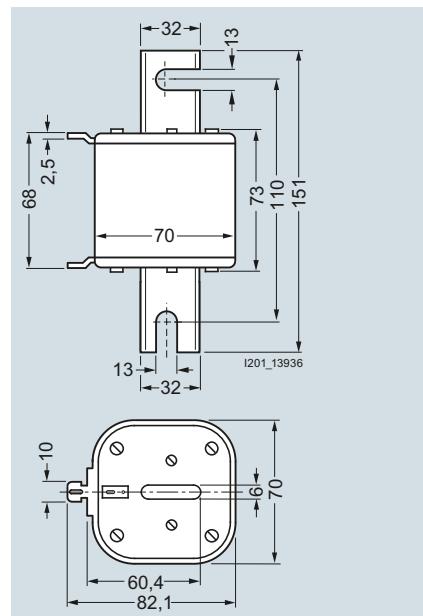

3NE14..-3

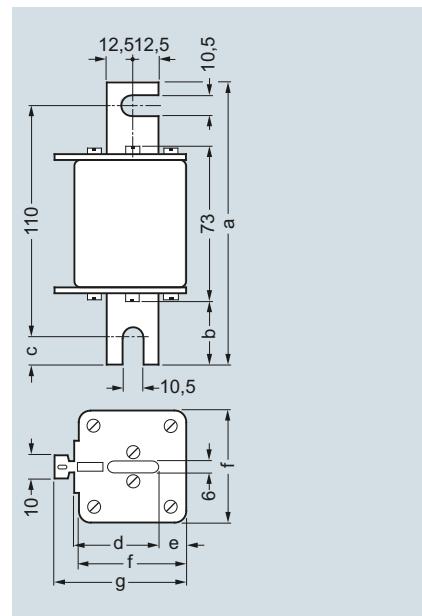


3NE12..-3, 3NE13..-3

Type	Dimensions (mm)						
	a	b	c	d	e	f	g
3NE12..-3	135	31	12.5	40.5	13.5	52	63.5
3NE13..-3	149	38	19.5	47.5	15	60	72


Fuse Systems

SITOR Semiconductor Fuses


SITOR, LV HRC design

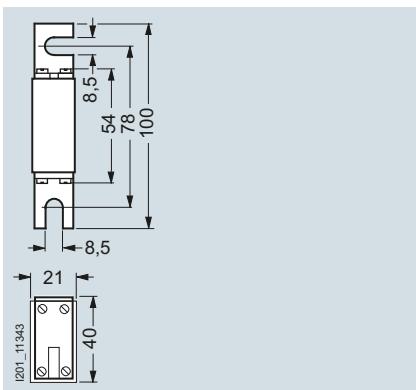


3NE87..-1

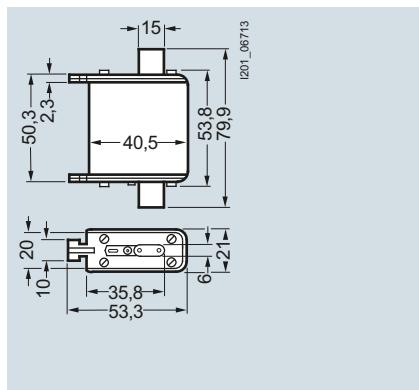


3NE18..-0

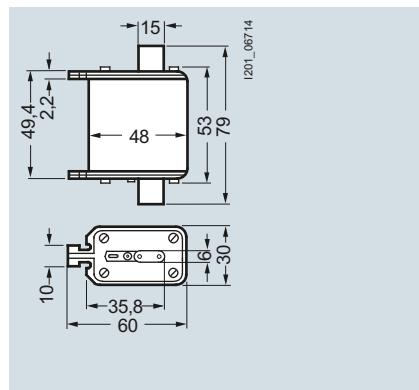


3NE102..-0, 3NE102..-2, 3NE80..-1

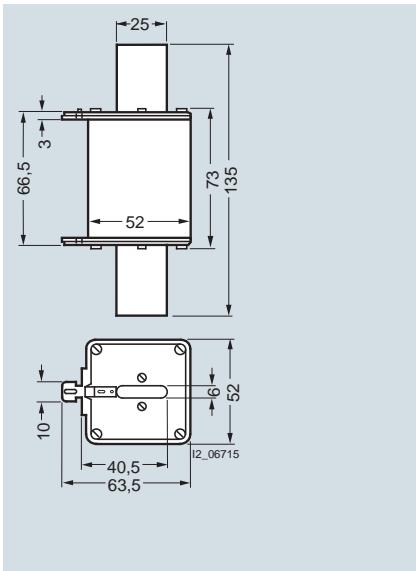

3NE12..-0, 3NE12..-2

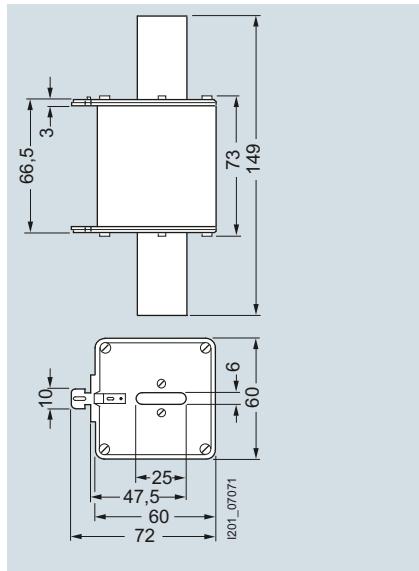

3NE133..-0, 3NE133..-2

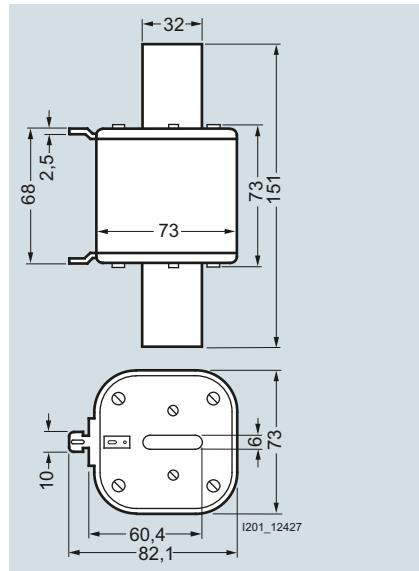


3NE14..-2

Fuse Systems


SITOR Semiconductor Fuses

SITOR, LV HRC design

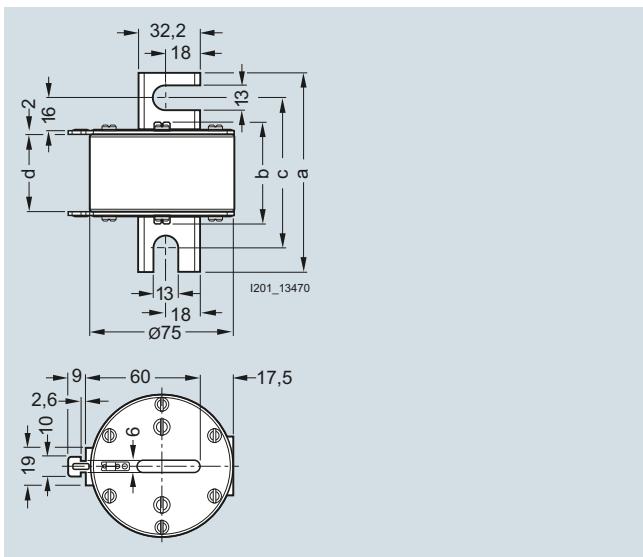


3NC32..-1, 3NC33..-1

Type	Dimensions (mm)			
	a	b	c	d
3NC32..-1	102	51	78	40
3NC33..-1	139	72	108	61

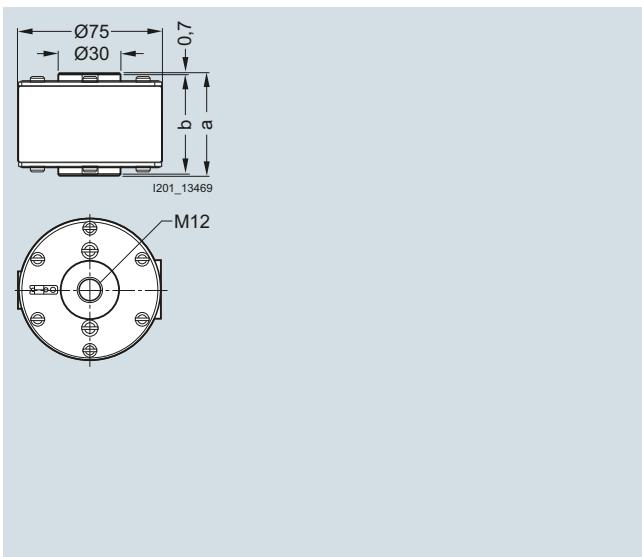


3NC32..-6, 3NC33..-6


Type	Dimensions (mm)	
	a	b
3NC32..-6	52	50
3NC33..-6	73	71

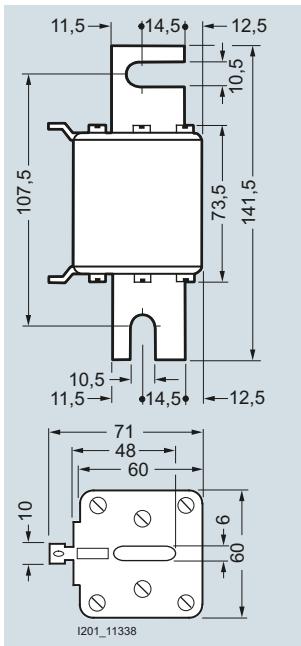

3NE43..-0B, 3NE4337

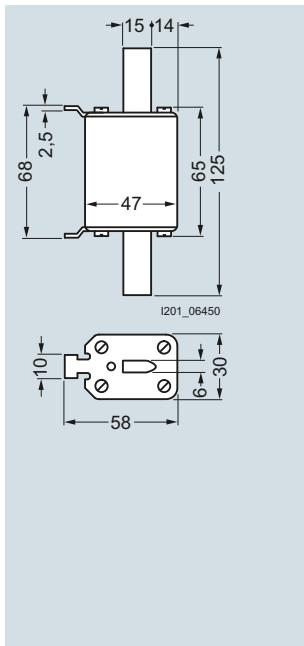

3NE41..

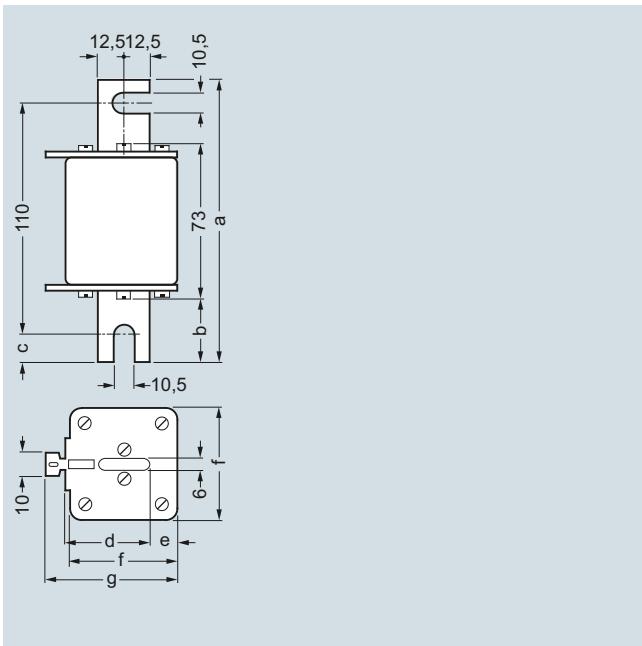


3NE322., 3NE323., 3NE33..

Type	Dimensions (mm)						
	a	b	c	d	e	f	g
3NE322.	135	31	12.5	40.5	13.5	52	63.5
3NE323.	135	31	12.5	40.5	13.5	52	63.5
3NE33..	149	38	19.5	47.5	15	60	72

Fuse Systems


SITOR Semiconductor Fuses

SITOR, LV HRC design

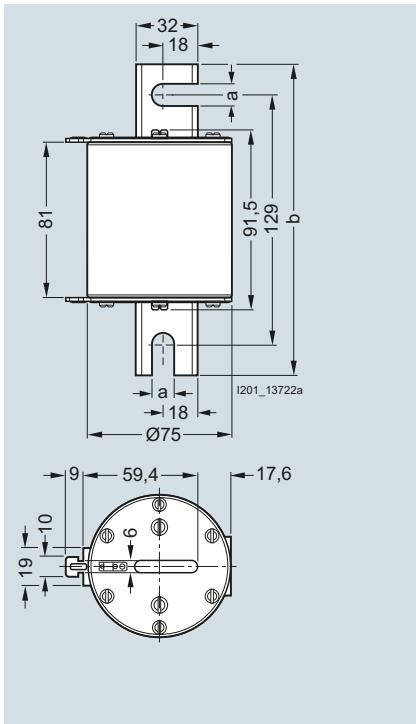


3NE3...-0C, 3NE36...-1C

Type	Dimensions (mm)	
	a	b
3NE3...-0C	11.5	161
3NE36...-1C	13	171

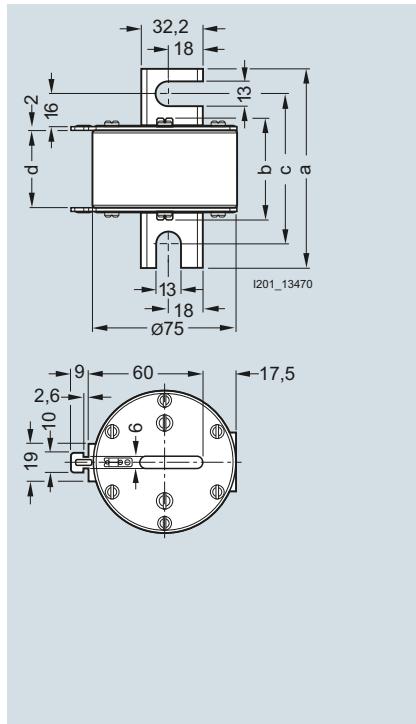


3NC34..-1

Type	Dimensions (mm)			
	a	b	c	d
3NC34...1	139	72	108	61

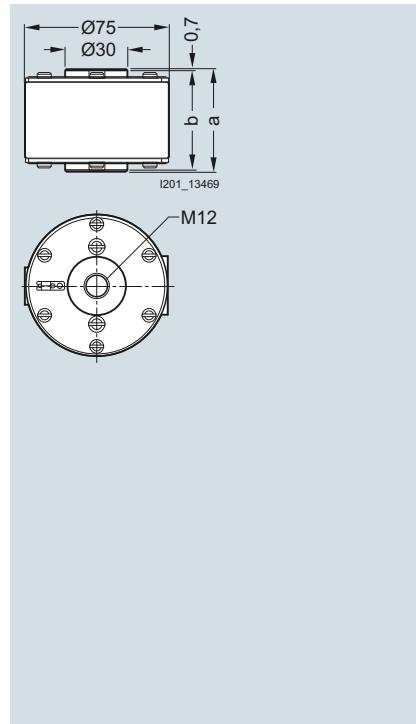


3NC34..-6



Type	Dimensions (mm)	
	a	b
3NC34..-6	73	71

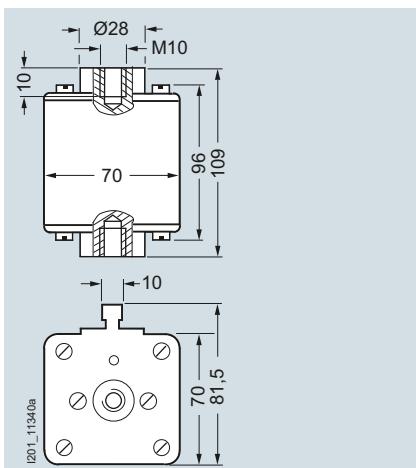

3NE3635-6

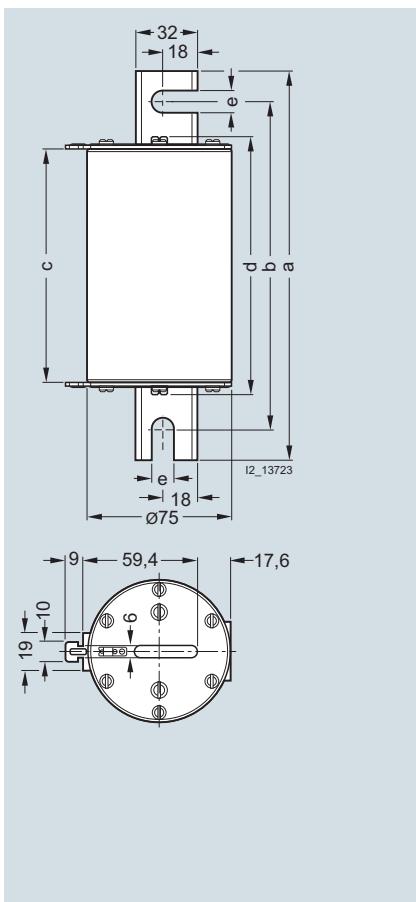

3NE56..-0C

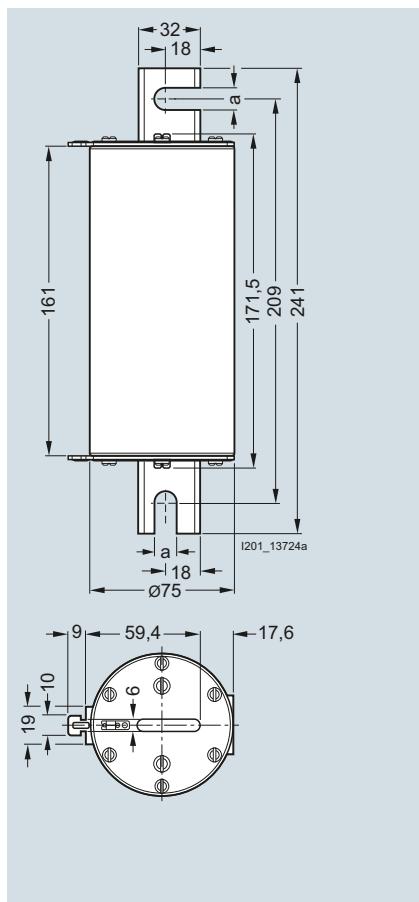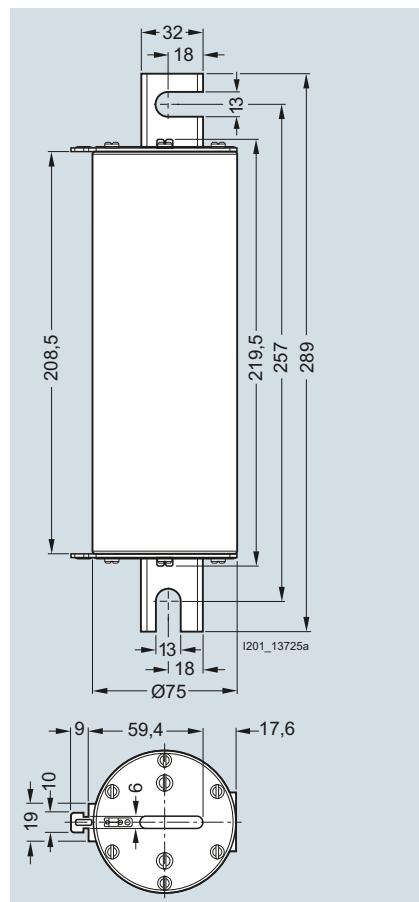3NE54..-0C, 3NE54..-1C;
3NE7...-0C, 3NE7...-1C

3NE96..-1C


Type	Dimensions (mm)				
	a	b	c	d	e
3NE56..-0C	201	169	121	131.5	11.5

Type	Dimensions (mm)
3NE54..-0C	11.5
3NE54..-1C	13
3NE7...-0C	11.5
3NE7...-1C	13


Fuse Systems

SITOR Semiconductor Fuses


SITOR, LV HRC design

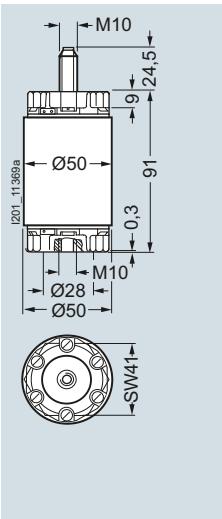


3NC5531

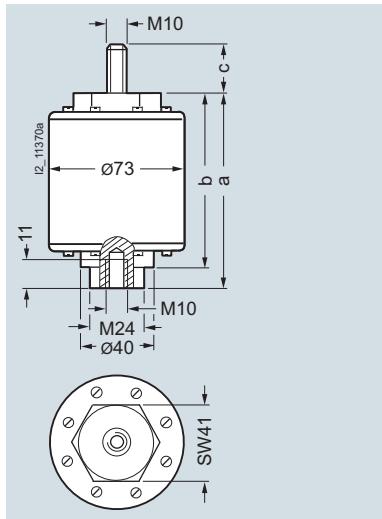

3NC58..

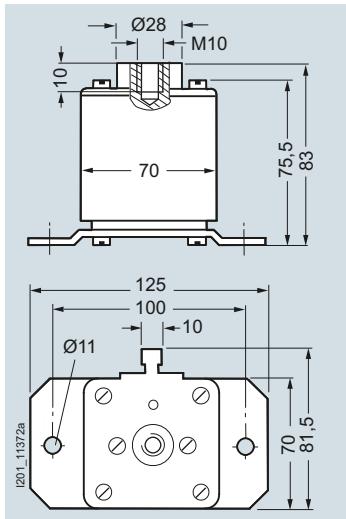


3NE64..-7, 3NE94..-7

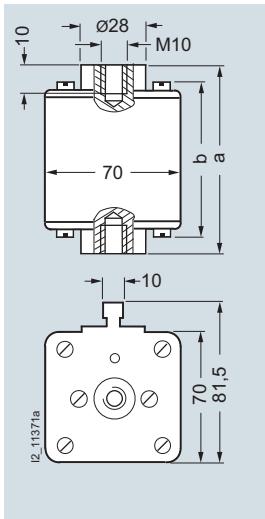


3NE64.., 3NE94..

Type	Dimensions (mm)		
	a	b	c
3NC5838	98	88.5	25
3NC5841	98	88.5	25
3NC5840	119	109.5	20.5


Type	Dimensions (mm)
a	b
3NE6437	89
3NE9450	89
3NE9440-6	89
3NE6444	99
	76
	76
	76
	86

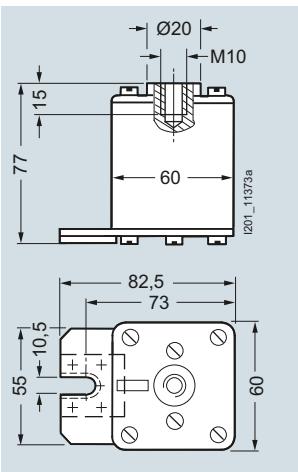


3NE3...-5

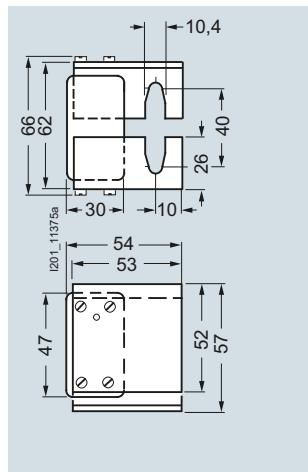

3NE41..-5

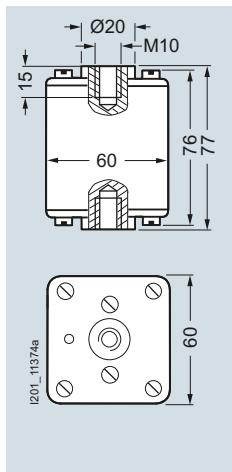

3NE43..-6B, 3NE4337-6

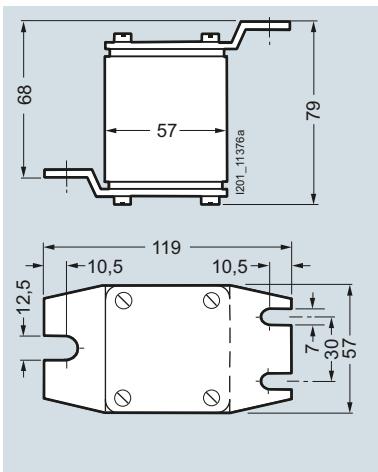


3NC73..-2

Characteristic curves


3NC24.. series

Size: 3
 Operational class: gR or aR
 Rated voltage: 500 V AC
 Rated current: 150 ... 400 A


Time/current characteristics diagram

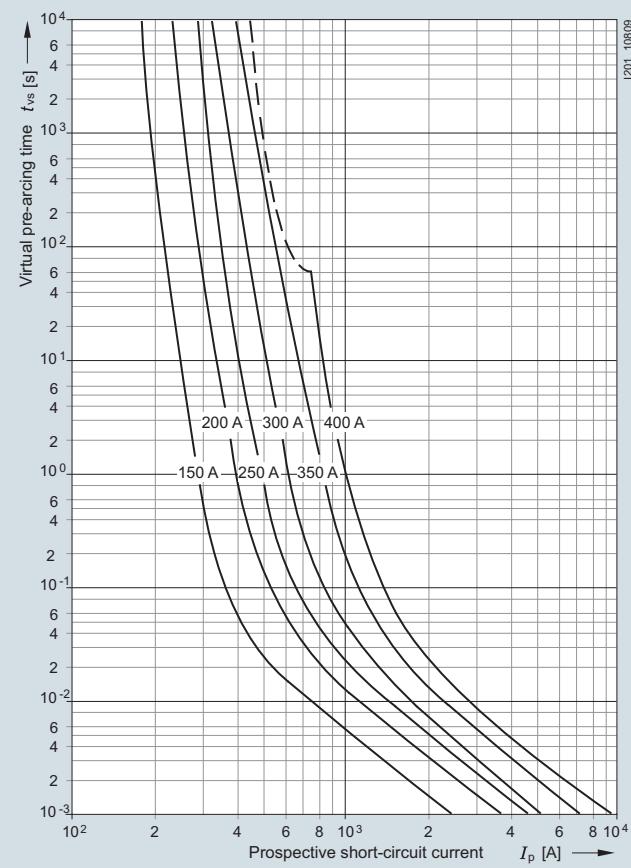


Let-through characteristics (current limitation at 50 Hz)

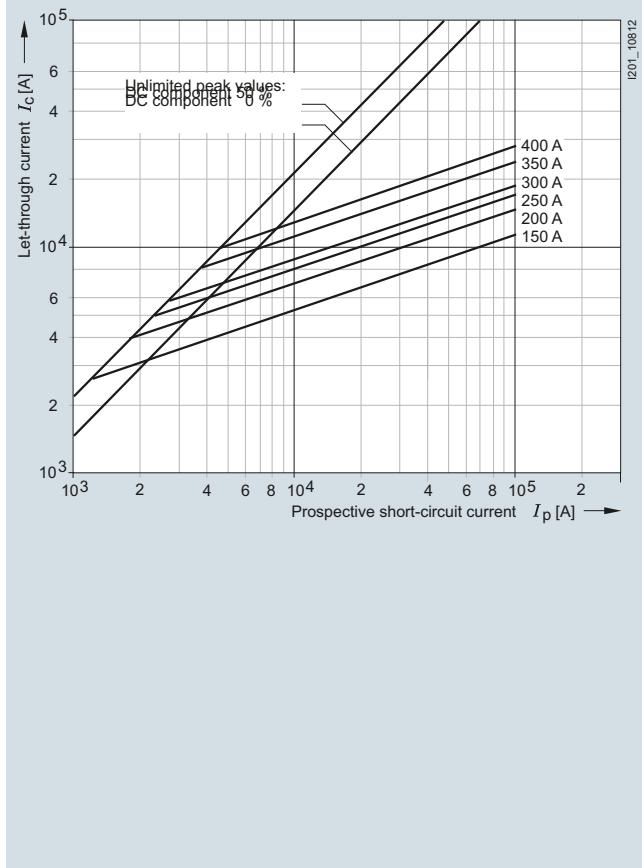

Correction factor k_A for breaking I^2t value

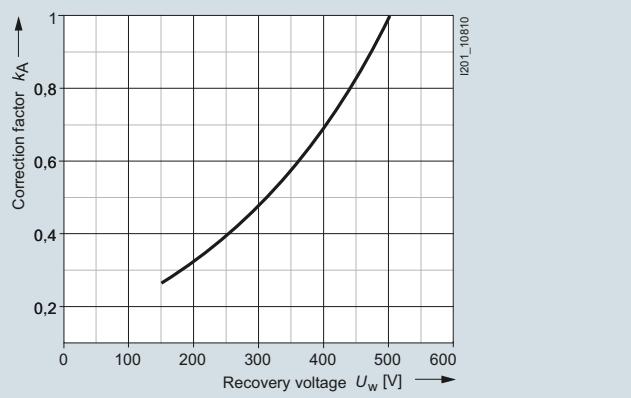

Peak arc voltage

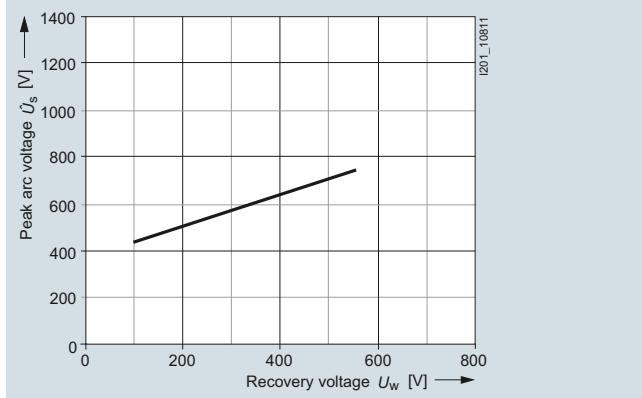

Fuse Systems


SITOR Semiconductor Fuses

SITOR, LV HRC design


3NC32 series

Size: 3
 Operational class: aR
 Rated voltage: 690 V AC (630 ... 1250 A),
 500 V AC (1400 ... 1600 A)
 Rated current: 630 ... 1600 A


Time/current characteristics diagram

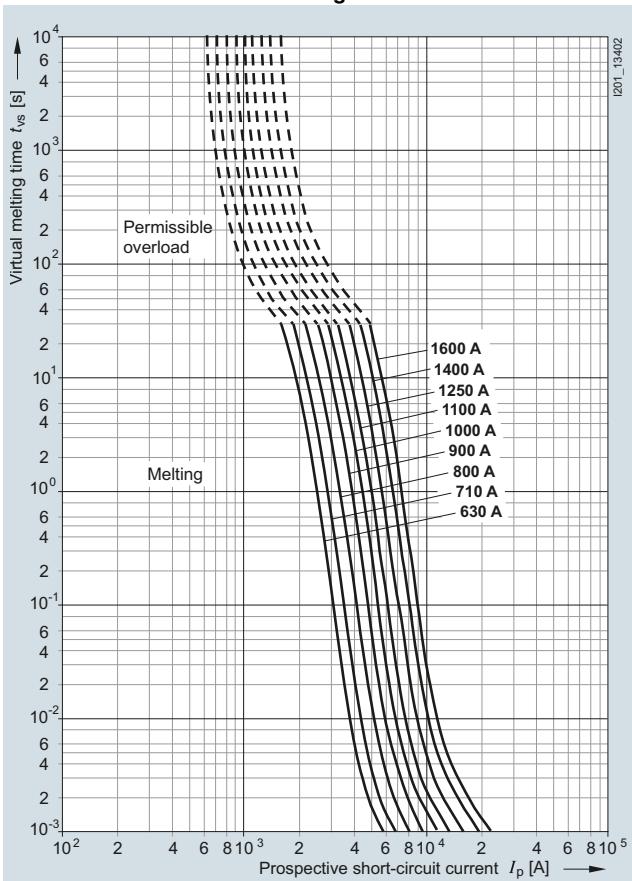


Let-through characteristic curves

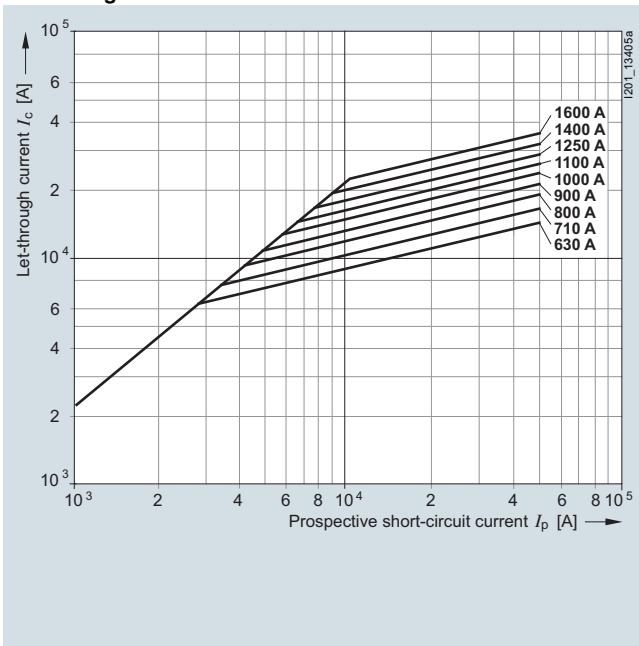

Correction factor k_A for breaking I^2t value




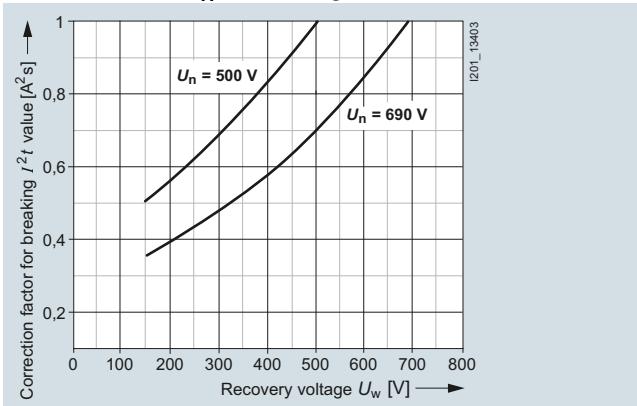


Peak arc voltage

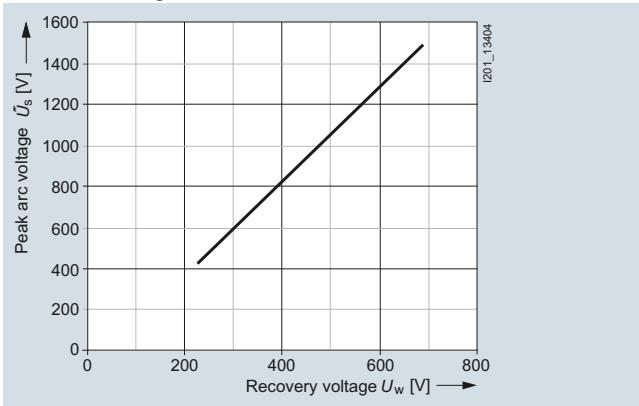

3NC33 series

Size: 3
 Operational class: aR
 Rated voltage: 1000 V AC (630 ... 1000 A),
 800 V AC (1100 ... 1250 A)
 Rated current: 630 ... 1250 A

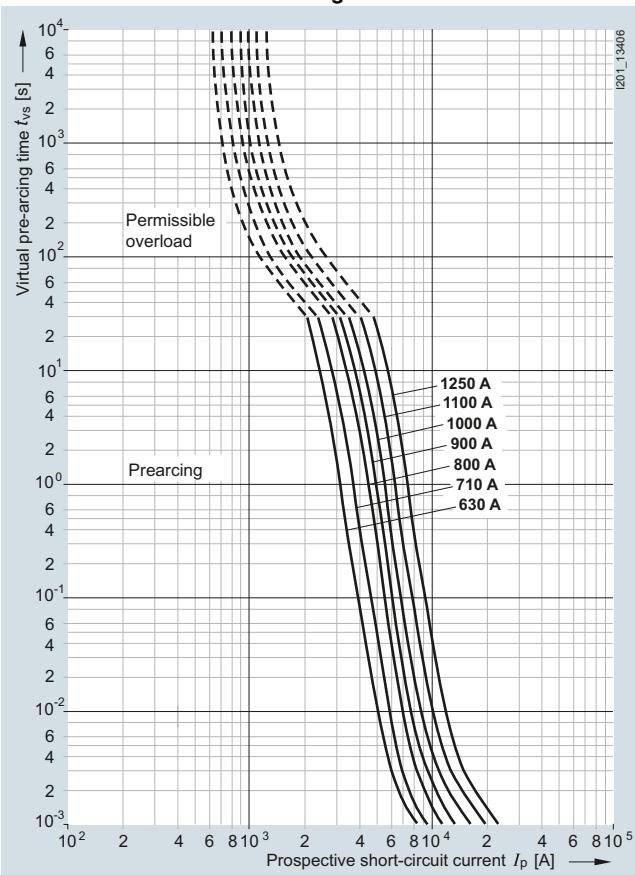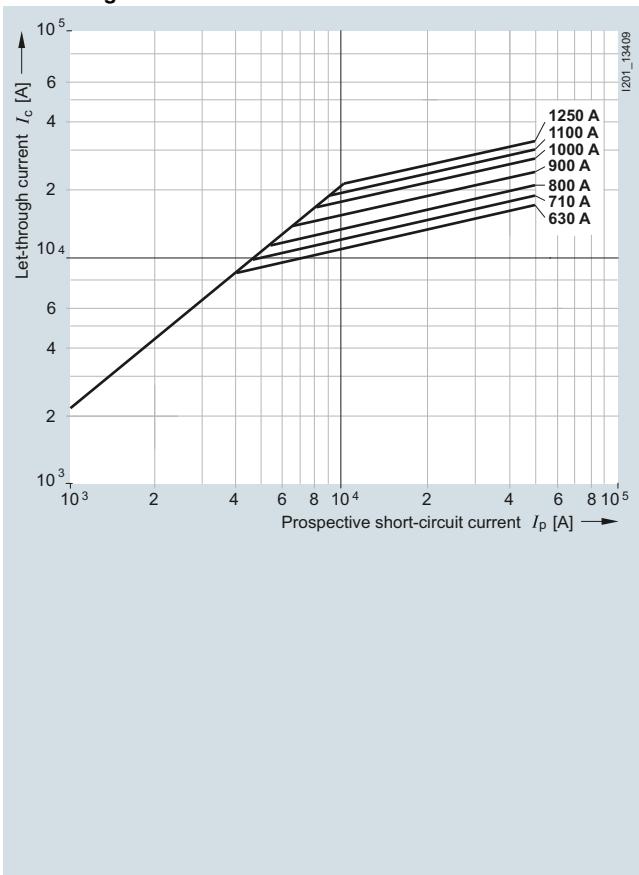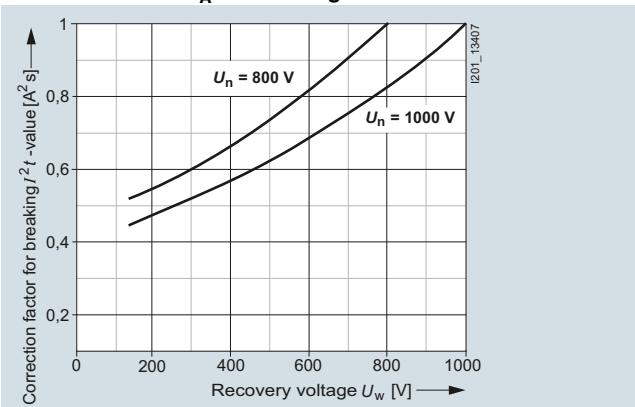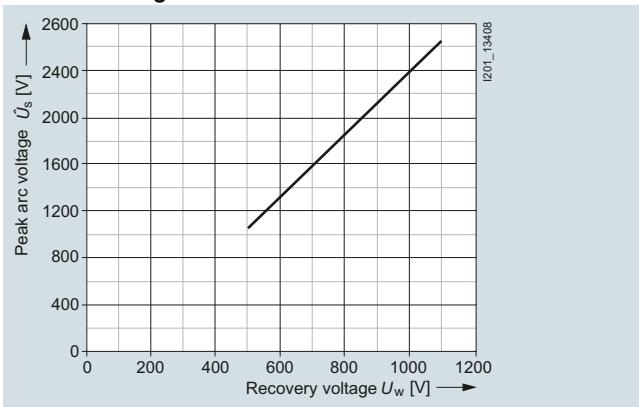Time/current characteristics diagram**Let-through characteristic curves****Correction factor k_A for breaking I^2t value****Peak arc voltage**

Fuse Systems


SITOR Semiconductor Fuses

SITOR, LV HRC design


3NC34 series

Size: 3
 Operational class: aR
 Rated voltage: 1250 V AC (315 ... 630 A),
 1100 V AC (800 A)
 Rated current: 315 ... 800 A


Time/current characteristics diagram

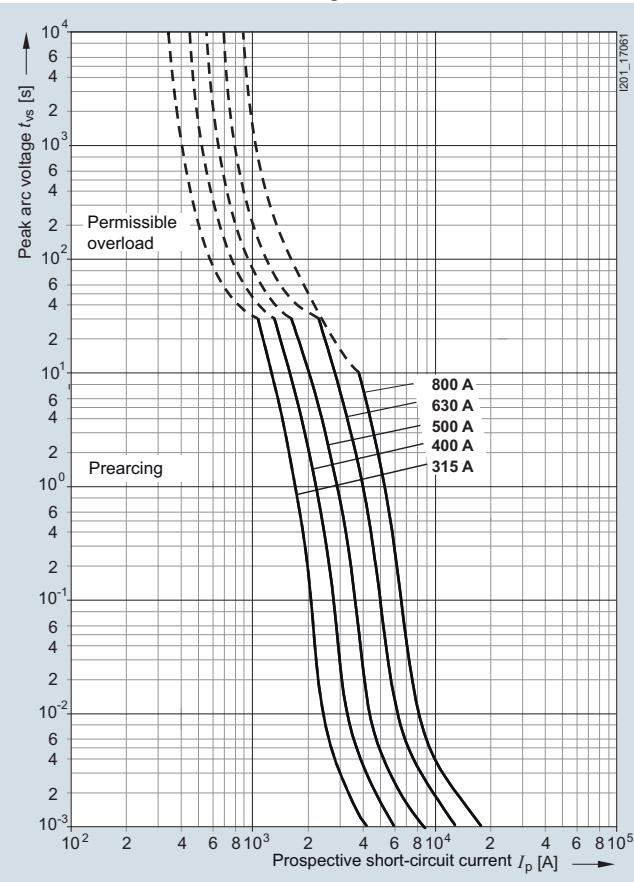


Let-through characteristic curves

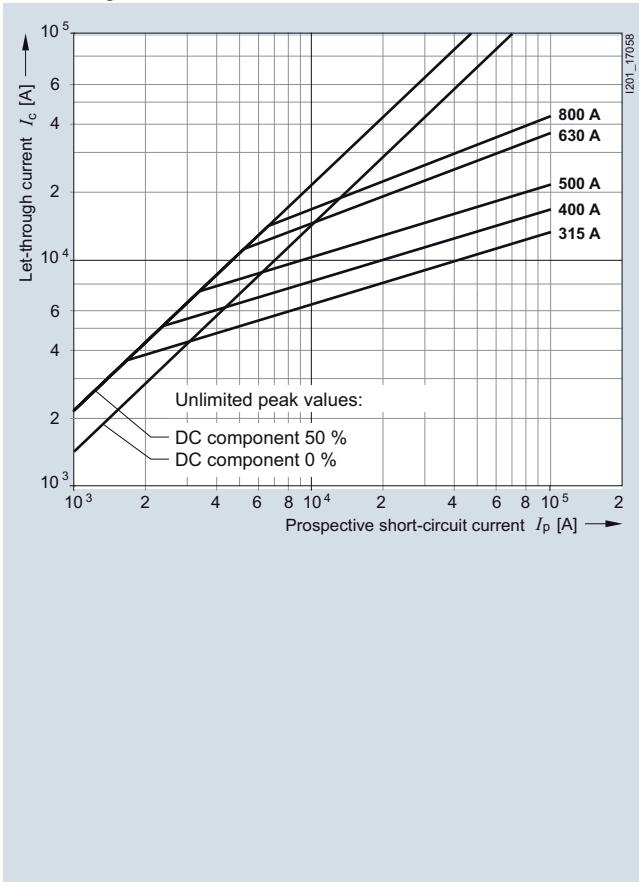

Correction factor k_A for breaking I^2t value




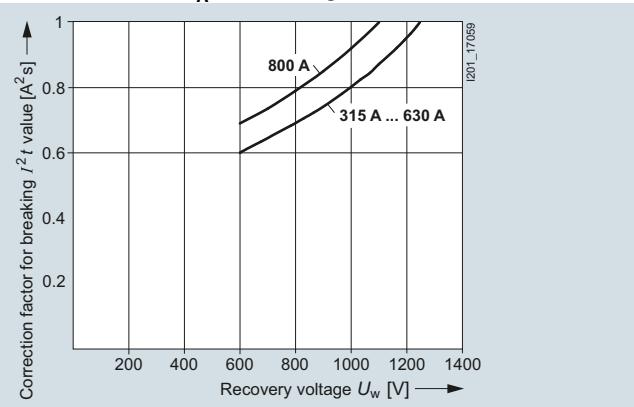


Peak arc voltage

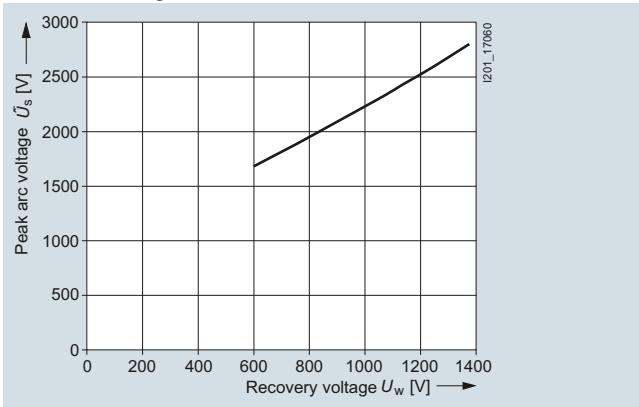

3NC5531, 3NC58.. series

Operational class: aR
 Rated voltage: 800 V AC (350 A, 630 A),
 1000 V AC (600 A, 800 A)
 Rated current: 350 ... 800 A

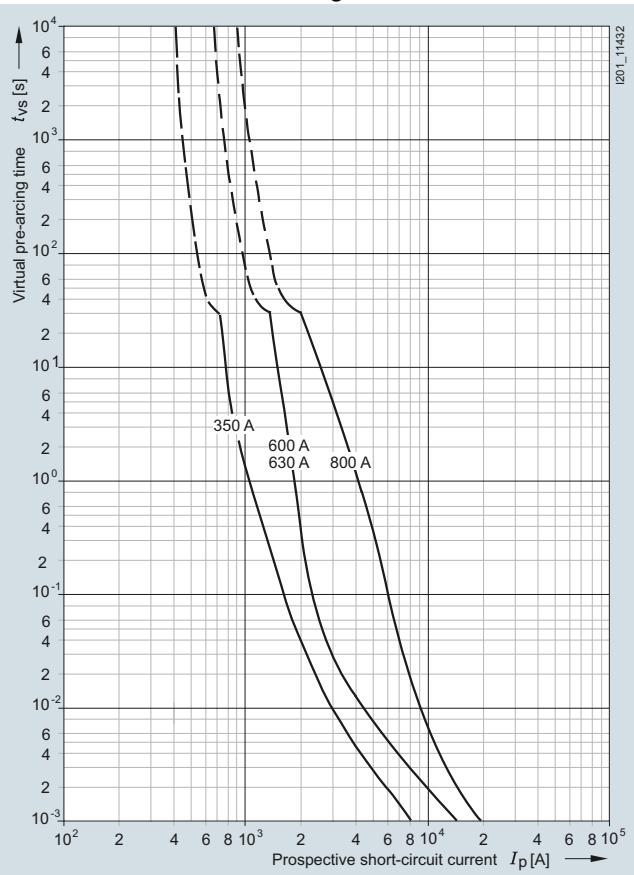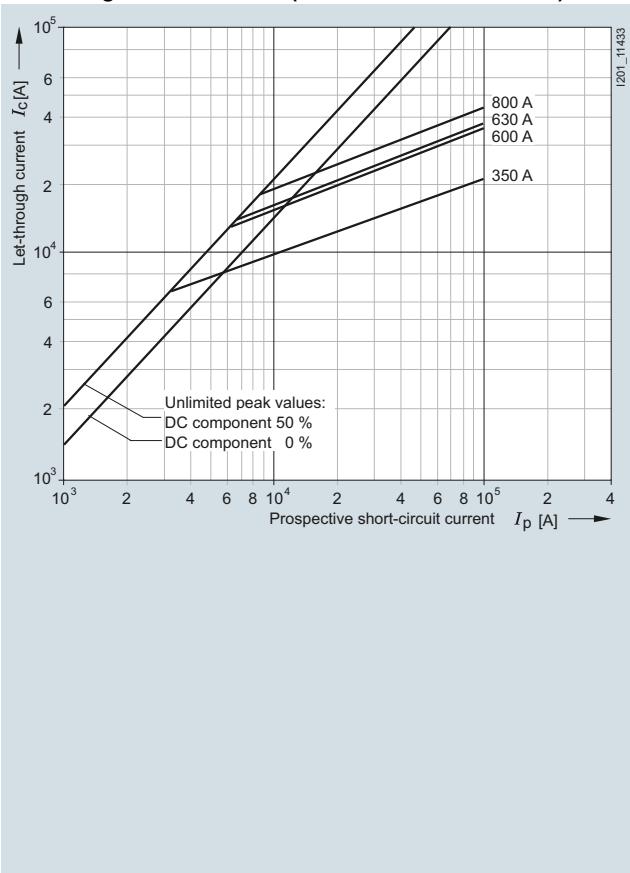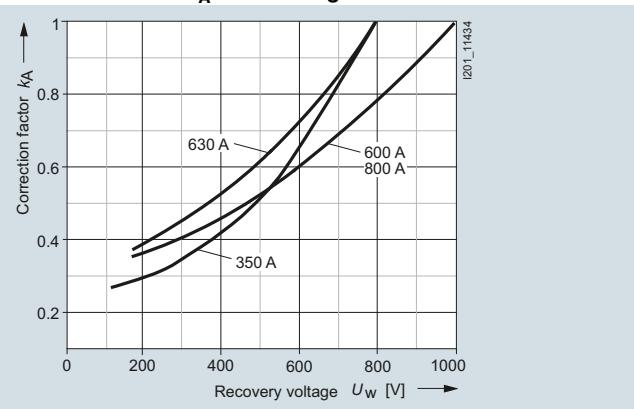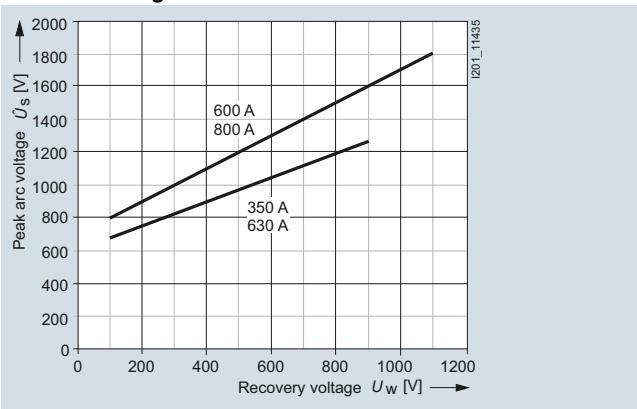Time/current characteristics diagram**Let-through characteristics (current limitation at 50 Hz)****Correction factor k_A for breaking I^2t value****Peak arc voltage**

Fuse Systems


SITOR Semiconductor Fuses

SITOR, LV HRC design


3NC73...-2 series

Operational class: aR
 Rated voltage: 680 V AC
 Rated current: 250 A, 350 A


Time/current characteristics diagram

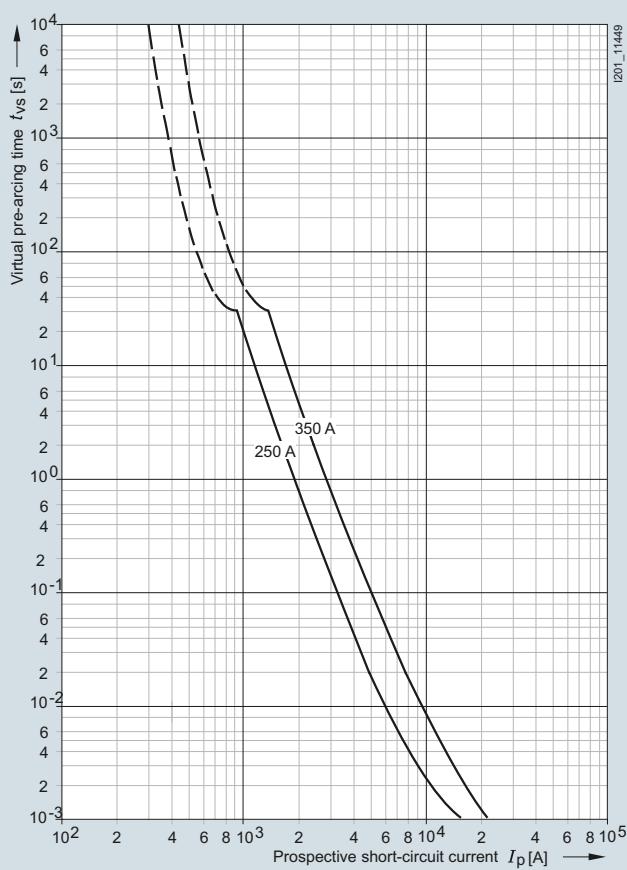


Let-through characteristics (current limitation at 50 Hz)

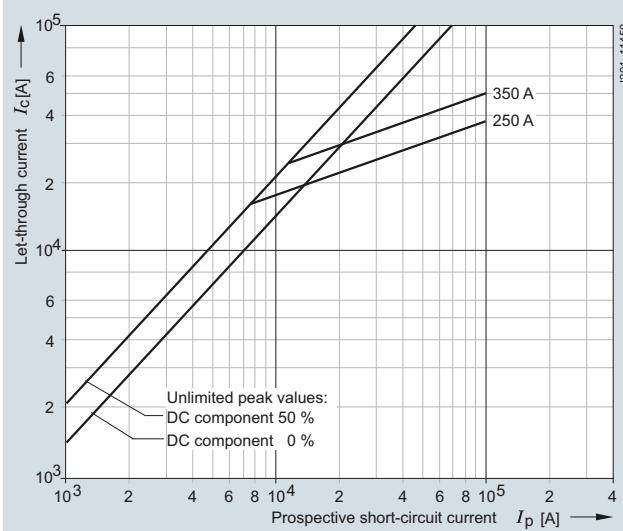

Correction factor k_A for breaking I^2t value




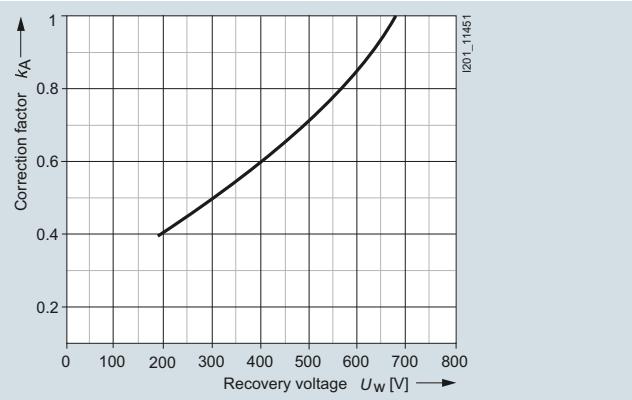


Peak arc voltage

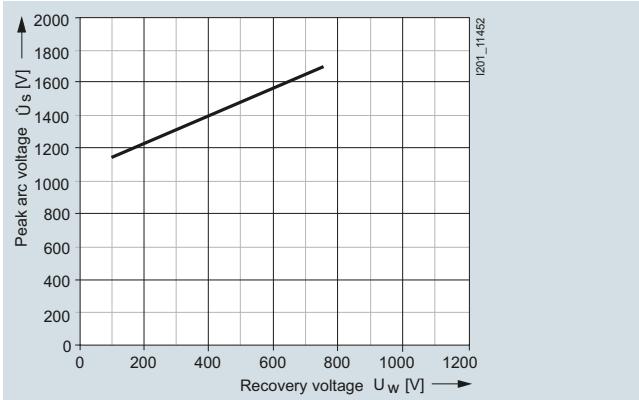

3NC84.. series

Size: 3
 Operational class: gR or aR
 Rated voltage: 660 V AC
 Rated current: 150 ... 1000 A

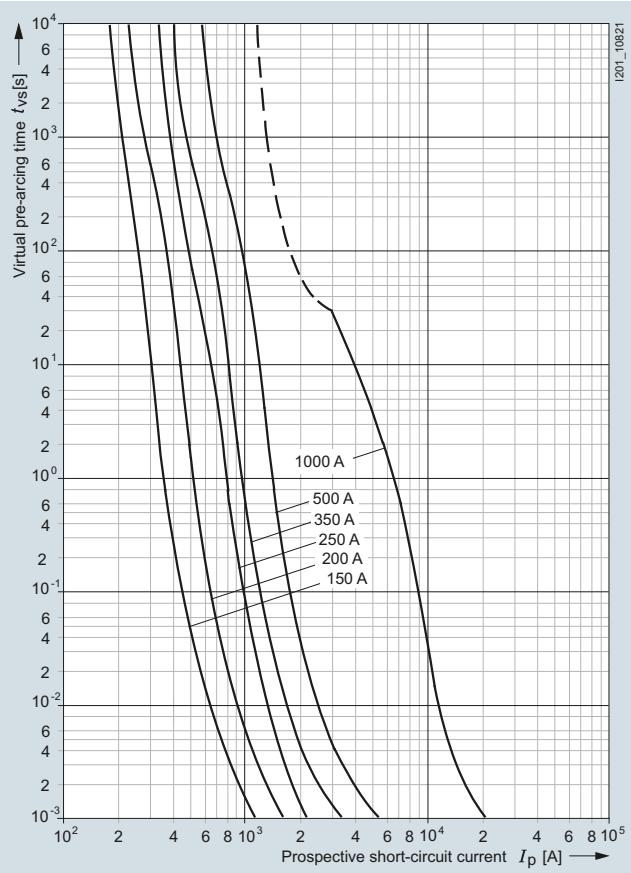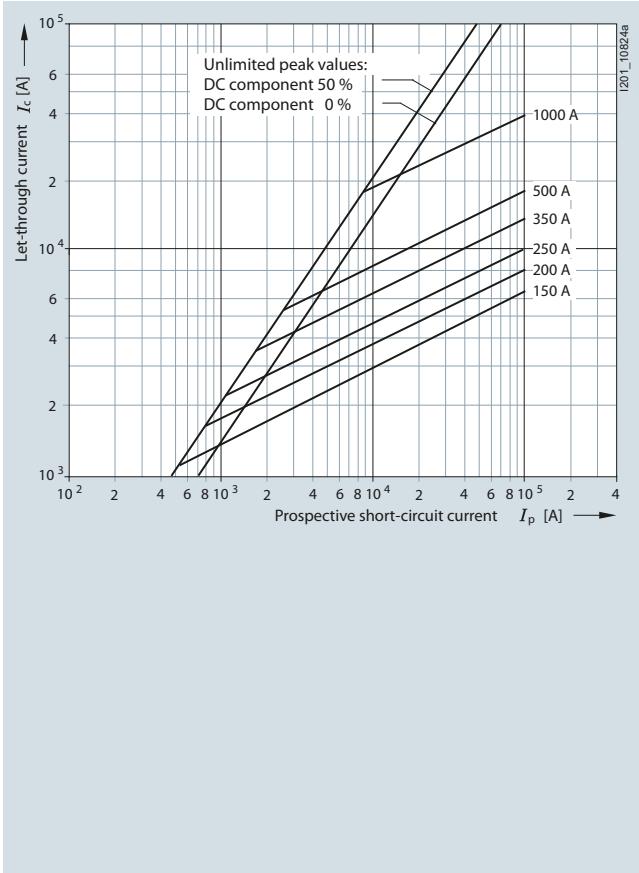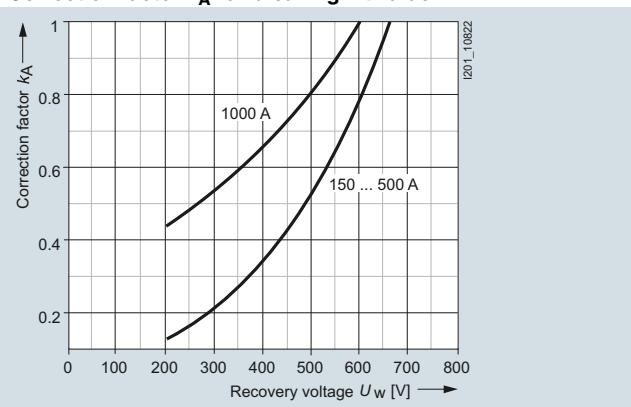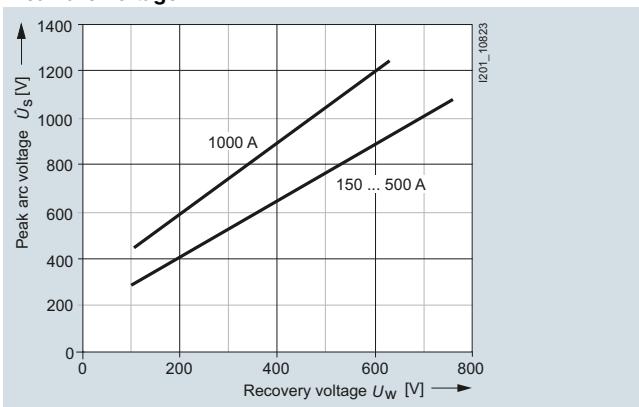Time/current characteristics diagram**Let-through characteristics (current limitation at 50 Hz)****Correction factor k_A for breaking I^2t value****Peak arc voltage**

Fuse Systems


SITOR Semiconductor Fuses

SITOR, LV HRC design


3NE102.-0, 3NE12..-0 series

Size: 00, 1
 Operational class: gS
 Rated voltage: 690 V AC
 Rated current: 100 ... 315 A


Time/current characteristics diagram

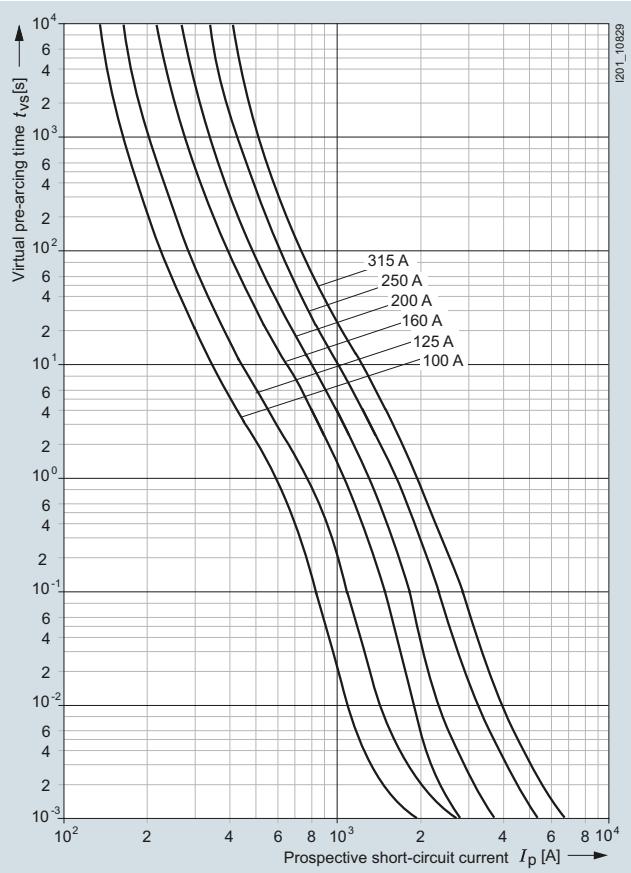


Let-through characteristics (current limitation at 50 Hz)

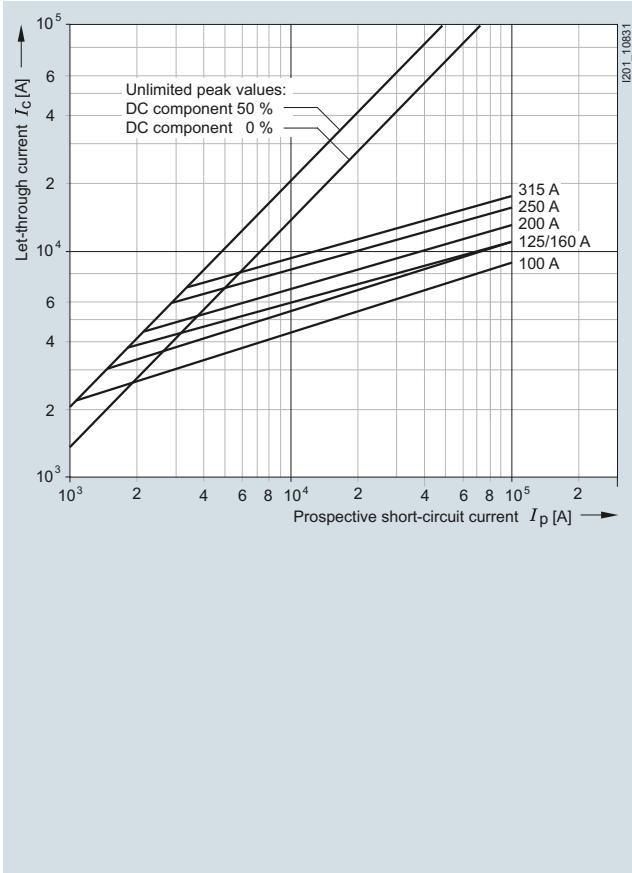

Correction factor k_A for breaking I^2t value




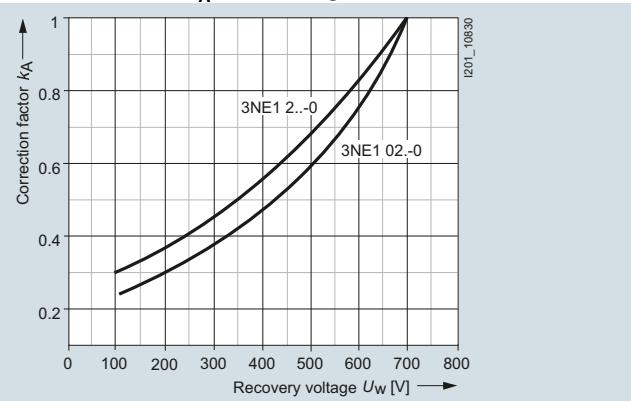


Peak arc voltage

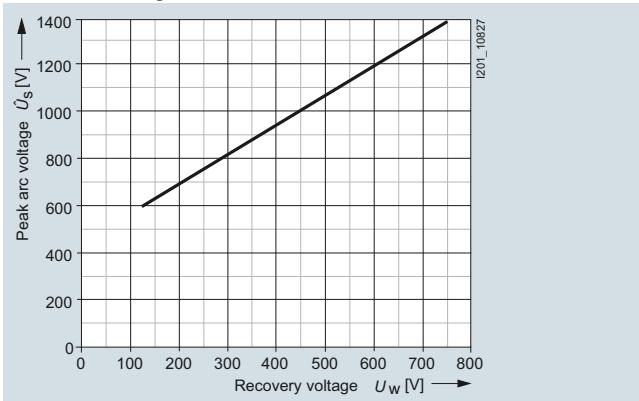

3NE102..-2, 3NE12..-2, 3NE12..-3, 3NE13..-2, 3NE13..-3 series

Size: 00, 1, 2
 Operational class: gR
 Rated voltage: 690 V AC
 Rated current: 80 ... 500 A

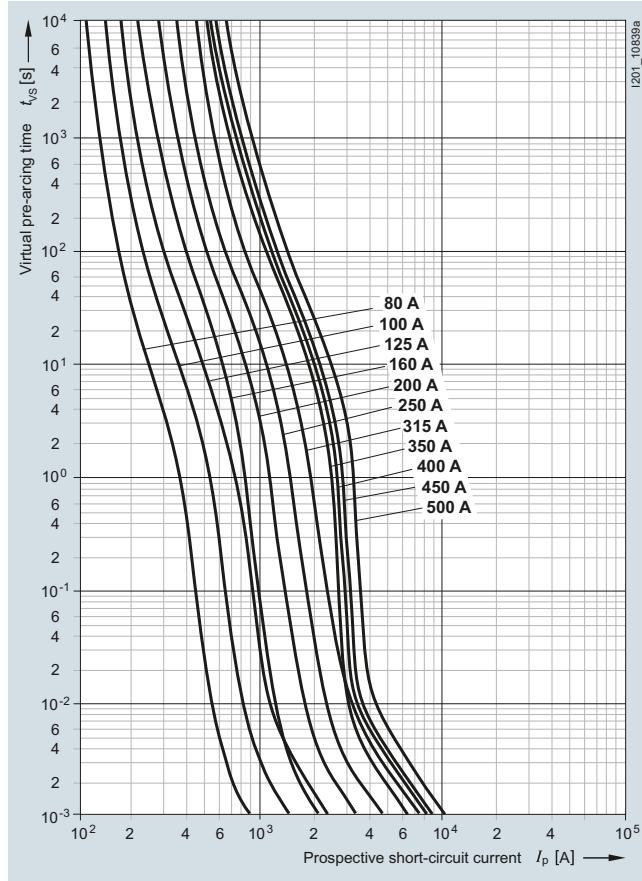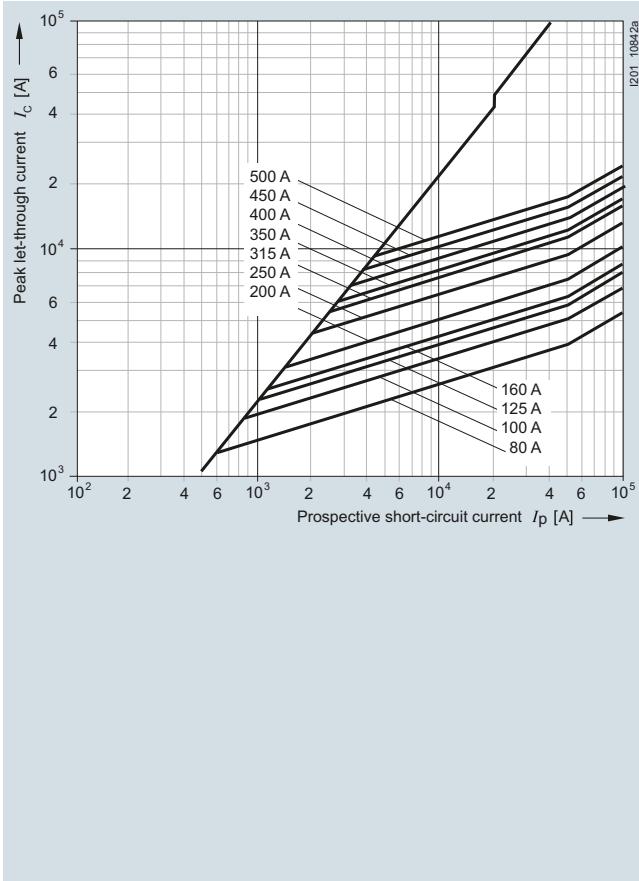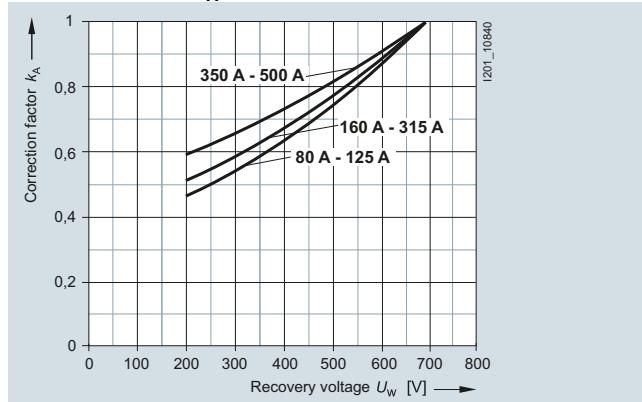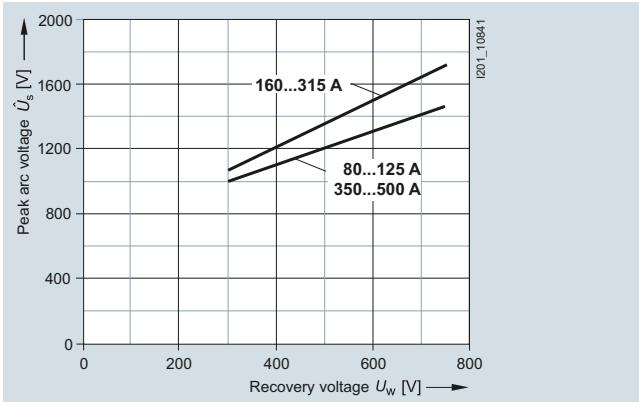Time/current characteristics diagram**Let-through characteristics (current limitation at 50 Hz)****Correction factor k_A for breaking I^2t value****Peak arc voltage**

Fuse Systems


SITOR Semiconductor Fuses

SITOR, LV HRC design


3NE133.-0, 3NE143.-0 series

Size: 2, 3
 Operational class: gS
 Rated voltage: 690 V AC
 Rated current: 350 ... 800 A


Time/current characteristics diagram

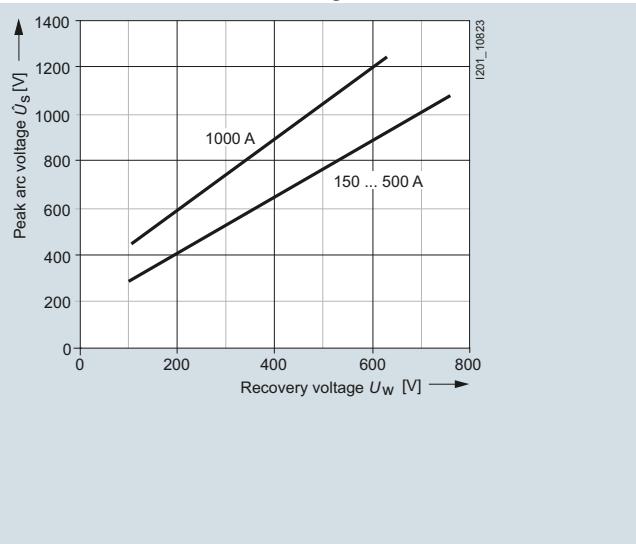


Let-through characteristics (current limitation at 50 Hz)

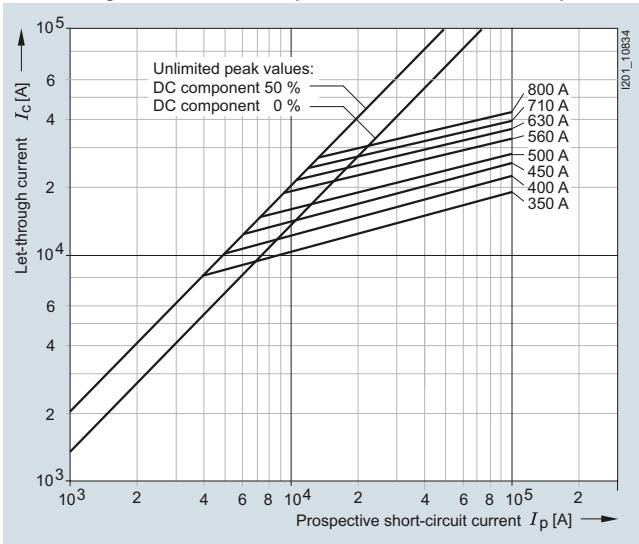

Correction factor k_A for breaking I^2t value




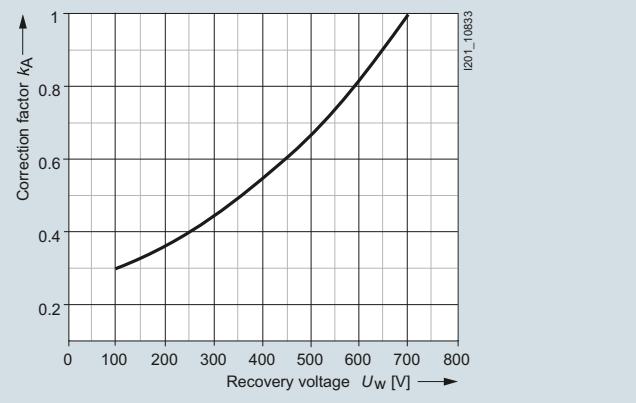


Peak arc voltage

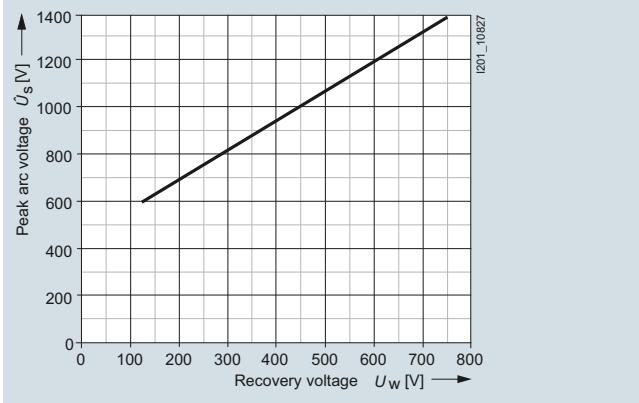

3NE14..-2, 3NE14..-3 series

Size: 3
 Operational class: gR
 Rated voltage: 690 V AC
 Rated current: 560 ... 850 A

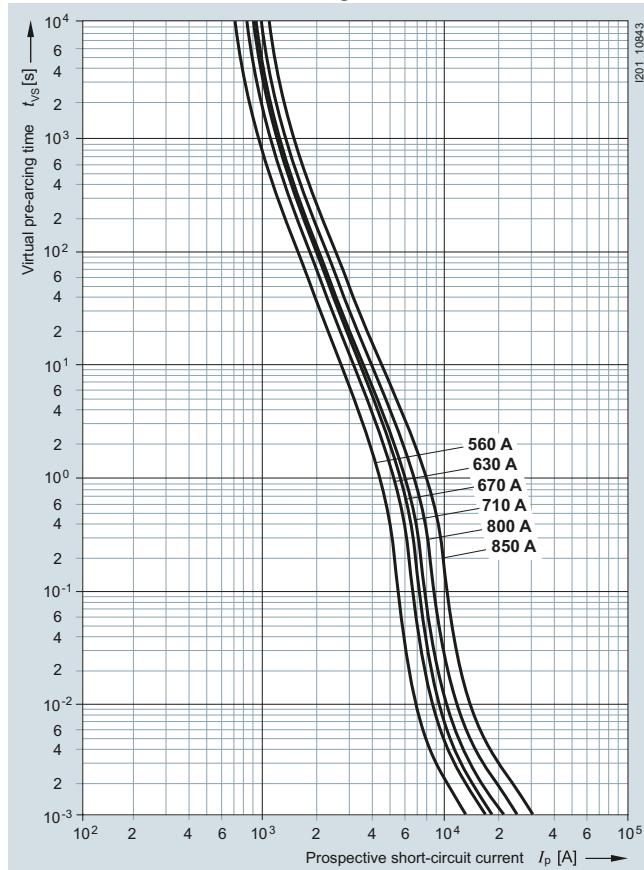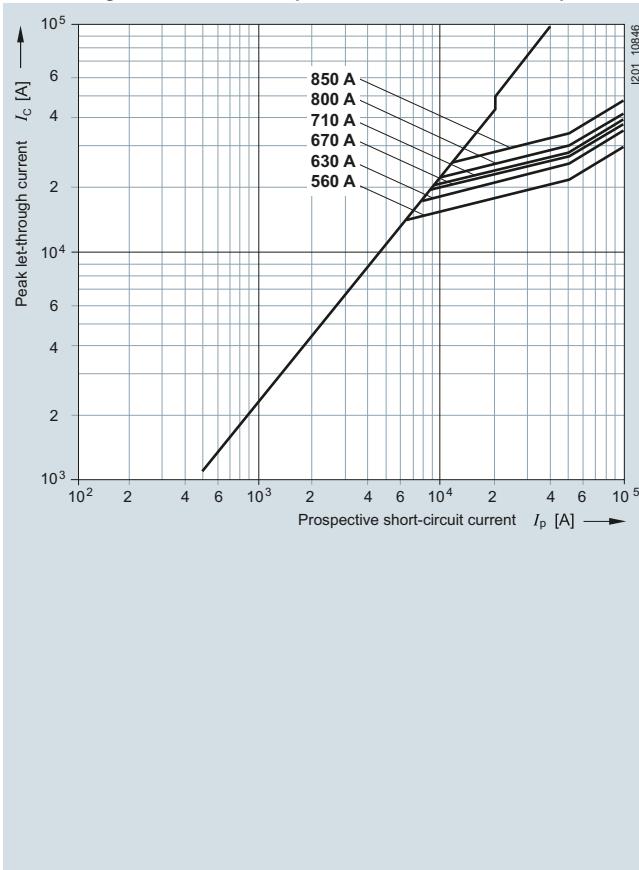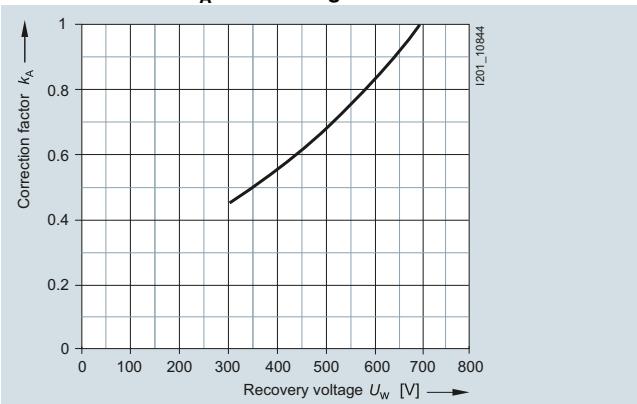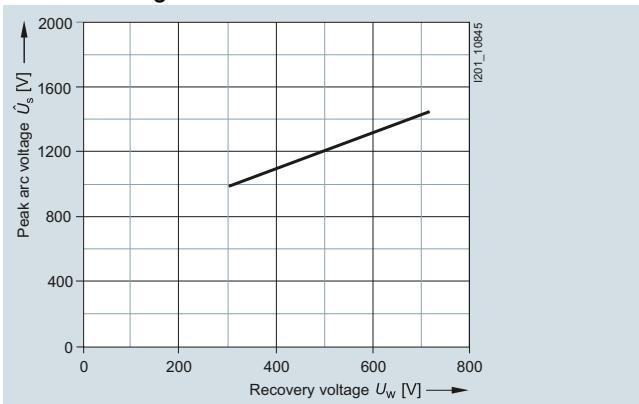Time/current characteristics diagram**Let-through characteristics (current limitation at 50 Hz)****Correction factor k_A for breaking I^2t value****Peak arc voltage**

Fuse Systems


SITOR Semiconductor Fuses

SITOR, LV HRC design


3NE1437-1, 3NE1438-1 series

Size: 3
 Operational class: gR
 Rated voltage: 600 V AC
 Rated current: 710 and 800 A


Time/current characteristics diagram

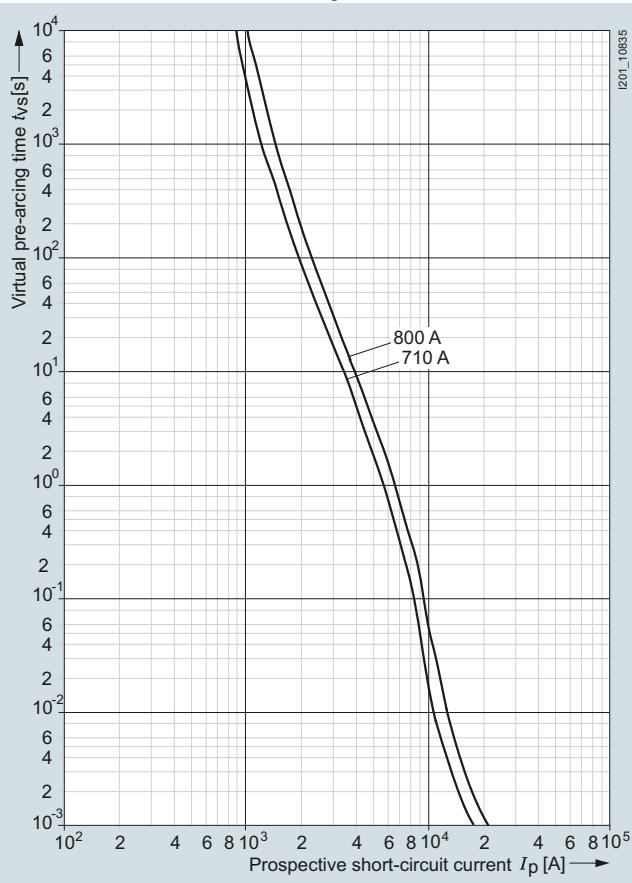


Let-through characteristics (current limitation at 50 Hz)

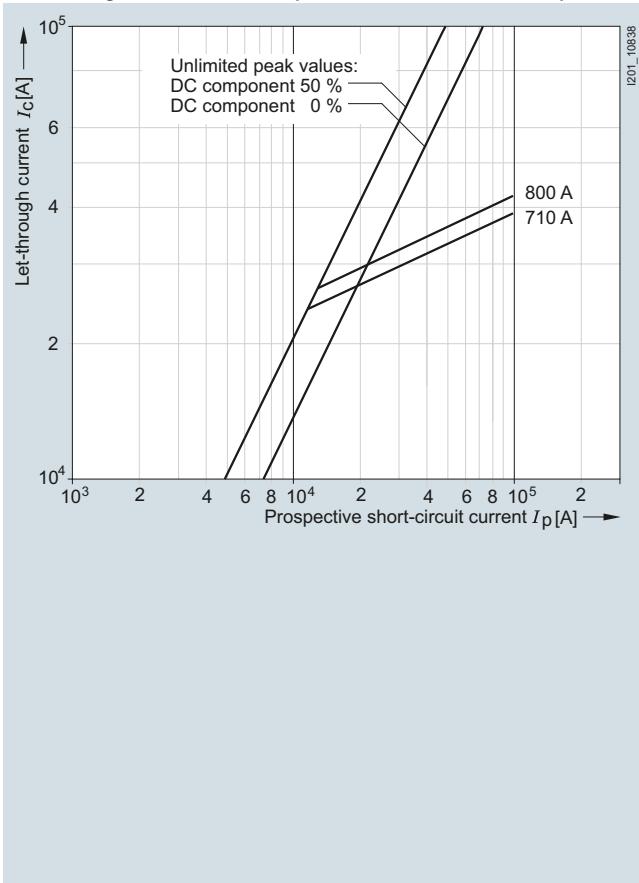

Correction factor k_A for breaking I^2t value




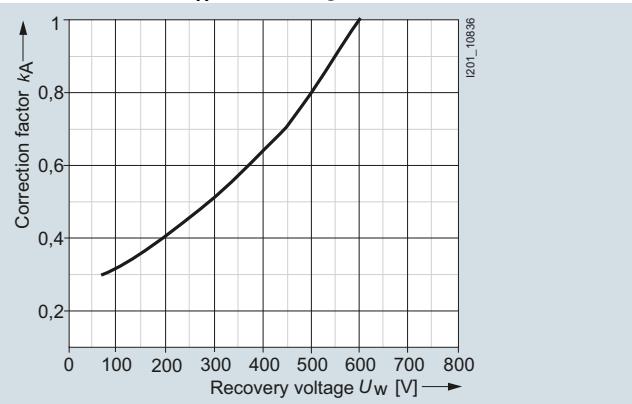


Peak arc voltage

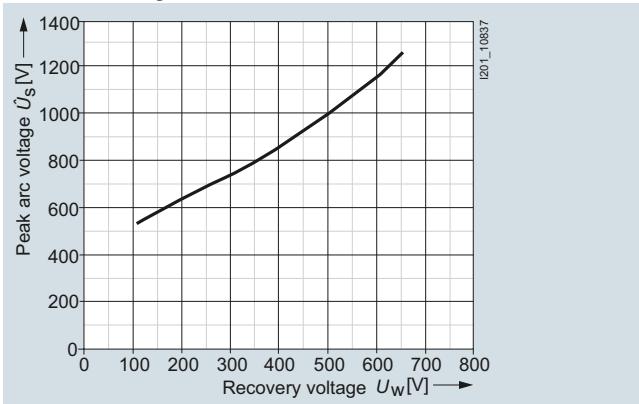

3NE18..-0 series

Size: 000
 Operational class: gS
 Rated voltage: 690 V AC
 Rated current: 16 ... 80 A

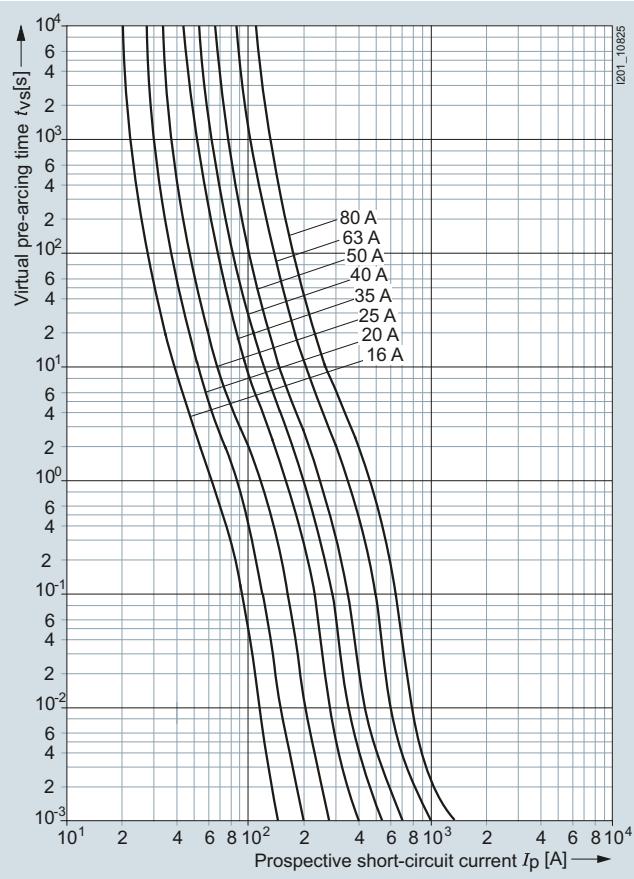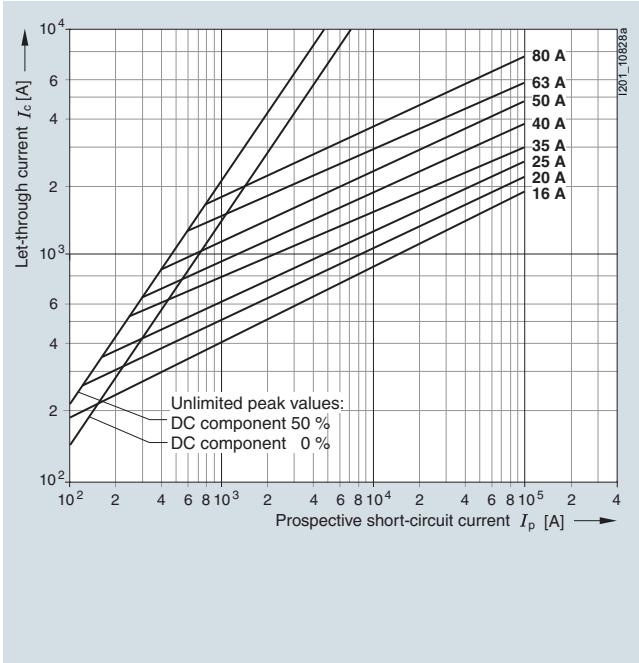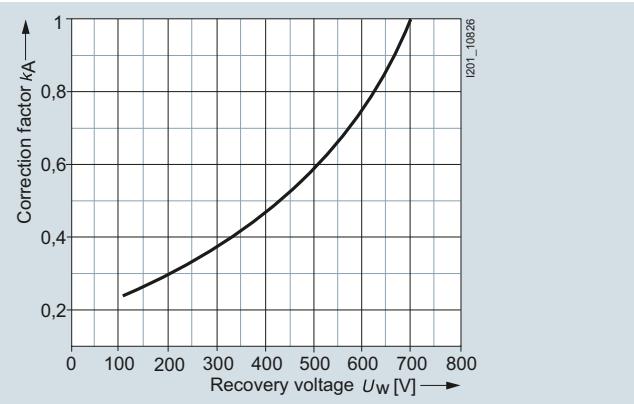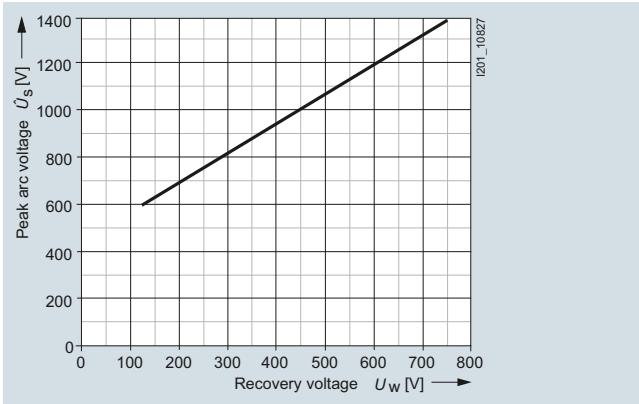Time/current characteristics diagram**Let-through characteristics (current limitation at 50 Hz)****Correction factor k_A for breaking I^2t value****Peak arc voltage**

Fuse Systems


SITOR Semiconductor Fuses

SITOR, LV HRC design


3NE322. series

Size: 1
 Operational class: aR
 Rated voltage: 1000 V AC
 Rated current: 100 ... 250 A


Time/current characteristics diagram

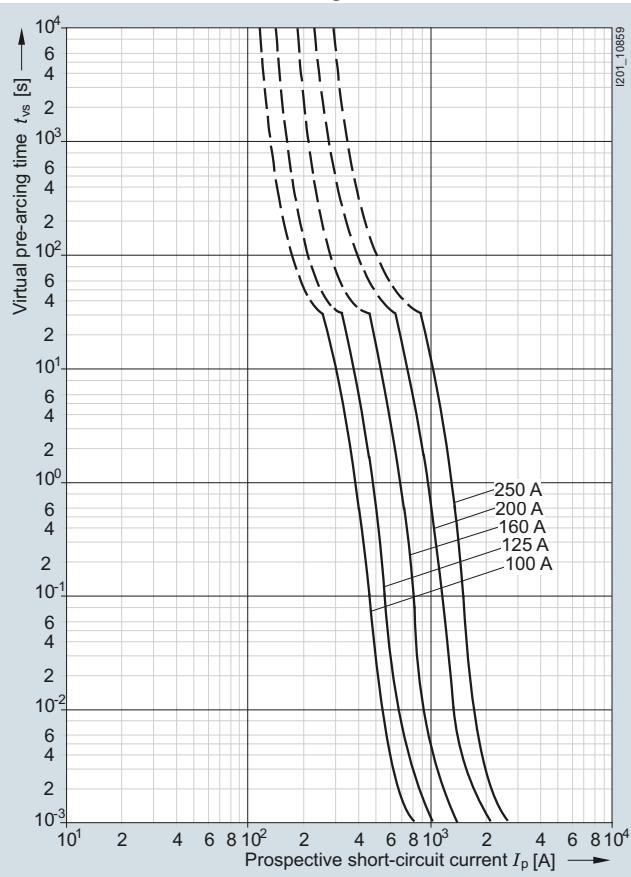


Let-through characteristics (current limitation at 50 Hz)

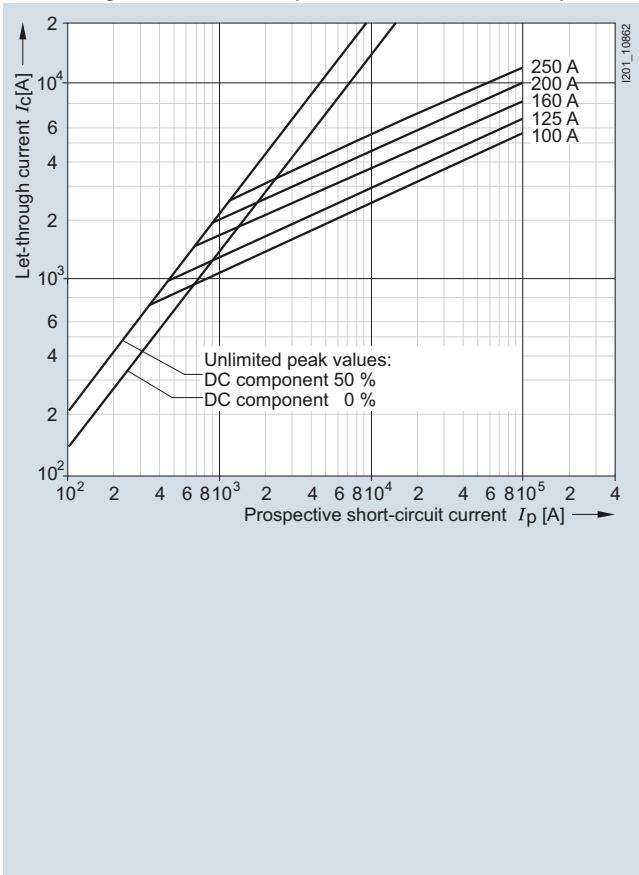

Correction factor k_A for breaking I^2t value




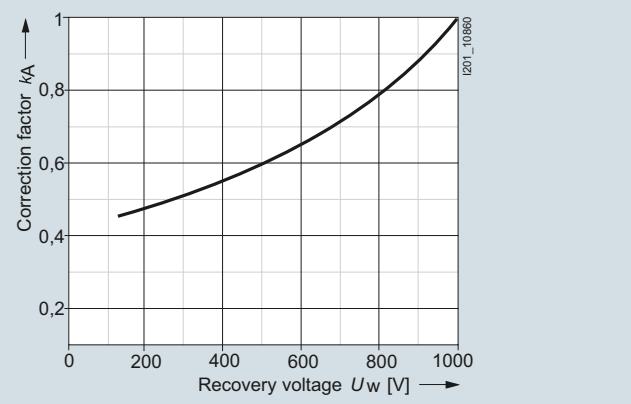


Peak arc voltage

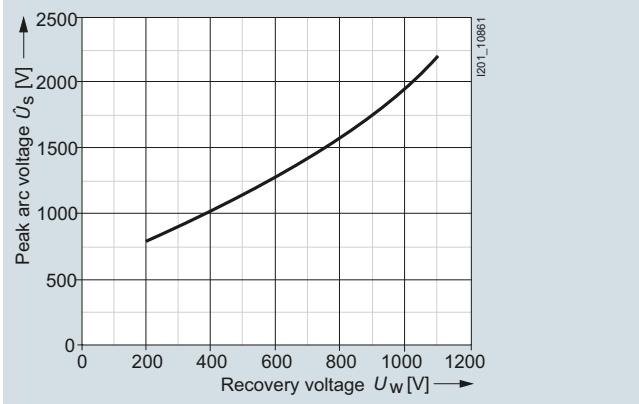

3NE323. series

Size: 1
 Operational class: aR
 Rated voltage: 1000 V AC
 Rated current: 315 ... 450 A

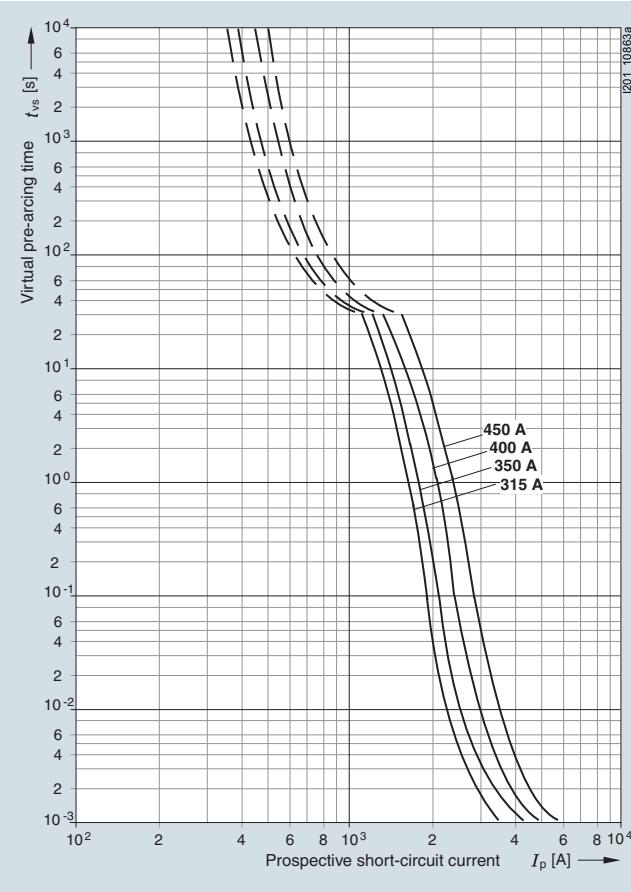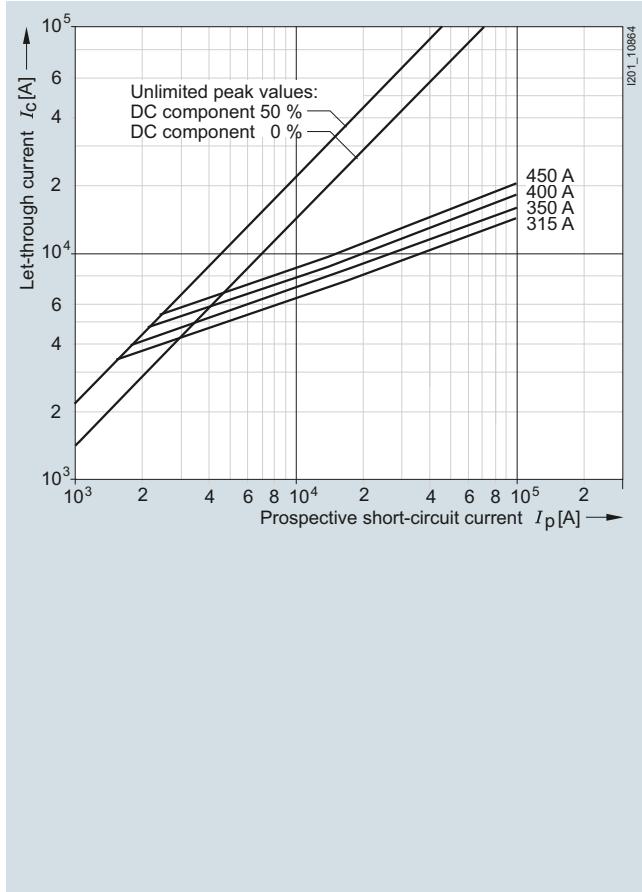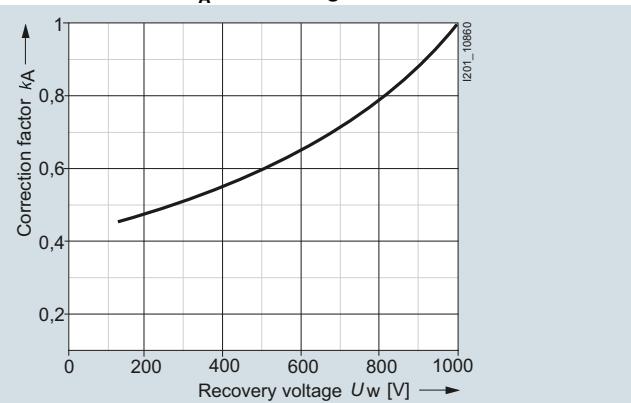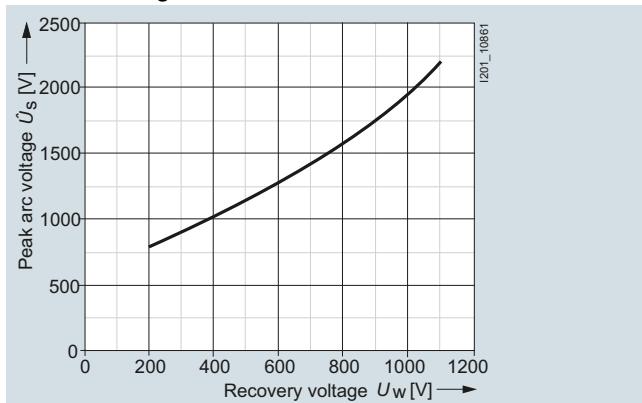Time/current characteristics diagram**Let-through characteristics (current limitation at 50 Hz)****Correction factor k_A for breaking I^2t value****Peak arc voltage**

Fuse Systems


SITOR Semiconductor Fuses

SITOR, LV HRC design


3NE33.. series

Size:	2
Operational class:	aR
Rated voltage:	1000 V AC (up to 630 A) 900 V AC (710 A) 800 V AC (800 A) 690 V AC (900 A)
Rated current:	400 ... 900 A


Time/current characteristics diagram

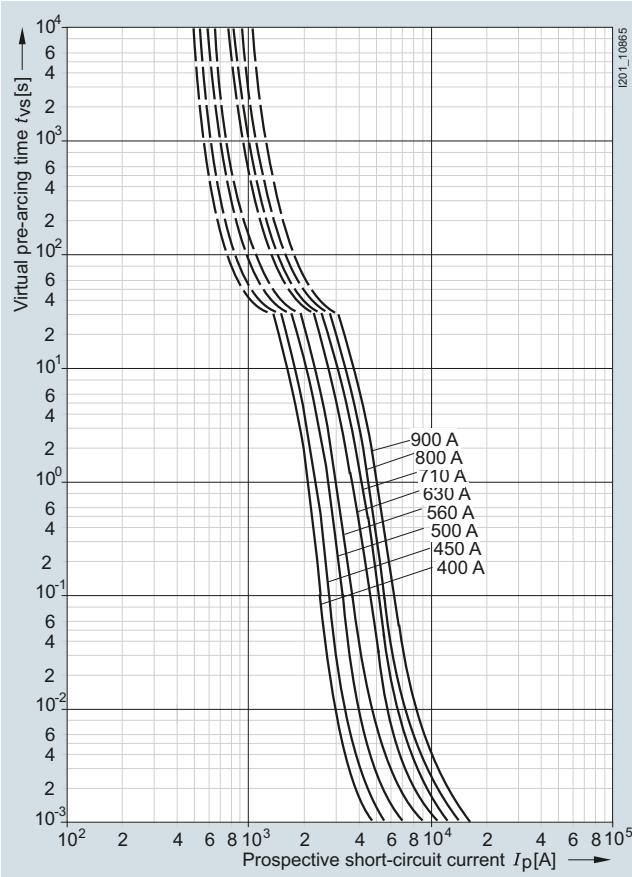


Let-through characteristics (current limitation at 50 Hz)

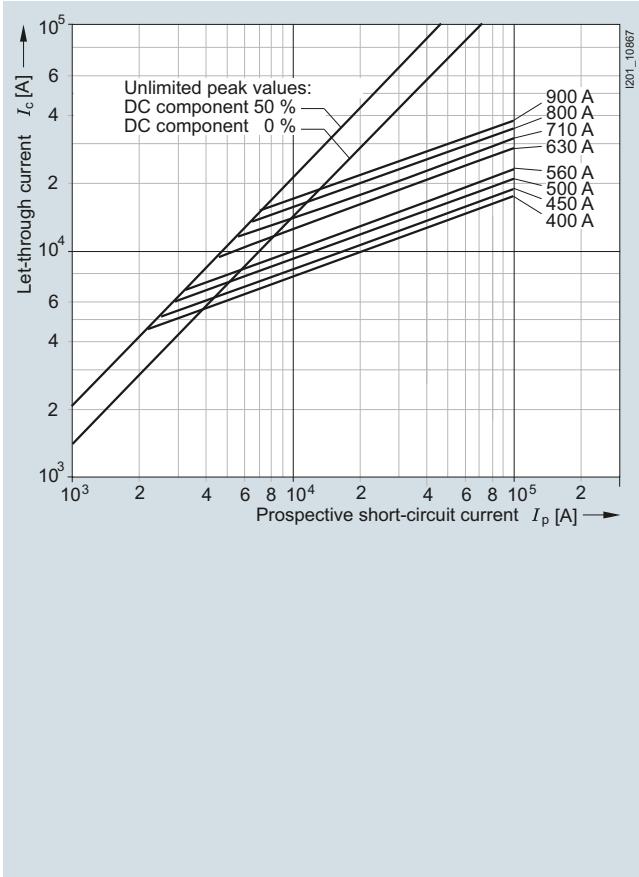

Correction factor k_A for breaking I^2t value




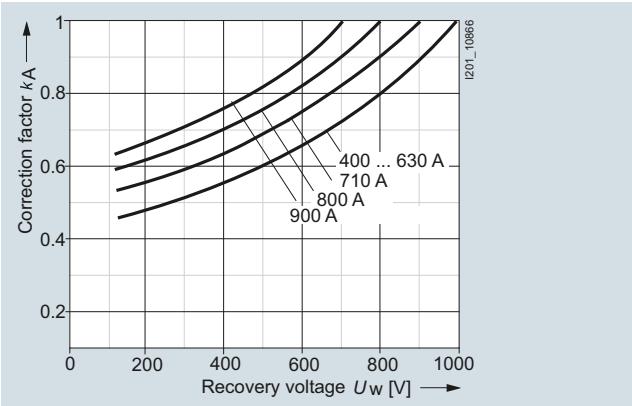


Peak arc voltage

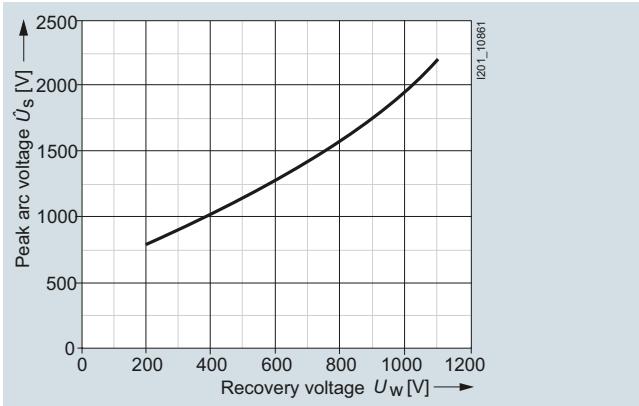

3NE34.., 3NE36.. series

Size: 3
 Operational class: aR
 Rated voltage: 1000 V AC
 Rated current: 100 ... 710 A

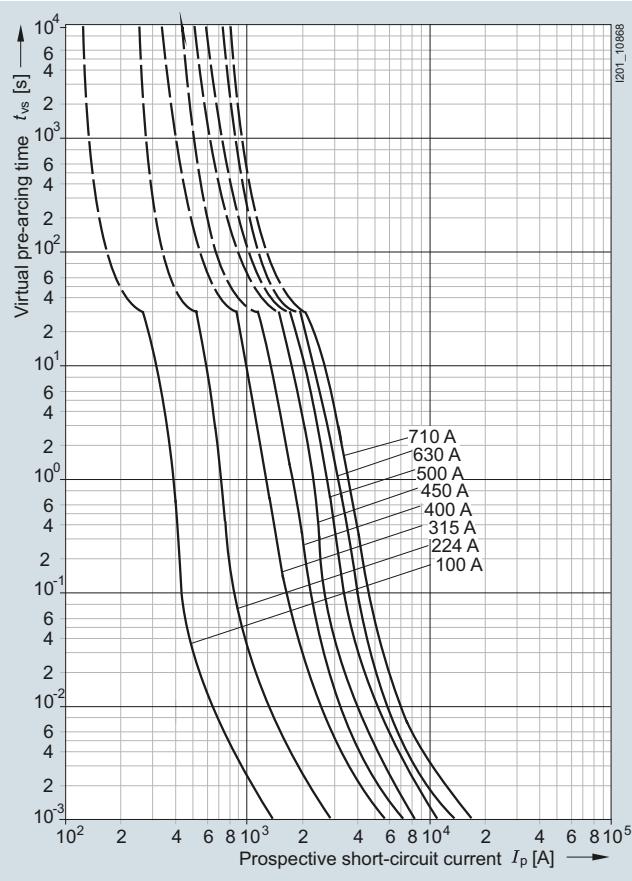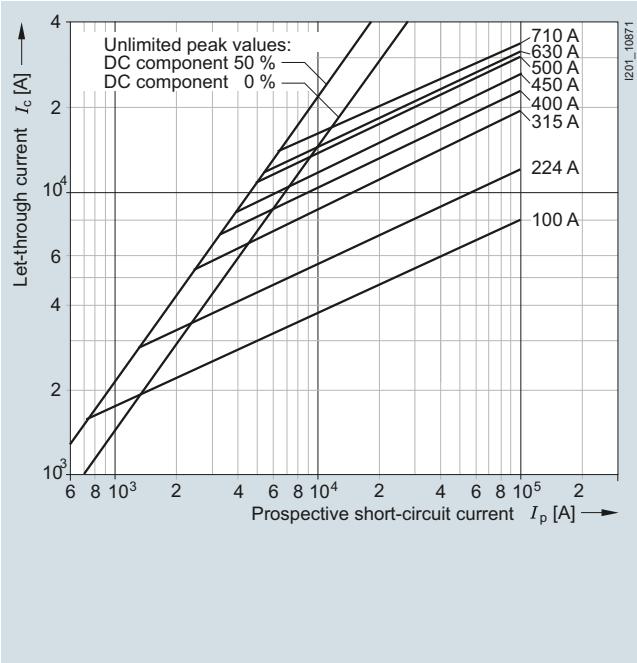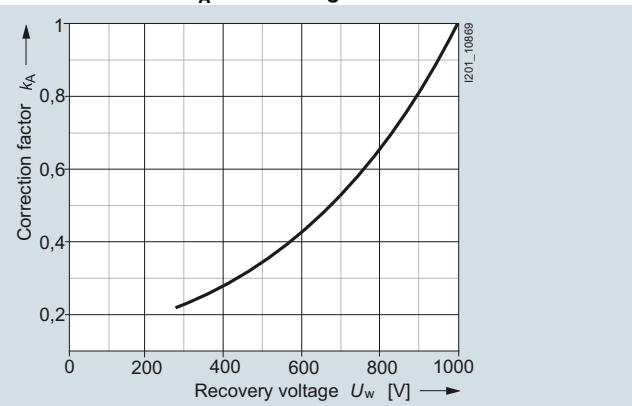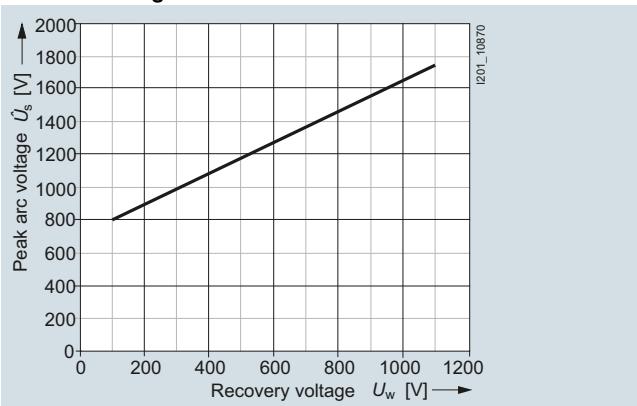Time/current characteristics diagram**Let-through characteristics (current limitation at 50 Hz)****Correction factor k_A for breaking I^2t value****Peak arc voltage**

Fuse Systems


SITOR Semiconductor Fuses

SITOR, LV HRC design


3NE35.5-5, 3NE41..-5 series

Operational class: aR, gR
 Rated voltage: 800 V AC (170 A)
 1000 V AC (50 A, 100 A, 200 A, 450 A)
 Rated current: 50 ... 450 A


Time/current characteristics diagram

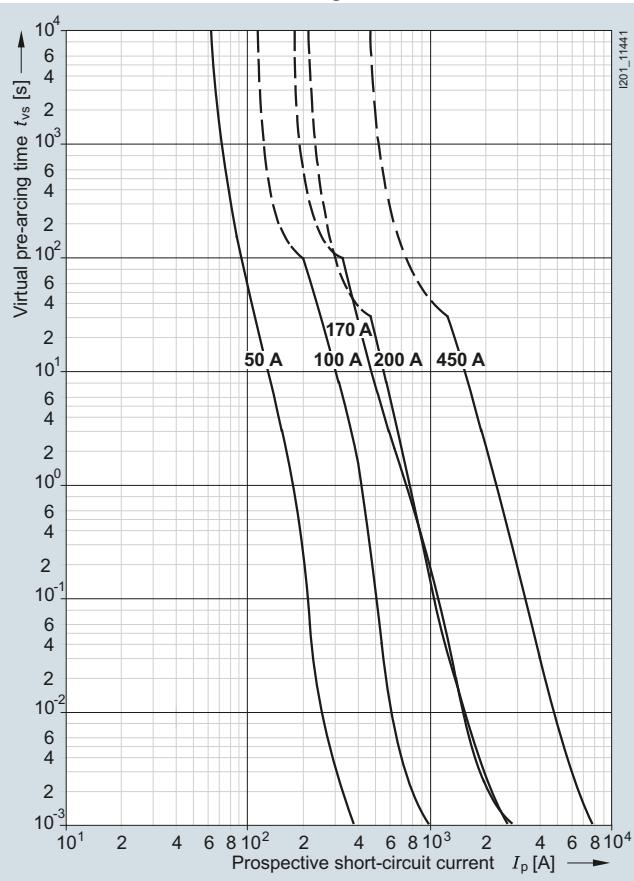


Let-through characteristics (current limitation at 50 Hz)

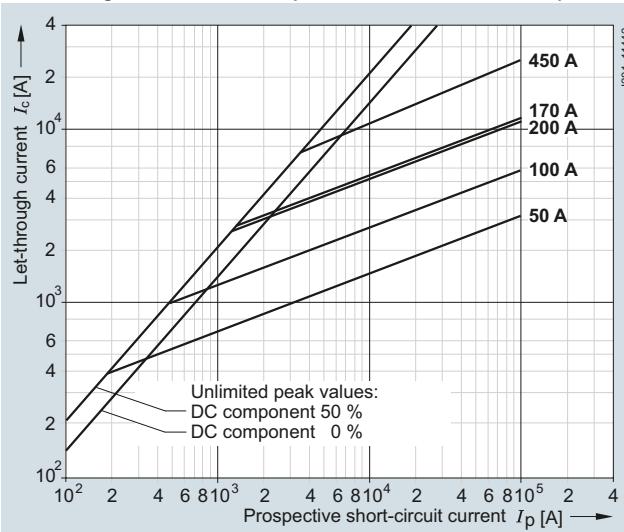

Correction factor k_A for breaking I^2t value




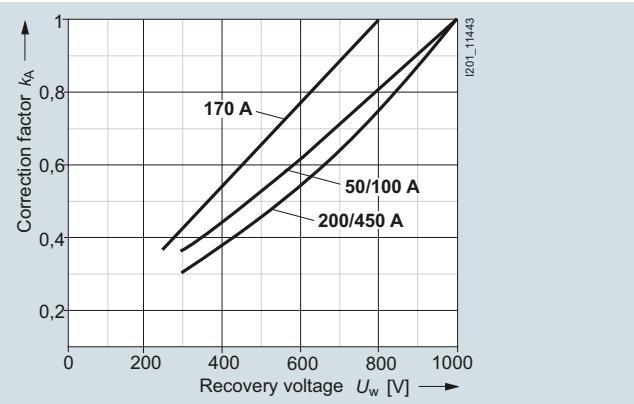


Peak arc voltage

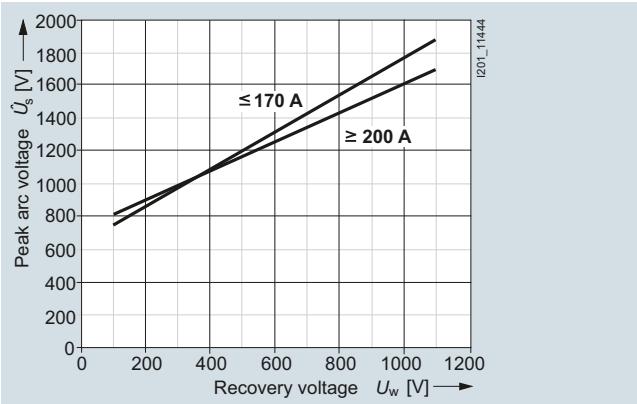

3NE41.. series

Size: 0
 Operational class: gR or aR
 Rated voltage: 1000 V AC
 Rated current: 32 ... 160 A

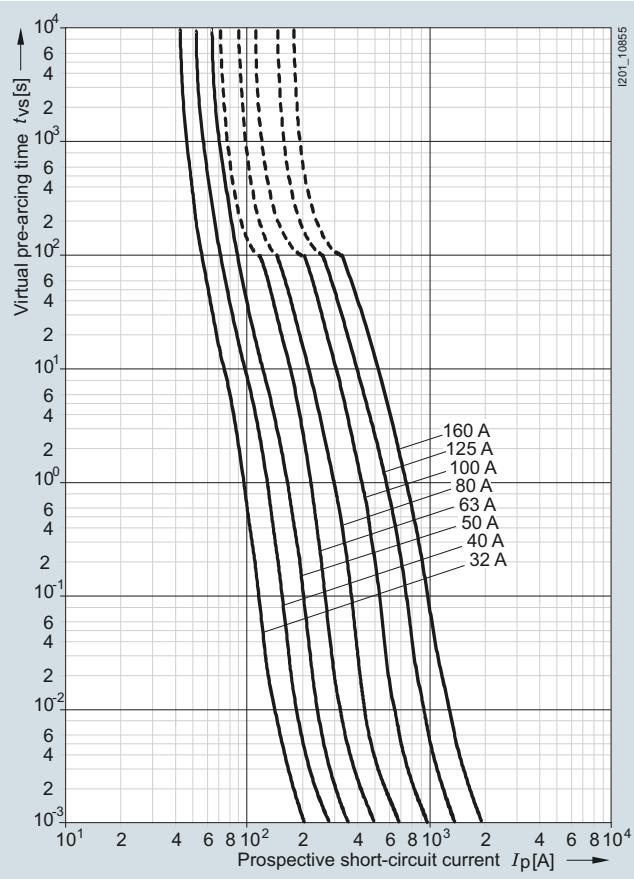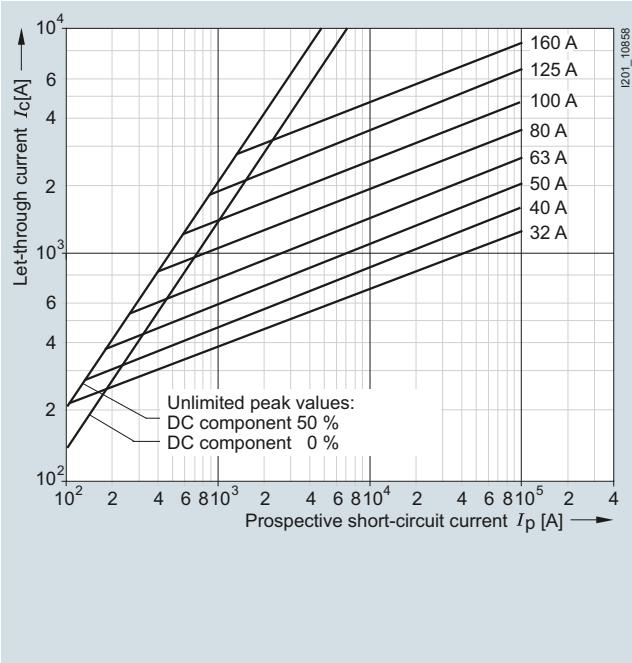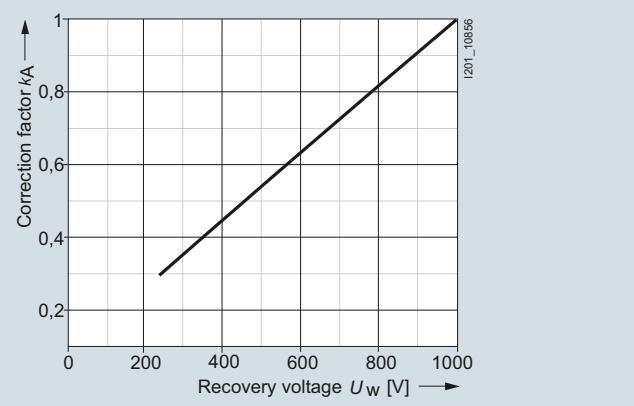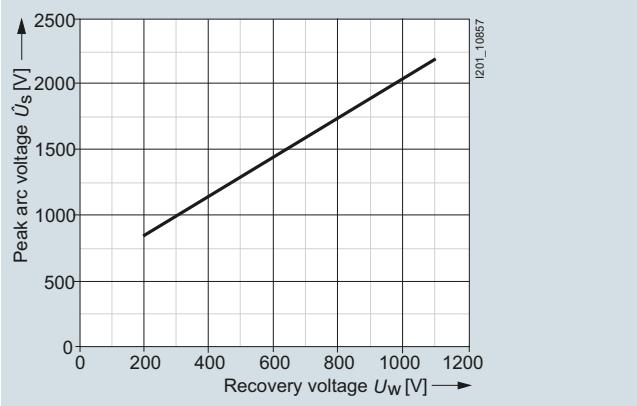Time/current characteristics diagram**Let-through characteristics (current limitation at 50 Hz)****Correction factor k_A for breaking I^2t value****Peak arc voltage**

Fuse Systems


SITOR Semiconductor Fuses

SITOR, LV HRC design


3NE43..-0B, 3NE4337 series

Size: 2
 Operational class: aR
 Rated voltage: 800 V AC
 Rated current: 250 ... 710 A


Time/current characteristics diagram

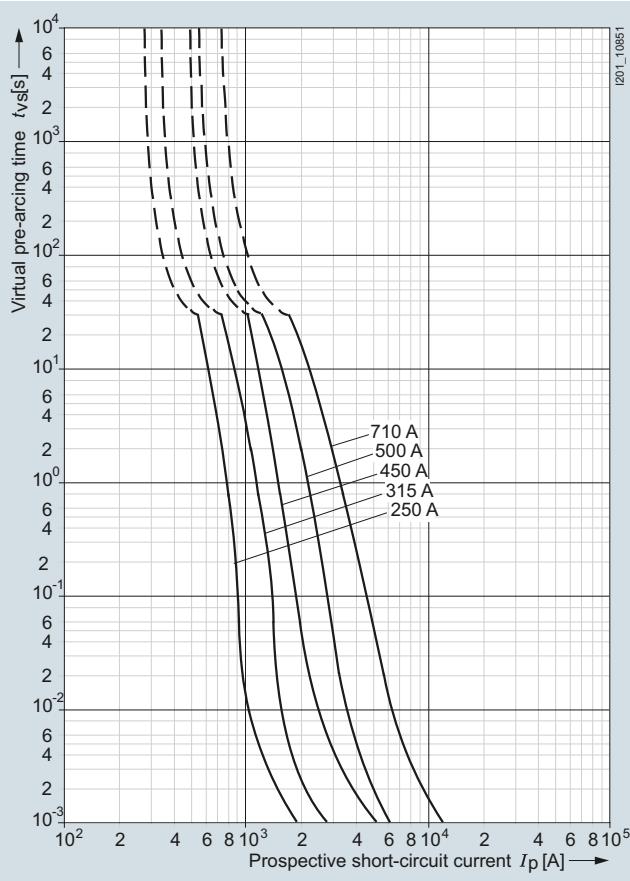


Let-through characteristics (current limitation at 50 Hz)

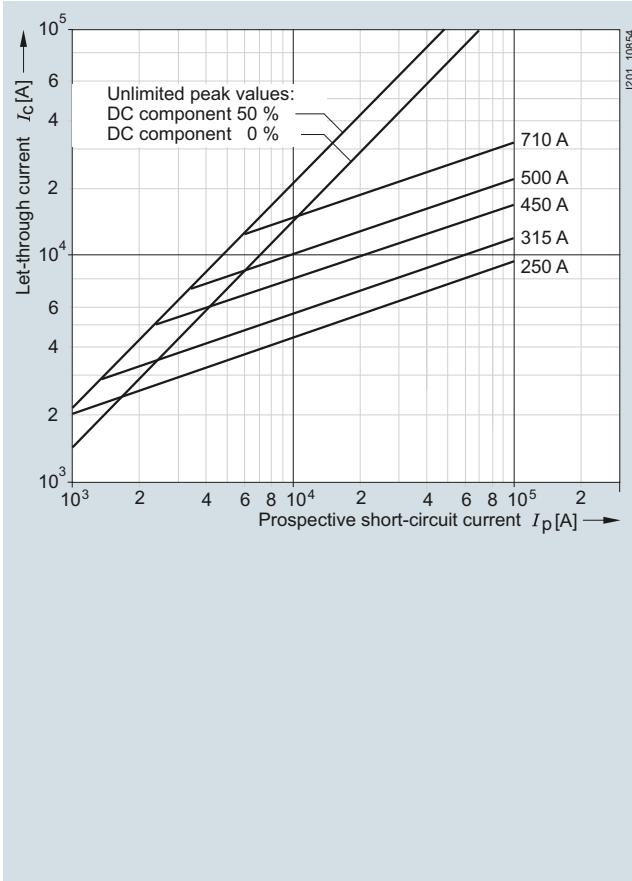

Correction factor k_A for breaking I^2t value

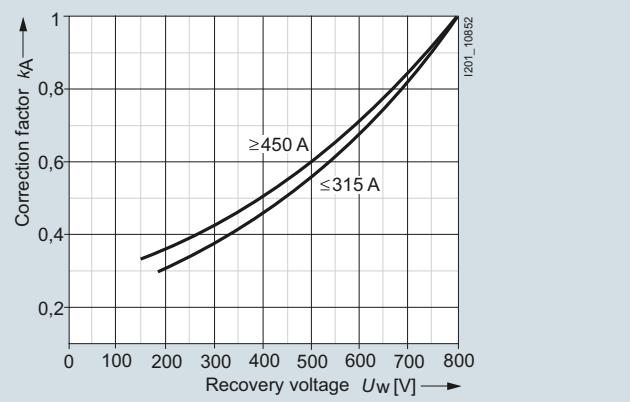

Peak arc voltage




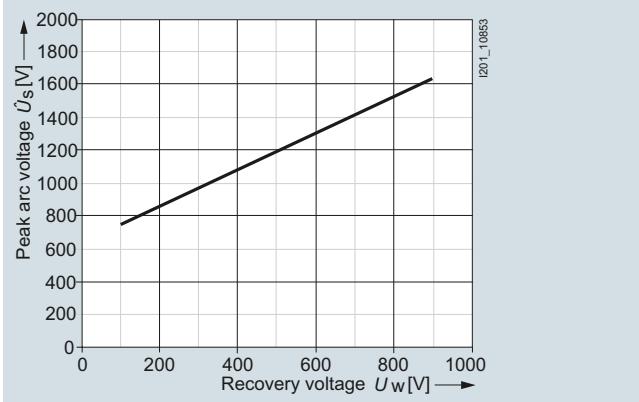


3NE43...-6B, 3NE4337-6 series

Operational class: R

Rated voltage: 800 V AC

Rated current: 250 ... 710 A

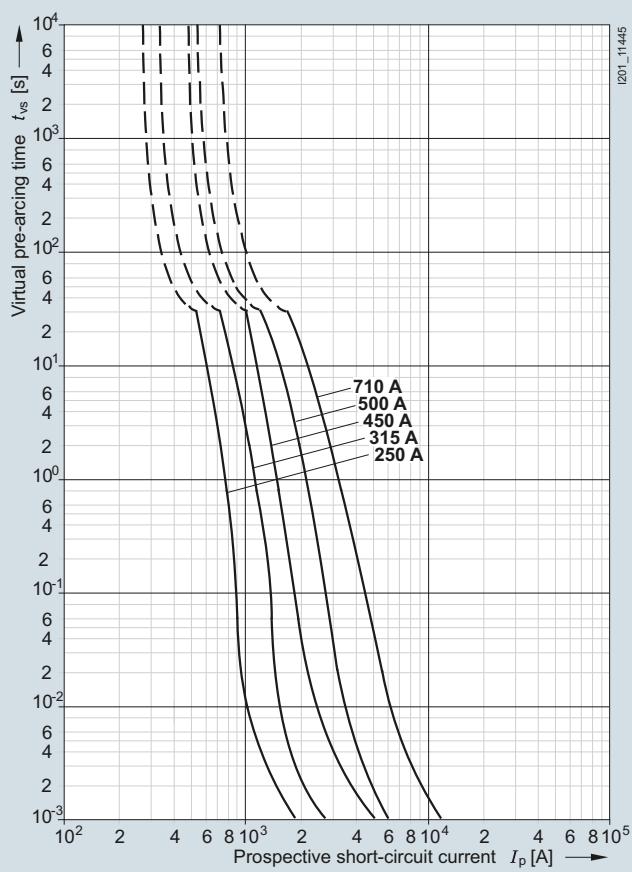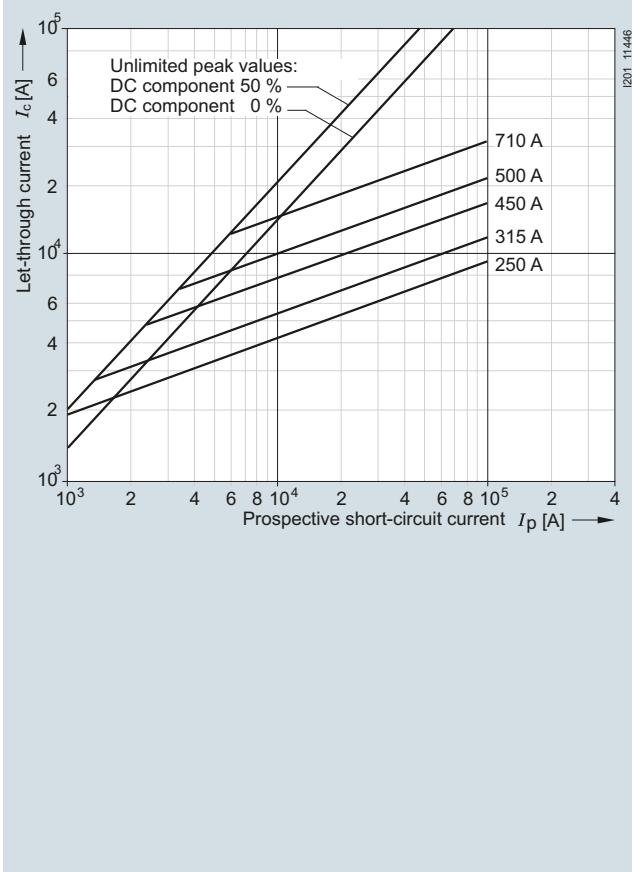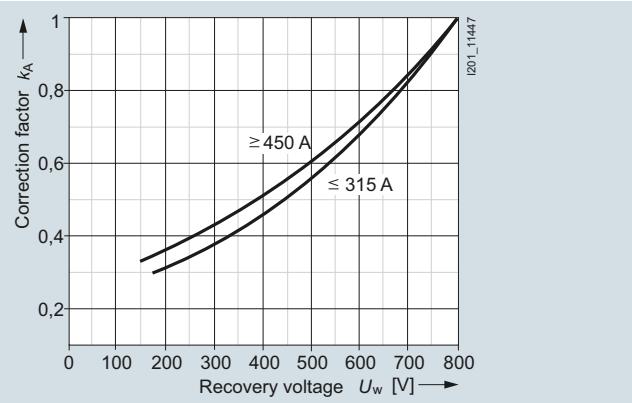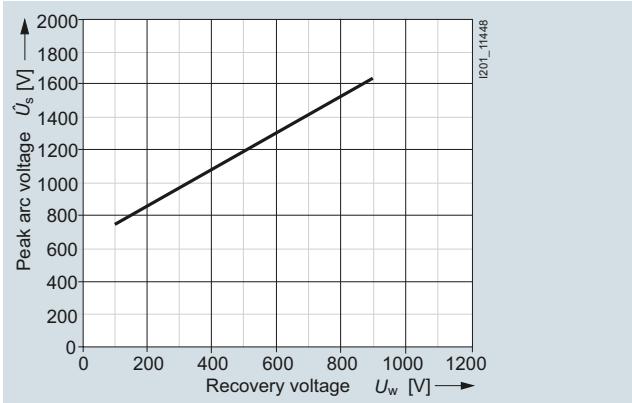Time/current characteristics diagram**Let-through characteristics (current limitation at 50 Hz)****Correction factor k_A for breaking I^2t value****Peak arc voltage**

Fuse Systems


SITOR Semiconductor Fuses

SITOR, LV HRC design


3NE54.. series

Size: 3
 Operational class: aR
 Rated voltage: 1500 V AC
 Rated current: 160 ... 450 A


Time/current characteristics diagram

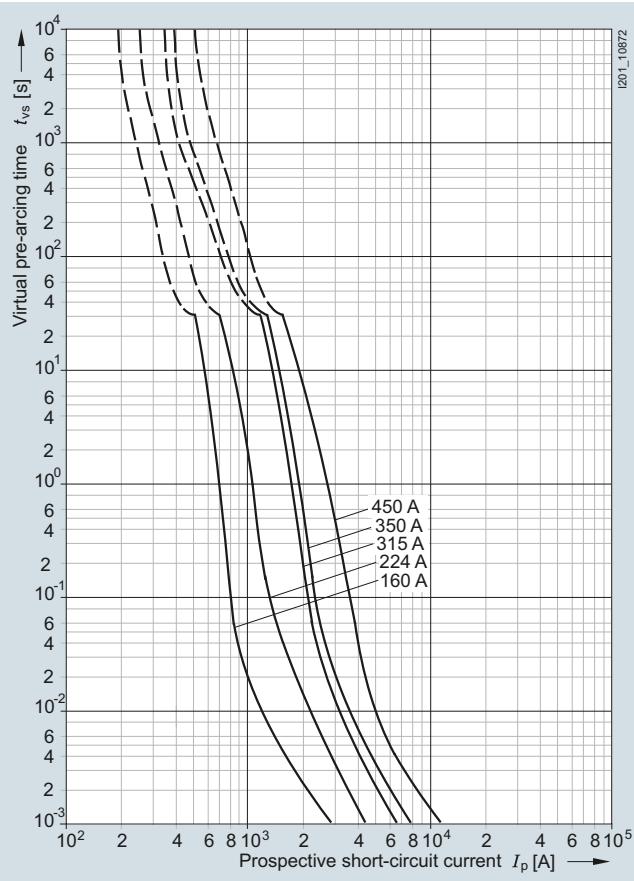


Let-through characteristics (current limitation at 50 Hz)

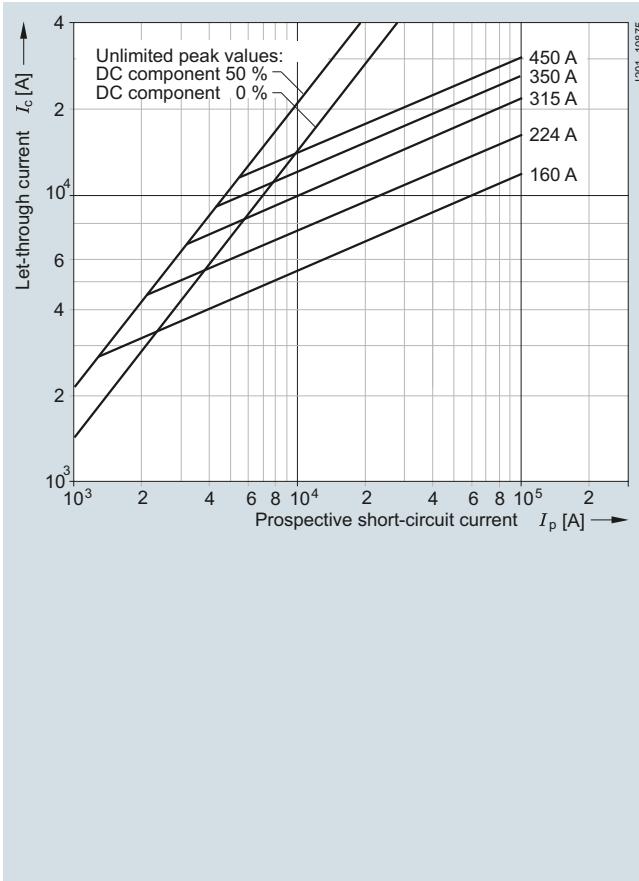

Correction factor k_A for breaking I^2t value




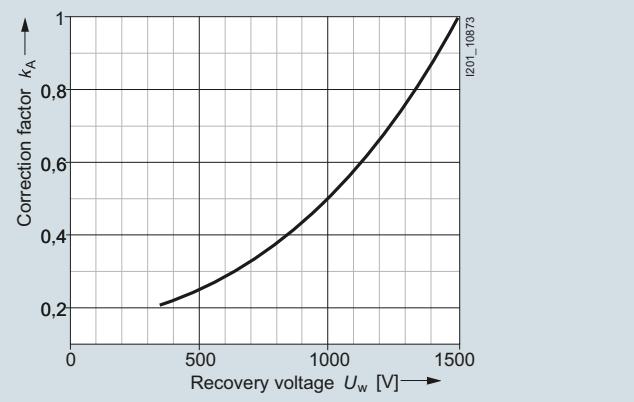


Peak arc voltage

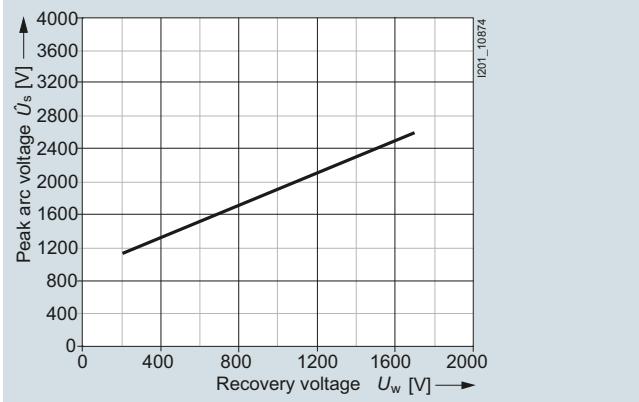

3NE56.. series

Size: 3
 Operational class: aR
 Rated voltage: 1500 V AC
 Rated current: 250 ... 600 A

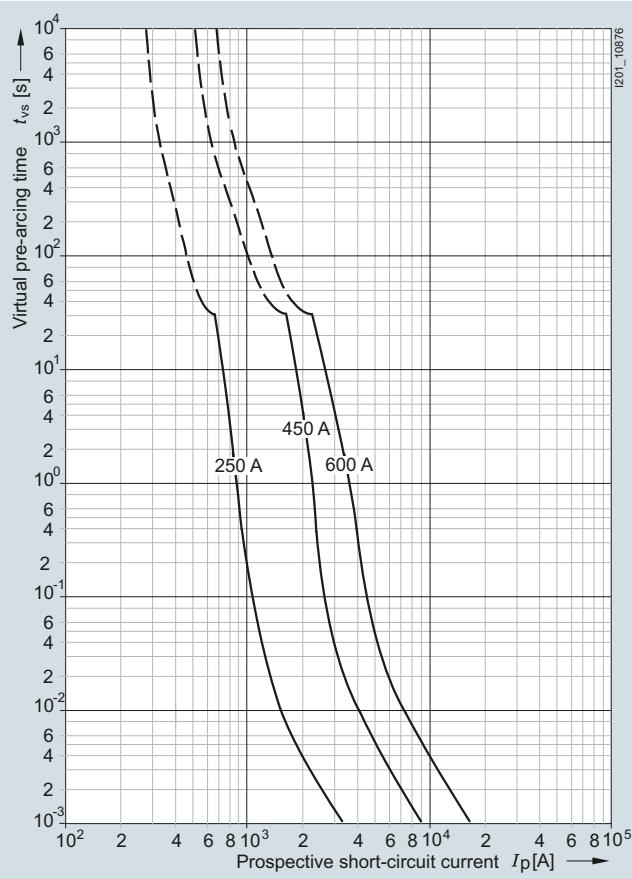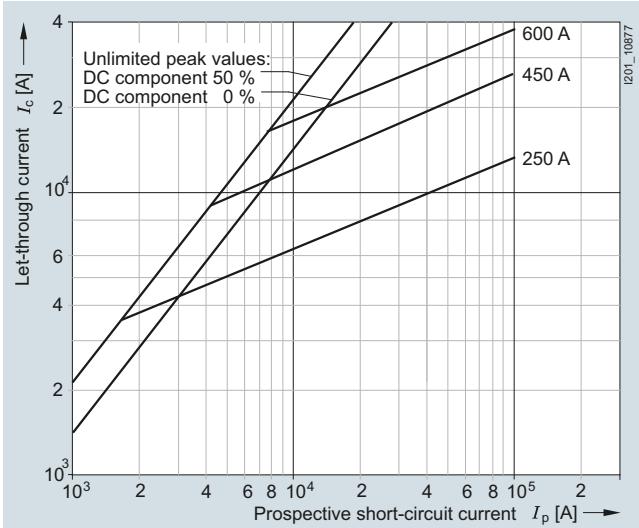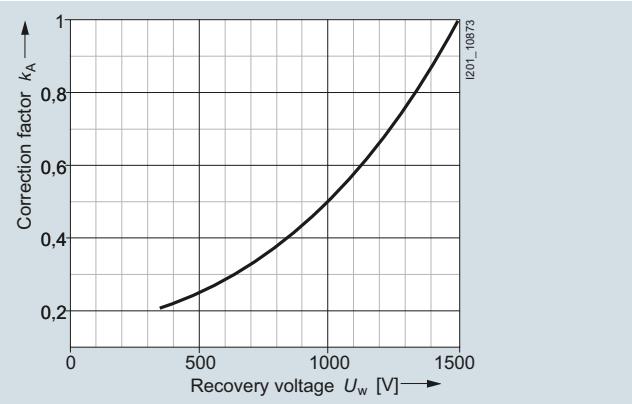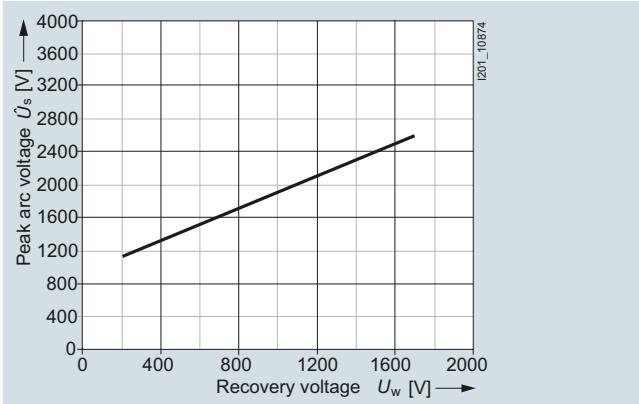Time/current characteristics diagram**Let-through characteristics (current limitation at 50 Hz)****Correction factor k_A for breaking I^2t value****Peak arc voltage**

Fuse Systems



SITOR Semiconductor Fuses

SITOR, LV HRC design

3NE64.., 3NE94.. series




Operational class: aR, gR
 Rated voltage: 600 V AC (850 A, 1250 A),
 900 V AC (710 A, 900 A)
 Rated current: 710 ... 1250 A

Time/current characteristics diagrams

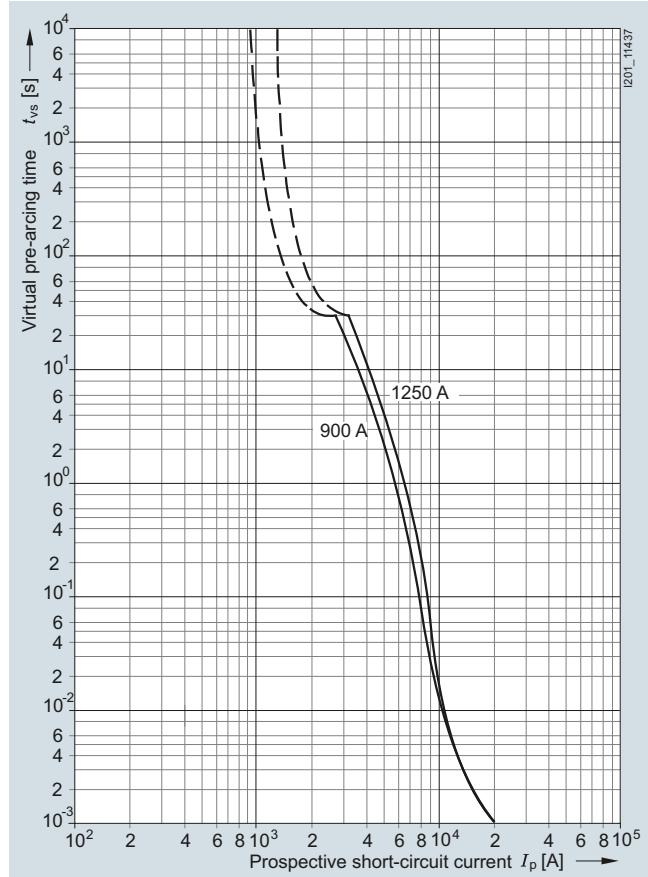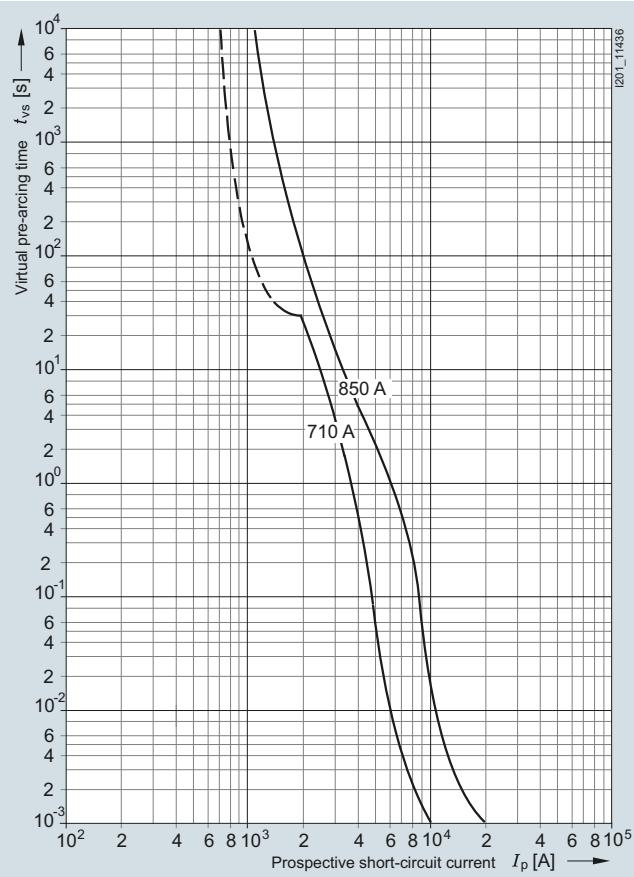

3NE64.., 3NE94.. series

Operational class: aR, gR
 Rated voltage: 600 V AC (850 A, 1250 A),
 900 V AC (710 A, 900 A)
 Rated current: 710 ... 1250 A

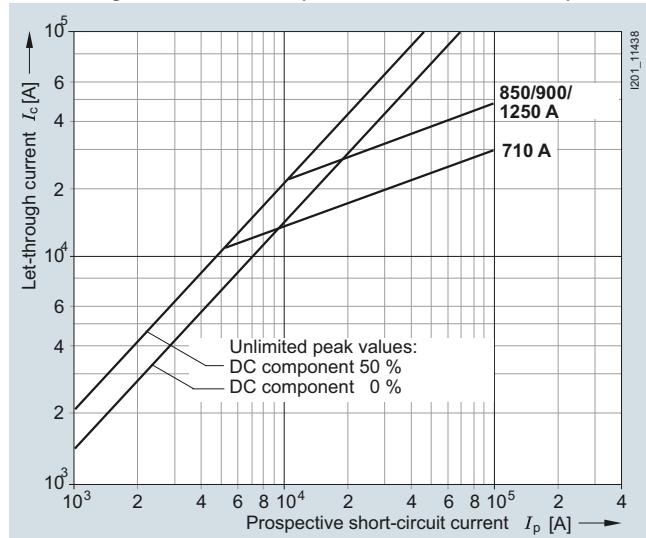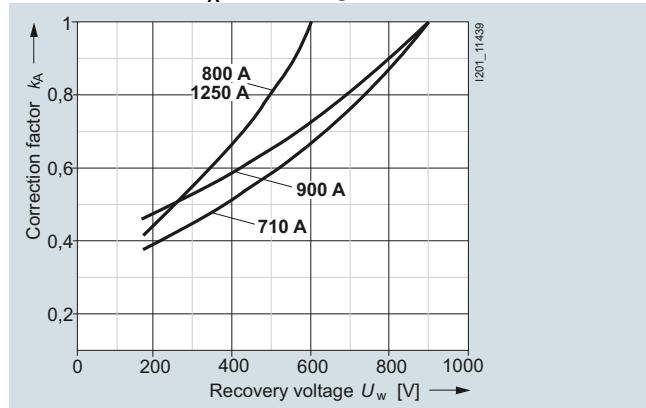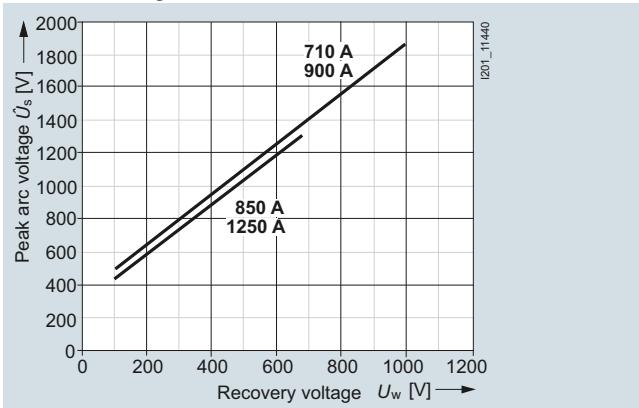Let-through characteristics (current limitation at 50 Hz)**Correction factor k_A for breaking I^2t value****Peak arc voltage**

Fuse Systems


SITOR Semiconductor Fuses

SITOR, LV HRC design


3NE74.., 3NE76.. series

Size: 3
 Operational class: aR
 Rated voltage: 2000 V AC
 Rated current: 200 ... 710 A


Time/current characteristics diagram

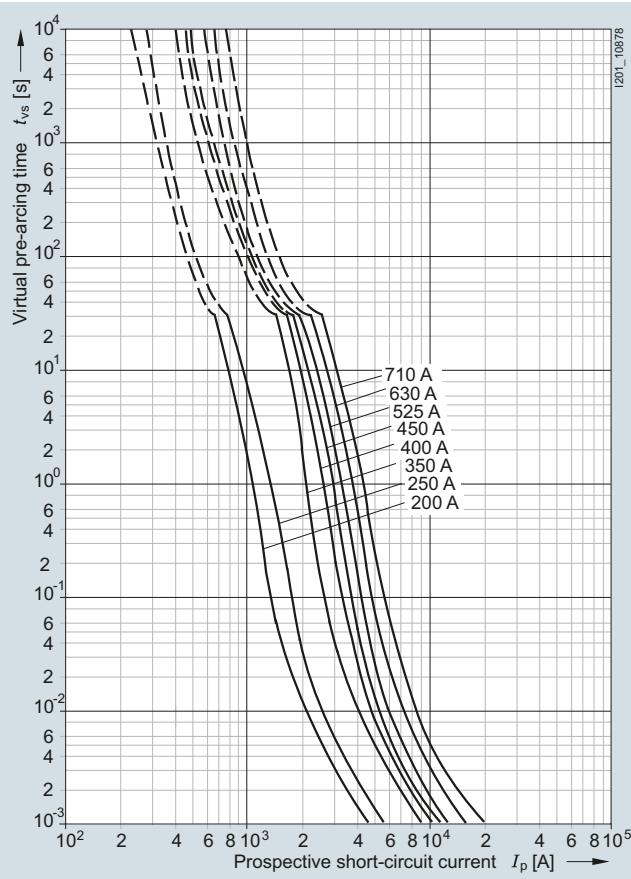


Let-through characteristics (current limitation at 50 Hz)

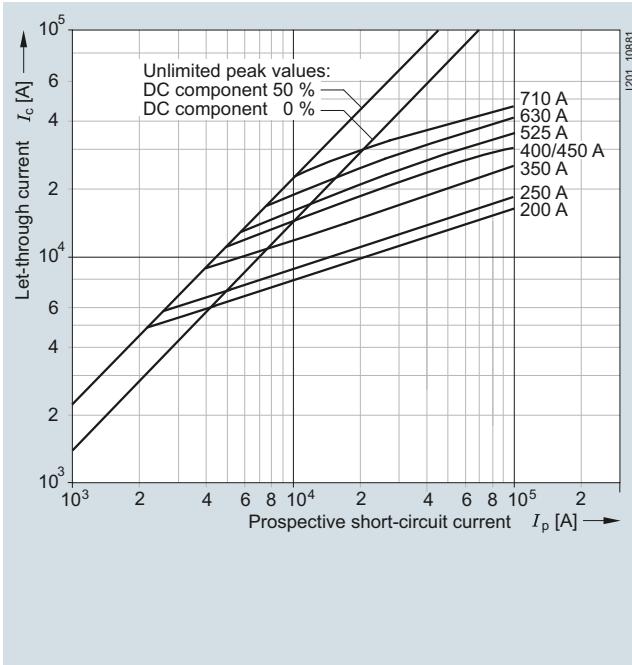

Correction factor k_A for breaking I^2t value




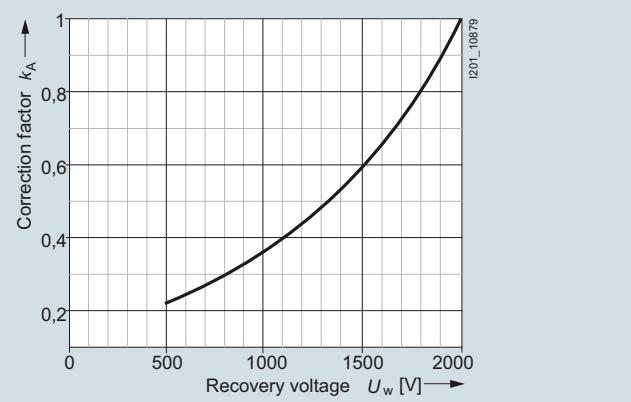


Peak arc voltage

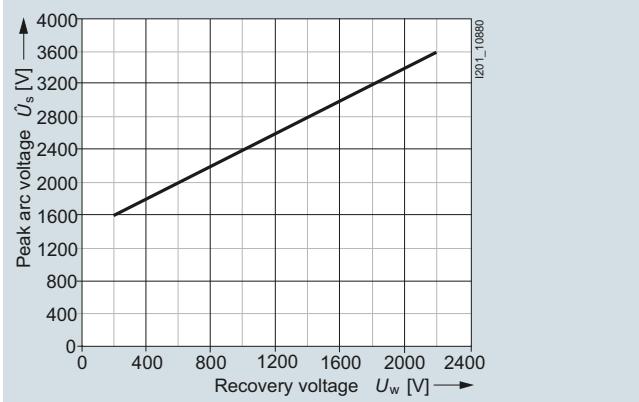

3NE80...-1 series

Size: 00
 Operational class: gR or aR
 Rated voltage: 690 V AC
 Rated current: 25 ... 160 A

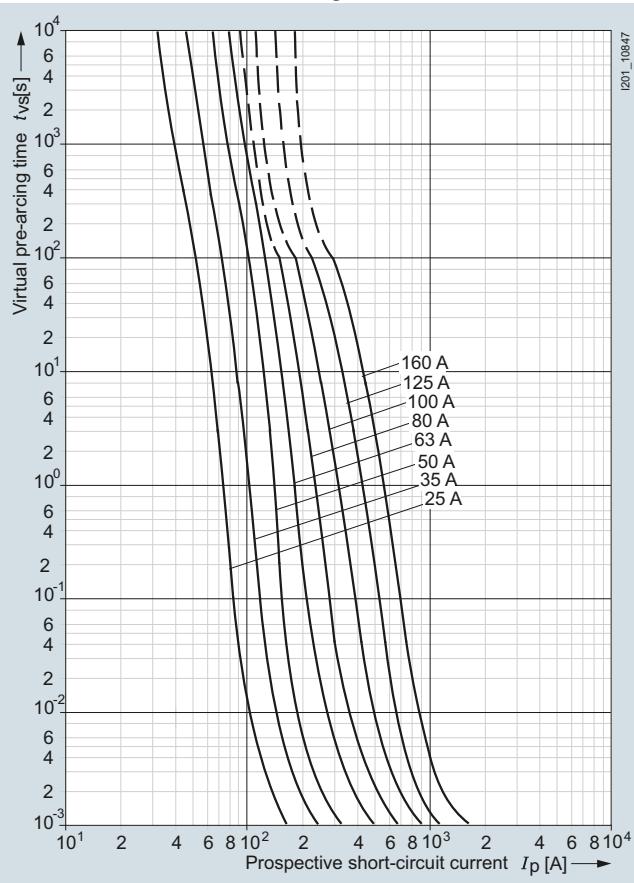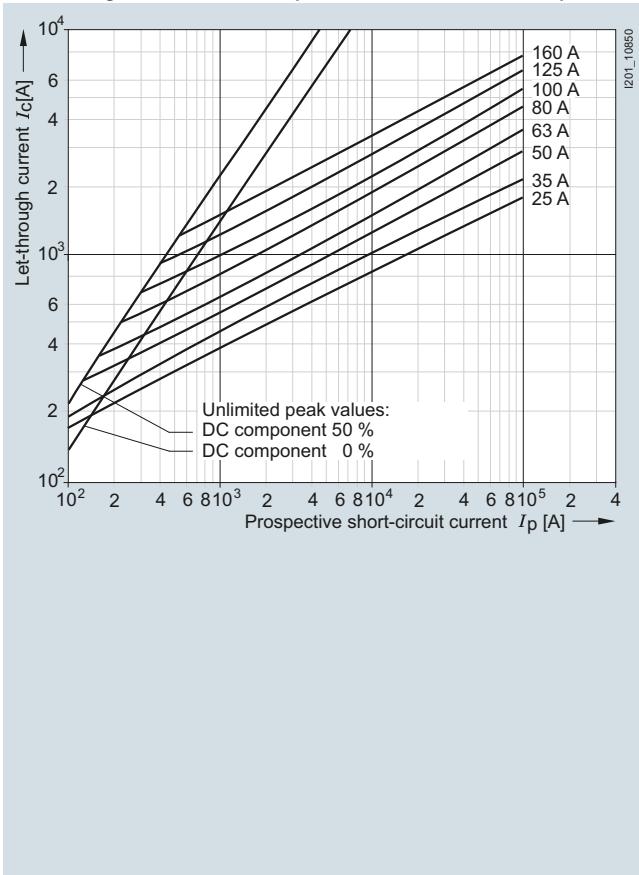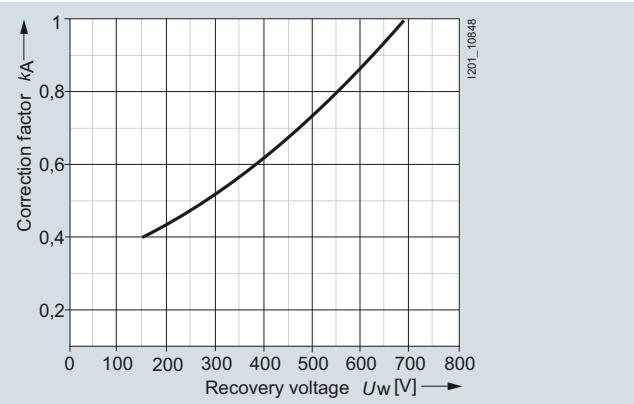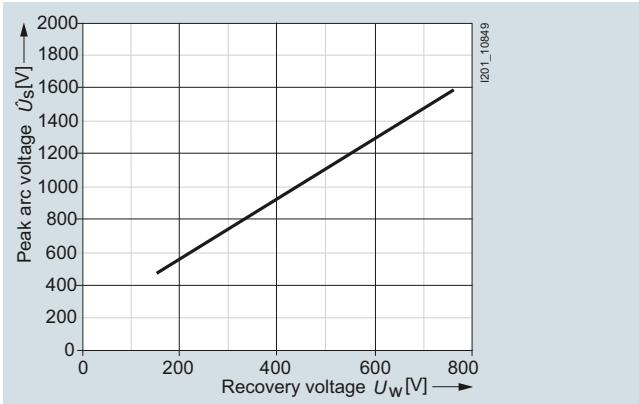Time/current characteristics diagram**Let-through characteristics (current limitation at 50 Hz)****Correction factor k_A for breaking I^2t value****Peak arc voltage**

Fuse Systems


SITOR Semiconductor Fuses

SITOR, LV HRC design


3NE870.-1, 3NE871.-1 series

Size: 000
 Operational class: gR or aR
 Rated voltage: 690 V AC/700 V DC
 Rated current: 20 ... 63 A


Time/current characteristics diagram

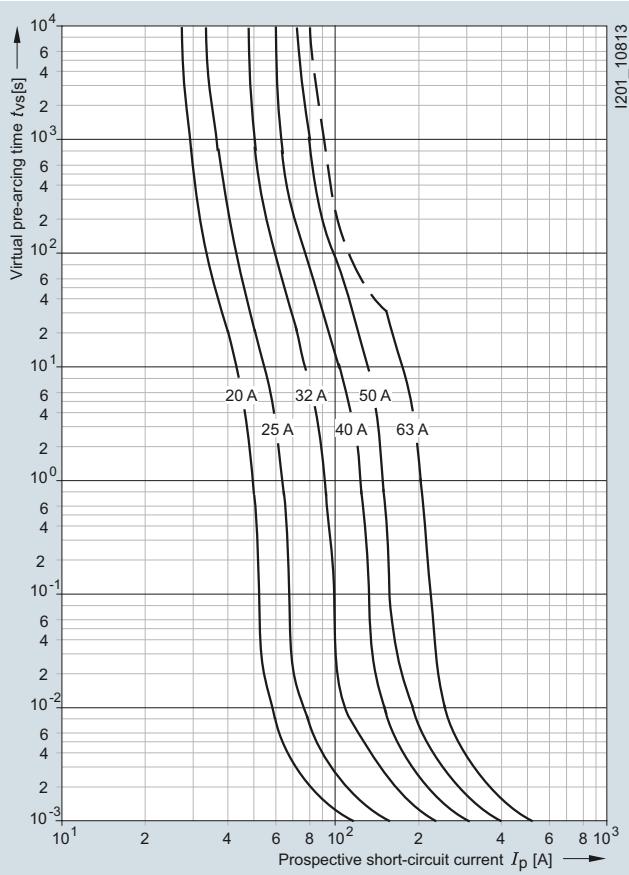


Let-through characteristics (current limitation at 50 Hz)

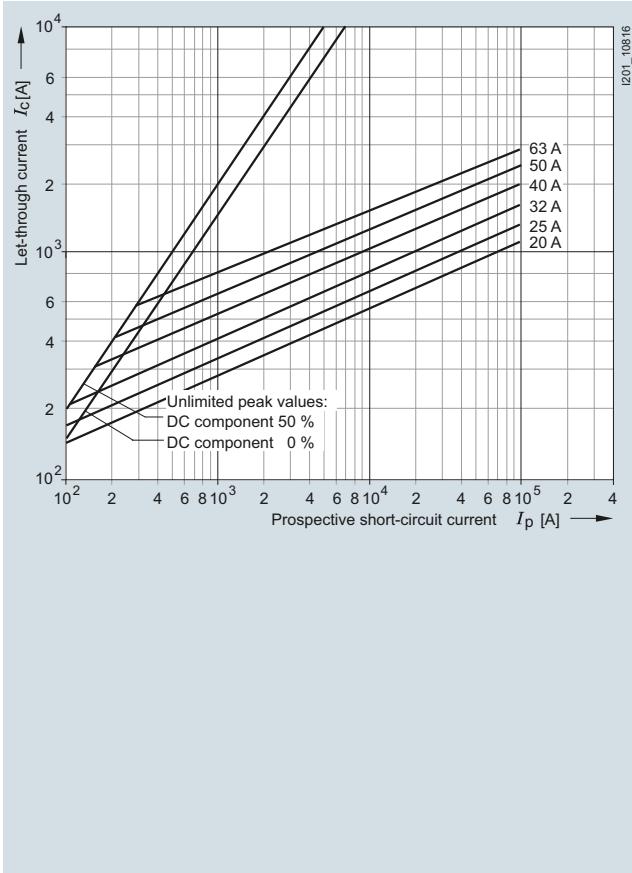

Correction factor k_A for breaking I^2t value




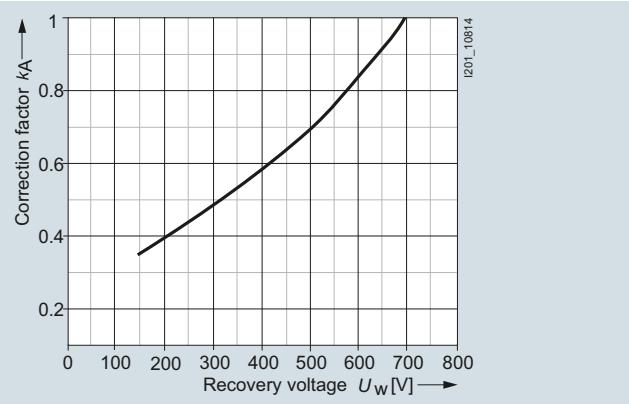


Peak arc voltage

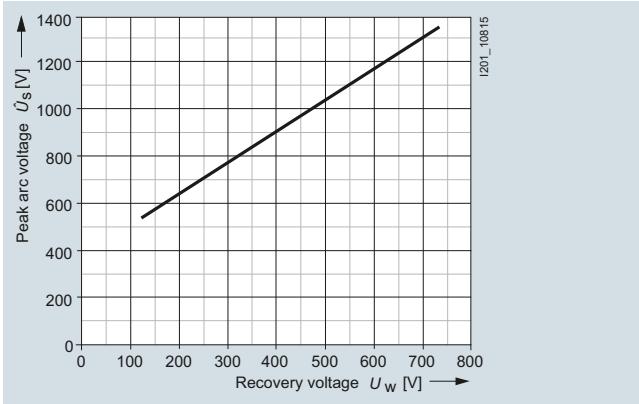

3NE872.-1, 3NE8731-1 series

Size: 000
 Operational class: aR
 Rated voltage: 690 V AC/700 V DC according to UL
 Rated current: 80 ... 315 A

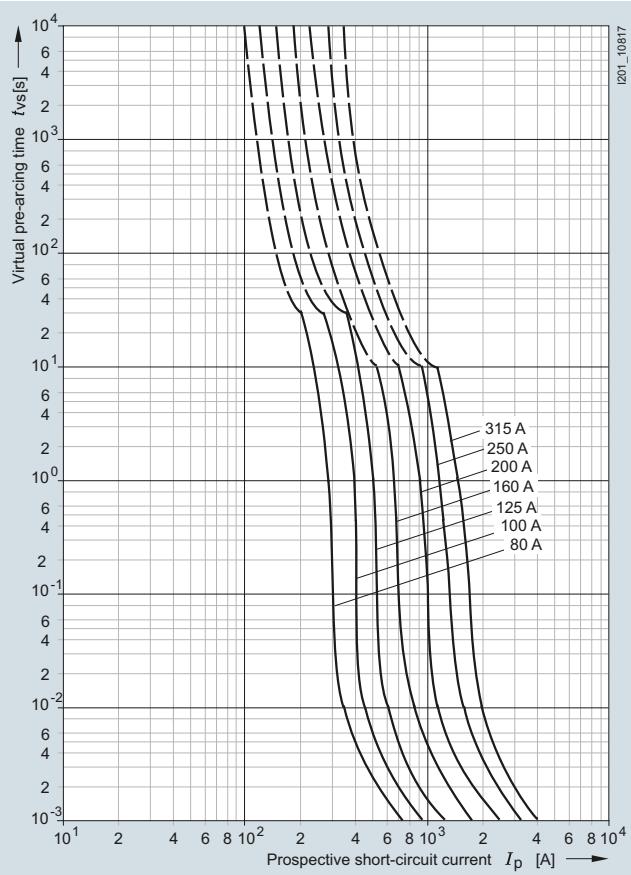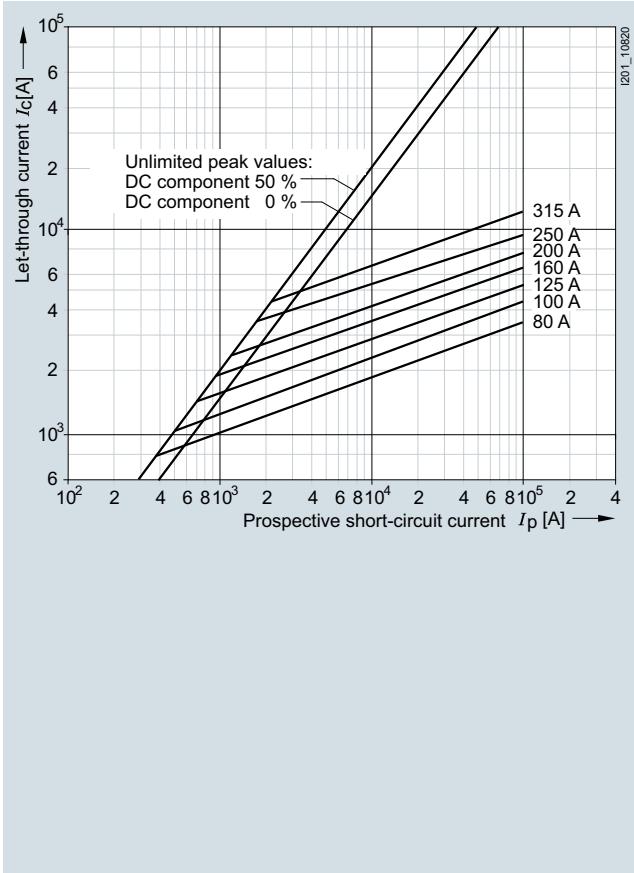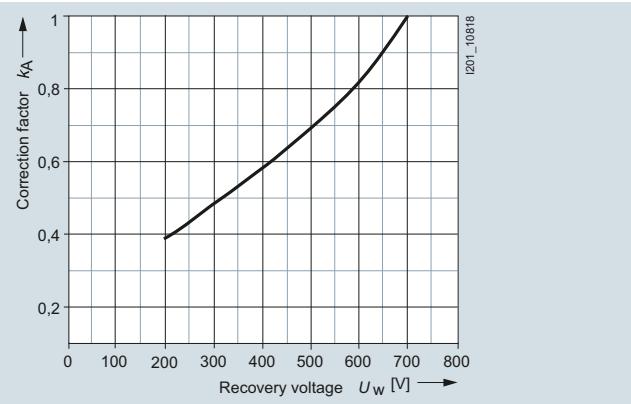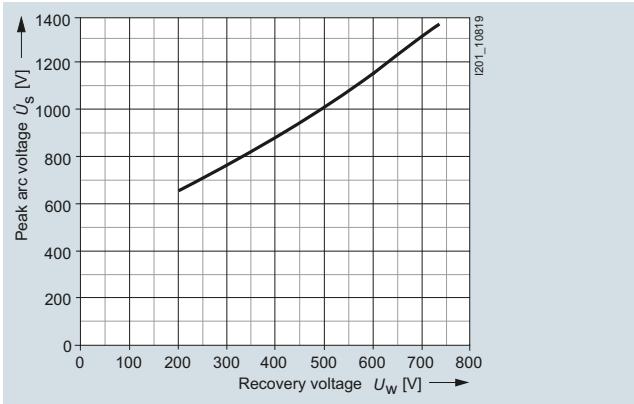Time/current characteristics diagram**Let-through characteristics (current limitation at 50 Hz)****Correction factor k_A for breaking I^2t value****Peak arc voltage**

Fuse Systems


SITOR Semiconductor Fuses

SITOR, LV HRC design


3NE963. series

Size: 3
 Operational class: aR
 Rated voltage: 2500 V AC
 Rated current: 400 ... 630 A


Time/current characteristics diagram

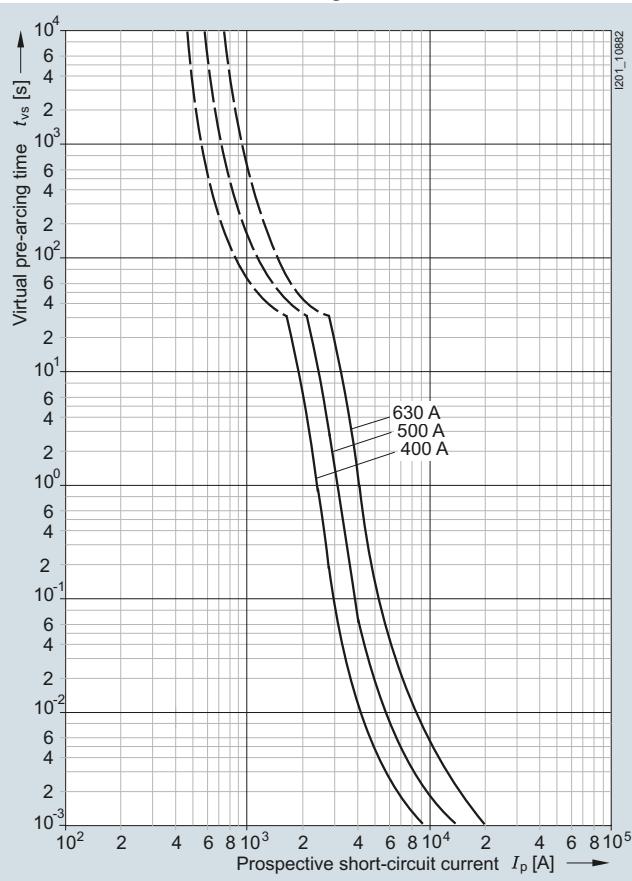


Let-through characteristics (current limitation at 50 Hz)

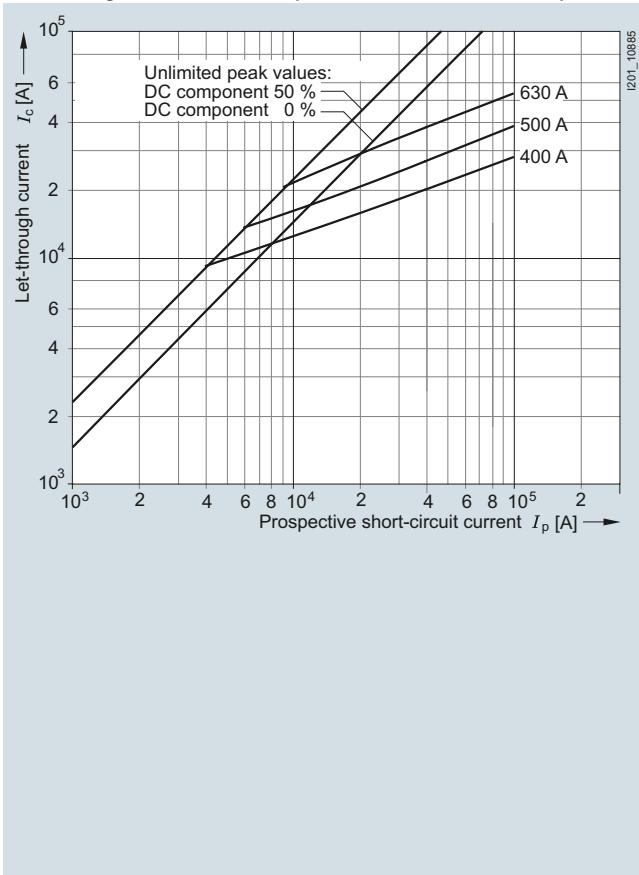

Correction factor k_A for breaking I^2t value

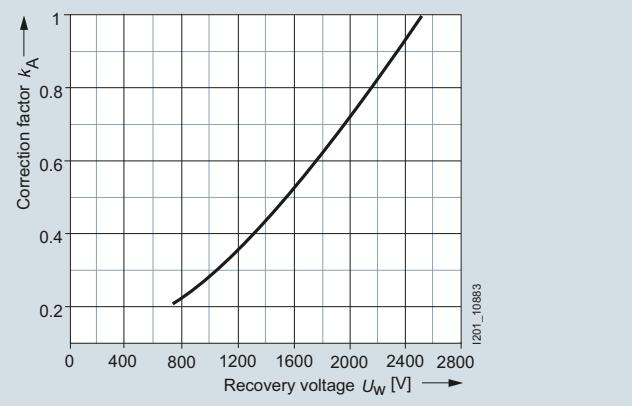

Peak arc voltage

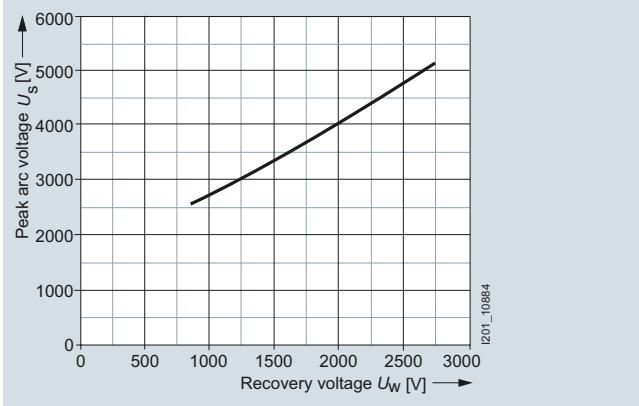

SITOR, cylindrical fuse design

Overview

SITOR cylindrical fuses protect power semiconductors from the effects of short-circuits because the super quick-response disconnect characteristic is far quicker than that of conventional fuses. They protect high-quality devices and system components such as semiconductor contactors, electronic relays (solid state), converters with fuses in the input and in the DC link, UPS systems and soft starters for motors up to 100 A.

The cylindrical design is approved for industrial applications. The cylindrical fuse links comply with IEC 60269.

Cylindrical fuse holders also comply with IEC 60269 and UL 512. The cylindrical fuse holders for 10 x 38 mm and 14 x 51 mm have been tested and approved as fuse switch disconnectors and the cylindrical fuse holders for 22 x 58 mm as fuse disconnectors according to the switching device standard IEC 60947-3. The utilization category and the tested current and voltage values are specified in the Table "Technical Specifications".

The cylindrical fuse holders have been specially developed for the application of SITOR fuse links with regard to heat tolerance and heat dissipation and are therefore not recommended for standard applications.

Cylindrical fuse bases do not offer the same comprehensive touch protection as the fuse holders, but have better heat dissipation. The single-pole cylindrical fuse bases for 14 x 51 mm and 22 x 58 mm allow modular expansion to multi-pole bases.

Benefits

- Cylindrical fuses have an extremely compact design and a correspondingly small footprint
- The cylindrical fuses have IEC and UL approval and are suitable for universal use worldwide.
- The use of SITOR cylindrical fuses in the cylindrical fuse holders and bases has been tested with regard to heat dissipation and maximum current loading. This makes planning and dimensioning easier and prevents consequential damage.
- The use of fuse holders as switch disconnectors expands the area of application of these devices and increases operating safety.

Technical specifications

	Cylindrical fuse holders		
	3NC10	3NC14	3NC22
Size	mm x mm 10 x 38	14 x 51	22 x 58
Standards	UL 512; CSA C22.2; IEC 60269-2, IEC 60947-3		
Approvals	UL 512; UL File No. E171267; CSA C22.2 No. 39-M		
Rated voltage U_n	V AC 690; 600 acc. to UL/CSA		
Rated current I_n	A AC 32 30 acc. to UL/CSA	50 50 acc. to UL 40 acc. to CSA	100 80 acc. to UL/CSA
Rated conditional short-circuit current	kA 50	50 (100 at 400 V)	50 (100 at 500 V)
Switching capacity			
• Utilization category	AC-22B (400 V)	AC-22B (400 V)	AC-20B (690 V)
Max. power dissipation of fuse links (conductor cross-section used)	W 3 (6 mm ²) 4.3 (10 mm ²)	5 (10 mm ²) 6.5 (25 mm ²)	9.5 (35 mm ²) 11 (50 mm ²)
Rated impulse withstand voltage	kV 6		
Overvoltage category	II		
Pollution degree	2		
No-voltage changing of fuse links	Yes		
Sealable when installed	Yes		
Mounting position	Any		
Current direction	Any		
Degree of protection acc. to IEC 60529	IP20		
Terminals with touch protection according to BGV A3 at incoming and outgoing feeder	Yes		
Ambient temperature	°C 45		
Conductor cross-sections			
• Finely stranded, with end sleeve	mm ² AWG	1.5 ... 16 15 ... 5	1.5 ... 35 14 ... 2
• AWG (American Wire Gauge)			4 ... 50 10 ... 1/0
Tightening torque	Nm lb.in	2.5 22	2.5 ... 3 22 ... 26
			3.5 ... 4 31 ... 35

Fuse Systems

SITOR Semiconductor Fuses

SITOR, cylindrical fuse design

Load rating of SITOR cylindrical fuses

Cylinder	Operational class (IEC 60269)	Rated voltage U_n V AC	Rated voltage U_n V DC	Rated current I_n A	Melting I^2t value I^2t_s ($t_{vs} = 1$ ms) A ² s	Breaking I^2t value I^2t_a at U_n A ² s	Temperature rise at I_n body center K	Power dissipation at I_n W	Weight approx. kg
3NC1003	aR	600	700	3	3	8	30	1.2	0.01
3NC1006	aR	600	700	6	4	20	30	1.5	0.01
3NC1008	aR	600	700	8	6	30	25	2	0.01
3NC1010	aR	600	700	10	9	60	40	2.5	0.01
3NC1012	aR	600	700	12	15	110	50	3	0.01
3NC1016	aR	600	700	16	25	150	60	3.5	0.01
3NC1020	aR	600	700	20	34	200	80	4.8	0.01
3NC1025	aR	600	700	25	60	250	90	6	0.01
3NC1032	aR	600	--	32	95	500	110	7.5	0.01
3NC1401	aR	660	--	1		1.2	90	5	0.02
3NC1402	aR	660	--	2		10	30	3	0.02
3NC1403	aR	660	--	3		15	40	2.5	0.02
3NC1404	aR	660	--	4		25	50	3	0.02
3NC1405	aR	690	800	5	1.6	9	20	1.5	0.02
3NC1406	aR	690	800	6		12	30	1.5	0.02
3NC1410	aR	690	800	10	3.6	20	50	4	0.02
3NC1410-5	aR	690	600	10	3.6	90	50	4	0.02
3NC1415	aR	690	800	15	10	75	60	5.5	0.02
3NC1415-5	aR	690	600	15	9	100	60	5.5	0.02
3NC1420	aR	690	800	20	26	120	70	6	0.02
3NC1420-5	aR	690	600	20	26	500	70	6	0.02
3NC1425	aR	690	800	25	44	250	80	7	0.02
3NC1425-5	aR	690	600	25	47	400	80	7	0.02
3NC1430	aR	690	800	30	58	300	80	9	0.02
3NC1430-5	aR	690	600	30	58	500	80	9	0.02
3NC1432	aR	690	800	32	95	700	80	7.6	0.02
3NC1432-5	aR	690	600	32	68	600	80	7.6	0.02
3NC1440	aR	690	800	40	110	900	100	8	0.02
3NC1440-5	aR	690	600	40	84	900	100	8	0.02
3NC1450	aR	690	800	50	220	1800	110	9	0.02
3NC1450-5	aR	690	600	50	200	2000	110	9	0.02
3NC2200	aR	600	500	100	1250	8000	110	16	0.06
3NC2200-5	aR	600	500	100	1100	8500	110	16	0.06
3NC2220	aR	690	500	20	34	220	40	4.6	0.06
3NC2220-5	aR	690	500	20	19	240	40	5	0.06
3NC2225	aR	690	500	25	50	300	50	5.6	0.06
3NC2225-5	aR	690	500	25	34	350	50	6	0.06
3NC2232	aR	690	500	32	80	450	65	7	0.06
3NC2232-5	aR	690	500	32	54	500	65	8	0.06
3NC2240	aR	690	500	40	100	700	80	8.5	0.06
3NC2240-5	aR	690	500	40	68	800	80	9	0.06
3NC2250	aR	690	500	50	185	1350	90	9.5	0.06
3NC2250-5	aR	690	500	50	135	1500	90	9.5	0.06
3NC2263	aR	690	500	63	310	2600	100	11	0.06
3NC2263-5	aR	690	500	63	280	3000	100	11	0.06
3NC2280	aR	690	500	80	620	5500	110	13.5	0.06
3NC2280-5	aR	690	500	80	600	6000	110	13.5	0.06

Load rating of SITOR cylindrical fuses without strikers in fuse holders - can be used as fuse switch disconnectors ¹⁾

For SITOR fuse links	Rated voltage	Required current I_n	Required conductor cross-section Cu	Fuse holders - can be used as fuse switch disconnectors ¹⁾					
				1-pole Type		I_{max} (²⁾) A	2-pole Type		I_{max} (²⁾) A
	V AC/V DC	A	mm ²						
Size10 x 38 mm									
3NC1003	600/700	3	1	3NC1091		3	3NC1092/ 2 x 3NC1091	3	3NC1093/ 3 x 3NC1091
3NC1006		6	1			6		6	
3NC1008		8	1			8		8	
3NC1010		10	1.5			10			10
3NC1012		12	1.5			12		12	
3NC1016		16	2.5			16			16
3NC1020		20	2.5			20			20
3NC1025		25	4			25		24	
3NC1032	600/--	32	6			32		30	

Footnotes see next page.

Fuse Systems

SITOR Semiconductor Fuses

SITOR, cylindrical fuse design

For SITOR fuse links	Rated voltage	Rated current I_n	Required conductor cross-section Cu mm ²	Fuse holders - can be used as fuse switch disconnectors ¹⁾					
				1-pole Type		2-pole Type		3-pole Type	
				I_{max} ²⁾ A	I_{max} ²⁾ A	I_{max} ²⁾ A	I_{max} ²⁾ A	I_{max} ²⁾ A	
	V AC/V DC	A	mm ²						
Size 14 x 51 mm									
3NC1401	660	1	1	3NC1491	1	3NC1492/ 2 x 3NC1491	1	3NC1493/ 3 x 3NC1491	1
3NC1402		2	1		2		2		2
3NC1403		3	1		3		3		3
3NC1404		4	1		4		4		4
3NC1405	690/800	5	1		5		5		5
3NC1406		6	1		6		6		6
3NC1410		10	1.5		10		10		10
3NC1415		15	1.5		15		15		15
3NC1420		20	2.5		20		20		20
3NC1425		25	4		25		24		22
3NC1430		30	6		28		27		25
3NC1432		32	6		32		32		32
3NC1440		40	10		40		39		38
3NC1450		50	10		48		46		44
Size 22 x 58 mm									
3NC2220	690/500	20	2.5	3NC2291	20	3NC2292/ 2 x 3NC2291	20	3NC2293/ 3 x 3NC2291	20
3NC2225		25	4		25		25		25
3NC2232		32	6		32		32		32
3NC2240		40	10		40		39		38
3NC2250		50	10		50		48		44
3NC2263		63	16		60		58		56
3NC2280		80	25		74		71		69
3NC2200	600/500	100	35		95		90		85

Fuse tongs: 3NC1000.

¹⁾ Fuse holders acc. to IEC 60269-3, UL 512

Fuse switch disconnectors (10 x 38, 14 x 51 mm) acc. to IEC 60947-3

Fuse disconnectors (22 x 58 mm) acc. to IEC 60947-3.

²⁾ The values I_{max} apply for "stand-alone operation". If several devices are butt-mounted and/or subject to unfavorable cooling conditions, these values may be reduced still further. With a larger conductor cross-section, values higher than I_{max} are possible.

Load rating of SITOR cylindrical fuses with strikers in fuse holders - can be used as fuse switch disconnectors ¹⁾

For SITOR fuse links	Rated voltage	Rated current I_n	Required conductor cross-section Cu mm ²	Fuse holders - can be used as fuse switch disconnectors ¹⁾					
				1-pole Type		2-pole Type		3-pole Type	
				I_{max} ²⁾ A	I_{max} ²⁾ A	I_{max} ²⁾ A	I_{max} ²⁾ A	I_{max} ²⁾ A	
	V AC	A	mm ²						
Size 14 x 51 mm									
3NC1410-5	690/600	10	1.5	3NC1491	10	3NC1492/ 2 x 3NC1491-5	10	3NC1493/ 3 x 3NC1491-5	10
3NC1415-5		15	1.5		15		15		15
3NC1420-5		20	2.5		20		20		20
3NC1425-5		25	4		25		25		25
3NC1430-5		30	6		30		30		30
3NC1432-5		32	6		32		32		31
3NC1440-5		40	10		38		35		34
3NC1450-5		50	10		48		46		44
Size 22 x 58 mm									
3NC2220-5	690/500	20	2.5	3NC2291	20	3NC2292/ 2 x 3NC2291-5	20	3NC2293/ 3 x 3NC2291-5	20
3NC2225-5		25	4		25		25		25
3NC2232-5		32	6		32		31		30
3NC2240-5		40	10		40		39		37
3NC2250-5		50	10		45		43		42
3NC2263-5		63	16		59		55		52
3NC2280-5		80	25		71		69		68
3NC2200-5	600/500	100	35		94		90		85

¹⁾ Fuse holders acc. to IEC 60269-3, UL 512

Fuse switch disconnectors (10 x 38, 14 x 51 mm) acc. to IEC 60947-3

Fuse disconnectors (22 x 58 mm) acc. to IEC 60947-3.

²⁾ The values I_{max} apply for "stand-alone operation". If several devices are butt-mounted and/or subject to unfavorable cooling conditions, these values may be reduced still further. With a larger conductor cross-section, values higher than I_{max} are possible.


Fuse Systems

SITOR Semiconductor Fuses


SITOR, cylindrical fuse design

Dimensional drawings


Cylindrical fuse links

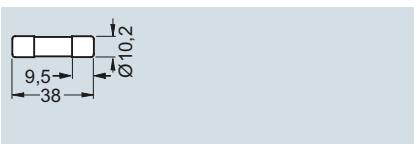

3NC10..

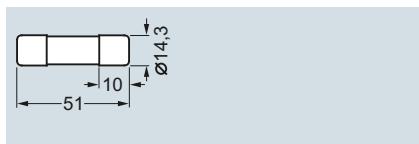


3NC14..

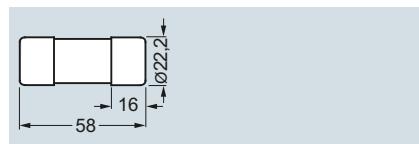


3NC22..


Cylindrical fuse holders

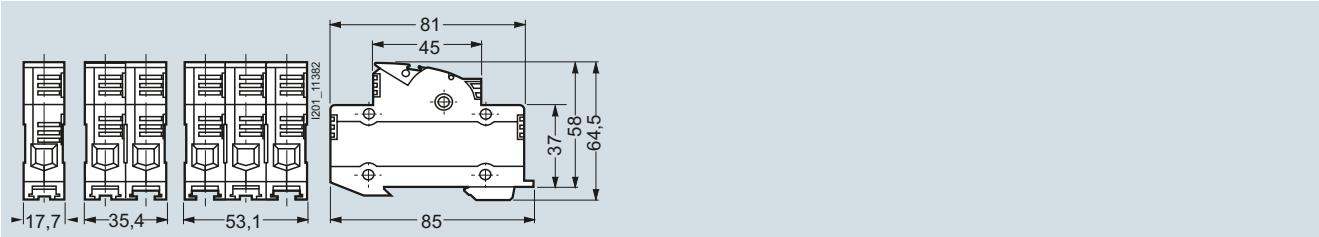

3NC109.

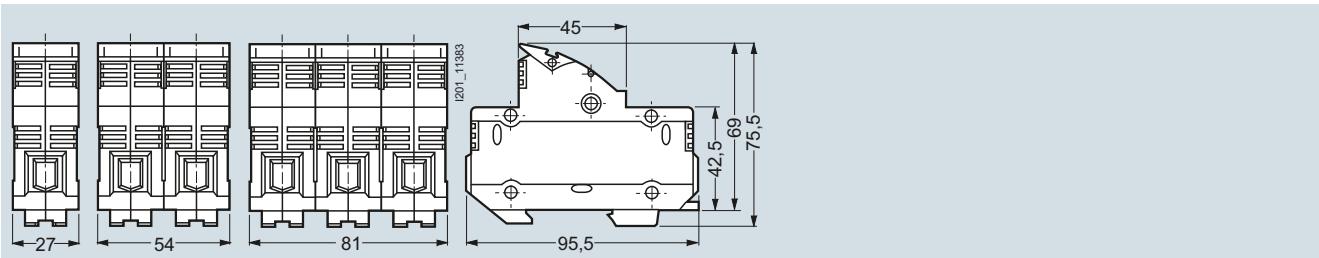


3NC149.

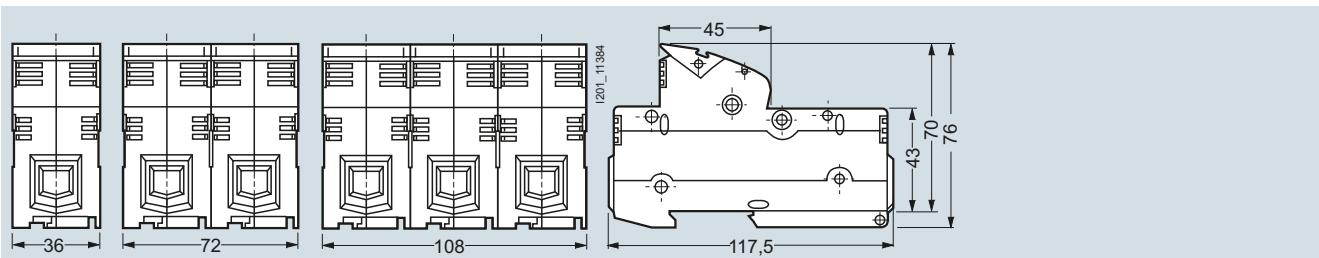


3NC129.


Cylindrical fuse holders with signaling switch

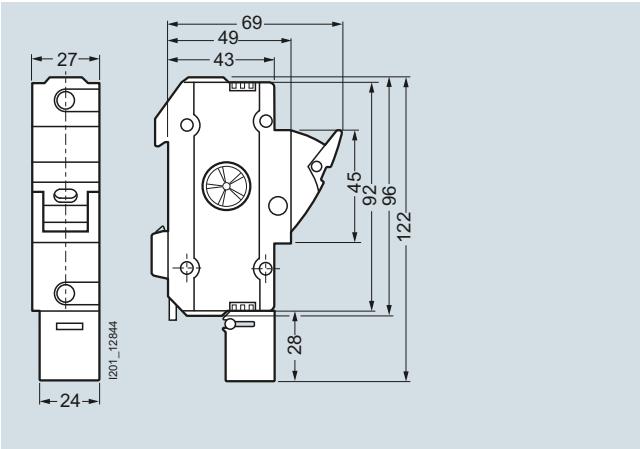


3NC1491-5

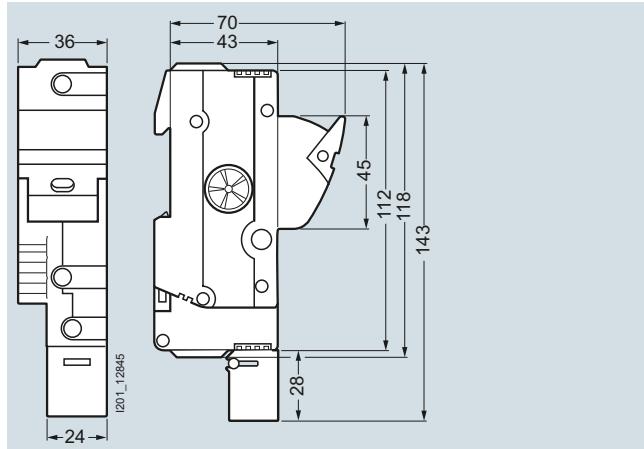


3NC1291-5

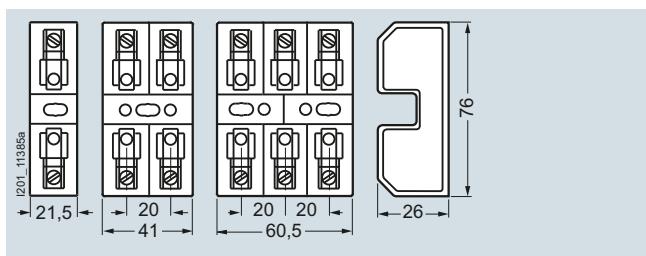Cylindrical fuse bases

3NC1038-1 to 3NC1038-3

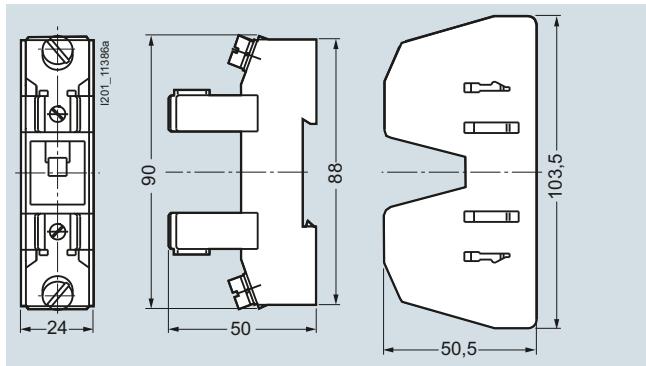

3NC1451-1

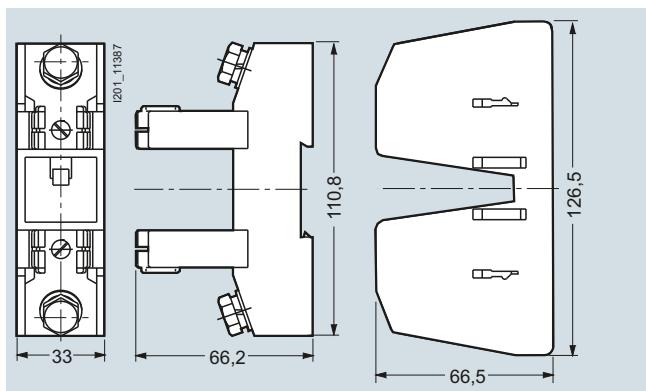

3NC2258-1

Fuse Systems

SITOR Semiconductor Fuses


SITOR, cylindrical fuse design

Characteristic curves


3NC10 series

Size: 10×38 mm
 Operational class: aR
 Rated voltage: 600 V AC/700 V DC, 3 ... 25 A
 600 V AC, 32 A
 Rated current: 3 ... 32 A


Time/current characteristics diagram

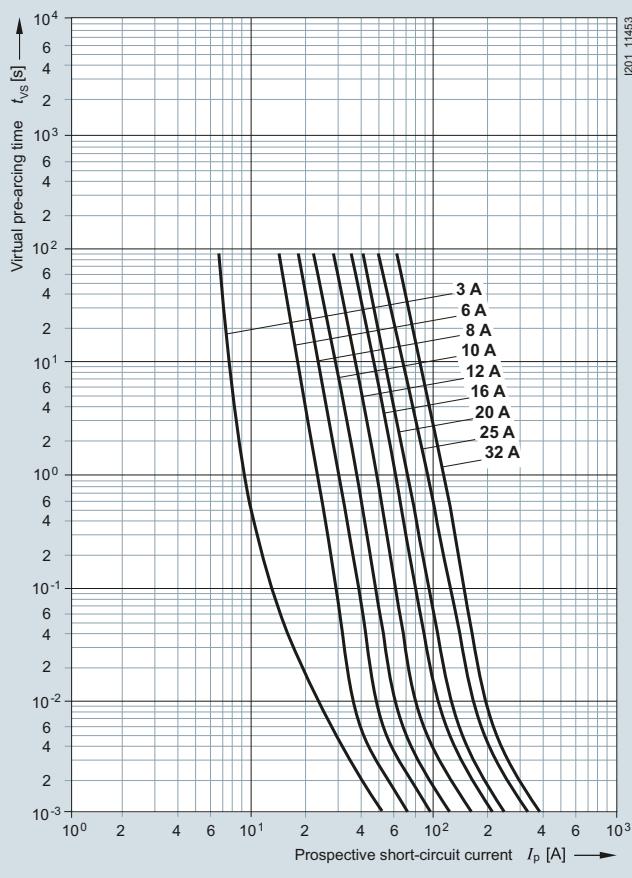


Let-through characteristics (current limitation at 50 Hz)

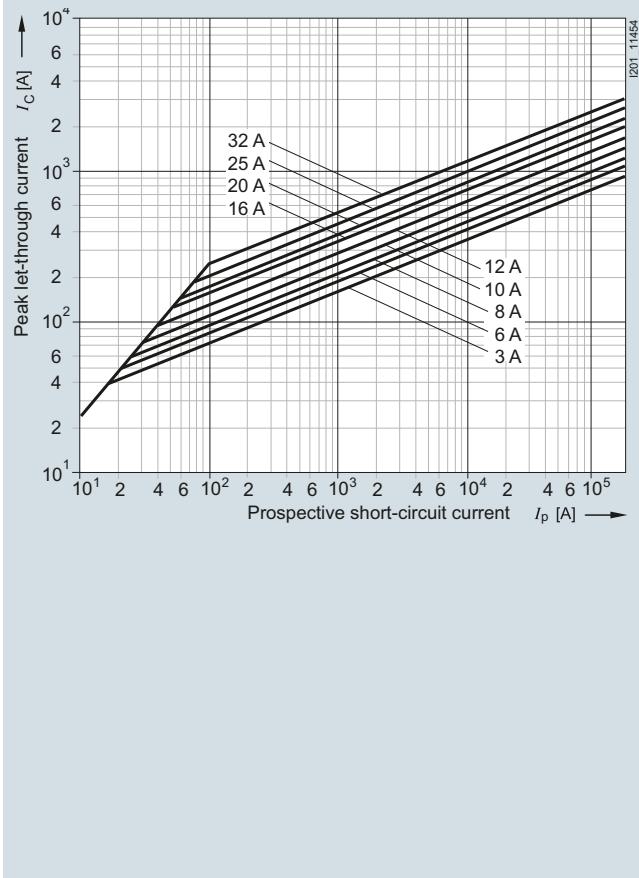

Correction factor k_A for breaking I^2t value




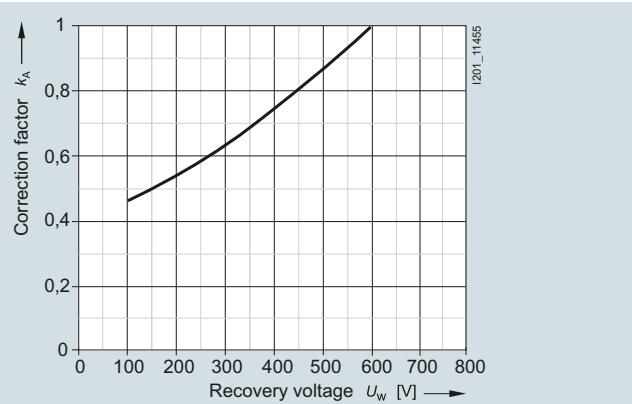


Peak arc voltage

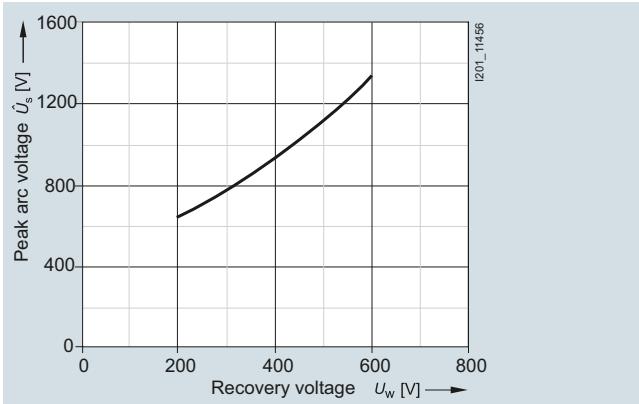

3NC14 series

Size: 14×51 mm
 Operational class: aR
 Rated voltage: 660 V AC (1 ... 4 A);
 690 V AC/800 V DC (5 ... 50 A)
 Rated current: 1 ... 10 A

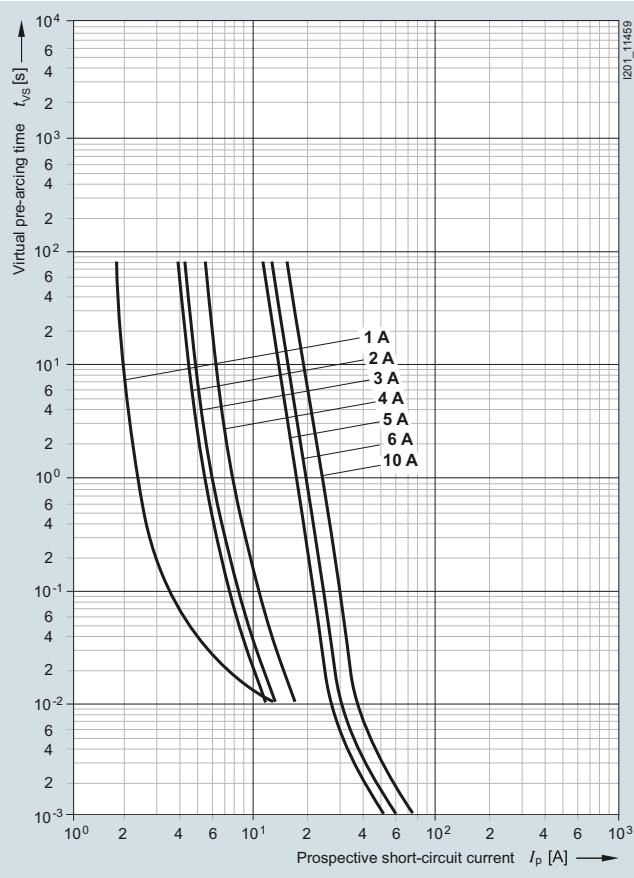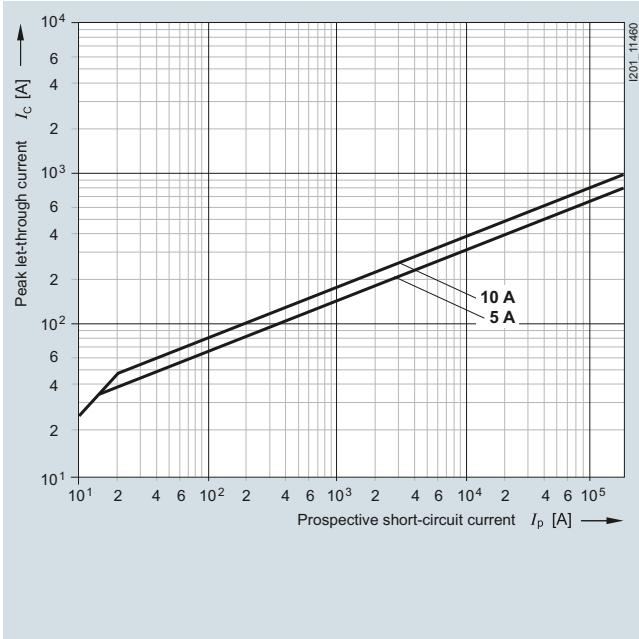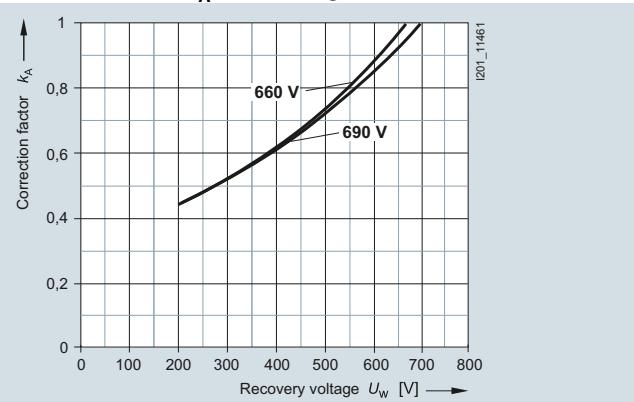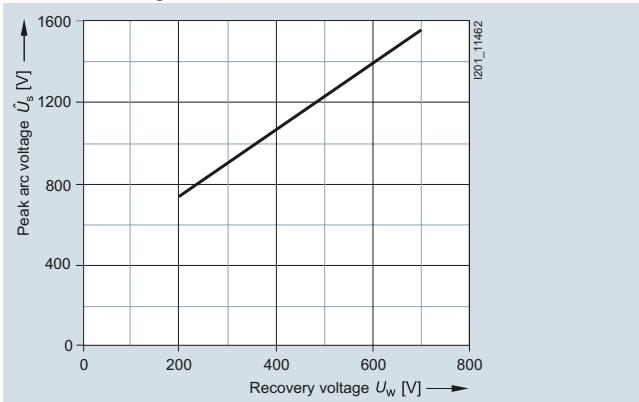Time/current characteristics diagram**Let-through characteristics (current limitation at 50 Hz)****Correction factor k_A for breaking I^2t value****Peak arc voltage**

Fuse Systems


SITOR Semiconductor Fuses

SITOR, cylindrical fuse design


3NC14 series

Size: 14×51 mm
 Operational class: aR
 Rated voltage: 660 V AC (1 ... 4 A);
 690 V AC/800 V DC (5 ... 50 A)
 Rated current: 15 ... 50 A


Time/current characteristics diagram

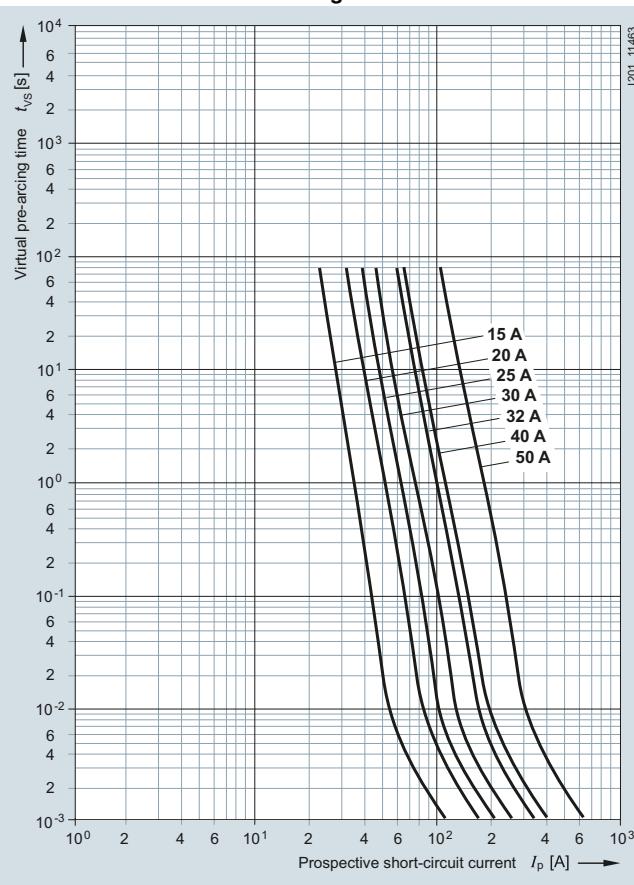


Let-through characteristics (current limitation at 50 Hz)

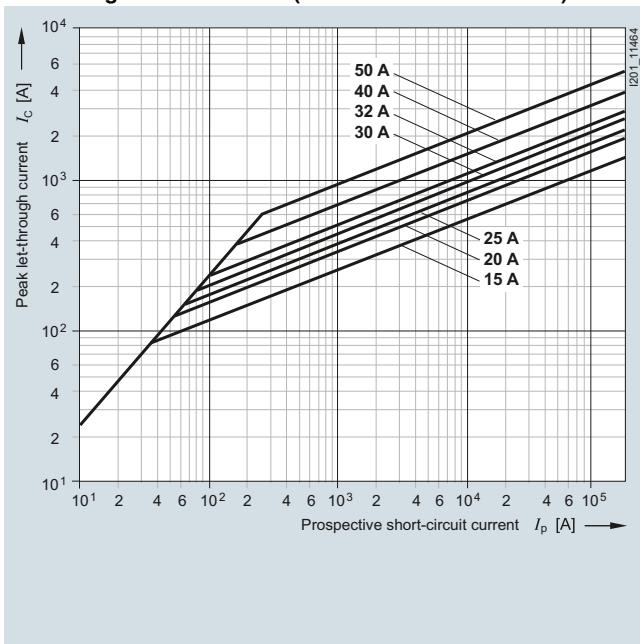

Correction factor k_A for breaking I^2t value

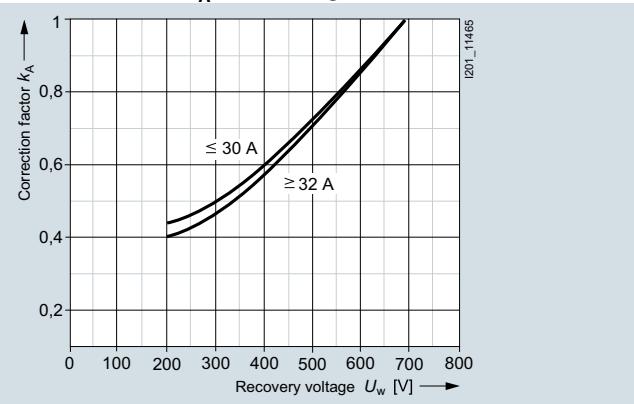

Peak arc voltage

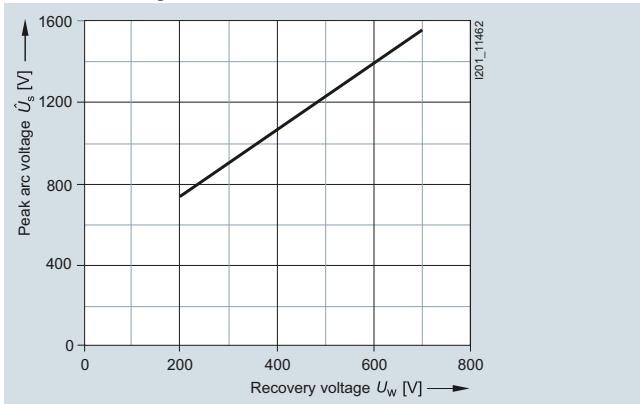


SITOR, cylindrical fuse design


3NC14...-5 series with striking pin

Size: 14 x 51 mm
 Operational class: aR
 Rated voltage: 690 V AC/600 V DC
 Rated current: 10 ... 50 A


Time/current characteristics diagram

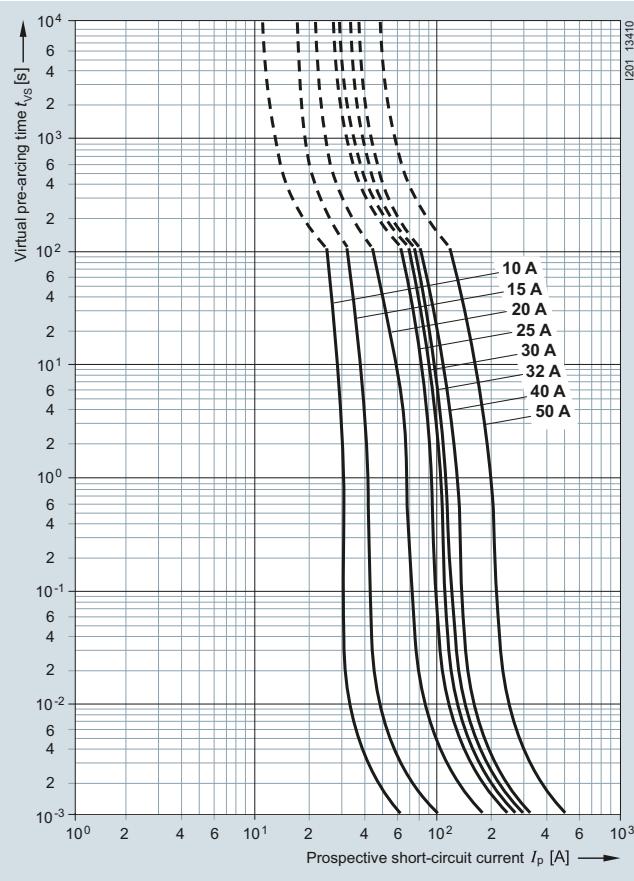


Let-through characteristics (current limitation at 50 Hz)

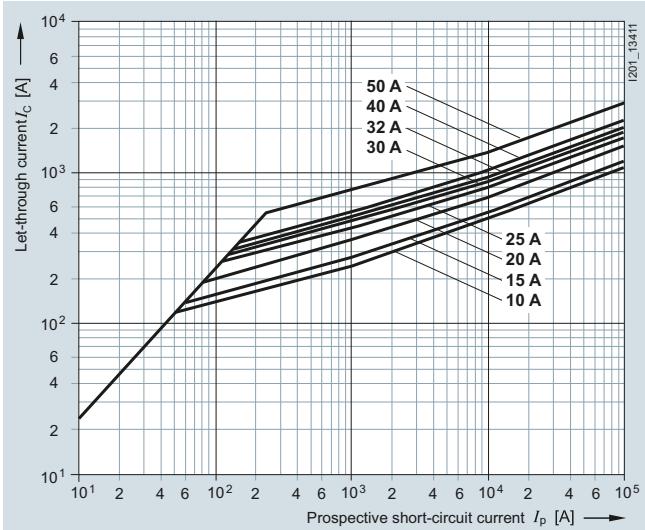

Correction factor k_A for breaking I^2t value

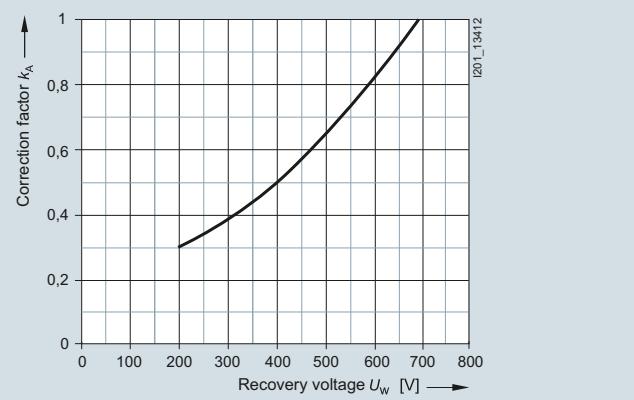

Peak arc voltage

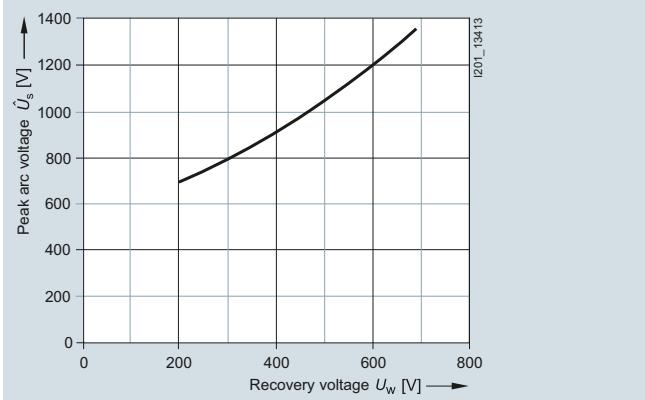

Fuse Systems


SITOR Semiconductor Fuses

SITOR, cylindrical fuse design


3NC22 series

Size: 22×58 mm
 Operational class: aR
 Rated voltage: 690 V AC/500 V DC (20 ... 80 A);
 600 V AC/500 V DC (100 A)
 Rated current: 20 ... 100 A


Time/current characteristics diagram

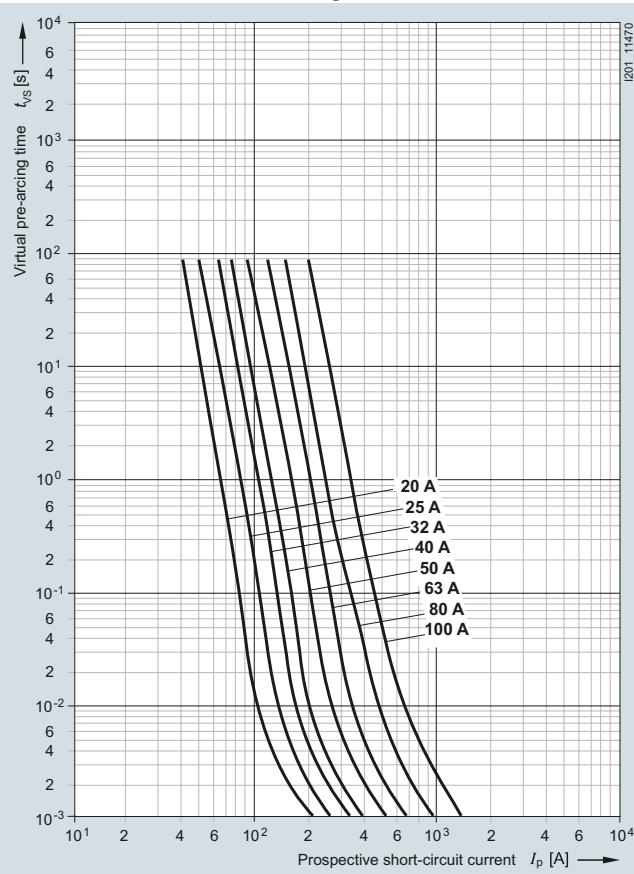


Let-through characteristics (current limitation at 50 Hz)

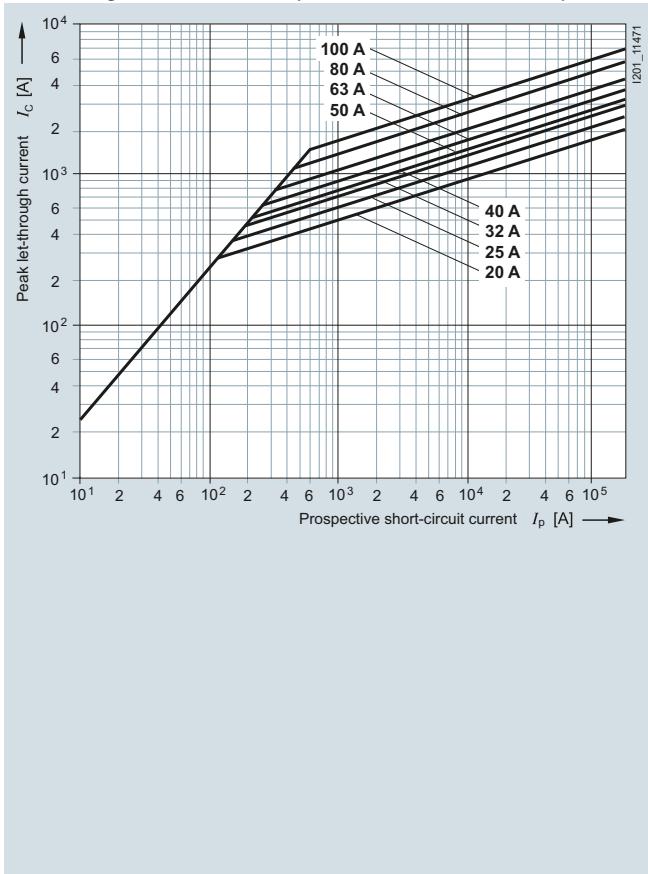

Correction factor k_A for breaking I^2t value




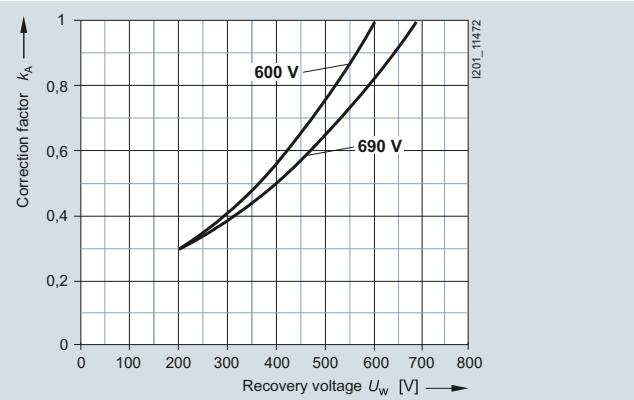


Peak arc voltage

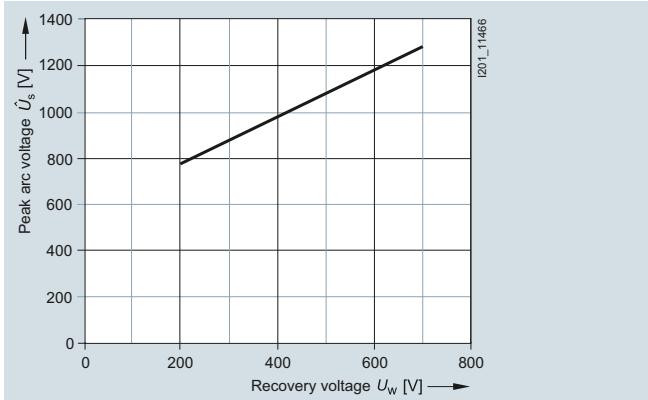

3NC22...-5 series with striking pin

Size: 22×58 mm
 Operational class: aR
 Rated voltage: 690 V AC/500 V DC (20 ... 80 A);
 600 V AC/500 V DC (100 A)
 Rated current: 20 ... 100 A

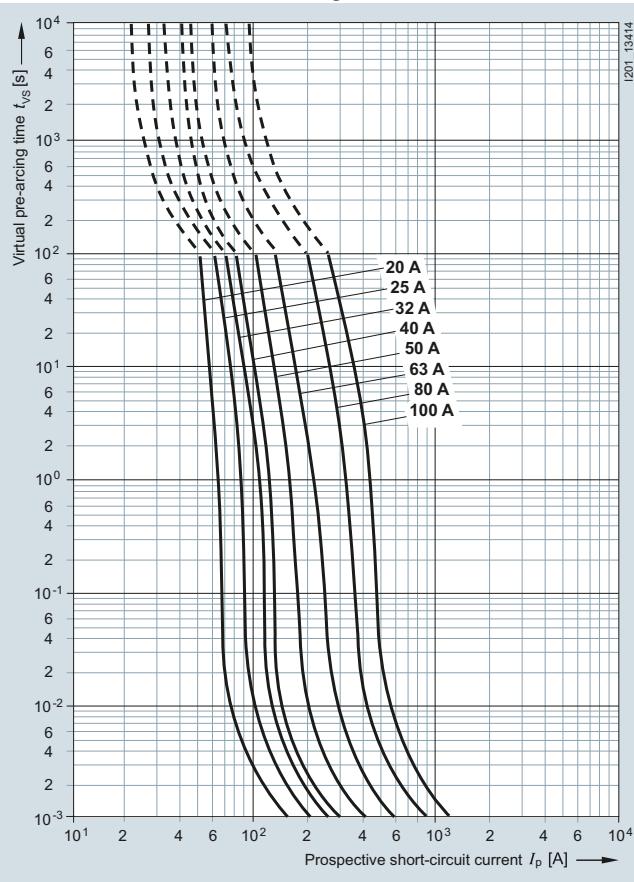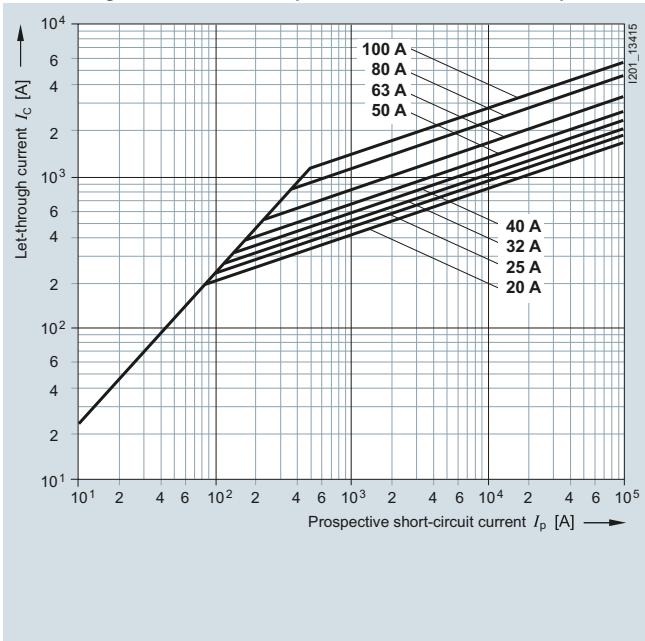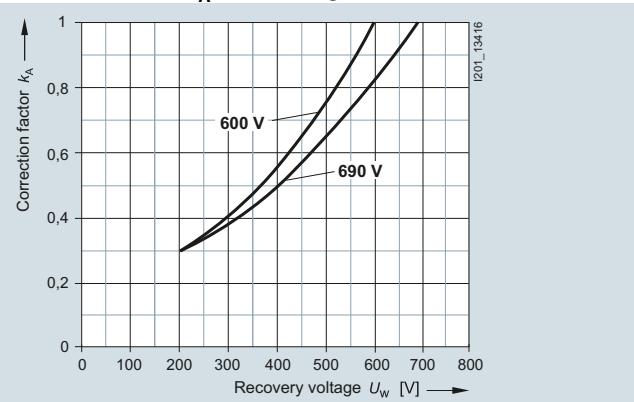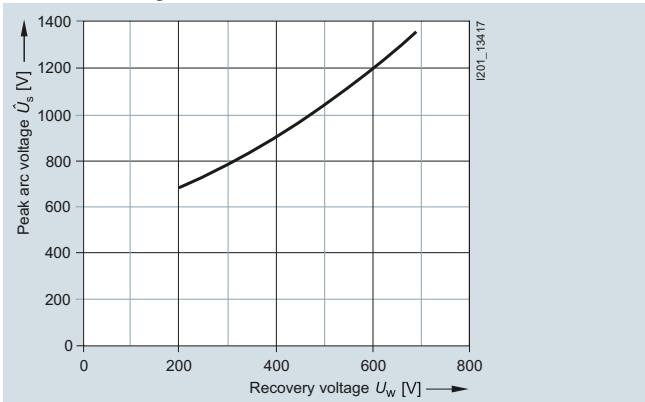Time/current characteristics diagram**Let-through characteristics (current limitation at 50 Hz)****Correction factor k_A for breaking I^2t value****Peak arc voltage**

Fuse Systems

SITOR Semiconductor Fuses

NEOZED, DIAZED, SILIZED design

Overview

SILIZED is the brand name for NEOZED fuses (D0 fuses) and DIAZED fuses (D fuses) with super quick-response characteristic for semiconductor protection. The fuses are used in combination with fuse bases, fuse screw caps and accessory parts of the standard fuse system.

SILIZED fuses protect power semiconductors from the effects of short circuits because the super quick disconnect characteristic is far quicker than that of conventional fuses. They protect high-quality devices and system components, such as semiconductor contactors, static relays, converters with fuses in the input and in the DC link,

UPS systems and soft starters for motors up to 100 A.

When using fuse bases and fuse screw caps made of molded plastic, always heed the maximum permissible power loss values due to the high power loss (power dissipation) of the SILIZED fuses.

When using these components, the following maximum permissible power loss applies:

- NEOZED D02: 5.5 W
- DIAZED DII: 4.5 W
- DIAZED DIII: 7.0 W

This enables a partial thermal permanent load of only 50 %.

The DIAZED screw adapter DII for 25 A is used for the 30 A fuse link.

Benefits

- SILIZED fuses have an extremely compact design. This means they have a very small footprint – particularly the NEOZED version.
- The rugged and well-known DIAZED design complies with IEC 60269-3. It is globally renowned and can be used in many countries.
- A wide range of fuse bases and accessories are available for the NEOZED and DIAZED versions of the SILIZED fuses. This increases the application options in many devices.

Technical specifications

	5SE13 NEOZED, SILIZED fuse links	5SD4 DIAZED SILIZED fuse links
Standards	DIN VDE 0636-3; IEC 60269-3; EN 60269-4 (VDE 0636-4); IEC 60269-4	
Operational class	gR	
Characteristic	Quick-acting	
Rated voltage U_n	V AC 400 V DC 250	500 500
Rated current I_n	A 10 ... 63	16 ... 100
Rated breaking capacity	kA AC 50 kA DC 8	
Mounting position	Any, but preferably vertical	
Non-interchangeability	Using adapter sleeves	Using screw adapter or adapter sleeves
Resistance to climate	°C Up to 45 at 95 % rel. humidity	
Ambient temperature	°C -5 ... +40, humidity 90 % at 20	

Dimensional drawings



Size	D01	D02
Rated current in A	10 ... 16	20 ... 30
Dimension d	11	15.3
Dimension h	36	36




Size/thread	DII/E27			
Rated current in A	16	20	25	30
Dimension d	10	12	14	14

Fuse Systems

SITOR Semiconductor Fuses


NEOZED, DIAZED, SILIZED design

5SD450, 5SD460, 5SD470

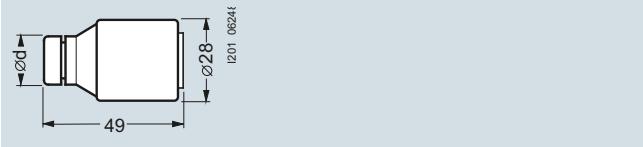

Size/thread	DIII/E33		
Rated current in A	35	50	63
Dimension d	16	18	20

5SD510, 5SD520

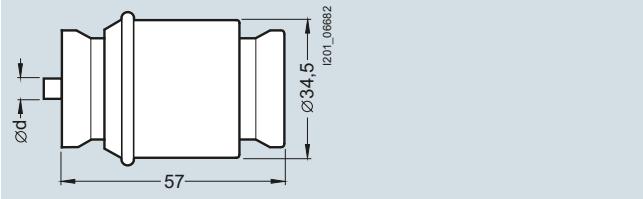

Size/thread	DIV/R1¼"	
Rated current in A	80	100
Dimension d	5	7

Fuse Systems

SITOR Semiconductor Fuses

NEOZED, DIAZED, SILIZED design

Technical specifications

Type	Size	NEOZED design			I^2t_s 1 ms A ² s	I^2t_a 4 ms A ² s	I^2t_a 230 V AC A ² s	I^2t_a 400 V AC A ² s
		I_n A	P_v W	$\Delta\phi$ K				
5SE1310	D01	10	6.9	64	30	30	56	73
5SE1316		16	6.2	61	31	34	92	120
5SE1320	D02	20	8.1	64	50	56	146	190
5SE1325		25	8.2	63	120	120	166	215
5SE1335		35	16.7	100	145	182	361	470
5SE1350		50	12.0	80	460	540	1510	1960
5SE1363		63	15.5	96	845	932	3250	4230


Type	Size	DIAZED design			I^2t_s 1 ms A ² s	I^2t_a 500 V AC A ² s		
		I_n A	P_v W	$\Delta\phi$ K				
5SD420	DII	16	12.1	63	16.2	60		
5SD430		20	12.3	69	35.8	139		
5SD440		25	12.5	61	48.9	205		
5SD480		30	13.4	65	85	310		
5SD450	DIII	35	14.8	62	135	539		
5SD460		50	18.5	66	340	1250		
5SD470		63	28	84	530	1890		
5SD510	DIV	80	34.3	77	980	4200		
5SD520		100	41.5	83	1950	8450		

Characteristic curves


5SE13.. series

Size: D01, D02
 Operational class: gR
 Rated voltage: 400 V AC/250 V DC
 Rated current: 10 ... 63 A


Time/current characteristics diagram

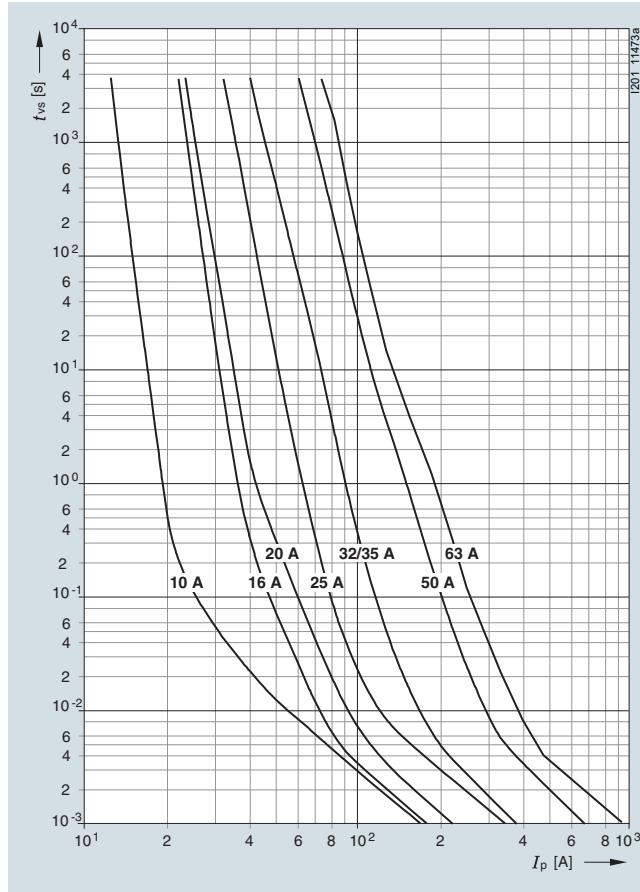

Melting I^2t values diagram

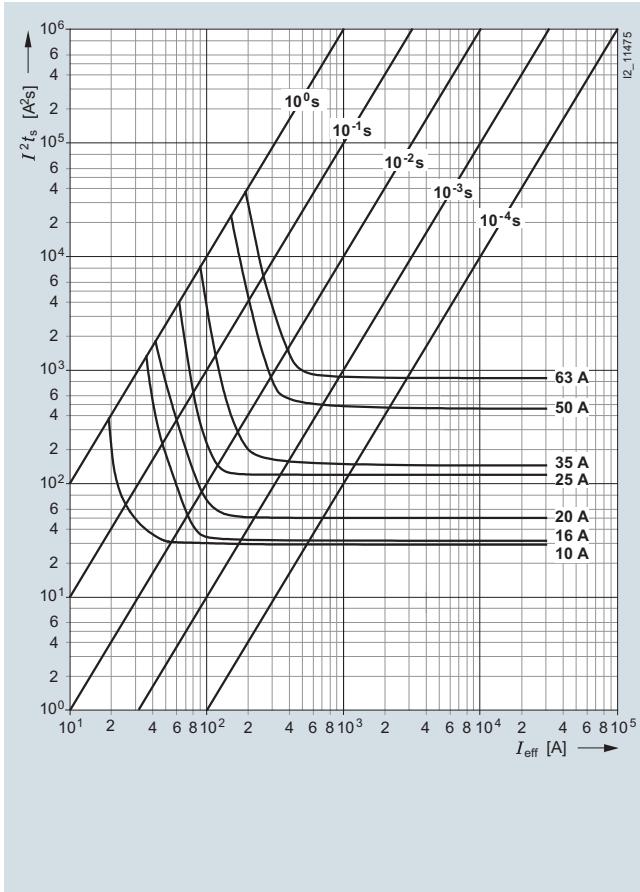

Current limitation diagram

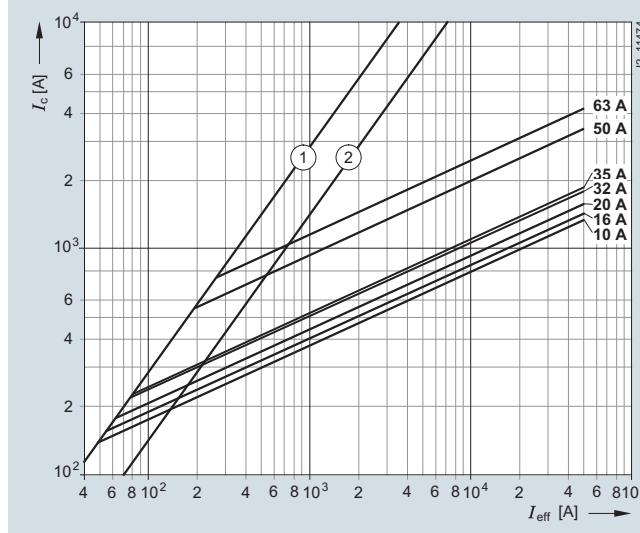

① Peak short-circuit current with largest DC component

② Peak short-circuit current without DC component

Fuse Systems


SITOR Semiconductor Fuses

NEOZED, DIAZED, SILIZED design


5SD4, 5SD5 series

Size: DII, DIII, DIV
 Operational class: gR
 Characteristic: super quick
 Rated voltage: 500 V AC/500 V DC
 Rated current: 16 ... 100 A


Time/current characteristics diagram

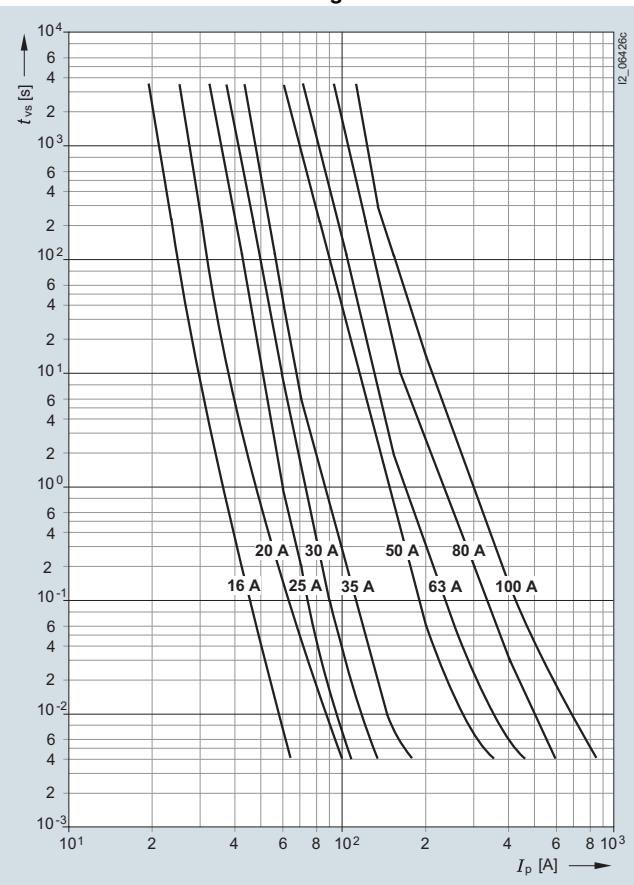

Melting I^2t values diagram

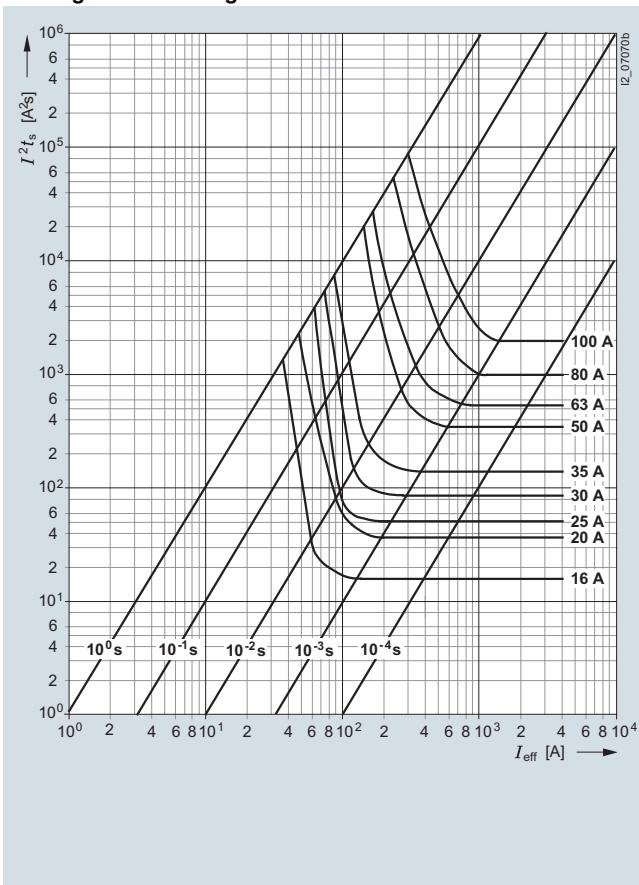

Current limitation diagram

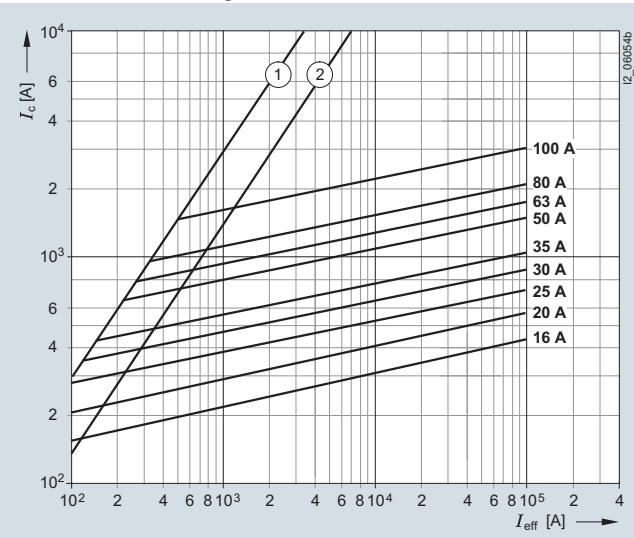

① Peak short-circuit current with largest DC component

② Peak short-circuit current without DC component

Overview

Parameter

The fuse links are selected according to rated voltage, rated current, breaking I^2t value I^2t_a and varying load factor, taking into consideration other specified conditions. All of the following data refer, unless otherwise specified, to the use of alternating current from 45 Hz to 62 Hz.

Rated voltage U_n

The rated voltage of a SITOR fuse link is the voltage specified as the rms value of the AC voltage on the fuse link and in the ordering and configuration data and the characteristics.

Always ensure that the rated voltage of the fuse link you select is such that the fuse link will reliably quench the voltage driving the short-circuit current. The driving voltage must not exceed the value $U_n + 10\%$. Please note that the supply voltage U_{v0} of a power converter can also be increased by 10 %. If, in the shorted circuit, two branches of a converter circuit are connected in series, and if the short-circuit current is sufficiently high, it can be assumed that voltage sharing is uniform. It is essential to observe the [instructions in "Series connection of fuse links" on page 152](#).

Rectifier operation

With converter equipment that can only be used for rectifier operation, the supply voltage U_{v0} is the driving voltage.

Inverter operation

With converter equipment that can also be used for inverter operation, inverter shoot-through may occur as faults. In this case, the driving voltage U_{WK} in the shorted circuit is the sum of the infeed direct voltage (e.g. the e.m.f. of the DC generator) and the AC-line supply voltage. When rating a fuse link, this sum can be replaced by an AC voltage whose rms value is 1.8 times that of the AC-line supply voltage ($U_{WK} = 1.8 U_{v0}$). The fuse links must be rated so that they reliably quench the voltage U_{WK} .

Rated current I_n , load rating

The rated current of a SITOR fuse link is the current specified in the "Selection and ordering data", in the "Characteristic curves" and on the fuse link as the rms value of an alternating current for the frequency range 45 Hz to 62 Hz.

When operating fuse links with rated current, the following are considered normal operating conditions:

- Natural air cooling with an ambient temperature of +45 °C
- Conductor cross-sections equal test cross-sections (see table "Test cross-sections"), for operation in LV HRC fuse bases and switch disconnectors see "Selection and ordering data" in Catalog LV 10.
- Conduction angle of a half-period 120°el
- Continuous load maximum with rated current.

For operating conditions that deviate from the above, the permissible load current I_n' of the SITOR fuse link can be determined using the following formula:

$$I_n' = k_u \times k_q \times k_\lambda \times k_l \times WL \times I_n$$

with

I_n Rated current of the fuse link¹⁾

k_u Correction factor for ambient temperature (page 146)

k_λ Correction factor for conductor cross-section (page 146)

k_q Correction factor for conduction angle (page 146)

k_l Correction factor for forced-air cooling (page 146)

WL Varying load factor (page 147).

Test cross-sections

Rated current I_n	Test cross-sections	
	(3NC10, 3NC11, 3NC14, 3NC15, 3NC22, 3NE1... 3NE80..., 3NE4 series) ¹⁾	(all other series)
A	Cu mm ²	Cu mm ²
10	1.0	--
16	1.5	--
20	2.5	45
25	4	45
35	6	45
40	10	45
50	10	45
63	16	45
80	25	45
100	35	60
125	50	80
160	70	100
200	95	125
224	--	150
250	120	185
315	2 x 70	240
350	2 x 95	260
400	2 x 95	320
450	2 x 120	320
500	2 x 120	400
560	2 x 150	400
630	2 x 185	480
710	2 x (40 x 5)	560
800	2 x (50 x 5)	560
900	2 x (80 x 4)	720
1000	--	720
1100	--	880
1250	--	960
1400	--	1080
1600	--	1200

¹⁾ When using SITOR fuse links in LV HRC fuse bases according to IEC/EN 60269-2-1 and in fuse switch disconnectors and switch disconnectors with fuses, please also refer to the information in the "Selection and ordering data" in Catalog LV 10.


Fuse Systems

SITOR Semiconductor Fuses

Configuration

Correction factor for ambient temperature k_u


The influence of the ambient temperature on the permissible load of the SITOR fuse link is taken into account using the correction factor k_u as shown in the following diagram.

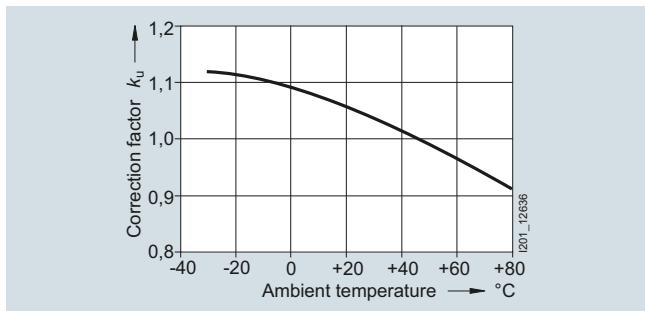

Correction factor for conductor cross-section k_q

The rated current of the SITOR fuse links applies to operation with conductor cross-sections that correspond to the respective test cross-section (see the table on page 145).

In the case of reduced conductor cross-sections, the correction factor k_q must be used, as shown in the following diagram.

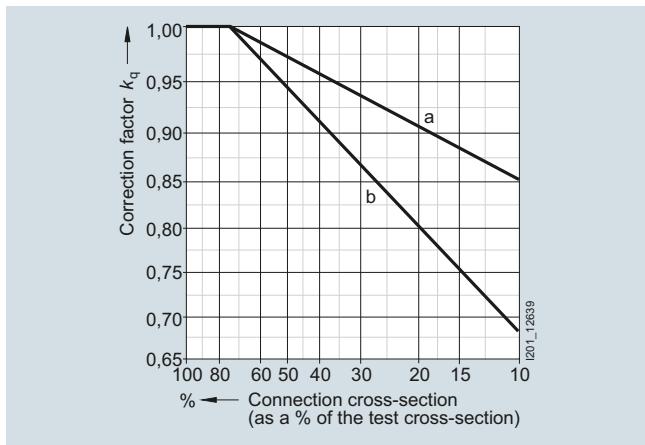


a = Reduction of cross-section of one connection

b = Reduction of cross-section of both connections


Correction factor for conduction angle k_λ

The rated current of the SITOR fuse links is based on a sinusoidal alternating current (45 Hz to 62 Hz). However, in converter operation, the branch fuses are loaded with an intermittent current, whereby the conduction angle is generally 180°el or 120°el. With this load current wave form, the fuse link can still carry the full rated current. In the case of smaller conduction angles, the current must be reduced in accordance with the following diagram.

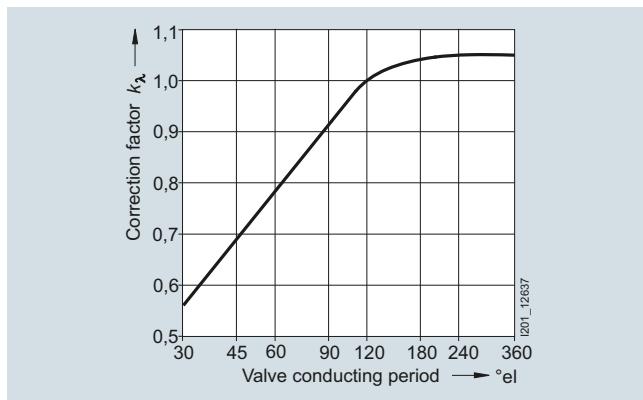

Correction factor for forced-air cooling k_i

In the case of increased air cooling, the current carrying capacity of the fuse links increase with the air speed, air speeds > 5 m/s do not effect any significant further increase in current carrying capacity.

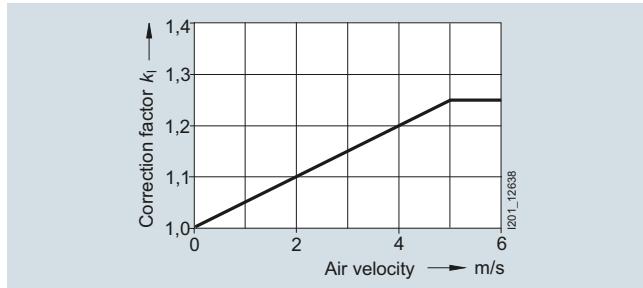


Configuration

Varying load factor WL

The varying load factor WL is a reduction factor by which the non-aging current carrying capacity of the fuse links can be determined for any load cycles. Due to their design, the SITOR fuse links have different varying load factors. In the characteristic curves of the fuse links, the respective varying load factor WL for >10000 load changes (1 hour "ON", 1 hour "OFF") is specified for the expected operating time of the fuse links. In the event of a lower number of load changes during the expected operating

time, it may be possible to use a fuse link with a smaller varying load factor WL as shown in the following diagram.

In the case of uniform loads (no load cycles and no shutdowns), the varying load factor can be taken as $WL = 1$. For load cycles and shutdowns that last longer than 5 min. and are more frequent than once a week, you need to select the varying load factor WL specified in the characteristic curves of the individual fuse links.

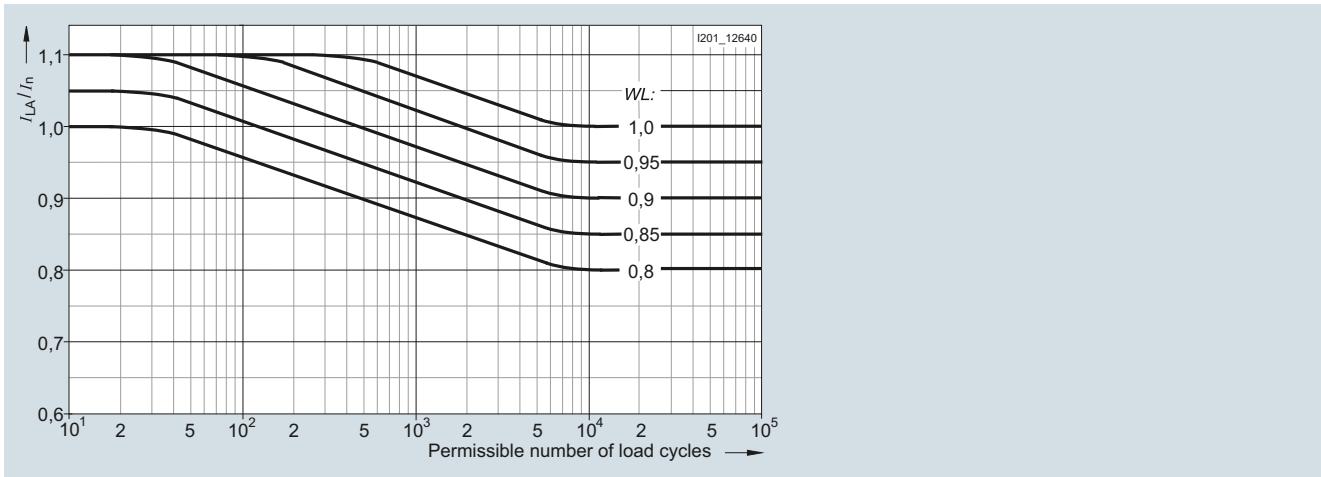

Waveform of the varying load factor WL for load cycles

Fuse currents for operation in power converter

The rms value of the fuse current can be calculated for the most common converter circuits from the (smoothed) direct current I_d or the conductor current I_L according to the following table.

Converter circuit		Rms value of the conductor current (phase fuse)	Rms value of the branch current (branch fuse)
Single-pulse center tap connection	(M1)	$1.57 I_d$	--
Double-pulse center tap connection	(M2)	$0.71 I_d$	--
Three-pulse center tap connection	(M3)	$0.58 I_d$	--
Six-pulse center tap connection	(M6)	$0.41 I_d$	--
Double three-pulse center tap connection (parallel)	(M3.2)	$0.29 I_d$	--
Two-pulse bridge circuit	(B2)	$1.0 I_d$	$0.71 I_d$
Six-pulse bridge circuit	(B6)	$0.82 I_d$	$0.58 I_d$
Single-phase bidirectional circuit	(W1)	$1.0 I_L$	$0.71 I_L$

Fuse Systems


SITOR Semiconductor Fuses

Configuration

I^2t values

In the event of a short circuit, the current of the fuse link increases during melting time t_s up to let-through current I_c (melting current peak).

During the arc quenching time t_L , the electric arc develops and the short-circuit current is quenched ([see the following diagram](#)).

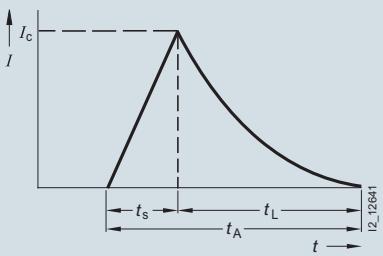

Current path when switching fuse links

The integral of the current squared ($\int I^2 dt$) over the total operating time ($t_s + t_L$), known as the breaking I^2t value, determines the heat to be fed to the semiconductor device that is to be protected during the breaking operation.

In order to ensure adequate protection, the breaking I^2t value of the fuse link must be smaller than the I^2t value of the semiconductor device. As the temperature increases, i.e. preloading increases, the breaking I^2t value of the fuse link decreases almost in the same way as the I^2t value of a semiconductor device, so that it is sufficient to compare the I^2t values in a non-loaded (cold) state.

The breaking I^2t value (I^2t_b) is the sum of the melting I^2t value (I^2t_s) and the quenching I^2t value (I^2t_L).

$$\left(\int I^2 dt \right) \text{ (semiconductor, } t_{vj} = 25^\circ\text{C, } t_p = 10 \text{ ms} \right) > \left(\int I^2 t_A \right) \text{ (fuse link)}$$

Melting I^2t value I^2t_s

The melting value I^2t can be calculated from the value pairs of the time/current characteristic curve of the fuse link for any periods.

As the melting time decreases, the melting I^2t value tends towards a lower limit value at which almost no heat is dissipated from the bottleneck of the fuse element to the environment during the melting process. The melting I^2t values specified in the selection and ordering data and in the characteristic curves correspond to the melting time $t_{vs} = 1 \text{ ms}$.

Quenching I^2t value I^2t_L

Whereas the melting I^2t value is a characteristic of the fuse link, the quenching I^2t value depends on circuit data, such as

- The recovery voltage U_w
- The power factor p.f. of the shorted circuit
- The prospective current I_p (current at the installation position of the fuse link if this is jumped)


The maximum quenching I^2t value is reached at a current of $10 \times I_n$ to $30 \times I_n$ depending on the fuse type.

Breaking I^2t value I^2t_a , correction factor k_A

The breaking I^2t values of the fuse links are specified in the characteristic curves for the rated voltage U_n . In order to determine the breaking I^2t value for recovery voltage U_w the correction factor k_A must be taken into account.

$$I^2t_a \text{ (at } U_w) = I^2t_a \text{ (at } U_n) \times k_A$$

The characteristic "correction factor k_A " ([see the following diagram](#)) is specified in the characteristic curves for the individual fuse range. The thus determined breaking I^2t values apply to prospective currents $I_p \geq 10 \times I_n$ and p.f. = 0.35.

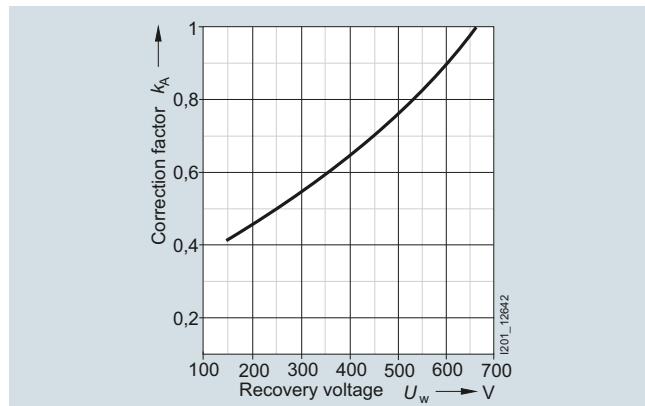

Correction factor k_A for breaking I^2t value
Example: Series 3NE8 0..


Taking into account the recovery voltage U_w

The recovery voltage U_w is derived from the voltage driving the short-circuit current. For most faults, the driving voltage is equal to the supply voltage U_{v0} , however, for shoot-throughs it is 1.8 times the value for the supply voltage U_{v0} (see rated voltage, page 145). If the shorted circuit contains two branches of a converter circuit and thus two fuse links in series, and if the short-circuit current is sufficiently high (see series connection, page 152) it can be assumed that there is a uniform voltage sharing, i.e. $U_w = 0.5 \times U_{v0}$ or in the case of shoot-throughs $U_w = 0.9 \times U_{v0}$.

Influence of the power factor p.f.

The specifications in the characteristic curves for the breaking I^2t values (I^2t_a) refer to p.f. = 0.35 (exception: for 3NC58.., 3NE64.., 3NE94.. SITOR fuse links the following applies: p.f. = 0.2).

The dependence of the breaking I^2t values on the power factor p.f. at $1.0 \times U_n$ and at $0.5 \times U_n$ is shown in the following diagram.

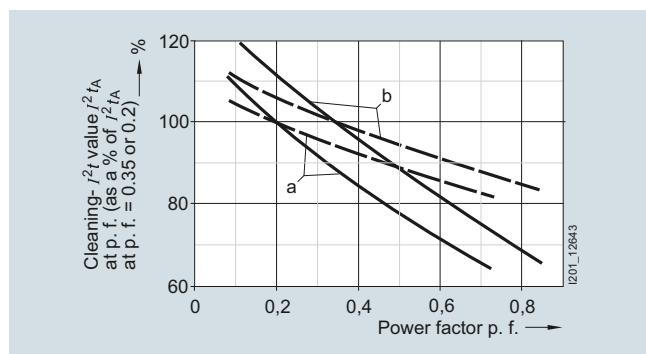

Breaking I^2t value I^2t_a of SITOR fuse links dependent on the power factor p.f.

— at $1.0 U_n$
- - - at $0.5 U_n$

a = for 3NC58.., 3NE64.., 3NE94.. SITOR fuse links
(reference to p.f. = 0.2)

b = for all other SITOR fuse links (reference to p.f. = 0.35)


Fuse Systems

SITOR Semiconductor Fuses

Configuration

Time/current characteristics

The solid time/current characteristic curves in the following diagram specify the time to melting for the non-loaded fuse link in a cold state (max. +45 °C).

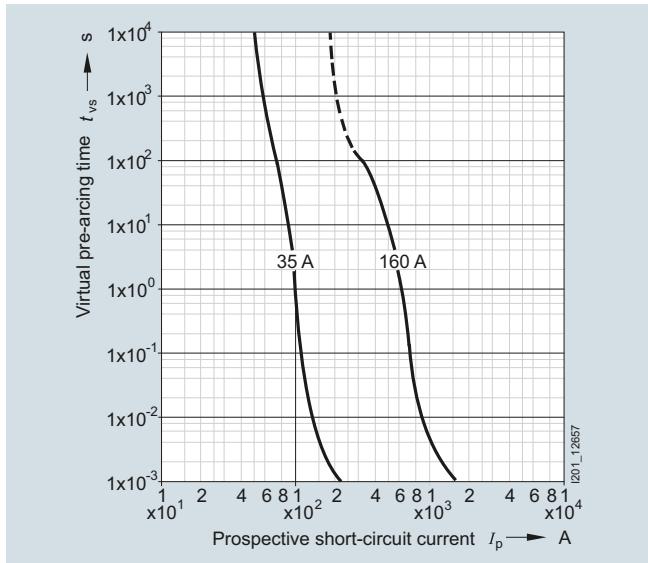

35 A: Operational class gR

160 A: Operational class aR

If the time/current characteristic curve in the long-time range ($t_{vs} > 30$ s) is dashed (fuse links of operational class aR), this specifies the limit of the permissible overload in a cold state. If the dotted part of the characteristic curve is exceeded, there is a risk of damage to the ceramic body of the fuse link. The fuse link can only be used for short-circuit protection. In this case, an additional protective device (overload relay, circuit breaker) is required to protect against overload. In the case of controlled converter equipment, the current limiter is sufficient.

If the time/current characteristic curve is shown as a solid line over the entire time range (fuse links of operational class gR or gS), the fuse link can operate in the entire time range. This means it can be used both for overload and short-circuit protection.

Real melting time

The virtual melting time t_{vs} is specified in the time/current characteristic curve, depending on the prospective current. It is a value that applies to the current squared ($d/i/dt = \infty$).

In the case of melting times $t_{vs} < 20$ ms the virtual melting time t_{vs} deviates from the real melting time t_s . The real melting time may be several milliseconds longer (depending on the rate of current rise).

Within a range of several milliseconds, during which the rise of the short-circuit current can be assumed to be linear, the real melting time for a sinusoidal current rise and 50 Hz is as follows:

$$t_s = \frac{3 \cdot I^2 \cdot t_s}{I_c^2}$$

Taking into account preloading, residual value factor RW


Preloading the fuse link shortens the permissible overload duration and the melting time.

The residual value factor RW can be used to determine the time that a fuse link can be operated during a periodic or non-periodic load cycle, above and beyond the previously determined permissible load current I_n , with any overload current I_{La} without aging.

The residual value factor RW is dependent on the preloading V (I_{rms} rms value of the fuse current during the load cycle at permissible load current I_n')

$$V = \frac{I_{rms}}{I_n'}$$

and the frequency of the overloads (see the following diagram, curves a and b).

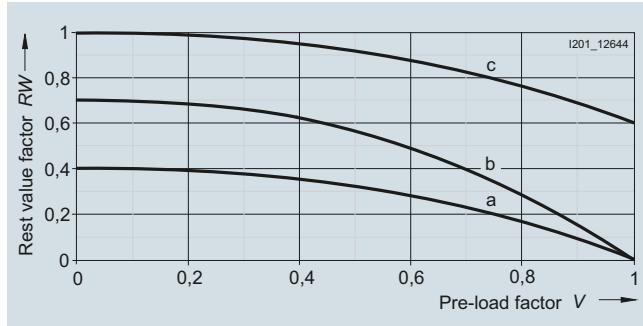

Permissible overload and melting time for previous load

a = frequent surge/load cycle currents (>1/week)

b = infrequent surge/load cycle currents (<1/week)

c = melting time for preloading

Permissible overload duration =
residual value factor $RW \times$ melting time t_{vs}
(time/current characteristic curve)

A reduction of the melting time of a fuse link in the case of preloading can be derived from curve c.


Melting time =
residual value factor $RW \times$ melting time t_{vs}
(time/current characteristic curve)

Configuration

Let-through current I_c

The let-through current I_c can be determined from the current limiting characteristics (current limitation at 50 Hz) specified for the respective fuse link. This depends on the prospective current and the DC component when the short circuit occurs (instant of closing).

The following diagram shows the let-through current I_c of a fuse link, depending on the prospective short-circuit current I_p using the 3NE4333-0B SITOR fuse link as an example.

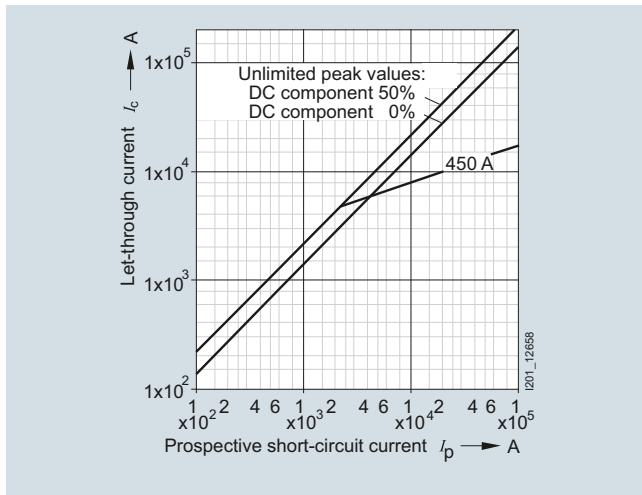

Example:
3NE4333-0B SITOR fuse link


Rated breaking capacity

The rated breaking capacity of all SITOR fuse links is at least 50 kA, unless higher values are specified in the characteristic curves.

The data apply to a test voltage of $1.1 \times U_n$, 45 Hz to 62 Hz and $0.1 \leq p.f. \leq 0.2$. In the case of inception voltages that are below the rated voltage as well as rated currents of the fuse links that are below the maximum rated current of a fuse series, the breaking capacity is considerably higher than the rated breaking capacity.

Peak arc voltage \hat{U}_s

During the quenching process, a peak arc voltage \hat{U}_s occurs at the connections of the fuse link, which can significantly exceed the supply voltage. The level of the peak arc voltage depends on the design of the fuse link and the level of the recovery voltage. It is presented in characteristic curves as a function of the recovery voltage U_w (see the following diagram).

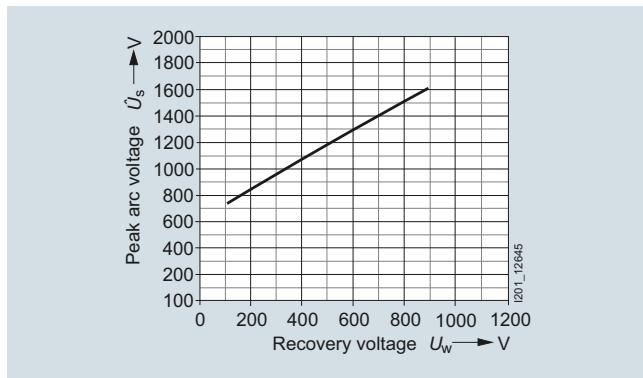

Example:
3NE4333-0B SITOR fuse link


The peak arc voltage occurs as a cutoff voltage at the semiconductor devices not in the shorted circuit. In order to prevent voltage-related hazards, the peak arc voltage must not exceed the peak cutoff voltage of the semiconductor devices.

Power dissipation, temperature rise

On reaching the rated current, the fuse elements of the SITOR fuse links have a considerably higher temperature than the fuse elements of line protection fuse links.

The power dissipation specified in the characteristic curves is the upper variance coefficient if the fuse link is loaded with the rated current.

In the case of partial loads, this power dissipation decreases as shown in the following diagram.

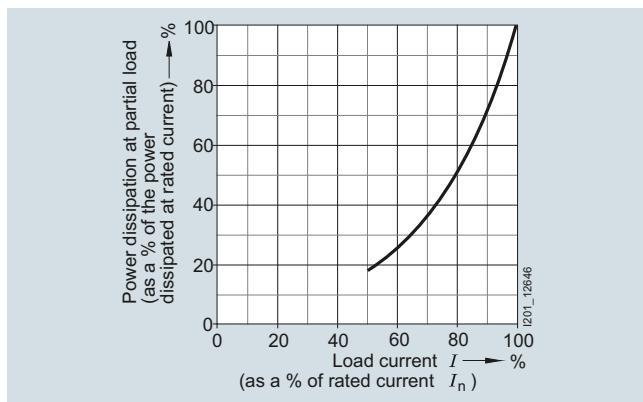

The temperature rise specified in the characteristic curves applies to the respective reference point and is determined when testing the fuse link (test setup according to DIN VDE 0636, Part 23 and IEC 269-4).

Fuse Systems

SITOR Semiconductor Fuses

Configuration

Parallel and series connection of fuse links

Parallel connection

If a branch of a converter circuit has several semiconductor devices so that the fuse links are connected in parallel, only the fuse link connected in series to the faulty semiconductor device is tripped in the event of an internal short circuit. It must quench the full supply voltage.

To boost the voltage, two or more parallel fuse links can be assigned to a single semiconductor device without reducing the current. The resulting breaking I^2t value increases with the square of the number of parallel connections. In this case, in order to prevent incorrect distribution of the current, you should only use fuse links of the same type.

Series connection

There are two kinds of series connection available:

- Series connection in the converter branch
- Two fused converter branches through which a short-circuit current flows in series

In both cases, uniform voltage sharing can only be assumed if the melting time of the SITOR fuse link does not exceed the value specified in the following table.

SITOR fuse links	Maximum melting time for uniform voltage sharing
Type	ms
3NC10..	10
3NC14..	
3NC15..	
3NC22..	
3NC24..	40
3NC58..	10
3NC73..	
3NC84..	
3NE10..	10
3NE12..	
3NE13..	
3NE14..	20
3NE18..	10
3NE32..	10
3NE33..	
3NE34..	20
3NE35..	
3NE36..	
3NE41..	10
3NE43..	
3NE54..	20
3NE56..	
3NE64..	10
3NE74..	20
3NE76..	
3NE80..	10
3NE87..	
3NE94..	10
3NE96..	20

Cooling conditions for series-connected fuse links should be approximately the same. If faults are expected, during which the specified melting times are exceeded (as a result of a slower current rise), it can no longer be assumed that voltage sharing is uniform. The voltage of the fuse links must then be rated so that a single fuse link can quench the full supply voltage.


It is best to avoid the series connection of fuse links in a converter connection branch and instead use a single fuse link with a suitably high rated voltage.

Use with direct current


For fuse links that are to be used in DC circuits, some data may vary from the data specified in the characteristic curves for alternating current.

Permissible direct voltage

The permissible direct voltage U_{perm} of the fuse links depends on the rated voltage U_n , on the time constants $\tau=L/R$ in the DC circuit and on the prospective current I_p . The permissible direct voltage refers to the rated voltage U_n and is specified depending on the time constants τ , the prospective current is a parameter (see the following diagrams).

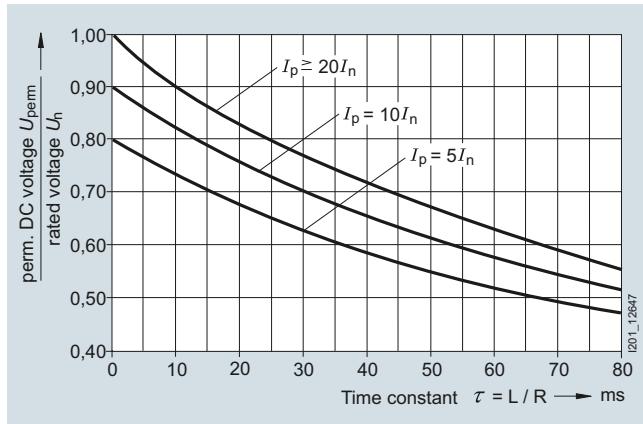

Applies to all series except 3NE10.., 3NE18..

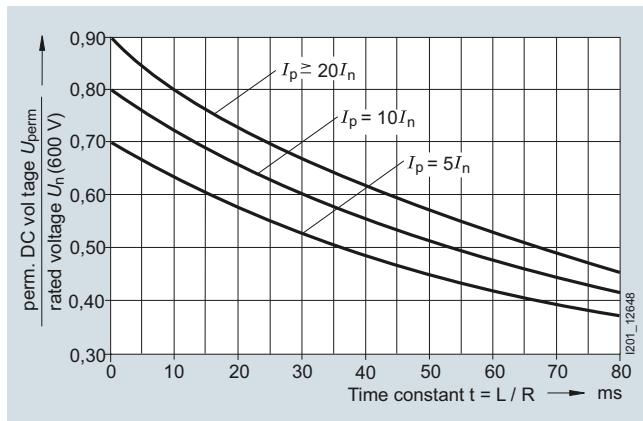

For series 3NE10.., 3NE18..

Breaking I^2t value I^2t_a

The breaking I^2t value I^2t_a depends on the voltage, on the time constants $\tau=L/R$ and on the prospective current I_p . It is calculated from the I^2t_a value specified in the characteristic curve for the respective fuse link at rated voltage U_n and correction factor k_A whereby, instead of the recovery voltage U_w , the direct voltage is used against which the fuse link is to switch.

The breaking I^2t value determined in this way applies under the following conditions:

- Time constant $L/R \leq 25$ ms for $I_p \geq 20 \times I_n$
- Time constant $L/R \leq 10$ ms for $I_p = 10 \times I_n$
- The breaking I^2t values increase by 20 %
- For $I_p \geq 20 \times I_n$ and time constants $L/R = 60$ ms
- For $I_p = 10 \times I_n$ and time constants $L/R = 35$ ms

Configuration

Peak arc voltage \hat{U}_s

The peak arc voltage \hat{U}_s is determined from the curve specified in the characteristics for the respective fuse link, whereby instead of the recovery voltage U_w , the direct voltage is used against which the fuse link is to switch.

The peak arc voltage determined in this way applies under the following conditions:

- Time constants $L/R \leq 20$ ms for $I_p \geq 20 I_n$
- Time constants $L/R \leq 35$ ms for $I_p = 10 I_n$.

The switching voltages increase by 20 %

- For $I_p \geq 20 I_n$ and time constants $L/R = 45$ ms
- For $I_p = 10 I_n$ and time constants $L/R = 60$ ms.

Indicator

An indicator displays the switching of the fuse link. The SITOR fuse links have an indicator whose operational voltage lies between 20 V ($U_n \leq 1000$ V) and 40 V ($U_n > 1000$ V).

Accessories

Fuse bases, fuse pullers

Some of the SITOR fuse links can be inserted in matching fuse bases. The matching fuse bases (single-pole and three-pole) and the respective fuse pullers are listed in the Technical specifications, [from page 87](#).

Note

Even if the values of the rated voltage and/or current of the fuse bases

are lower than those of the allocated fuse link, the values of the fuse link apply.

Fuse switch disconnectors, switch disconnectors with fuses

Some series of SITOR fuse links are suitable for operation in 3NP4 and 3NP5 fuse switch disconnectors or in 3KL and 3KM switch disconnectors with fuses (see Catalogs [LV 10](#) and [LV 30](#)).

When using switch disconnectors, the following points must be observed:

- Because, compared to LV HRC fuses for line protection, the power dissipation of the SITOR fuse links is higher, the permissible load current of the fuse links sometimes needs to be reduced, [see below \(Configuration Manual\)](#)
- Fuse links with rated currents $I_n > 63$ A must not be used for overload protection even when they have operational class gR.

Note:

By contrast, all fuse links of the 3NE1... series with rated currents I_n from 16 A to 850 A and operational classes gR and gS can be used for overload protection.

- The rated voltage and rated isolation voltage of the switch disconnectors must at least correspond to the existing voltage.
- When using fuse links of the 3NE32.., 3NE33.., 3NE43.., 3NC24.. and 3NC84.. series the breaking capacity of fuse switch disconnectors must not be fully utilized due to the slotted blade. Occasional switching of currents up to the rated current of the fuse links is permissible
- When used in fuse switch disconnectors, fuse links of the 3NE41.. series may only be occasionally switched, and only without load, as this places the fuse blade under great mechanical stress.

In the Technical specifications, [starting on page 87](#), the switch disconnectors are allocated to their respective individual fuse links.

Fuse Systems

SITOR Semiconductor Fuses

Configuration

Specifying the rated current I_n for non-aging operation with varying load

Power converters are often operated not with a continuous load, but with varying loads, that can also temporarily exceed the rated current of the power converter.

The selection process for non-aging operation of SITOR fuse links for four typical types of load is as follows:¹⁾

- Continuous load
- Unknown varying load, but with known maximum current
- Varying load with known load cycle
- Occasional surge load from preloading with unknown surge outcome

The diagrams for the correction factors k_u , k_q , k_λ , k_l , [page 146](#), and the residual value factor RW , [page 150](#) must be observed. The varying load factor WL for the fuse links is specified on [page 147](#).

Specifying the required rated current I_n of the fuse link is carried out in two steps:

1. Specifying the rated current I_n on the basis of the rms value I_{rms} of the load current:

$$I_n > I_{rms} \times \frac{1}{k_u \times k_q \times k_\lambda \times k_l \times WL}$$

Permissible load current I_n' of the selected fuse link:

$$I_n' = k_u \times k_q \times k_l \times WL \times I_n$$

2. Checking the permissible overload duration of current blocks exceeding the permissible fuse load current I_n' .

Melting time t_{vs} (time/current characteristic curve) \times residual value factor $RW \geq$ overload duration t_k


To do this, you require the previous load ratio

$$V = \frac{I_{rms}}{I_n'}$$

as well as the characteristic curve "permissible overload and melting time for previous load" ([page 150, curve a](#)) and the "time/current characteristic curve" for the selected fuse link.

If a determined overload duration is less than the respective required overload duration, then you need to select a fuse link with a greater rated current I_n (taking into account the rated voltage U_n and the permissible breaking I^2t value) and repeat the check.

Continuous load

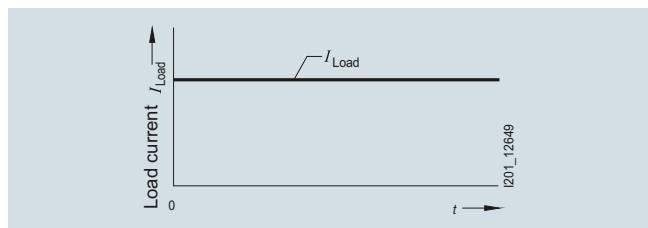

Rated current I_n of the fuse link

$$I_n \geq I_{La} \times \frac{1}{k_u \times k_q \times k_\lambda \times k_l \times WL}$$


I_{La} = load current of the fuse link (rms value)

Less than 1 shutdown per week: $WL = 1$

More than 1 shutdown per week: WL = see [Technical specifications, from page 87](#).

¹⁾ In the case of varying loads that cannot be assigned to one of the four types of load shown here, please contact us.

Unknown varying load, but with known maximum current I_{max}

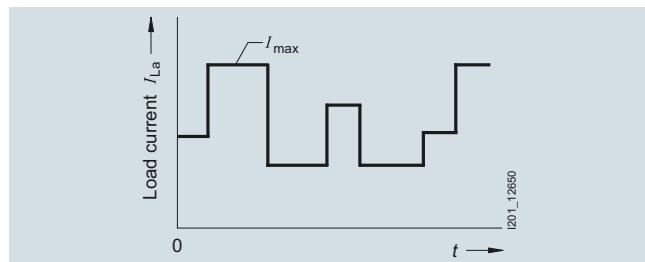


Rated current I_n of the fuse link

$$I_n \geq I_{max} \times \frac{1}{k_u \times k_q \times k_\lambda \times k_l \times WL}$$

I_{max} = maximum load current of the fuse link (rms value)

Varying load with known load cycle

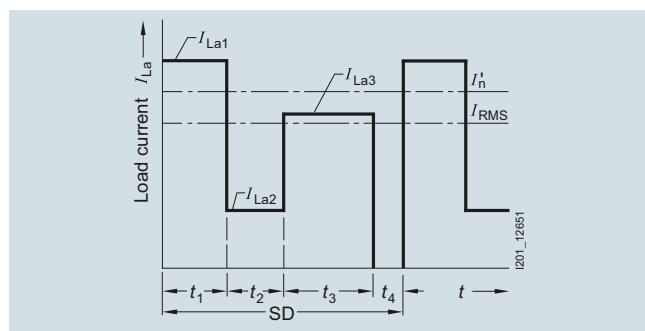

$$I_{rms} = \sqrt{\frac{\sum_{k=1}^n I_{Lak}^2 \times t_k}{SD}}$$

$$I_{rms} = \sqrt{\frac{I_{La1}^2 t_1 + I_{La2}^2 t_2 + I_{La3}^2 t_3}{SD}}$$

I_{LK} = maximum load current of the fuse link (rms value)

Configuration

Occasional surge load from preloading with unknown surge outcome

Specifying the required rated current I_n of the fuse link is carried out in two steps:

1. Specifying the rated current I_n on the basis of the previous load current I_{prev} :

$$I_n > I_{prev} \times \frac{1}{k_u \times k_q \times k_\lambda \times k_l \times WL}$$

Permissible load current I_n' of the selected fuse link:

$$I_n' = k_u \times k_q \times k_\lambda \times k_l \times WL \times I_n$$

2. Checking the permissible overload duration of the surge current I_{surge}


Melting time t_{vs} (time/current characteristic curves) × residual value factor $RW \geq$ surge wave duration t_{surge}

To do this, you require the previous load ratio

$$V = \frac{I_{rms}}{I_n'}$$

as well as the characteristic curve "Permissible overload and melting time for previous load" (page 150, curve a or b) and the "time/current characteristic curve" for the selected fuse link.

If a determined overload duration is less than the required overload duration t_{surge} , then you need to select a fuse link with a greater rated current I_n (taking into account the rated voltage U_n and the permissible breaking I^2t value) and repeat the check.

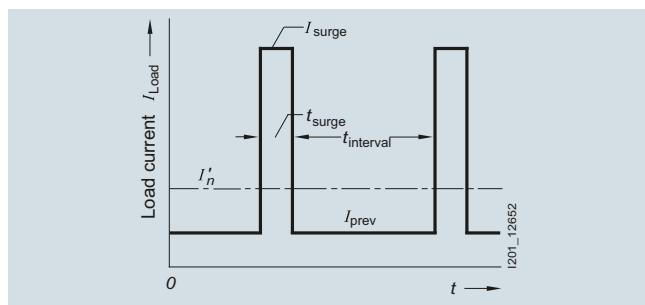

Condition:

$$\begin{aligned} t_{interval} &\geq 3 \times t_{surge} \\ t_{interval} &\geq 5 \text{ min} \end{aligned}$$

Selection examples


For a converter assembly in circuit (B6) A (B6) C, whose rated direct current is $I_{dn}=850$ A, fuse links that can be installed as branch fuses should be selected. The choice of fuse is shown for different operating modes of the converter assembly.

Data for converter assembly

- Supply voltage
 $U_N = 3 \text{ AC } 50 \text{ Hz } 400 \text{ V}$
- Recovery voltage
 $U_W = 360 \text{ V} = U_N \times 0.9$ (for shoot-throughs)
- Thyristor T 508N (eupec),
 I^2t value
 $\int I^2 dt = 320 \times 10^3 \text{ A}^2\text{s}$ (10 ms, cold)
- Fuse links, natural air cooling,
ambient temperature $\vartheta_u = +35^\circ \text{C}$
- Conductor cross-section for copper fuse links: 160 mm²
- Conversion factor
direct current I_d /fuse load current I_{La} : $I_{La} = I_d \times 0.58$.

For the following examples, it is assumed, in the case of loads that exceed the rated direct current of the converter assembly, that the converter assembly is rated for these loads.

Continuous, no-break load

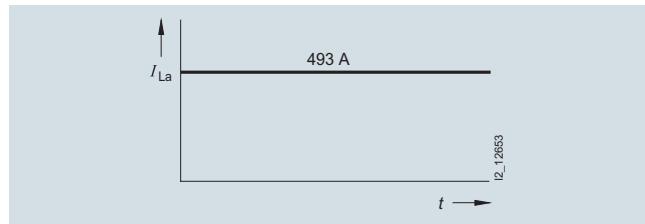

Direct current $I_d = I_{dn} = 850 \text{ A}$

$$I_{La} = I_d \times 0.58 = 493 \text{ A}$$

Selected:

3NE3335 SITOR fuse link

(560 A/1000 V), $WL = 1$

breaking I^2t value

$$I^2t_A = 360 \times 10^3 \times 0.53 = 191 \times 10^3 \text{ A}^2\text{s}$$

test cross-section to 145: 400 mm²

The following correction factors are to be applied:

$$k_u = 1.02 (\vartheta_u = +35^\circ \text{C})$$

$k_q = 0.91$ (conductor cross-section, double-ended, 40 % of test cross-section)

$$k_\lambda = 1.0 \text{ (conduction angle } \lambda = 120^\circ)$$


$$k_l = 1.0 \text{ (no forced-air cooling)}$$

Required rated current I_n of the SITOR fuse link:

$$I_n \geq I_{La} \times \frac{1}{k_u \times k_q \times k_\lambda \times k_l \times WL} =$$

$$493 \text{ A} \times \frac{1}{1,02 \times 0,91 \times 1,0 \times 1,0 \times 1,0} = 531 \text{ A}$$

Unknown varying load, but with known maximum current

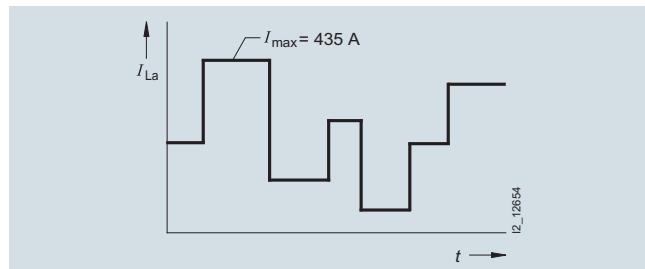

Max. direct current $I_{dmax} = 750 \text{ A}$

$$\text{Max. fuse current } I_{max} = I_{dmax} \times 0.58 = 435 \text{ A}$$

Selected:

3NE3334-0B SITOR fuse link

(560 A/1000 V), $WL = 1$

breaking I^2t value

$$I^2t_A = 260 \times 10^3 \times 0.53 = 138 \times 10^3 \text{ A}^2\text{s}$$

test cross-section to 145: 400 mm²

The following correction factors are to be applied:

$$k_u = 1.02 (\vartheta_u = +35^\circ \text{C})$$

$k_q = 0.91$ (conductor cross-section, double-ended, 40 % of test cross-section)

$$k_\lambda = 1.0 \text{ (conduction angle } \lambda = 120^\circ)$$

$$k_l = 1.0 \text{ (no forced-air cooling)}$$

Required rated current I_n of the SITOR fuse link:

$$I_n \geq I_{max} \times \frac{1}{k_u \times k_q \times k_\lambda \times k_l \times WL} =$$


$$435 \text{ A} \times \frac{1}{1,02 \times 0,91 \times 1,0 \times 1,0 \times 1,0} = 469 \text{ A}$$

Fuse Systems

SITOR Semiconductor Fuses

Configuration

Varying load with known load cycle

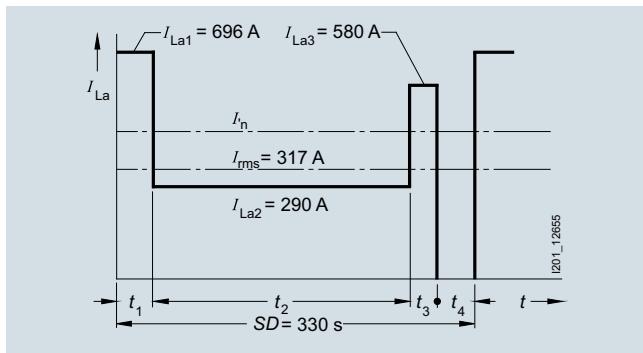

Direct current:

$$\begin{aligned} I_{d1} &= 1200 \text{ A} & t_1 &= 20 \text{ s} \\ I_{d2} &= 500 \text{ A} & t_2 &= 240 \text{ s} \\ I_{d3} &= 1000 \text{ A} & t_3 &= 10 \text{ s} \\ I_{d4} &= 0 \text{ A} & t_4 &= 60 \text{ s} \end{aligned}$$

Fuse current:

$$\begin{aligned} I_{La1} &= 1200 \times 0.58 = 696 \text{ A} \\ I_{La2} &= 500 \times 0.58 = 290 \text{ A} \\ I_{La3} &= 1000 \times 0.58 = 580 \text{ A} \end{aligned}$$

Rms value of load current

$$I_{rms} = \sqrt{\frac{696^2 \times 20 + 290^2 \times 240 + 580^2 \times 10}{330}} = 317 \text{ A}$$

Selected:

3NE3333 SITOR fuse link
(450 A/1000 V), $WL = 1$
breaking I^2t value $I^2t_a = 175 \times 10^3 \times 0.53 = 93 \times 10^3 \text{ A}^2\text{s}$
test cross-section to 145: 320 mm²

The following correction factors are to be applied:

$$k_u = 1.02 (\theta_u = +35^\circ \text{ C})$$

$$k_q = 0.94 \text{ (conductor cross-section, double-ended, 50 \% of test cross-section)}$$

$$k_\lambda = 1.0 \text{ (conduction angle } \lambda = 120^\circ)$$

$$k_l = 1.0 \text{ (no forced-air cooling)}$$

1. Required rated current I_n of the SITOR fuse link:

$$\begin{aligned} I_n &\geq I_{rms} \times \frac{1}{k_u \times k_q \times k_\lambda \times k_l \times WL} = \\ 317 \text{ A} \times \frac{1}{1,02 \times 0,94 \times 1,0 \times 1,0 \times 1,0} &= 331 \text{ A} \end{aligned}$$

Permissible load current I_n' of the selected fuse link:

$$I_n' = k_u \times k_q \times k_\lambda \times k_l \times WL \times I_n = 1.02 \times 0.94 \times 1.0 \times 1.0 \times 1.0 \times 450 = 431 \text{ A}$$

2. Checking the permissible overload duration of current blocks exceeding the permissible fuse load current I_n'

Previous load ratio:


$$V = \frac{I_{rms}}{I_n'} = \frac{317}{431} = 0,74$$

Residual value factor RW : For $V = 0.74$ of curve a (characteristic curve page 150, frequent surge/load cycle currents) $RW = 0.18$ surge current I_{surge} : melting time t_{vs} : 110 S (from time/current characteristic curve for 3NE3333) $t_{vs} \times RW = 110 \text{ s} \times 0.18 = 19.8 \text{ s} > t_{surge}$ correction factors can be found on page 145 and page 146.

Current block I_{La1} : melting time t_{vs} : 230 s (from time/current characteristic curve for 3NE3 333) $t_{vs} \times RW = 230 \text{ s} \times 0.2 = 46 \text{ s} > t_1$

Current block I_{La3} : melting time t_{vs} : 1200 s (from time/current characteristic curve for 3NE3 333) $t_{vs} \times RW = 1200 \text{ s} \times 0.2 = 240 \text{ s} > t_3$

Occasional surge load from preloading with unknown surge outcome

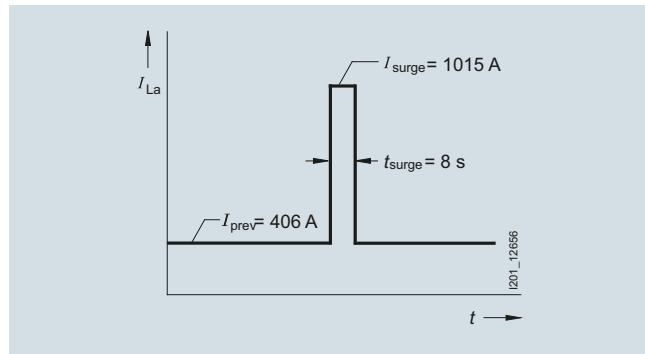

Direct current:

$$\begin{aligned} I_{dprev} &= 700 \text{ A} \\ I_{dsurge} &= 500 \text{ A} & t_{surge} &= 8 \text{ s} \end{aligned}$$

Fuse current:

$$\begin{aligned} I_{prev} &= I_{dprev} \times 0.58 = 406 \text{ A} \\ I_{surge} &= I_{dsurge} \times 0.58 = 1015 \text{ A} \end{aligned}$$

Conditions:

$t_{interval} \geq 3 t_{surge}$ and $t_{interval} \geq 5 \text{ min}$ must be fulfilled.

Selected:

3NE3333 SITOR fuse link
(560 A/1000 V), $WL = 1$
breaking I^2t value $I^2t_a = 360 \times 10^3 \times 0.53 = 191 \times 10^3 \text{ A}^2\text{s}$
test cross-section to 145: 400 mm²

The following correction factors are to be applied:

$$k_u = 1.02 (\theta_u = +35^\circ \text{ C})$$

$$k_q = 0.91 \text{ (conductor cross-section, double-ended, 40 \% of test cross-section)}$$

$$k_\lambda = 1.0 \text{ (conduction angle } \lambda = 120^\circ)$$

$$k_l = 1.0 \text{ (no forced-air cooling)}$$

1. Required rated current I_n of the SITOR fuse link:

$$\begin{aligned} I_n &\geq I_{prev} \times \frac{1}{k_u \times k_q \times k_\lambda \times k_l \times WL} = \\ 406 \text{ A} \times \frac{1}{1,02 \times 0,91 \times 1,0 \times 1,0 \times 1,0} &= 437 \text{ A} \end{aligned}$$

Permissible load current I_n' of the selected fuse link:

$$I_n' = k_u \times k_q \times k_\lambda \times k_l \times WL \times I_n = \\ 1.02 \times 0.91 \times 1.0 \times 1.0 \times 1.0 \times 560 = 520 \text{ A}$$

2. Checking the permissible overload duration of the surge current I_{surge}

Previous load ratio:

$$V = \frac{I_{prev}}{I_n'} = \frac{406}{520} = 0,78$$

Residual value factor RW : For $V = 0.78$ of curve a (characteristic curve page 150, frequent surge/load cycle currents) $RW = 0.18$ surge current I_{surge} : melting time t_{vs} : 110 S (from time/current characteristic curve for 3NE3333) $t_{vs} \times RW = 110 \text{ s} \times 0.18 = 19.8 \text{ s} > t_{surge}$ correction factors can be found on page 145 and page 146.

Overview

Special demands are made on fuses for application in photovoltaic systems. These fuses have a high DC rated voltage and a tripping characteristic specially designed to protect PV modules and their connecting cables (the newly defined operational class gPV). It is also crucial that the PV fuses do not age in spite of strongly alternating load currents, in order to ensure high plant availability throughout the service life of the PV system. The fuses must also be able to withstand high temperature fluctuations without damage. These requirements were only incorporated into an international standard in recent years and have now been published as IEC 60269-6.

All Siemens photovoltaic fuse systems comply with this new standard. Furthermore, they also already comply with the recently agreed corrections to the characteristic curves, which will be incorporated in the next standard update.

The IEC cylindrical fuses used as phase fuses also correspond to the characteristic curves specified in UL standard UL 2579. The non-fusing current I_{nf} and fusing current I_f test currents are crucial to the shape of the characteristic curves.

Standard	I_{nf}	I_f
Current IEC standard	$1.13 \times I_n$	$1.45 \times I_n$
UL standard	$1.0 \times I_n$	$1.35 \times I_n$
Future IEC standard	$1.05 \times I_n$	$1.35 \times I_n$
Siemens fuses	$1.13 \times I_n$	$1.35 \times I_n$

These test currents of gPV phase fuses to 32 A apply for a conventional test duration of one hour; at I_{nf} , the fuse must not trip within an hour, at I_f , it must trip within an hour.

The PV cylindrical fuses of size 10 mm x 38 mm offer an especially space-saving solution for the protection of the strings.

The PV fuses in LV HRC design are usually used as cumulative fuses upstream of the inverter. In addition, they can also be used for protecting groups (PV subarrays). For the PV cumulative fuses of size 1, standard LV HRC fuse bases are available. For PV cumulative fuses of size 1L, 1XL, 2L, 2XL and 3L, we have developed a special 3NH7...-4 fuse base with a swiveling mechanism which combines maximum touch protection with maximum user-friendliness. This makes it possible to change fuses safely and without the need for any tools, such as a fuse handle. This provides safe and fast access even in an emergency.

The cylindrical fuse holders can be supplied in single-pole and two-pole versions with and without signal detectors. In the case of devices with signal detector, a small electronic device with LED is located behind an inspection window in the plug-in module. If the inserted fuse link is tripped, this is indicated by the LED flashing.

The fuse holders size 10 x 38 mm have a sliding catch that enables the removal of individual devices from the assembly. The infeed can be from the top or the bottom. Because the cylindrical fuse holders are fitted with the same anti-slip terminals at the top and the bottom, the devices can also be bus-mounted at the top or the bottom.

Our cylindrical fuse holders and 3NH7...-4 fuse bases with swiveling mechanism comply with the IEC 60269-6 standard and are considered fuse disconnectors as defined in the switchgear and controlgear standard IEC 60947. Under no circumstances are they suitable for switching loads.

To ensure that PV fuses are correctly selected and dimensioned, the specific operating conditions and the PV module data must be taken into account when calculating voltage and current ratings.

Benefits

- Protection of the modules and their connecting cables in the event of reverse currents
- Safe tripping in case of fault currents reduces the risk of fire due to DC electric arcs
- Safe isolation when the fuse holder/fuse base is open



PV cylindrical fuse system, 3NW70..-4, 3NW60..-4



PV LV HRC fuse systems, 3NH73..-4, 3NE13..-4D

Fuse Systems


Photovoltaic fuses

PV cylindrical fuses


Technical specifications

	Cylindrical fuse links 3NW60..-4	Cylindrical fuse holders 3NW70..-4
Size	mm x mm	10 x 38
Standards	IEC 60269-6	IEC 60269, IEC 60269-6, IEC 60947, UL 4248-1, -18
Approvals	UL 248-13 (available soon)	UL 4248-1, -18, File No. E 355487, CSA
Operational class	gPV	
Rated voltage U_n	V DC	1000
Rated current I_n	A DC	2 to 16
Rated short-circuit strength	kA	--
Rated breaking capacity	KA DC	30
Switching capacity	--	AC-20B, DC-20B (switching without load)
• Utilization category	--	
Max. power dissipation of the fuse link	W	--
Rated impulse withstand voltage	kV	--
Overvoltage category	--	II
Pollution degree	--	2
No-voltage changing of fuse links	--	Yes
Sealable when installed	--	Yes
Mounting position	Any, but preferably vertical	
Current direction	--	Any (signal detector with antiparallel LED)
Degree of protection acc. to IEC 60529	--	IP20, with connected conductors
Terminals with touch protection according to BGV A3 at incoming and outgoing feeder	--	Yes
Ambient temperature	°C	-25 ... +55, humidity 90 % at +20
Conductor cross-sections		
• Finely stranded, with end sleeve	mm ²	--
• AWG (American Wire Gauge)	AWG	--
Tightening torque	Nm	--
		2.5

Characteristic curves

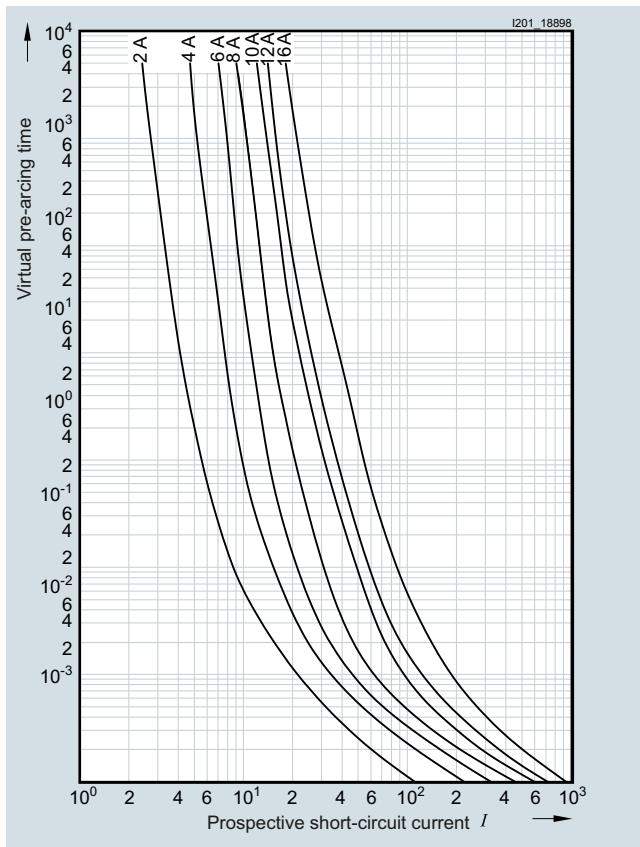


Time/current characteristics diagram

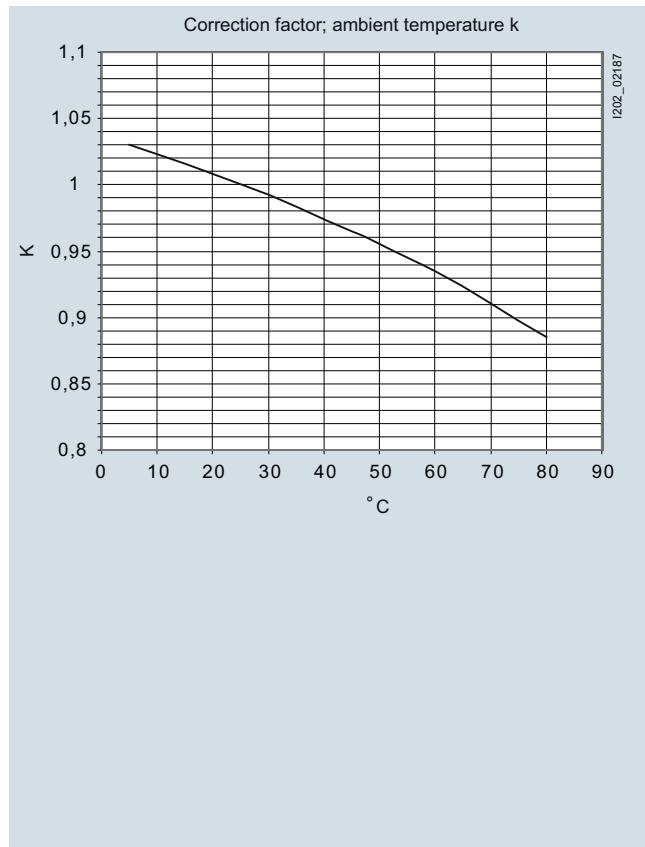

Characteristic curves diagram Correction factor Ambient temperature


Dimensional drawings

3NW600..-4



10 x 38 mm

3NW70..-4

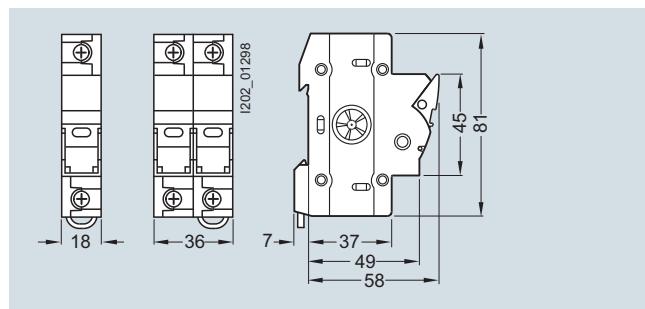

1-pole 2-pole

Circuit diagrams



1-pole

2-pole

Fuse Systems

Photovoltaic fuses

PV cylindrical fuses

More information

Selecting and dimensioning photovoltaic fuses from Siemens

Standards:

The contents of the new standard IEC 60269-6 are currently being drawn up.

We follow this new standard when rating and labeling our PV fuses. Until now, some of our rivals have been relying on products based on the standard IEC 60269-4 "Fuses for semiconductor protection". Differences between the two standards are particularly evident for the rated voltage and the test voltage and in the definition of the operational class.

Terms:

$U_{OC\ STC}$ (also known as $V_{OC\ STC}$)¹⁾

Voltage under standard test conditions on an unloaded string taking into account minimum ambient temperature (no-load voltage). The voltage $U_{OC\ STC}$ of a string is obtained by multiplying the single voltages $U_{OC\ STC}$ of a PV module ($U_{OC\ STC} \times M^2$)²⁾.

$I_{SC\ STC}$

Short-circuit current of a PV module, a PV string, a PV sub-generator or a PV generator under standard test conditions

I_{MPP}

is the largest possible working current of a string (MPP = Maximum Power Point).

$I_p\ max$

Is the maximum occurring load current; this is usually equivalent to I_{MPP} .

$I_{SC\ MOD}$

Short-circuit current of a PV module under regional conditions.

Standard test conditions (STC)

Test conditions which are laid down in DIN EN 60904-3 for PV cells and PV modules:

- Solar radiation 1000 W/m²
- Ambient temperature 25 °C
- Air distribution (AM) 1.5

Standard test conditions are normally specified by the manufacturer of the PV module in data sheets.

Operational class

We use draft standard IEC 60269-6 as a guide when naming the operational class gPV. Accordingly, the symbols are also on the fuse:



It is important that the fuse has a full-range characteristic which can cut off with certainty all possible fault currents, and especially also small fault currents³⁾.

The test currents for PV fuses are defined in draft standard IEC 60269-6.

$I_{nf} = 1.13 \times I_n$ (test current at which the fuse must not trip for one hour).

$I_f = 1.45 \times I_n$ (test current at which the fuse must trip for one hour).

Time/current characteristic curve diagram see page 159.

Rated making and breaking capacity

Under draft standard IEC 60269-6 a rated breaking capacity of at least 10 kA is required. While this is comparatively low compared to other fuses, it is more than adequate for handling the fault currents occurring in PV systems. We have tested our PV fuses at 30 kA.

Dimensioning rules

PV fuses are to be dimensioned according to special rules with regard to rated voltage, rated current and operational class (characteristic).

Dimensioning rule

The rated voltage⁴⁾ of the fuse should be calibrated 20 % higher than the open-circuit voltage $U_{OC\ STC}$ of a string. Extreme operating conditions, e.g. temperatures down to -25 °C, are thus taken into account.

Rated voltage

Our PV fuses have been tested according to draft standard IEC 60269-6 with the rated voltage, i.e. the test voltage is the same as the rated voltage.

Based on IEC 60269-4, some manufacturers have issued two voltage values for their fuses, e.g. 900 V (tested 1000 V).

Rated current

1. In order to prevent unwanted tripping of the PV fuse during normal operation and in case of a fault in a different string that is connected in parallel, the rated current of the PV fuse must be greater than the short-circuit current I_{SC} of the respective module or string: $I_n \geq 1.4 \cdot I_{SC}$.

The value 1.4 was determined in draft standard IEC 60269-6 and should apply to the simple dimensioning of the fuse.

This value contains the following correction factors for the standard test conditions:

A higher ambient temperature of 45 °C, a higher solar radiation of 1200 W/m² and the reduction due to the variable loading.

An additional reduction must be used when several fuse holders are bundled.

According to EN 60469-1, Table 1, the following reduction factors must be applied:

Number of main circuits	Rated diversity factor
2 and 3	0.9
5 and 6	0.8
6 ... 9	0.7
10 and more	0.6

Since the fuses are only operated with around 70 to 80 % of the load current, a further reduction is only necessary from around six main circuits (e.g. three two-pole devices), including also where the fuses only have maximum power dissipation of 3.4 W.

¹⁾ Voltage of the unloaded circuit under standard test conditions.

²⁾ M is the number of PV modules connected in series in a string.

³⁾ Note: A difference in the overload current and the short-circuit current is not meaningful when protecting PV systems, because even for a short circuit, only small currents occur, which are not designated as short-circuit currents in terms of the standards of overcurrent protective devices. Therefore in the following we shall refer to fault currents.

⁴⁾ Note: Unlike with mechanical switching devices, when two fuses (positive pole and negative pole) are used, you cannot count on a division of the voltage in the event of fault current tripping. Accordingly every fuse must be dimensioned with the full rated voltage.

PV cylindrical fuses

Fuses with a lower rated current have a lower power dissipation, so that the reduction is considerably less. The 10 A fuse for example has a rated power dissipation of 1.5 W, with the result that no reduction is necessary here.

In the event of extreme solar radiation a further reduction of the rated current of the fuse may be necessary.

The short circuit current $I_{SC\ MOD}$ is dependent on regional climatic conditions. Under particular climatic conditions and cloud constellations, in particular high in the mountains, higher values for the solar radiation than the 1200 W/m² used above may by all means occur (above: simplified calculation).

In order to incorporate the peak values into the calculation, we recommend using the following correction factors.

Climate zone	Max. solar radiation	Correction factor
Standard test conditions	1000 W/m ²	1
Moderate climate zone	1200 W/m ²	1.2
Moderate climate zone/high mountains	1400 ... 1600 W/m ²	1.4 ... 1.6
Africa	1400 ... 1600 W/m ²	1.4 ... 1.5

The rated current of the fuse refers to an ambient temperature of 25 °C.

Cut-off performance will change at higher temperatures. A further reduction may be required for an ambient temperature higher than the ambient temperature used above (+45 °C).

2. To protect the modules and their connecting cables, the PV fuse should cut off fault currents reliably and in time.

Fault currents can result from faulty modules, double ground faults or incorrect wiring. The PV modules are rated in such a way that they can continuously withstand the fault current in the forward direction without any problems.

However, fault currents which flow through the string or the PV module in a reverse direction are particularly critical.

This fault current $I_{SC\ REVERSE}$ is calculated from the number of parallel connected strings $n-1$ multiplied by the short circuit current $I_{SC\ MOD}$ of a string or module.

$$I_{SC\ REVERSE} = n-1 \times I_{SC\ MOD}$$

This $I_{SC\ MOD}$ is likewise dependent on the regional circumstances described above:

$$I_{SC\ MOD} = 1.2^{1)} \times I_{SC\ STC}$$

Only above $n = 3$ parallel strings are PV phase fuses meaningful at all.

In order to protect the PV modules against reverse currents $I_{SC\ REVERSE}$ which have a value higher than the reverse current resistance of the PV modules $I_{MOD\ REVERSE}$, the "cut-off current" of the PV fuse must be of a smaller size than the permitted and tested reverse current resistance of the module.

You can dispense with PV fuses if the reverse current resistance of the PV modules is greater than the fault current:

$$I_{MOD\ REVERSE} > I_{SC\ REVERSE}$$

The manufacturers of the modules normally test their modules with a 1.35x reverse current for two hours.

For protection, you therefore need a fuse that trips earlier under these conditions.

The PV fuses have a "disconnect current" (generally referred to as high test current I_f), which causes the fuse to disconnect at 1.45 x the rated current in less than one hour (at the latest).

In order to connect the tested reverse current resistance of the PV modules $I_{MOD\ REVERSE}$ with the cut-off performance of the fuse, we recommend the use of a conversion factor of 0.9.

For the rated current of the PV fuse, I_n produces the following dimensioning rules:

$$I_n \leq 0.9 \times I_{MOD\ REVERSE}$$

This does not consider possible fault currents, if any, which are fed by the back-up batteries and/or the solar converters.

Protection of the factory-fitted connecting cables of the PV modules should be mainly ensured by the manufacturer.

Connecting cables/wires of a string must be able to withstand n times the short-circuit current $I_{SC\ MOD}$. As with other cables and wires, the following simple relationship applies:

$$I_n \leq I_z^{2)}$$

If several strings connected in parallel are grouped together, the aforementioned dimensioning rules also apply. The rated current of the PV fuse group should be at least 1.2¹⁾ times greater than the total of the short-circuit currents of the group.

¹⁾ Climate zone-dependent correction factor 1.2 ... 1.6
(see the table on page 161).

²⁾ I_z is the permitted capacity of the line/cable.

Fuse Systems


Photovoltaic fuses

PV cumulative fuses


Technical specifications

	Fuse links 3NE1...-4 / -4D / -4E / -5E						Fuse bases 3NH7...-4				
Size	1	1L	2L	3L	1XL	2XL	1L	2L	3L	1XL	2XL
Standards	IEC 60269-6						IEC 60269	IEC 60269-6		IEC 60947	
Operational class	gPV										
Rated voltage U_n	V DC	1000 at time constant (L/R) 3 ms 1500 at time constant (L/R) 3 ms					1000			1500	
Rated current I_n	A DC	63 ... 160 200/250 315/400 500/630 63 ... 200 250/315					250	400	630	250	400
Rated short-circuit strength	kA	--					30				
Rated breaking capacity	kA DC	30					--				
Switching capacity											
• Utilization category	--						AC-20B, DC-20B (switching without load)				
Max. power dissipation of the fuse link	W	--					90	110	130	90	110
No-voltage changing of fuse links	--						Yes				
Sealable when installed	--						Yes				
Mounting position		Any, but preferably vertical									
Current direction	--						Any				
Ambient temperature	°C	-25 ... +55, humidity 90 % at +20									
Tightening torque	Nm	--					20				

Characteristic curves

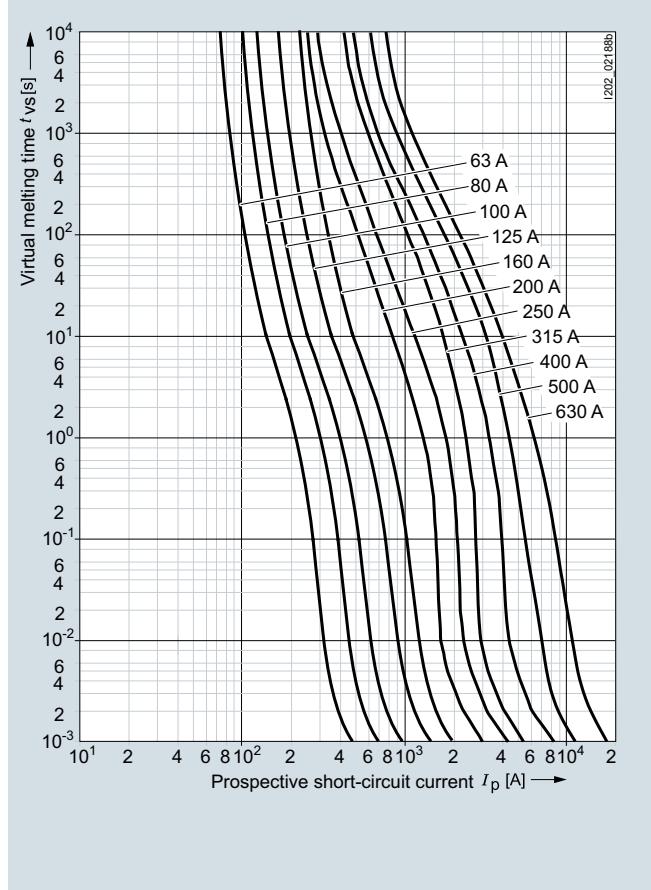


Time/current characteristics diagram 1000 V

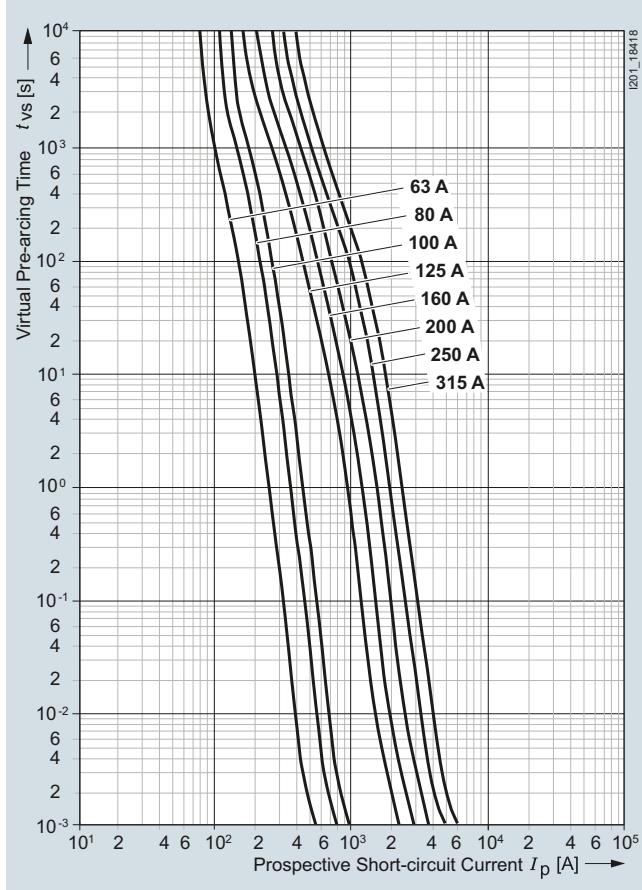


Time/current characteristics diagram 1500 V

Dimensional drawings

3NE1

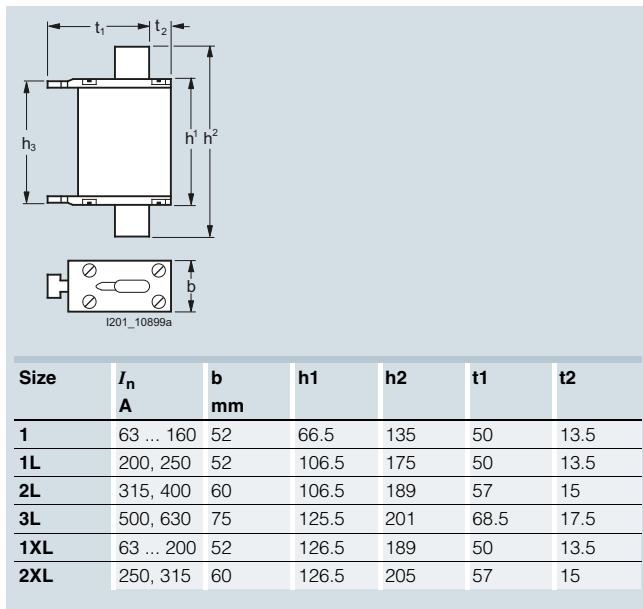

3NH73..-4

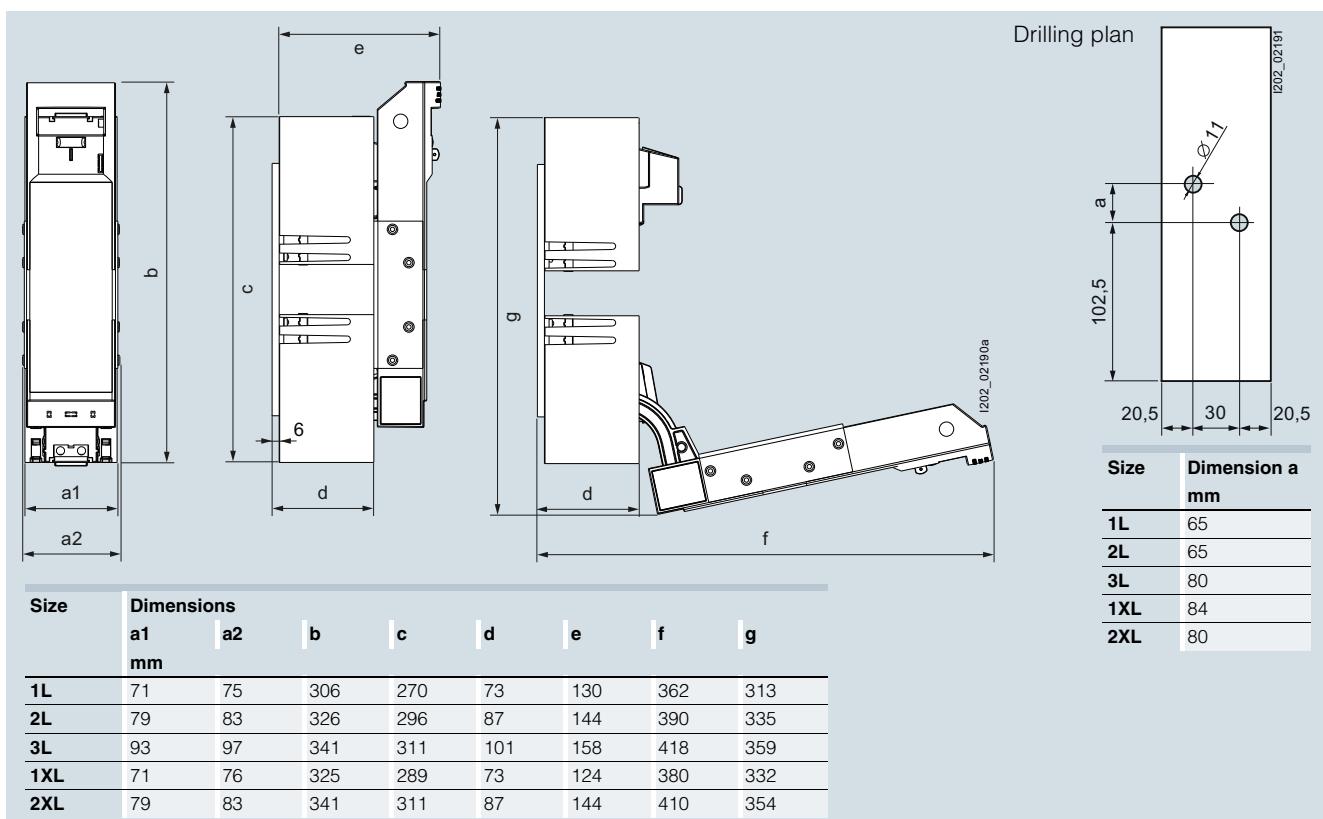

Fuse bases with swiveling mechanism, 3NH73..-4

Circuit diagrams



1-pole

Fuse Systems

Notes

Siemens AG
Infrastructure & Cities Sector
Low and Medium Voltage Division
Low Voltage & Products
Postfach 10 09 53
93009 REGENSBURG
GERMANY

Subject to change without prior notice
PDF (3ZW1012-3NW10-0AC1)
MP.R3.LP.0000.00.3.79
PH 0314 164 En
Produced in Germany
© Siemens AG 2014

The information provided in this brochure contains merely general descriptions or characteristics of performance which in case of actual use do not always apply as described or which may change as a result of further development of the products. An obligation to provide the respective characteristics shall only exist if expressly agreed in the terms of contract. Availability and technical specifications are subject to change without notice.
All product designations may be trademarks or product names of Siemens AG or supplier companies whose use by third parties for their own purposes could violate the rights of the owners.