


Microtrak Pre-sensitised PCBs

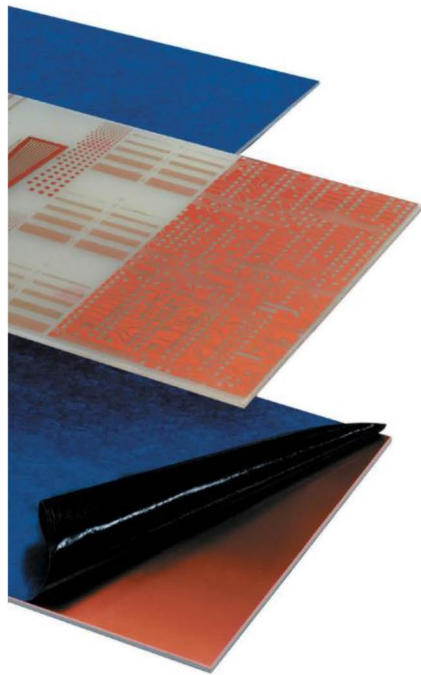

FR4 single and double sided PCB laminated coated with a dip coated high quality positive working Photoresist. Panels are protected by a light proof removable blue film which allows them to be guillotined without the risk of fracturing the photoresist.

| Specifications: | |
|--------------------------------|-------------------|
| Thickness | 1.6mm |
| Copper foil | 35 micron |
| Dissipation factor | 35 |
| Dielectric constant | 5.4 |
| Solder bath resistance (260°C) | 20 secs |
| Resist thickness | 5 microns |
| Spectral response | 350-450nm |
| UV light energy required | approx. 50mJ/cm |
| Shelf life | 1 year at 15-20°C |
| | |
| | |