

## Optoelectronic Devices

Order code	Manufacturer code	Description
58-0540	TLP3041	TLP3041 TRIAC DRIVER ***OFFER 58-0544***
58-0542	TLP3042	TLP3042 TRIAC DRIVER OPTOCOUP.

Optoelectronic Devices	Page 1 of 6
The enclosed information is believed to be correct, Information may change 'without notice' due to product improvement. Users should ensure that the product is suitable for their use. E. & O. E.	Revision A 04/07/2003

**SEMICONDUCTOR**  
**TOSHIBA**  
TECHNICAL DATA

**TOSHIBA PHOTOCOUPLER**  
**TLP3041, TLP3042, TLP3043**  
GaAs IRED & PHOTO-TRIAC

(TLP3041)

- OFFICE MACHINE
- HOUSEHOLD USE EQUIPMENT
- TRIAC DRIVER
- SOLID STATE RELAY

The TOSHIBA TLP3041, TLP3042 and TLP3043 consist of a zero voltage crossing turn-on photo-triac optically coupled to a gallium arsenide infrared emitting diode in a six lead plastic DIP package.


- Peak Off-State Voltage : 400V (Min.)
- Trigger LED Current : 15mA (Max.) (TLP3041)  
10mA (Max.) (TLP3042)  
5mA (Max.) (TLP3043)
- On-State Current : 100mA (Max.)
- UL Recognized : UL1577, File No. E67349  
Isolation Voltage : 5000Vrms (Min.)
- Option (D4) type VDE Approved : DIN VDE0884/08.87,  
Certificate No. 68329

Maximum Operating Insulation Voltage : 630V<sub>PK</sub>  
Highest Permissible Over Voltage : 6000V<sub>PK</sub>

(Note) When a VDE0884 approved type is needed, please designate the "Option (D4)"


- |                      | 7.62mm pitch<br>standard type | 10.16mm pitch<br>(LF2) type |
|----------------------|-------------------------------|-----------------------------|
| • Creepage Distance  | 7.0mm (Min.)                  | 8.0mm (Min.)                |
| Clearance            | 7.0mm (Min.)                  | 8.0mm (Min.)                |
| Insulation Thickness | 0.5mm (Min.)                  | 0.5mm (Min.)                |

Unit in mm

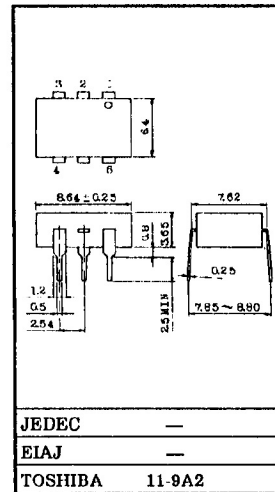

Weight : 0.44g

PIN CONFIGURATION (TOP VIEW)



- 1 : ANODE
- 2 : CATHODE
- 3 : NC
- 4 : TERMINAL 1
- 6 : TERMINAL 2

① The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by TOSHIBA CORPORATION for any infringement of intellectual property or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any intellectual property or other rights of TOSHIBA CORPORATION or others.

② These TOSHIBA products are intended for use in general commercial applications (office equipment, communication equipment, measuring equipment, domestic appliances, etc.) please make sure that you consult with us before you use these TOSHIBA products in equipment which requires extraordinarily high quality and/or reliability, and in equipment which may involve life threatening or critical application, including but not limited to such uses as atomic energy control, airplane or spaceship instrumentation, traffic signals, medical instrumentation, combustion control, all types of safety devices, etc. TOSHIBA cannot accept and hereby disclaims liability for any damage which may occur in case the TOSHIBA products are used in such equipment or applications without prior consultation with TOSHIBA.

TLP3041 - 1

1996 - 4 - 8

TOSHIBA CORPORATION

(TLP3041)

MAXIMUM RATINGS (Ta = 25°C)

CHARACTERISTIC		SYMBOL	RATING	UNIT
LED	Forward Current	I <sub>F</sub>	50	mA
	Forward Current Derating (Ta ≥ 53°C)	ΔI <sub>F</sub> /°C	-0.7	mA/°C
	Peak Forward Current (100μs pulse, 100pps)	I <sub>FP</sub>	1	A
	Power Dissipation	P <sub>D</sub>	100	mW
	Power Dissipation Derating (Ta ≥ 25°C)	ΔP <sub>D</sub> /°C	-1.0	mW/°C
	Reverse Voltage	V <sub>R</sub>	5	V
	Junction Temperature	T <sub>j</sub>	125	°C
DETECTOR	Off-State Output Terminal Voltage	V <sub>DRM</sub>	400	V
	On-State RMS Current	Ta = 25°C	100	mA
		Ta = 70°C	50	
	On-State Current Derating (Ta ≥ 25°C)	ΔI <sub>T</sub> /°C	-1.1	mA/°C
	Peak On-State Current (100μs pulse, 120pps)	I <sub>TP</sub>	2	A
	Peak Nonrepetitive Surge Current (P <sub>w</sub> = 10ms, DC = 10%)	I <sub>TSM</sub>	1.2	A
	Power Dissipation	P <sub>D</sub>	300	mW
	Power Dissipation Derating (Ta ≥ 25°C)	ΔP <sub>D</sub> /°C	-4.0	mW/°C
	Junction Temperature	T <sub>j</sub>	115	°C
	Storage Temperature Range	T <sub>stg</sub>	-55~150	°C
Operating Temperature Range	T <sub>opr</sub>	-40~100	°C	
Lead Soldering Temperature (10s)	T <sub>sol</sub>	260	°C	
Total Package Power Dissipation	P <sub>T</sub>	330	mW	
Total Package Power Dissipation Derating (Ta ≥ 25°C)	ΔP <sub>T</sub> /°C	-4.4	mW/°C	
Isolation Voltage (AC, 1 min., R.H. ≤ 60%) (Note 1)	BV <sub>S</sub>	5000	V <sub>rms</sub>	

Note 1 : Device considered a two terminal device : Pins 1, 2 and 3 shorted together and pins 4 and 6 shorted together.

TLP3041 - 2
1996 - 4 - 8
<b>TOSHIBA CORPORATION</b>

(TLP3041)

INDIVIDUAL ELECTRICAL CHARACTERISTICS (Ta = 25°C)

CHARACTERISTIC		SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
LED	Forward Voltage	$V_F$	$I_F = 10\text{mA}$	1.0	1.15	1.3	V
	Reverse Current	$I_R$	$V_R = 5\text{V}$	—	—	10	$\mu\text{A}$
	Capacitance	$C_T$	$V = 0, f = 1\text{MHz}$	—	10	—	pF
DETECTOR	Peak Off-State Current	$I_{DRM}$	$V_{DRM} = 400\text{V}$	—	10	100	nA
	Peak On-State Voltage	$V_{TM}$	$I_{TM} = 100\text{mA}$	—	1.7	3.0	V
	Holding Current	$I_H$	—	—	0.6	—	mA
	Critical Rate of Rise of Off-State Voltage	dv/dt	$V_{in} = 120\text{Vrms}, T_a = 85^\circ\text{C}$ (Fig.1)	200	500	—	V/ $\mu\text{s}$
	Critical Rate of Rise of Commutating Voltage	dv/dt(c)	$V_{in} = 30\text{Vrms}, I_T = 15\text{mA}$ (Fig.1)	—	0.2	—	V/ $\mu\text{s}$

COUPLED ELECTRICAL CHARACTERISTICS (Ta = 25°C)


CHARACTERISTIC		SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Trigger LED Current	TLP3041	$I_{FT}$	$V_T = 3\text{V}$	—	—	15	mA
	TLP3042			—	5	10	
	TLP3043			—	—	5	
Inhibit Voltage	$V_{IH}$	$I_F = \text{Rated } I_{FT}$	—	—	40	V	
Leakage in Inhibited State	$I_{IH}$	$I_F = \text{Rated } I_{FT}$ $V_T = \text{Rated } V_{DRM}$	—	100	300	$\mu\text{A}$	
Capacitance Input to Output	$C_S$	$V_S = 0, f = 1\text{MHz}$	—	0.8	—	pF	
Isolation Resistance	$R_S$	$V_S = 500\text{V (R.H. } \leq 60\%)$	$5 \times 10^{10}$	$10^{14}$	—	$\Omega$	
Isolation Voltage	$BV_S$	AC, 1 minute	5000	—	—	Vrms	
		AC, 1 second (in oil)	—	10000	—		
		DC, 1 minute (in oil)	—	10000	—	Vdc	

RECOMMENDED OPERATING CONDITIONS

CHARACTERISTIC	SYMBOL	MIN.	TYP.	MAX.	UNIT
Supply Voltage	$V_{AC}$	—	—	120	Vac
Forward Current	$I_F^*$	15	20	25	mA
Peak On-State Current	$I_{TP}$	—	—	1	A
Operating Temperature	$T_{opr}$	-25	—	85	°C







※ In the case of TLP3042

Fig.1 dv/dt TEST CIRCUIT









TLP3041 - 3  
 1996 - 4 - 8  
 TOSHIBA CORPORATION

(TLP3041)

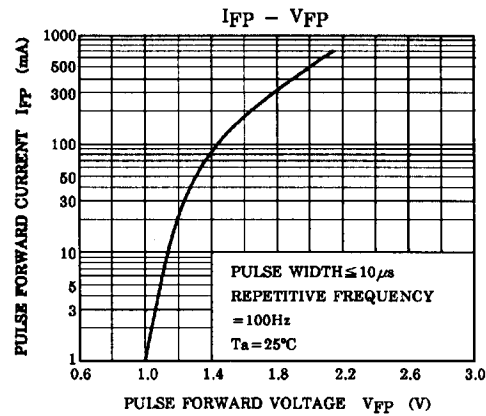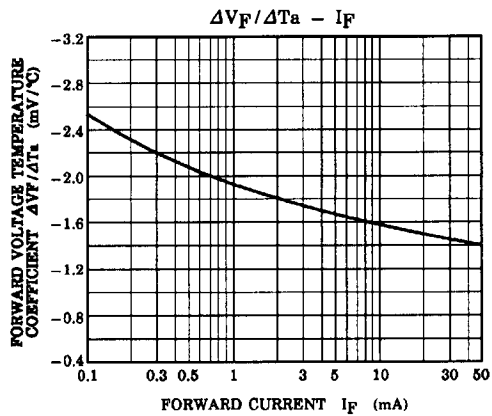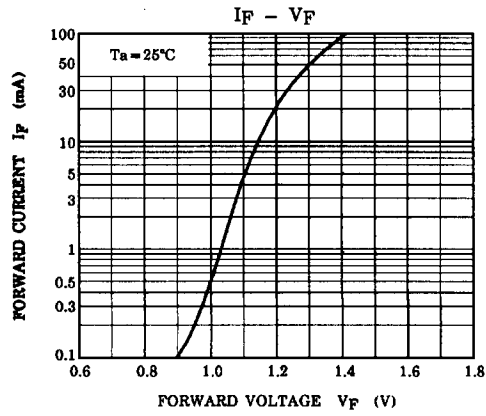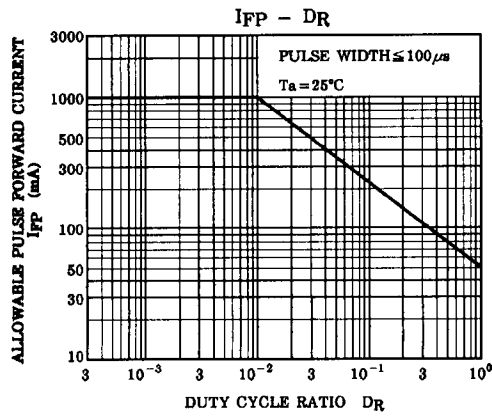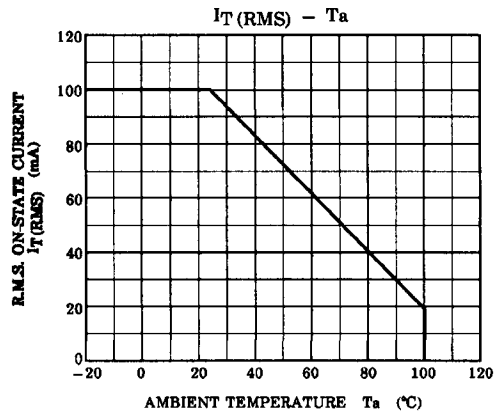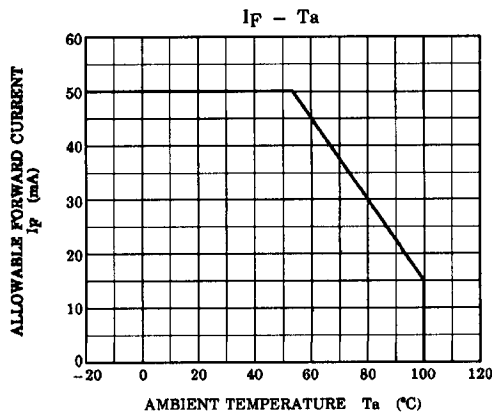

TLP3041 - 4  
 1996 - 4 - 8  
 TOSHIBA CORPORATION

(TLP3041)

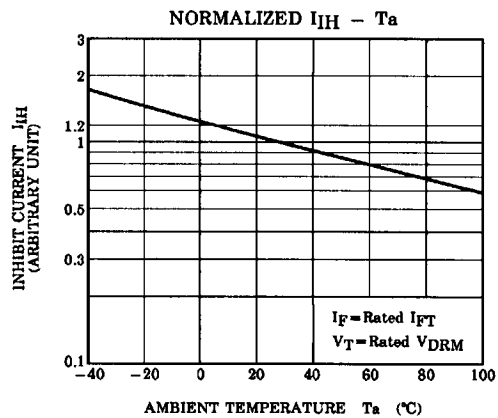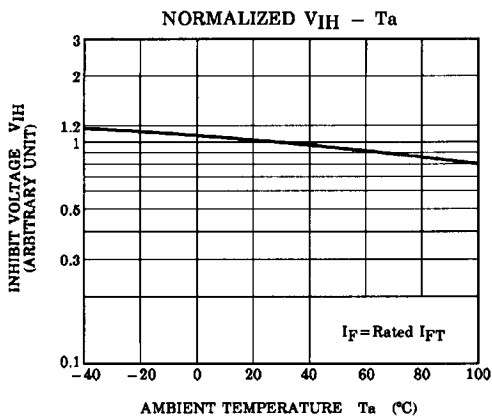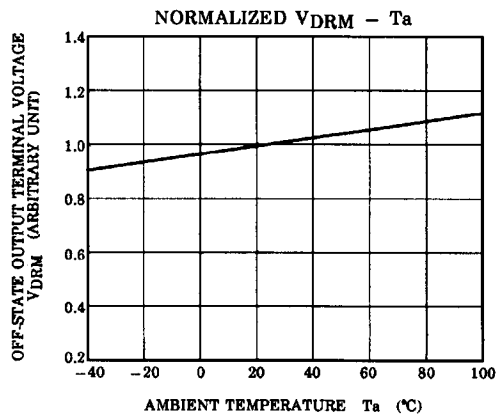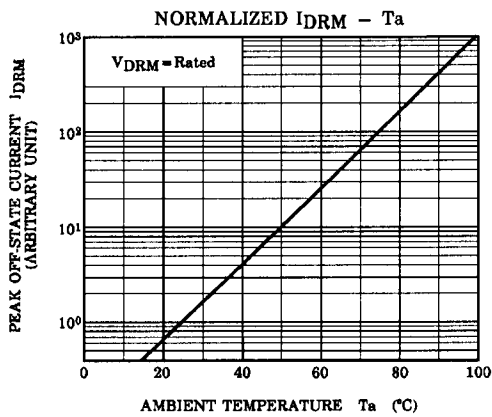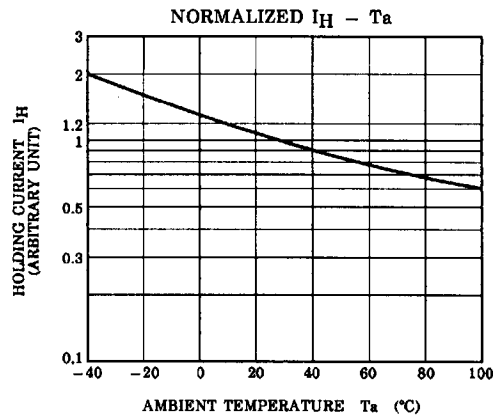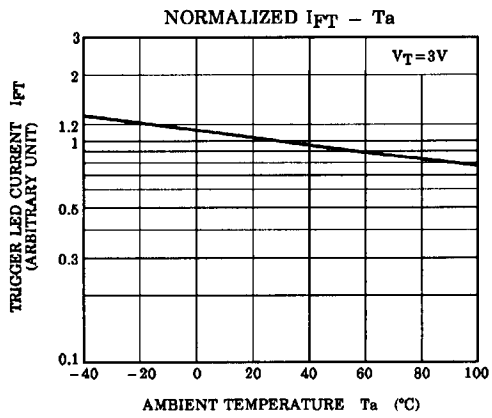

TLP3041 - 5\*  
 1996-4-8  
 TOSHIBA CORPORATION