

LS303-51N horizontal Level Sensor

LS Series

- High or low level sensing
- N/O or N/C by rotating through 180°
- Suitable for a wide range of liquids
- Interface option available
- G/F Nylon 6.6 Material



✓RoHS




The LS303-51N


From our range of horizontal liquid level sensors which offer design engineers reed switch reliability. The design allows for sensing high or low liquid levels from the side of the tank.

dimensions

Internal Fitting

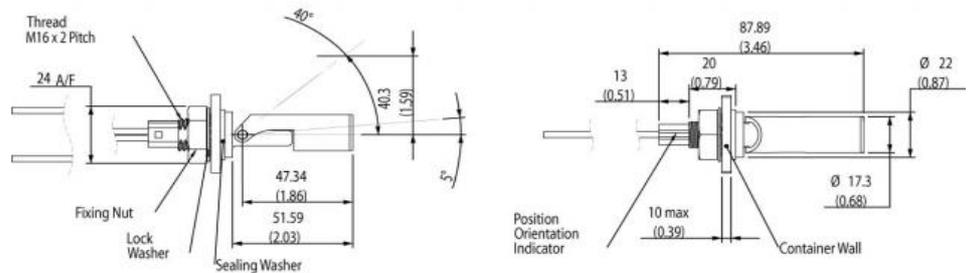

External Fitting

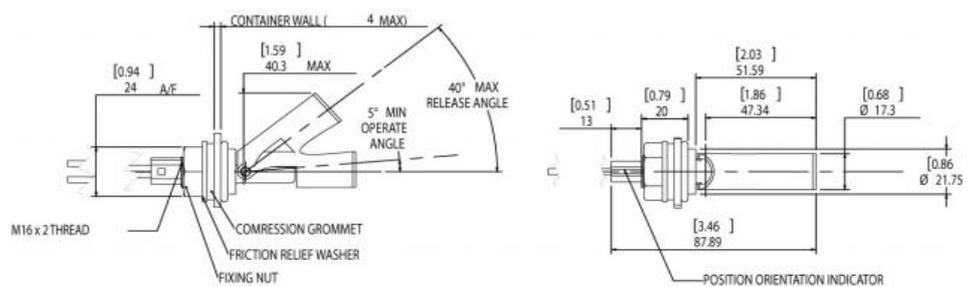

FEATURES

- High or low level sensing
- Internal or External fitting
- Reed switch reliability
- Nitrile sealing washer/grommet
- Easy installation

APPLICATIONS

- Chemical high or low Level
- Diesel Fuel
- Fuel low level
- Alcohols
- Low Oil Detection

LS303-51N horizontal Level Sensor

performance specifications

Material, Design and Operation

Mounting	Horizontal
Housing Material	Glass Filled Nylon 6.6
Housing Colour	Blue
Float Material	Glass Filled Nylon 6.6
Float Colour	Blue
Contact Form	A
Contact Material	Ruthenium
Maximum Switching Volts (VAC)	250
Maximum Switching Volts (VDC)	200
Maximum Switching Current (Amp)	1
Maximum Power (Watt)	40
Connection Type	Stripped Cables
Cable Type	18AWG, 32/0.2mm PVC insulated
Cable Length	2 x 0.5M single insulated
Cable Colour	Black/Black
Minimum Specific Gravity	0.85
Operate Temperature Range	-30° to +130°C
Medium/Liquid	Fuels, Oils, Alcohols
Sealing Component	Nitrile Washer/Nitrile Grommet
Mounting Shock	50g for 11mS duration
Operate Mode	N/C with float horizontal
IP Rating	IP65

The information in this sheet has been carefully reviewed and is believed to be accurate; however, no responsibility is assumed for inaccuracies. Furthermore, this information does not convey to the purchaser of such devices any license under the patent rights to the manufacturer. Measurement Specialties, Inc. reserves the right to make changes without further notice to any product herein. Measurement Specialties, Inc. makes no warranty, representation or guarantee regarding the suitability of its product for any particular purpose, nor does Measurement Specialties, Inc. assume any liability arising out of the application or use of any product or circuit and specifically disclaims any and all liability, including without limitation consequential or incidental damages. Typical parameters can and do vary in different applications. All operating parameters must be validated for each customer application by customer's technical experts. Measurement Specialties, Inc. does not convey any license under its patent rights nor the rights of others.

ordering info

The LS303-51N is from our LS Series of horizontal Level Sensors.

The Series is available in alternative with a number of standard options including:

- Housing and float materials
- Reed Switch configurations
- Maximum load switching abilities
- Installation Methods
- Sealing materials
- Cable types
- Cable lengths

Please see the LS Series part number tree.