

5



4

3



2

1

Mating face according to : MIL-C-24308 / DIN 41652 / CECC 75301-802

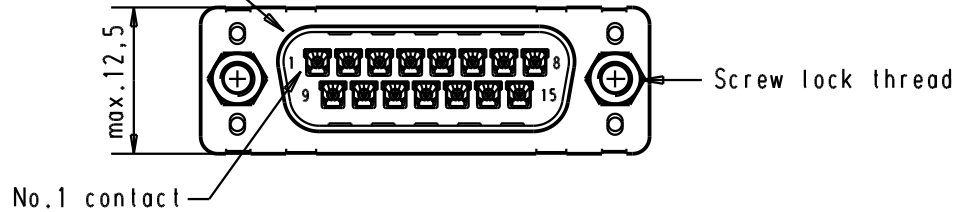

Printed board layout
component side

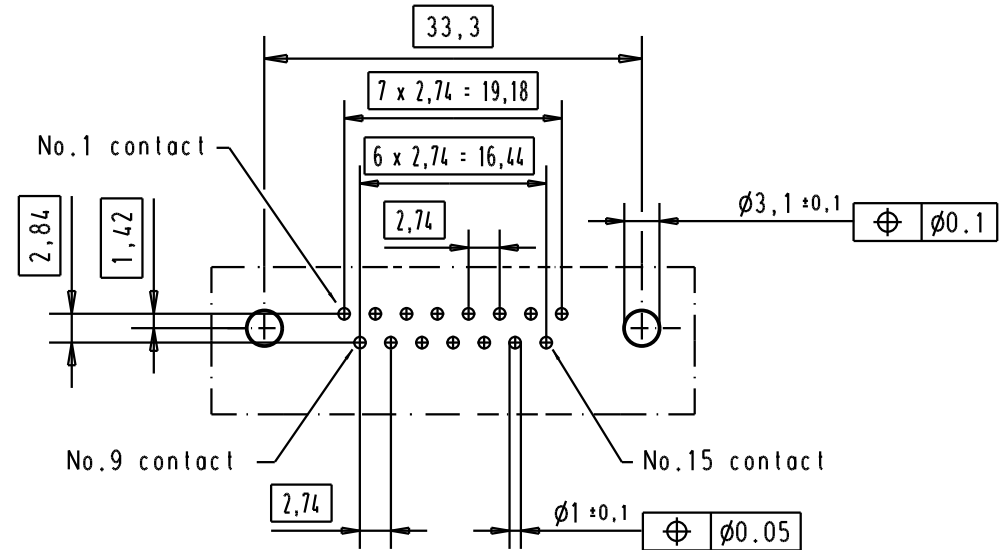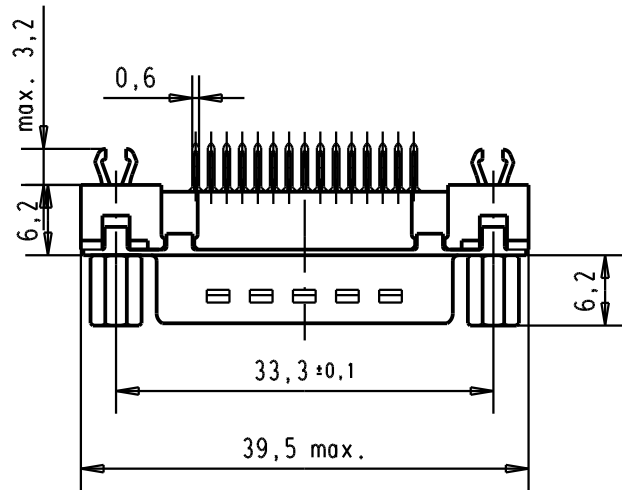

Connector retention and insertion forces on the PCB = 25 / 80 Newtons.

A	09 65 261 3733	M3	1					Dat.	Name	 All Dim. in mm Orig. Size DIN A 4	D-Sub, 15 poles, male, straight with solder pins 3.7, screw lock and grounding board lock.	Maßstab/ Scale 1,5:1
	09 65 261 6733	M3	2					Detail.	07-FEB-02 JB			
	09 65 261 7733	M3	3					Insp.				
	09 65 261 3713	4-40 UNC	1	31892	22/04/04	JH		Stand.				
	09 65 261 6713	4-40 UNC	2	29723	05-MAR-02	JB						
	09 65 261 7713	4-40 UNC	3	29746	07-FEB-02	JB						
	Part number	Screw lock thread	Performance level	Mod.	Dat.	Name	HARTING EURL F-95972 Paris				TB 09 65 261 X7X3 Sub.	Blatt/ Page 1 /