

5

4



3

2



1

Mating face according to : MIL-C-24308 / DIN 41652 / CECC 75301-802

No.1. contact

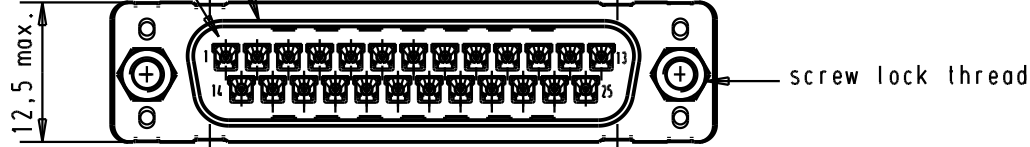

Printed board layout
component side

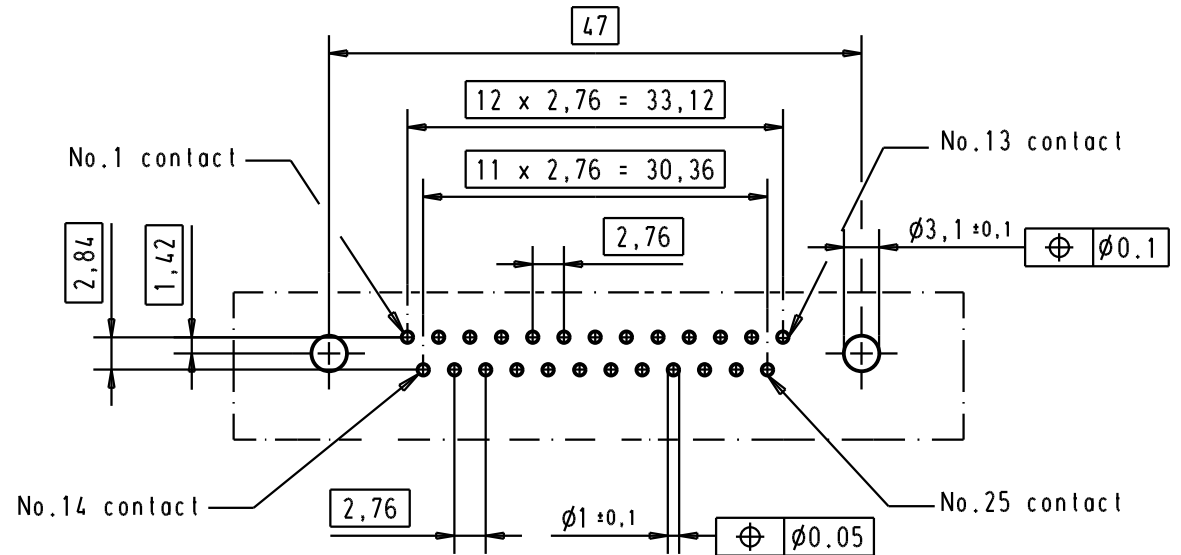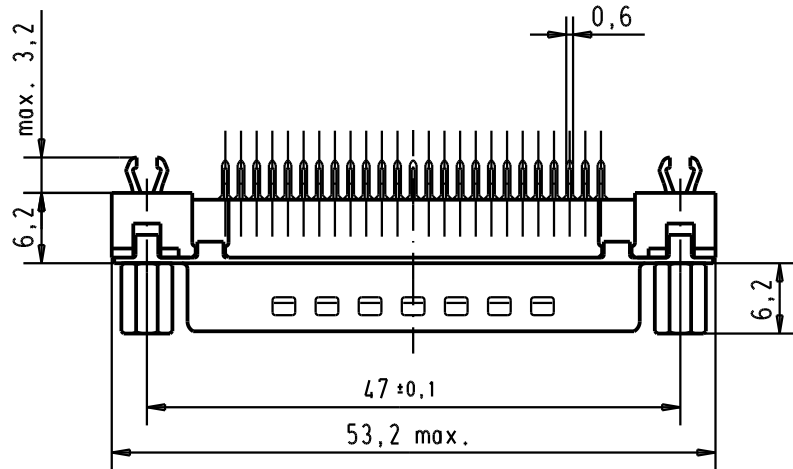

Connector retention and insertion forces on the PCB = 25 / 80 Newtons.

09 65 361 3733	M3	1					Dat.	Name	 All Dim. in mm Orig. Size DIN A 4	D-Sub, 25 poles, male, straight with solder pins 3,7 screw lock and grounding board lock.	Maßstab/ Scale 1.5:1
09 65 361 6733	M3	2				Detail.	07-FEB-02	JB			
09 65 361 7733	M3	3				Insp.					
09 65 361 3713	4-40 UNC	1	31892	22/04/04	JH	Stand.					
09 65 361 6713	4-40 UNC	2	29723	05-MAR-02	CV	HARTING EURL F-95972 Paris				TB 09 65 361 x7x3	Blatt/ Page 1/
09 65 361 7713	4-40 UNC	3	29746	07-FEB-02	JB						
Part number	Screw lock thread	Performance level	Mod.	Dat.	Name	Sub.					