





Rocker, Special Rocker Switch, Illuminated, 16A/125 VAC (10A/250 VAC)

Rating	10A 24VDC	Mounting Hole	Circuit Diagram												
Contact Resistance	50m ohm Max.														
Insulation Resistance	DC 500V 100M ohm Min.														
Dielectric Strength	AC 1500V 1 minute														
Operation Temperature	-20°C~85°C														
Switch Function	4P SPST ON-OFF (LED)	<table border="1"> <thead> <tr> <th>Thickness</th> <th>X</th> <th>Y</th> </tr> </thead> <tbody> <tr> <td>0.75...1.25</td> <td>19.2-0.1</td> <td>13+0.1</td> </tr> <tr> <td>1.25...2</td> <td>19.4-0.1</td> <td>13+0.1</td> </tr> <tr> <td>2...3</td> <td>19.8-0.1</td> <td>13+0.1</td> </tr> </tbody> </table>	Thickness	X	Y	0.75...1.25	19.2-0.1	13+0.1	1.25...2	19.4-0.1	13+0.1	2...3	19.8-0.1	13+0.1	LED Rating Red: @20mA, If=2.0VDC Amber: @20mA, If=2.1VDC Green: @20mA, If=2.2VDC
Thickness	X	Y													
0.75...1.25	19.2-0.1	13+0.1													
1.25...2	19.4-0.1	13+0.1													
2...3	19.8-0.1	13+0.1													



Material:

Frame: Black, Nylon 66 (94-V2)
 Actuator: Black, Nylon 66 (94-V2)
 Lens: White Clear, PC
 Terminals: Silver plated, Copper alloy
 Lamp: LED(red)
 Hot stamping: None

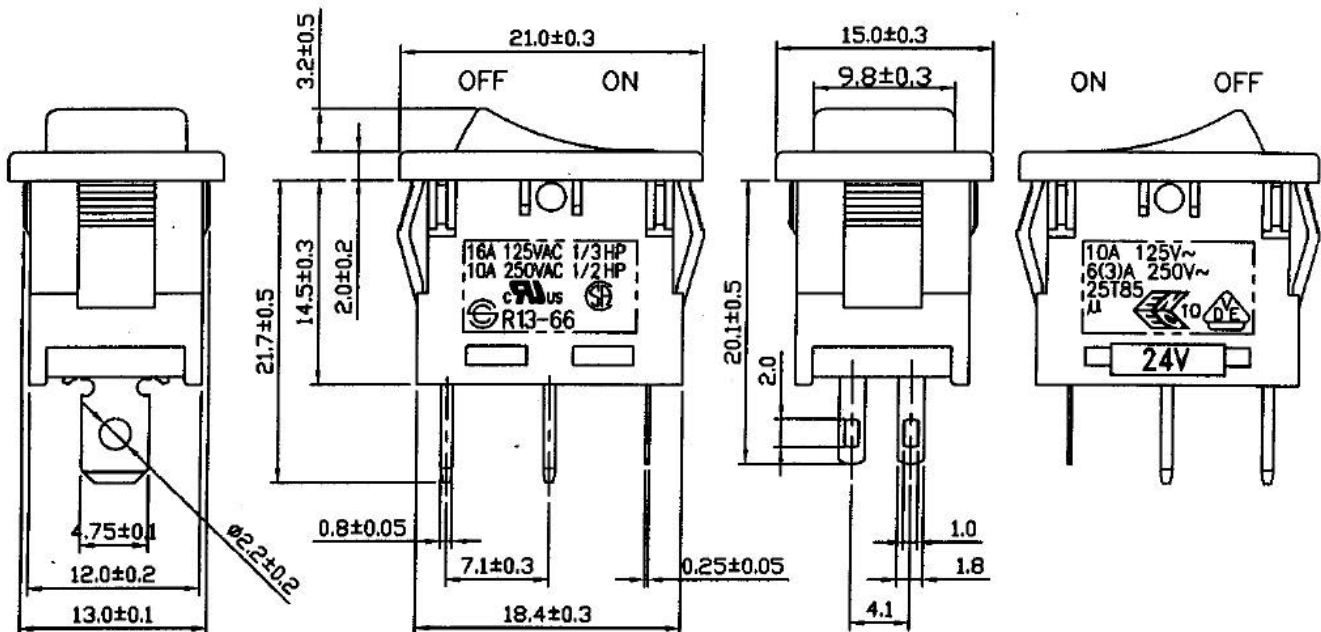

Unit: mm

This is a publication by Conrad Electronic SE, Klaus-Conrad-Str. 1, D-92240 Hirschau (www.conrad.com).

All rights including translation reserved. Reproduction by any method, e.g. photocopy, microfilming, or the capture in electronic data processing systems require the prior written approval by the editor. Reprinting, also in part, is prohibited. This publication represents the technical status at the time of printing.

© Copyright 2017 by Conrad Electronic SE.