



DC COMPONENTS CO., LTD.

DISCRETE SEMICONDUCTORS

BC548

TECHNICAL SPECIFICATIONS OF NPN EPITAXIAL PLANAR TRANSISTOR

**Description**


Designed for switching and AF amplifier amplification suitable for automatic insertion in thick and thin-film circuits.

**Pinning**

- 1 = Collector
- 2 = Base
- 3 = Emitter

**Absolute Maximum Ratings**( $T_A=25^{\circ}C$ )

Characteristic	Symbol	Rating	Unit
Collector-Base Voltage	V <sub>CB0</sub>	30	V
Collector-Emitter Voltage	V <sub>CE0</sub>	30	V
Emitter-Base Voltage	V <sub>EB0</sub>	5	V
Collector Current	I <sub>C</sub>	100	mA
Total Power Dissipation( $T_A=25^{\circ}C$ )	P <sub>D</sub>	500	mW
Junction Temperature	T <sub>J</sub>	+150	°C
Storage Temperature	T <sub>STG</sub>	-55 to +150	°C

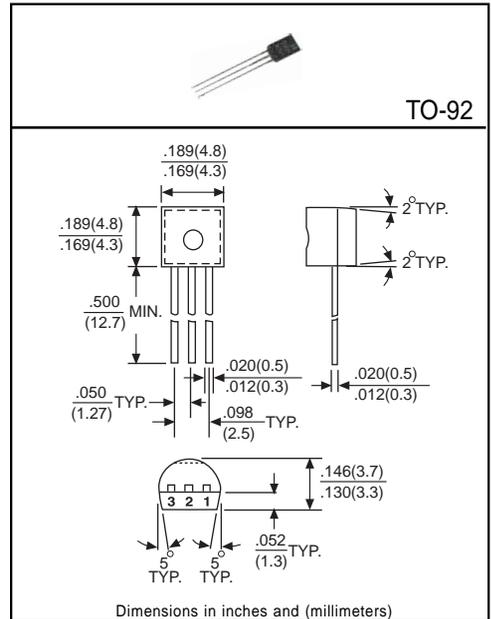

**Electrical Characteristics**

(Ratings at 25°C ambient temperature unless otherwise specified)

Characteristic	Symbol	Min	Typ	Max	Unit	Test Conditions
Collector-Base Breakdown Voltage	BV <sub>CB0</sub>	30	-	-	V	I <sub>C</sub> =100μA, I <sub>E</sub> =0
Collector-Emitter Breakdown Voltage	BV <sub>CE0</sub>	30	-	-	V	I <sub>C</sub> =1mA, I <sub>B</sub> =0
Emitter-Base Breakdown Voltage	BV <sub>EB0</sub>	5	-	-	V	I <sub>E</sub> =100μA, I <sub>C</sub> =0
Collector Cutoff Current	I <sub>CBO</sub>	-	-	15	nA	V <sub>CB</sub> =30V, I <sub>E</sub> =0
Collector-Emitter Saturation Voltage <sup>(1)</sup>	V <sub>CE(sat)1</sub>	-	0.2	0.6	V	I <sub>C</sub> =100mA, I <sub>B</sub> =5mA
	V <sub>CE(sat)2</sub>	-	0.9	1.1	V	I <sub>C</sub> =100mA, I <sub>B</sub> =5mA
Base-Emitter On Voltage	V <sub>BE(on)1</sub>	0.58	0.66	0.7	V	I <sub>C</sub> =2mA, V <sub>CE</sub> =5V
	V <sub>BE(on)2</sub>	-	-	0.77	V	I <sub>C</sub> =10mA, V <sub>CE</sub> =5V
DC Current Gain <sup>(1)</sup>	h <sub>FE</sub>	110	-	800	-	I <sub>C</sub> =2mA, V <sub>CE</sub> =5V
Transition Frequency	f <sub>T</sub>	-	300	-	MHz	I <sub>C</sub> =10mA, V <sub>CE</sub> =5V, f=100MHz
Output Capacitance	C <sub>ob</sub>	-	3.5	6	pF	V <sub>CB</sub> =10V, f=1MHz, I <sub>E</sub> =0
Noise Figure	NF	-	2	10	dB	V <sub>CE</sub> =5V, I <sub>C</sub> =200μA, f=1KHz, R <sub>S</sub> =2KW, B=200Hz

(1)Pulse Test: Pulse Width ≤ 380μs, Duty Cycle ≤ 2%

**Classification of h<sub>FE</sub>**

Rank	A	B	C
Range	110~220	200~450	420~800

## Disclaimer

Any Customer or user of this document or products described herein in such applications shall assume all risks of such use and will agree to hold *DC COMPONENTS* harmless against all damages.

*DC COMPONENTS* disclaims any and all liability arising out of the application or use of any product, including consequential or incidental damages. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application.

*DC COMPONENTS* reserve the right to make modifications, enhancements, improvements, corrections or other changes without further notice to this document and any product described herein, and disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Unless otherwise in writing, *DC COMPONENTS* products are intended for use as general electronic components in standard applications ( eg: Consumer electronic, Computer equipment, Office equipment, etc.), and not recommended for use in a high specific application where a failure or malfunction of the device could result in human injury or death ( eg: Aerospace equipment, Submarine cables, Combustion equipment, Safety devices, Life support systems, etc.)

Customers using or selling *DC COMPONENTS* products not expressly indicated for use in such applications do so at their own risk. If customer intended to use *DC COMPONENTS* standard quality grade devices for applications not envisioned by *DC COMPONENTS*, please contact our sales representatives in advance.



*DC COMPONENTS CO., LTD.*