DIN RAIL POWER SUPPLY 15VDC 24WATT

STONTRONICS: DG-15-S24

Features:

- Universal / Full Range Input
- Highly Reliable Design
- 100% Full Load Burn-in Test
- 3 Year Warranty



Electronics

Description:

The TT Electronics range of Din Rail Power Supplies can be installed on either TS-35/7 or TS-35/18. Featuring wide ranging universal Input for many industrial application and come with a 3 year warranty as standard. This 15 Watt unit is offered in 24V.

	Specification
Part Number	DG-15-S24
DC Output	24V
Rated Output Current	0.65A
Ripple & Noise	<140mV
Voltage ADJ. Range	24-28V
Voltage Accuracy	+/- 1%
Line Regulation	±0.5%
Load Regulation	+/-1%
Set-up Time	<1500mS@(230Vac input, Full load)
Hold up Time	≥20mS(230Vac input, Full load)
Temperature Coefficient	+/-0.03%
Overshoot and Undershoot	<5%
Input Voltage Range	90Vac - 264Vac
Input Frequency Range	47Hz - 63Hz
Efficiency	80%
AC Current (max.)	<0.5
Inrush Current (max.)	<50A/230Vac Cold Start
Leakage Current	Input-output:≤0.25mA
Over Load Protection	120-150%, Constant Current, Auto Recovery
Over Voltage Protection	28.8 - 31.2V Shutdown and Re Power On
Short Circuit	Long-term mode, auto recovery
Operating Temp. & Humidity	-25°C to 50°C; 20% to 90%
Storage Temp. & Humidity	-40°C to 85°C; 5% to 95%
Safety Standards	Meet GB4643 EN60950
Withstand Voltage	Primary-Secondary: 3.0Kvdc <10mA
Isolation Resistance	>10M ohms
EMC Emission	Compliance to EN55032, EN55024, Class B
Harmonic Current	Compliance to EN6100-3-2 class A
EMC Immunity	Compliance to EN61000-4-2,3,4,5,6,8,11; EN55024 heavy industry level
MTBF	300,000 hours
Dimensions	32mm x 97.5mm x 103.7mm


STONTRONICS


DIN RAIL POWER SUPPLY 15VDC 24WATT




STONTRONICS: DG-15-S24

Diagrams

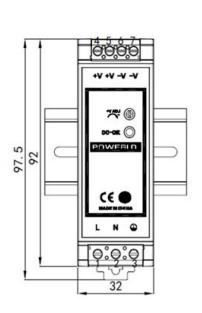

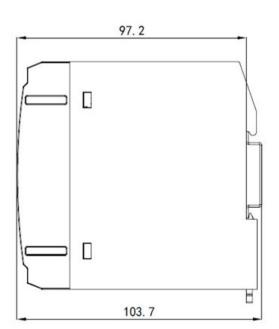

Derating Curve

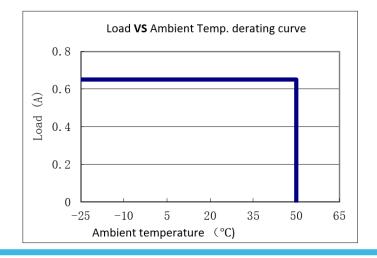

STONTRONICS