DIN RAIL POWER SUPPLY 12VDC 60WATT

STONTRONICS: DG-60-S12

Features:

- Universal / Full Range Input
- Highly Reliable Design
- 100% Full Load Burn-in Test
- 3 Year Warranty





Description:

The TT Electronics range of Din Rail Power Supplies can be installed on either TS-35/7 or TS-35/18. Featuring wide ranging universal Input for many industrial application and come with a 3 year warranty as standard. This 60 Watt unit is offered in 12V.

Specification	
Part Number	DG-60-S12
DC Output	12V
Rated Output Current	5A
Ripple & Noise	<100mV
Voltage ADJ. Range	12-14V
Voltage Accuracy	±1.0%
Line Regulation	±0.5%
Load Regulation	±1.0%
Set-up Time	<1500mS@230Vac
Hold up Time	≥20mS(230Vac input, Full load)
Temperature Coefficient	+/-0.03%/°C
Overshoot and Undershoot	<5.0%
Input Voltage Range	90Vac - 264Vac
Input Frequency Range	47Hz - 63Hz
Efficiency	86%
AC Current (max.)	<1.6A @ 230Vac
Inrush Current (max.)	<42A/230Vac Cold Start
Leakage Current	Input-output:≤0.25mA
Over Load Protection	120%~150% of rated current, Hiccup mode, auto recovery
Over Voltage Protection	15.4 - 16.8V Shutdown and Re Power On
Short Circuit	Long-term mode, auto recovery
Operating Temp. & Humidity	-20°C to +50°C / 20% to 90%
Storage Temp. & Humidity	-40°C to +85°C / 5% to 95%
Safety Standards	Meet GB4943/EN60950
Withstand Voltage	Primary-Secondary: 3.0Kvdc ≤10mA
Isolation Resistance	>10M ohms
EMC Emission	Compliance to EN55032, EN55024, Class B
Harmonic Current	Compliance to EN61000-3-2, Class A
EMC Immunity	Compliance to EN61000-4-2,3,4,5,6,8,11; EN55024 heavy industry level
MTBF	300,000 hours
Dimensions	32mm x 97.5mm x 103.7mm


STONTRONICS


DIN RAIL POWER SUPPLY 12VDC 60WATT




STONTRONICS: DG-60-S12

Diagrams

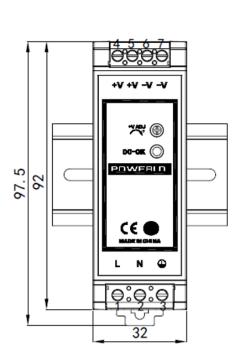

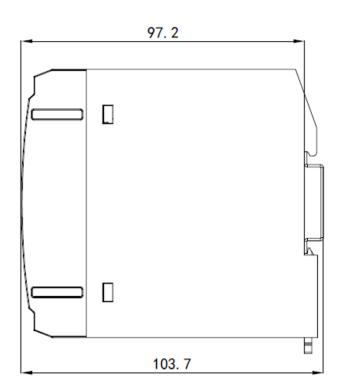

Derating Curve

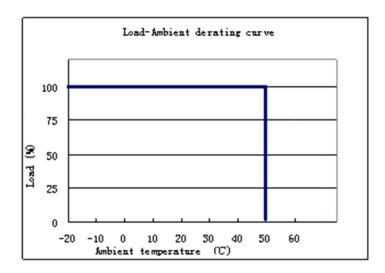

STONTRONICS