


AMP SOLISTRAND

Ringzungen,
6,7–304,0 mm²

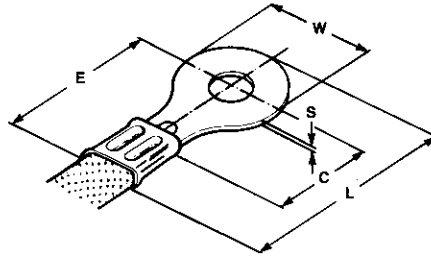

AMP SOLISTRAND

Ring Tongues,
6.7–304.0 mm²

Leiterquerschnittsbereich 10,0 mm²
AWG 8 (6,7–10,5 mm²)

Wire Size Range 10.0 mm²
AWG 8 (6.7–10.5 mm²)

| Bolzen Bolt M | Bolzenloch Stud Hole (mm) | Abmessungen/Dimensions (mm) | | | | | Bestell-Nummer Part Number | Werkzeug Tooling |
|---------------------|---------------------------------|-----------------------------|------|--------|------|------|-------------------------------|---|
| | | S | W | C min. | L | E | | |
| 5.0 | 5.2 | 1.2 | 11.9 | 9.1 | 23.7 | 17.7 | 160013-0 | siehe Seiten 22-63–22-78 see pages 22-63–22-78 |
| 6.0 | 6.1 | 1.2 | 11.9 | 9.1 | 23.8 | 17.9 | 130550-0 | |
| 6.0 | 6.7 | 1.2 | 11.9 | 9.1 | 23.7 | 17.7 | 33461-0 | |
| 8.0 | 8.3 | 1.2 | 15.1 | 13.5 | 29.7 | 22.1 | 33462-0 | |
| 10.0 | 10.5 | 1.2 | 15.1 | 13.5 | 29.7 | 22.2 | 160056-0 | |
| 12.0 | 13.0 | 1.2 | 31.8 | 25.4 | 49.9 | 34.0 | 35664-0 | |

Leiterquerschnittsbereich 16,0 mm²
AWG 6 (10,6–16,7 mm²)

Wire Size Range 16.0 mm²
AWG 6 (10.6–16.7 mm²)

| Bolzen Bolt M | Bolzenloch Stud Hole (mm) | Abmessungen/Dimensions (mm) | | | | | Bestell-Nummer Part Number | Werkzeug Tooling |
|---------------------|---------------------------------|-----------------------------|------|--------|------|------|-------------------------------|---|
| | | S | W | C min. | L | E | | |
| 5.0 | 5.2 | 1.45 | 11.9 | 13.5 | 29.7 | 23.7 | 130552-0 | siehe Seiten 22-63–22-78 see pages 22-63–22-78 |
| 6.0 | 6.3 | 1.45 | 11.9 | 13.5 | 29.7 | 23.7 | 130554-0 | |
| 6.0 | 6.7 | 1.45 | 15.9 | 13.5 | 31.8 | 23.8 | 33465-0 | |
| 8.0 | 8.3 | 1.45 | 15.9 | 13.5 | 31.6 | 23.7 | 33466-0 | |
| 10.0 | 10.3 | 1.45 | 15.9 | 13.5 | 31.6 | 23.7 | 160032-0 | |
| 12.0 | 13.0 | 1.45 | 22.2 | 25.4 | 46.7 | 35.9 | 320344-0 | |
| 12.0 | 13.1 | 1.45 | 31.8 | 25.4 | 51.6 | 35.6 | 36808-0 | |

Leiterquerschnittsbereich 25,0 mm²
AWG 4 (16,8–26,6 mm²)

Wire Size Range 25.0 mm²
AWG 4 (16.8–26.6 mm²)

| Bolzen Bolt M | Bolzenloch Stud Hole (mm) | Abmessungen/Dimensions (mm) | | | | | Bestell-Nummer Part Number | Werkzeug Tooling |
|---------------------|---------------------------------|-----------------------------|------|--------|------|------|-------------------------------|---|
| | | S | W | C min. | L | E | | |
| 5.0 | 5.2 | 1.8 | 16.7 | 13.1 | 33.3 | 25.0 | 160119-0 | siehe Seiten 22-63–22-78 see pages 22-63–22-78 |
| 6.0 | 6.1 | 1.8 | 16.7 | 13.1 | 33.2 | 24.9 | 130560-0 | |
| 6.0 | 6.7 | 1.8 | 12.7 | 11.1 | 30.5 | 24.1 | 33469-0 | |
| 8.0 | 8.3 | 1.8 | 16.7 | 13.1 | 33.2 | 24.9 | 33470-0 | |
| 10.0 | 10.5 | 1.8 | 16.7 | 13.1 | 33.2 | 24.9 | 160075-0 | |
| 12.0 | 13.0 | 1.8 | 22.2 | 25.4 | 48.3 | 37.2 | 327175-0 | |
| 12.0 | 13.1 | 1.8 | 31.8 | 25.4 | 53.1 | 37.1 | 35668-0 | |
| 16.0 | 16.6 | 1.8 | 31.8 | 25.4 | 53.1 | 37.2 | 35669-0 | |

Leiterquerschnittsbereich 35,0 mm²
AWG 2 (26,7–42,4 mm²)

Wire Size Range 35.0 mm²
AWG 2 (26.7–42.4 mm²)

| Bolzen Bolt M | Bolzenloch Stud Hole (mm) | Abmessungen/Dimensions (mm) | | | | | Bestell-Nummer Part Number | Werkzeug Tooling |
|---------------------|---------------------------------|-----------------------------|------|--------|------|------|-------------------------------|---|
| | | S | W | C min. | L | E | | |
| 6.0 | 6.3 | 1.8 | 15.9 | 17.4 | 38.8 | 30.9 | 130562-0 | siehe Seiten 22-63–22-78 see pages 22-63–22-78 |
| 6.0 | 6.7 | 1.8 | 22.6 | 17.5 | 42.1 | 30.8 | 320138-0 | |
| 8.0 | 8.3 | 1.8 | 15.9 | 17.4 | 38.8 | 30.9 | 322870-0 | |
| 8.0 | 8.3 | 1.8 | 22.2 | 17.5 | 42.2 | 30.2 | 35183-0 | |
| 10.0 | 10.5 | 1.8 | 22.2 | 17.4 | 42.0 | 30.9 | 160002-0 | |
| 12.0 | 13.0 | 1.8 | 22.2 | 17.4 | 42.0 | 30.9 | 35185-0 | |
| 16.0 | 16.6 | 1.8 | 32.0 | 34.1 | 63.7 | 49.8 | 320754-0 | |