DATASHEET - DILM150-22(RAC240)



Contactor, 380 V 400 V 75 kW, 2 N/O, 2 NC, RAC 240: 190 - 240 V 50/60 Hz, AC operation, Screw terminals



Part no. DILM150-22(RAC240)

Catalog No. 239598

Alternate Catalog XTCE150G22B

No.

EL-Nummer 4110250

(Norway)

Delivery program Froduct range Application Application Subhange Utilization category Connection technique ALS 3 388 V 400 V	(Norway)			
Application Subrange Chilacitoria category	Delivery program			
Subtrarage Ubilization category Connection technique Connection al current AC-3 380 V40 V	Product range			Contactors
Unitation cotegory AP 2- No ministuction motion count or estituting funding and a AP 2- Normal AP 2- AP Count AP 2- AP Count AP 2- AP Count AP 2-	Application			Contactors for Motors
AC 34C 96 Normal AC induction motors: Starting, switching off while training and AC induction motors: Starting, switching off while training and AC induction motors: Starting, plugging, reversing, inching a control of the property of th	Subrange			Complete devices up to 170 A
Notes Rated operational current AC-3 380 V 400 V AC-1 Conventional free air thermal current, 3 pole, 50 + 60 Hz Open at 40 °C In =	Utilization category			AC-3/AC-3e: Normal AC induction motors: Starting, switching off while running
Notes Rated operational current AC-3 380 V 400 V AC-1 Conventional free air thermal current, 3 pole, 50 - 80 Hz Open at 40 °C enclosed in at 40 °C open onclosed in at 40	Connection technique			Screw terminals
Also tested according to AC-3e. Also tested according to Also tested according to Also tested according to Also tested tested according to Also tested according to Also tested tested according to Also test				IE3 ✓
AC-3 380 V 400 V AC-1 Conventional free air thermal current, 3 pole, 50 - 60 Hz 0 pen at 40 °C enclused 1 b 1 b A 144 Conventional free air thermal current, 1 pole open 1 b 0 A 100 Conventional free air thermal current, 1 pole open 1 b 0 A 400 AC-3 270 V 230 V P NW 380 V 400 V 680 V 890 V P NW 380 V 400 V 680 V 890 V P NW 380 V 400 V 9 P NW 380 V 380 V 400 V 9 P NW 380 V 380 V 400 V 9 P NW 380 V 380	Notes			
Beach Act 150 15	Rated operational current			
AC-1 Conventional free air thermal current, 3 pole, 50 - 60 Hz Open at 40 °C enclosed l _{th} A 144 Conventional free air thermal current, 1 pole open enclosed l _{th} A 400 enclosed l _{th} A 400 enclosed l _{th} A 360 Max. rating for three-phase motors, 50 - 60 Hz AC-3 220 V 230 V P N W 48 360 V 400 V P N W 75 660 V 800 V P N W 96 AC-4 220 V 230 V P N W 96 AC-4 220 V 230 V P N W 33 380 V 400 V P N W 96 Contacts N/O = Normally open N/O = Normally closed mstructions Actuating voltage A 190 A 100 A 100	AC-3			
Conventional free air thermal current, 3 pole, 50 - 60 Hz Im =	380 V 400 V	I _e	Α	150
Open at 40 °C I _{Ih} = I ₀ A 190 enclosed I _{Ih} A 144 Conventional free air thermal current, 1 pole I _{Ih} A 400 open I _{Ih} A 360 Max. rating for three-phase motors, 50 - 60 Hz AC-3 360 AC-3 220 ∨ 230 ∨ P kW 48 380 ∨ 400 ∨ P kW 75 660 ∨ 690 ∨ P kW 96 AC-4 220 ∨ 230 ∨ P kW 33 660 ∨ 690 ∨ P kW 33 660 ∨ 690 ∨ P kW 33 660 ∨ 690 ∨ P kW 48 Contacts N/C = Normally open N/C = Normally closed 2 N/C Contacts to EN 50 012. integrated suppressor circuit in actuating electronics with mirror contact. Actuating voltage Actuating voltage	AC-1			
In In In In In In In In	Conventional free air thermal current, 3 pole, 50 - 60 Hz			
enclosed Conventional free air thermal current, 1 pole open enclosed Ish A 400 enclosed Ish A 360 Max. rating for three-phase motors, 50 - 60 Hz AC-3 220 V 230 V 9	Open			
Conventional free air thermal current, 1 pole	at 40 °C	$I_{th} = I_e$	Α	190
In A 400 In A 360 Max. rating for three-phase motors, 50 - 60 Hz AC-3 220 V 230 V P kW 48 380 V 400 V P kW 96 AC-4 220 V 230 V P kW 96 AC-4 220 V 230 V P kW 33 380 V 400 V P kW 33 660 V 690 V P kW 48 Contacts V/O = Normally open	enclosed	I_{th}	Α	144
enclosed	Conventional free air thermal current, 1 pole			
Max. rating for three-phase motors, 50 - 60 Hz AC-3 220 V 230 V P KW 48 380 V 400 V P KW 75 660 V 680 V P KW 96 AC-4 220 V 230 V P KW 20 380 V 400 V P KW 33 660 V 680 V P KW 33 660 V 680 V P KW 48 Contacts N/O = Normally open N/C = Normally closed Instructions Contact sequence Actuating voltage Actuating voltage Actuating voltage AC-3 RAC-4 AC-4 AC-	open	I_{th}	Α	400
AC-3 220 V 230 V	enclosed	I _{th}	Α	360
220 V 230 V	Max. rating for three-phase motors, 50 - 60 Hz			
Section Sect	AC-3			
660 V 690 V P KW 96 AC-4 220 V 230 V P KW 20 380 V 400 V P KW 33 660 V 690 V P KW 48 Contacts N/O = Normally open N/C = Normally closed Instructions Contacts to EN 50 012. integrated suppressor circuit in actuating electronics with mirror contact. Contact sequence Actuating voltage Actuating voltage RAC 240: 190 - 240 V 50/60 Hz	220 V 230 V	P	kW	48
AC-4 220 V 230 V	380 V 400 V	P	kW	75
P	660 V 690 V	P	kW	96
380 V 400 V P kW 48 Contacts N/O = Normally open N/C = Normally closed Instructions Contact sequence Contact sequence Actuating voltage P kW 48 Contacts Contacts Contacts to EN 50 012. integrated suppressor circuit in actuating electronics with mirror contact. RAC 240: 190 - 240 V 50/60 Hz	AC-4			
660 V 690 V P kW 48 Contacts N/O = Normally open N/C = Normally closed Instructions Contacts to EN 50 012. integrated suppressor circuit in actuating electronics with mirror contact. Contact sequence Actuating voltage RAC 240: 190 - 240 V 50/60 Hz	220 V 230 V	P	kW	20
Contacts N/O = Normally open 2 N/O N/C = Normally closed 2 NC Instructions Contacts to EN 50 012. integrated suppressor circuit in actuating electronics with mirror contact. Contact sequence A1 1 1 3 5 13 12 13 1 43 Actuating voltage RAC 240: 190 - 240 V 50/60 Hz	380 V 400 V	P	kW	33
N/O = Normally open N/C = Normally closed 2 NC Contacts to EN 50 012. integrated suppressor circuit in actuating electronics with mirror contact. Contact sequence At 11 1 3 15 1/3 12/1 2/3 14/3 Actuating voltage RAC 240: 190 - 240 V 50/60 Hz	660 V 690 V	P	kW	48
N/C = Normally closed 2 NC Instructions Contacts to EN 50 012. integrated suppressor circuit in actuating electronics with mirror contact. Contact sequence A1 1 1 3 5 13 12 13 1 43 Actuating voltage RAC 240: 190 - 240 V 50/60 Hz	Contacts			
Contacts to EN 50 012. integrated suppressor circuit in actuating electronics with mirror contact. Contact sequence A1 11 3 15 13 12 12 13 143 Actuating voltage RAC 240: 190 - 240 V 50/60 Hz	N/0 = Normally open			2 N/O
integrated suppressor circuit in actuating electronics with mirror contact. Contact sequence A1 1 1 3 5 13 12 13 1 43 A2 2 2 4 6 6 14 22 32 44 RAC 240: 190 - 240 V 50/60 Hz	N/C = Normally closed			2 NC
Actuating voltage RAC 240: 190 - 240 V 50/60 Hz	Instructions			integrated suppressor circuit in actuating electronics
	Contact sequence			A1 1 1 3 5 13 22 1 31 48 A2 2 4 6 14 22 32 44
Voltage AC/DC AC operation	Actuating voltage			RAC 240: 190 - 240 V 50/60 Hz
	Voltage AC/DC			AC operation

Technical data

Standards IEC/EN 60947, VDE 0660, UL, CSA

Lifespan, mechanical			
AC operated	Operations	4.06	5.7
		x 10 ⁶	
Operating frequency, mechanical	0 "		2000
AC operated	Operations/h		3600
Climatic proofing			Damp heat, constant, to IEC 60068-2-78 Damp heat, cyclic, to IEC 60068-2-30
Ambient temperature			
Open		°C	-25 - +60
Enclosed		°C	- 25 - 40
Storage		°C	- 40 - 80
Mounting position			30°
Mechanical shock resistance (IEC/EN 60068-2-27)			
Half-sinusoidal shock, 10 ms			
Main contacts			
N/O contact		g	10
Auxiliary contacts			
N/O contact		g	7
N/C contact		g	5
Mechanical shock resistance (IEC/EN 60068-2-27) when tabletop-mounted			
Half-sinusoidal shock, 10 ms			
Main contacts			
N/O contact		g	10
Auxiliary contacts			
N/O contact		g	7
N/C contact		g	5
Degree of Protection			IP00
Protection against direct contact when actuated from front (EN 50274)			Finger and back-of-hand proof
Altitude		m	Max. 2000
Weight			
AC operated		kg	2
Screw connector terminals			
Terminal capacity main cable			
Flexible with ferrule		mm ²	1 x (10 - 95) 2 x (10 - 70)
Stranded		mm ²	1 x (16 - 95) 2 x (16 - 70)
Solid or stranded		AWG	single 83/0, double 82/0
Flat conductor	Lamellenzahl x Breite x Dicke	mm	2 x (6 x 16 x 0.8)
Stripping length		mm	24
Terminal screw			M10
Tightening torque		Nm	14
Tool			
Hexagon socket-head spanner	SW	mm	5
Terminal capacity control circuit cables			
Solid		mm ²	1 x (0.75 - 2.5) 2 x (0.75 - 2.5)
Flexible with ferrule		mm ²	1 x (0.75 - 2.5) 2 x (0.75 - 2.5)
Solid or stranded		AWG	18 - 14
Stripping length		mm	10
Terminal screw			M3.5

Tightening torque		Nm	1.2
Tool			
Pozidriv screwdriver		Size	2
Standard screwdriver		mm	0.8 x 5.5 1 x 6
Main conducting paths			
Rated impulse withstand voltage	U _{imp}	V AC	8000
Overvoltage category/pollution degree			111/3
Rated insulation voltage	Ui	V AC	690
Rated operational voltage	U _e	V AC	690
Safe isolation to EN 61140			
between coil and contacts		V AC	690
between the contacts		V AC	690
Making capacity (p.f. to IEC/EN 60947)	Up to 690 V	A	2100
Breaking capacity			
220 V 230 V		Α	1500
380 V 400 V		Α	1500
500 V		Α	1500
660 V 690 V		Α	1200
Short-circuit rating			
Short-circuit protection maximum fuse			
Type "2" coordination			
400 V	gG/gL 500 V	Α	250
690 V	gG/gL 690 V	Α	250
Type "1" coordination			
400 V	gG/gL 500 V		250
690 V	gG/gL 690 V	Α	250
AC AC-1			
Rated operational current			
Conventional free air thermal current, 3 pole, 50 - 60 Hz			
Open			
at 40 °C	$I_{th} = I_e$	Α	190
at 50 °C	I _{th} =I _e	Α	180
at 55 °C	$I_{th} = I_e$	Α	170
at 60 °C	$I_{th} = I_e$	Α	160
enclosed	I _{th}	Α	144
Conventional free air thermal current, 1 pole			
open	I _{th}	Α	400
enclosed	I _{th}	Α	360
AC-3			
Rated operational current			
Open, 3-pole: 50 – 60 Hz Notes			At maximum permissible ambient temperature (open.) Also tested according to AC-3e.
220 V 230 V	I _e	Α	150
240 V	l _e	Α	150
380 V 400 V	I _e	Α	150
415 V	I _e	Α	150
440V	I _e	Α	150
500 V	l _e	Α	150
660 V 690 V	I _e	Α	100
Motor rating	P	kWh	
220 V 230 V	P	kW	48

240V	Р	kW	52
380 V 400 V	P	kW	75
415 V	P	kW	91
413 V 440 V	P	kW	
	P		95
500 V		kW	110
660 V 690 V AC-4	Р	kW	96
Open, 3-pole: 50 – 60 Hz			
220 V 230 V	I _e	Α	65
240 V	I _e	Α	65
380 V 400 V	I _e	A	65
415 V	I _e	A	65
440 V	l _e	Α	65
500 V	l _e	A	65
660 V 690 V			
	l _e	A	50
Motor rating	P	kWh	20
220 V 230 V	P	kW	20
240 V	P P	kW	22
380 V 400 V	P	kW	33
415 V 440 V	P	kW	39 41
440 V 500 V	P	kW	47
660 V 690 V	P	kW	48
DC	Г	KVV	40
Rated operational current, open			
DC-1			
60 V	I _e	Α	160
110 V	I _e	Α	160
220 V	I _e	Α	90
Current heat loss	· ·		
3 pole, at I _{th} (60°)		W	36.5
Current heat loss at I _e to AC-3/400 V		W	32.1
Impedance per pole		mΩ	0.6
Magnet systems			
Voltage tolerance			
AC operated	Pick-up	$x U_c$	0.8 - 1.15
Drop-out voltage AC operated	Drop-out	x U _c	0.25 - 0.6
Power consumption of the coil in a cold state and 1.0 x $\ensuremath{\text{U}_{\text{S}}}$			
50 Hz	Pick-up	VA	180
50 Hz	Sealing	VA	3.1
50 Hz	Sealing	W	2.3
60 Hz	Pick-up	VA	170
60 Hz	Sealing	VA	3.1
60 Hz	Sealing	W	2.3
Duty factor		% DF	100
Changeover time at 100 % $\rm U_S$ (recommended value)			
Main contacts			
AC operated			
Closing delay		ms	28 - 33
Opening delay		ms	35 - 41
Arcing time		ms	15
Arching unite			
Permissible residual current with actuation of A1 - A2 by the electronics (with 0 signal).		mA	≦1

Electromagnetic compatibility (EMC)

Libotiomagnotio compatibility (Emo)		
Emitted interference		to EN 60947-1
Interference immunity		to EN 60947-1
Rating data for approved types		
Switching capacity		
Maximum motor rating		
Three-phase		
200 V 208 V	HP	50
230 V 240 V	НР	60
460 V 480 V	НР	125
575 V 600 V	НР	125
Single-phase		
115 V 120 V	НР	10
230 V 240 V	НР	30
General use	A	225
Auxiliary contacts	^	
Pilot Duty		
		A600
AC operated DC operated		P300
General Use		F300
	V	.00
AC	V	600
AC	A	15
DC	V	250
DC	Α	1
Short Circuit Current Rating	SCCR	
Basic Rating		
SCCR	kA	10
max. Fuse	Α	600
max. CB	Α	600
480 V High Fault		
SCCR (fuse)	kA	30/100
max. Fuse	Α	300/300 Class J
SCCR (CB)	kA	65
max. CB	Α	250
600 V High Fault		
SCCR (fuse)	kA	30/100
max. Fuse	Α	300/600 Class J
SCCR (CB)	kA	30
max. CB	Α	350
Special Purpose Ratings		
Electrical Discharge Lamps (Ballast)		
480V 60Hz 3phase, 277V 60Hz 1phase	Α	160
600V 60Hz 3phase, 347V 60Hz 1phase	Α	160
Incandescent Lamps (Tungsten)		
480V 60Hz 3phase, 277V 60Hz 1phase	Α	160
600V 60Hz 3phase, 347V 60Hz 1phase	Α	160
Resistance Air Heating		
480V 60Hz 3phase, 277V 60Hz 1phase	Α	160
600V 60Hz 3phase, 347V 60Hz 1phase	Α	160
Refrigeration Control (CSA only)		
LRA 480V 60Hz 3phase	Α	540
FLA 480V 60Hz 3phase	Α	90
LRA 480V 60Hz 3phase		

LRA 600V 60Hz 3phase	Α	540
FLA 600V 60Hz 3phase	Α	90
Definite Purpose Ratings (100,000 cycles acc. to UL 1995)		
LRA 480V 60Hz 3phase	Α	900
FLA 480V 60Hz 3phase	Α	150
Elevator Control		
200V 60Hz 3phase	HP	30
200V 60Hz 3phase	Α	92
240V 60Hz 3phase	HP	40
240V 60Hz 3phase	Α	104
480V 60Hz 3phase	HP	75
480V 60Hz 3phase	Α	96
600V 60Hz 3phase	HP	100
600V 60Hz 3phase	А	99

Design verification as per IEC/EN 61439

Design vermoation as per 120/211 01703			
Technical data for design verification			
Rated operational current for specified heat dissipation	In	Α	150
Heat dissipation per pole, current-dependent	P _{vid}	W	9
Equipment heat dissipation, current-dependent	P _{vid}	W	0
Static heat dissipation, non-current-dependent	P _{vs}	W	2.1
Heat dissipation capacity	P _{diss}	W	0
Operating ambient temperature min.	0.00	°C	-25
Operating ambient temperature max.		°C	60
IEC/EN 61439 design verification			
10.2 Strength of materials and parts			
10.2.2 Corrosion resistance			Meets the product standard's requirements.
10.2.3.1 Verification of thermal stability of enclosures			Meets the product standard's requirements.
10.2.3.2 Verification of resistance of insulating materials to normal heat			Meets the product standard's requirements.
10.2.3.3 Verification of resistance of insulating materials to abnormal heat and fire due to internal electric effects			Meets the product standard's requirements.
10.2.4 Resistance to ultra-violet (UV) radiation			Meets the product standard's requirements.
10.2.5 Lifting			Does not apply, since the entire switchgear needs to be evaluated.
10.2.6 Mechanical impact			Does not apply, since the entire switchgear needs to be evaluated.
10.2.7 Inscriptions			Meets the product standard's requirements.
10.3 Degree of protection of ASSEMBLIES			Does not apply, since the entire switchgear needs to be evaluated.
10.4 Clearances and creepage distances			Meets the product standard's requirements.
10.5 Protection against electric shock			Does not apply, since the entire switchgear needs to be evaluated.
10.6 Incorporation of switching devices and components			Does not apply, since the entire switchgear needs to be evaluated.
10.7 Internal electrical circuits and connections			Is the panel builder's responsibility.
10.8 Connections for external conductors			Is the panel builder's responsibility.
10.9 Insulation properties			
10.9.2 Power-frequency electric strength			Is the panel builder's responsibility.
10.9.3 Impulse withstand voltage			Is the panel builder's responsibility.
10.9.4 Testing of enclosures made of insulating material			Is the panel builder's responsibility.
10.10 Temperature rise			The panel builder is responsible for the temperature rise calculation. Eaton will provide heat dissipation data for the devices.
10.11 Short-circuit rating			Is the panel builder's responsibility. The specifications for the switchgear must be observed.
10.12 Electromagnetic compatibility			Is the panel builder's responsibility. The specifications for the switchgear must be observed.
10.13 Mechanical function			The device meets the requirements, provided the information in the instruction leaflet (IL) is observed.

Technical data ETIM 7.0


Low-voltage industrial components (EG000017) / Power contactor, AC switching (EC000066)


Electric engineering, automation, process control engineering / Low-voltage switch technology / Contactor (LV) / Power contactor, AC switching (ecl@ss10.0.1-27-37-10-03 [AAB718015])

Rated control supply voltage Us at AC 50HZ	V	190 - 240
Rated control supply voltage Us at AC 60HZ	V	190 - 240
Rated control supply voltage Us at DC	V	0 - 0
Voltage type for actuating		AC
Rated operation current le at AC-1, 400 V	А	190
Rated operation current le at AC-3, 400 V	А	150
Rated operation power at AC-3, 400 V	kW	75
Rated operation current le at AC-4, 400 V	А	65
Rated operation power at AC-4, 400 V	kW	33
Rated operation power NEMA	kW	93
Modular version		No
Number of auxiliary contacts as normally open contact		2
Number of auxiliary contacts as normally closed contact		2
Type of electrical connection of main circuit		Screw connection
Number of normally closed contacts as main contact		0
Number of main contacts as normally open contact		3


Approvals

Product Standards	IEC/EN 60947-4-1; UL 60947-4-1; CSA - C22.2 No. 60947-4-1-14; CE marking
UL File No.	E29096
UL Category Control No.	NLDX
CSA File No.	012528
CSA Class No.	2411-03, 3211-04
North America Certification	UL listed, CSA certified
Specially designed for North America	No

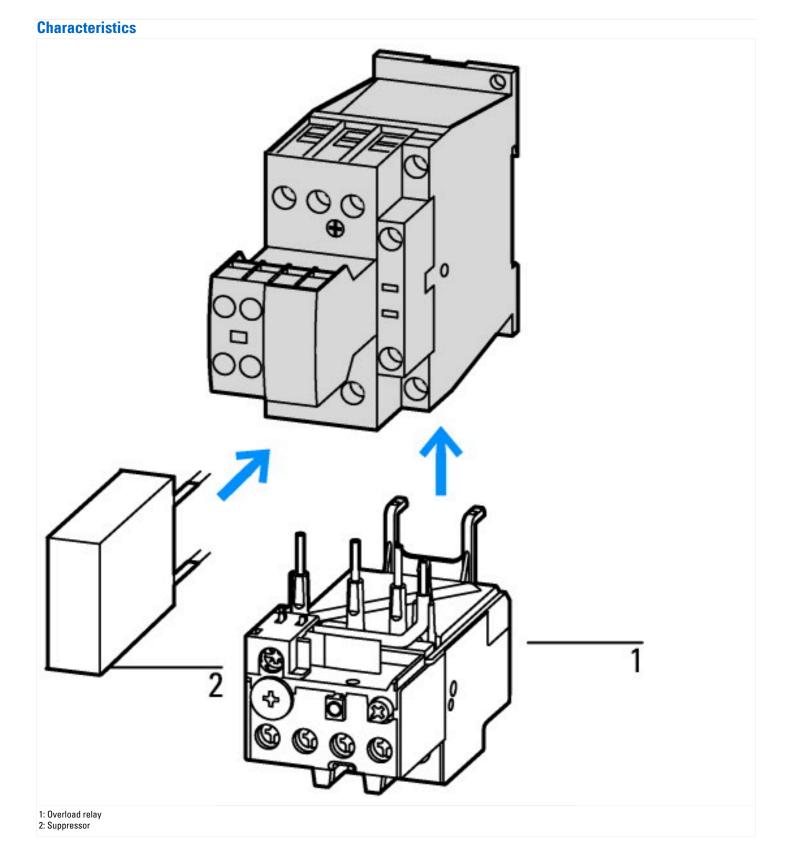

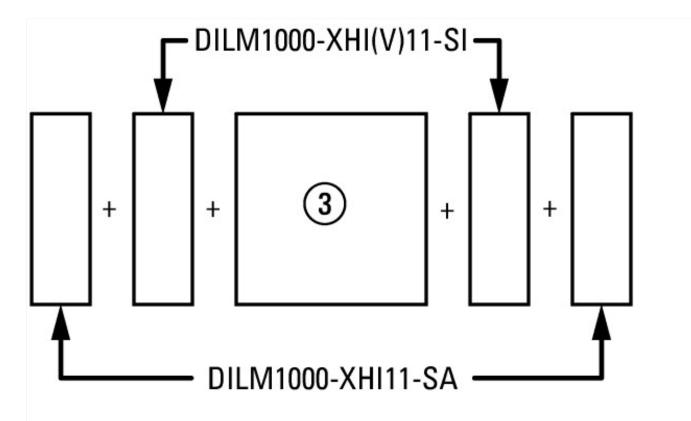

on the side: 2 x DILM820-XHI11(V)-SI; 2 x DILM820-XHI11-SA

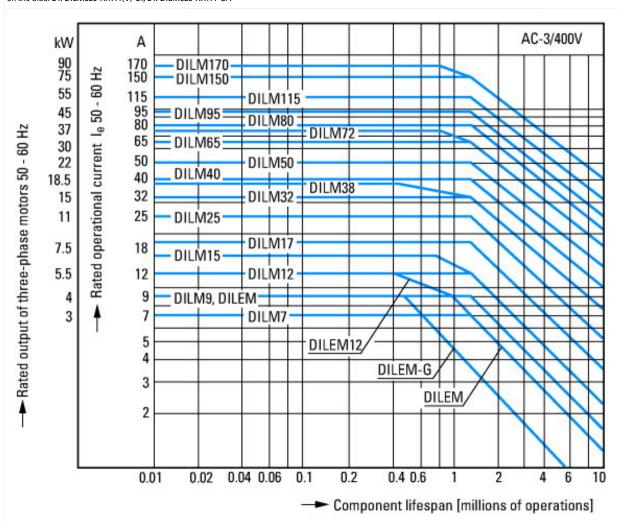


Squirrel-cage motor
Operating characteristics
Starting:from rest
Stopping:after attaining full running speed
Electrical characteristics
Make: up to 6 x rated motor current
Break: up to 1 x rated motor current
Utilization category
100 % AC-3
Typical applications

Compressors Lifts Mixers Pumps Escalators Agitators Fans Conveyor belts Centrifuges Hinged flaps


Bucket-elevators

Air conditioning system
General drives in manufacturing and processing machines

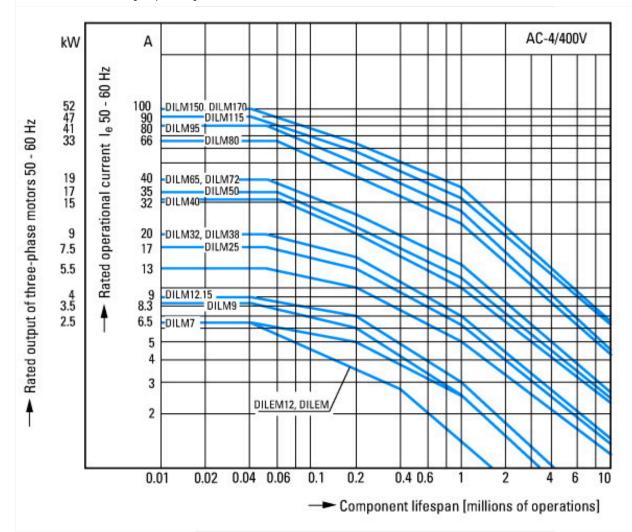

Extreme switching duty
Squirrel-cage motor
Operating characteristics
Inching, plugging, reversing
Electrical characteristics
Make: up to 6 x rated motor current
Break: up to 6 x rated motor current
Utilization category
100 % AC-4
Typical applications
Printing presses
Wire-drawing machines
Centrifuges


Special drives for manufacturing and processing machines

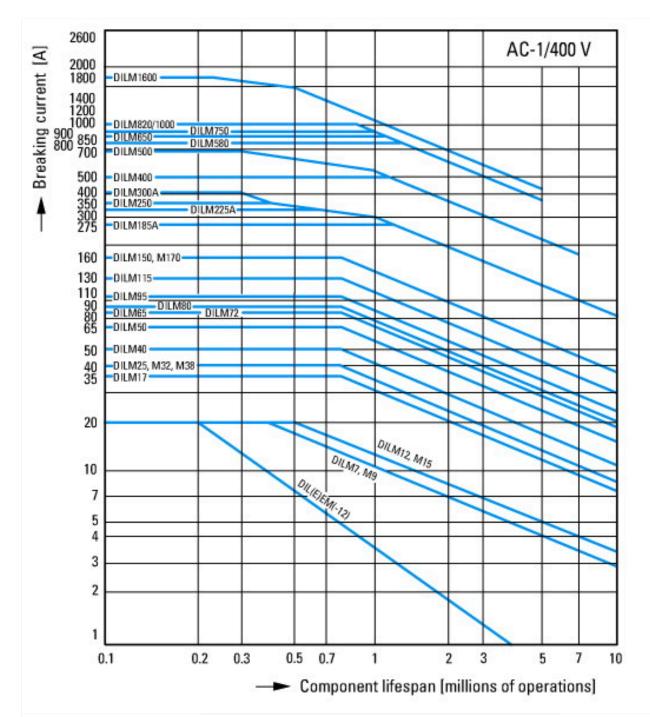


Switching conditions for 3 pole, non-motor loads Operating characteristics
Non inductive and slightly inductive loads
Electrical characteristics
Switch on: 1 x rated operational current
Switch off: 1 x rated operational current
Utilization category
100 % AC-1
Typical examples of application


06/18/2021

Electric heat

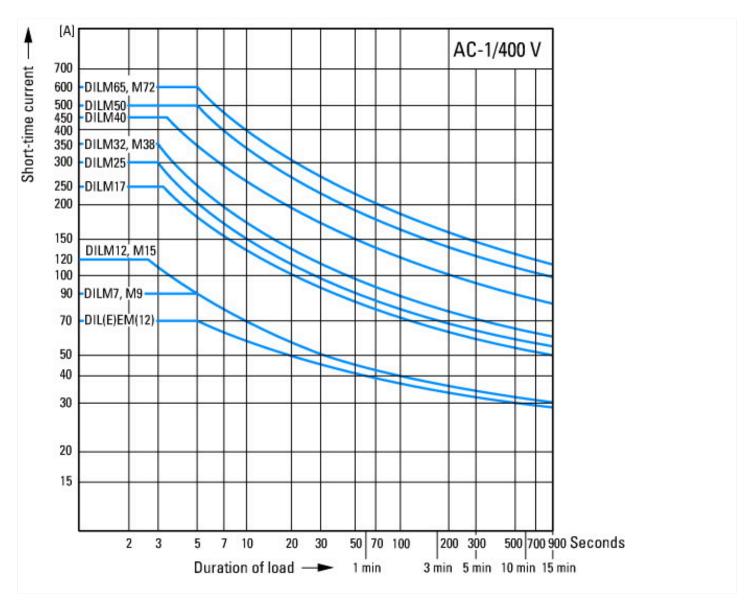

Dimensions

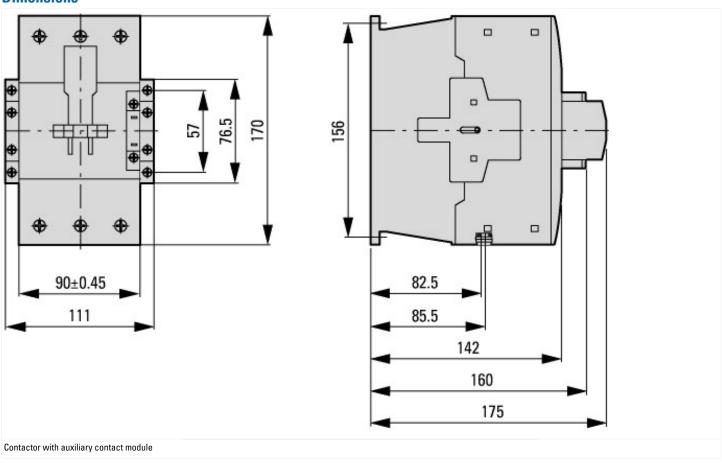

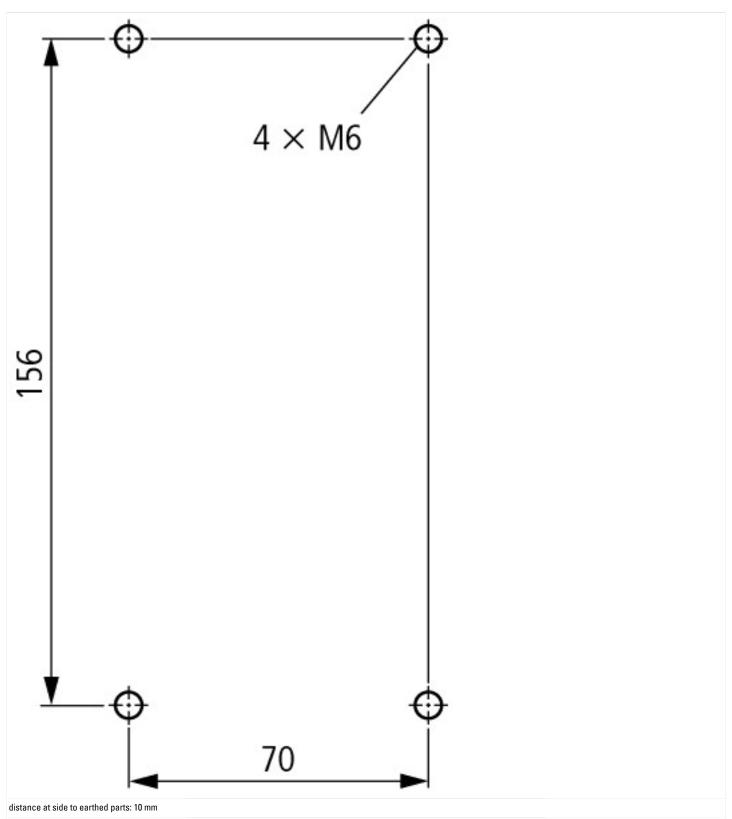

DILM80...DILM170 DILMC80...DILMC150 DILMF80...DILMF150