


# Jackery Battery Pack 2000 Plus

NEW

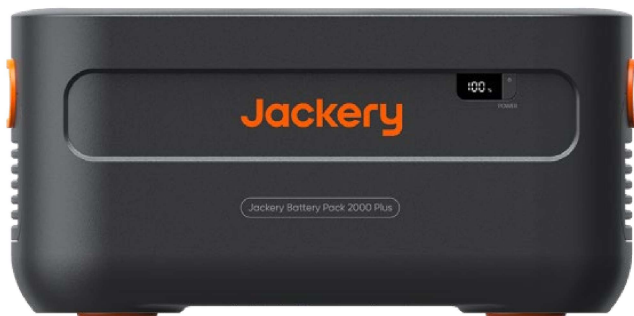

## POWER STATION SPECIFICATION

Capacity	2042.8Wh
Charged with Jackery Explorer 2000 Plus	1.7 Hours
Charged with 12V Car Outlet	25 Hours
Charged with Solar Panel	2 Hours
Battery Lifecycles	After 4000 cycles, ≥70% capacity remains
Input Ports	DC Input 11V-17.5V(Working Voltage)/8A Max, Double to 8A Max 17.5V-60V (Working Voltage)/12A, Double to 24A/1400W Max
DC Extension Ports	32.2V-50.4V~97A Max
Product Weight	43.65lbs (19.8KG)
Dimensions	18.5 x 13.2 x 9.1 in ( 47 x 33.1 x 23.1 cm )
Operating Usage Temperature	14°F~113°F(-10~45°C)
BMS Protection System	12 Types of Protection
Temperature Control Probes	x3
Fire Resistance Rating	UL 94-V0
Shock-Resistant Level	9 Level
Noise Level	≤40dB
APP Intelligent Control	√
Warranty	3+2 Years

## WHAT'S IN THE BOX



1\* Jackery Battery Pack 2000 Plus  
(2042.8Wh)



1\* Extension Cable



1\*User Manual