

# C.A 6522 – C.A 6524 – C.A 6526 C.A 6532 – C.A 6534 – C.A 6536

## **Insulation and Continuity Testers**



- Test voltage from 10 V to 1,000 V / 200 G $\Omega$
- Manual, Lock, Timer and PI / DAR Ratios modes
- Visual Pass / Fail: red / green
- 200 mA / 20 mA continuity with active protection without fuses
- Measurement of V (TRMS & DC), F, Ω, kΩ, C and cable length
- ΔRel mode & configurable alarms
- Storage of measurements in memory













## **Insulation and Continuity Testers**

## **Ergonomics**

Chauvin Arnoux's compact, lightweight testers are easy to learn how to use.

All the information and measurement results are displayed on the backlit screen.

Access to the instrument parameters and information

#### Access to the functions:

- Modification of the display and programming of the insulation measurement durations
- Choice of the current for continuity measurement
- Programming of the alarm thresholds

Activation / deactivation of the alarms

Reading of memorized data / activation of Bluetooth



DARPI TITE GOVEN AND ALARM & B.B.B.B.B.B.M.QuF KOVE

Logarithmic bargraph to display the insulation measurements

Secondary display

Main display

To compensate the resistance of the measurement leads

ΔRel to display the measurement from which a stored reference measurement is subtracted

TEST button to start measuring


Switch to choose the function or shut down the instrument

## **Accessories & Software**

The remote control probe is an accessory specially developed to make your insulation tests in the field simpler and quicker.

- Insulation measurement can be triggered with a single press on the probe's yellow button.
- Equipped with a torch function, this probe effectively lights the point of measurement.
- Thanks to the tester's backlit screen, the measurement results are visible at all times, including in places with poor lighting.



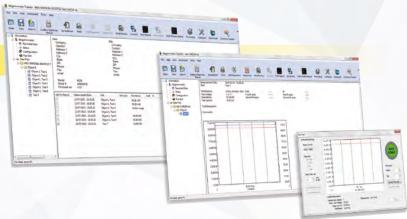

The DataView ® software, with its Megohmmeter Transfer module, automatically recognizes the instrument when it is connected to the PC and opens the corresponding menu. This tree-structure menu offers users direct access to the data recorded in the instrument and its configuration. The other functions available are:

- Activation of remote tests
- Real-time display
- → DAR and PI references
- Graphical plot of the tests
- Generation of measurement reports



## **Applications**

### > INDUSTRIAL MAINTENANCE C.A 6522, C.A 6524 and C.A 6526

Periodic insulation tests on installations and equipment help to prevent incidents by setting up preventive maintenance designed to detect ageing and premature deterioration of their insulation characteristics:

- Measurement of insulation over a programmed duration
- Alarms and Pass/Fail indicator light (C.A 6526)
- PI and DAR ratios to determine the quality of the insulation, with the advantage of not being significantly influenced by the temperature
- · Storage in memory to compare the measurement histories

## > **SPECIAL** C.A 6536

With a variable test voltage from 10 V to 100 V in 1 V increments, this model is intended for special applications in sectors such as avionics, space and defence, which often require a low test voltage and strict adherence to the programmed value.

### > ELECTRONICS C.A 6534

Thanks to its wide test-voltage range from 10 V to 500 V, this model covers the specific requirements of the electronics industries, for both low-current applications and power stages. Its measurement range is from 2 k $\Omega$  to 50 G $\Omega$ . With appropriate electrodes, the 10 V and 100 V test voltages can also be used for electrostatic discharge applications.

### > TELECOMMUNICATIONS C.A 6532

Ideal for measurements on telephone lines:

- Insulation tests at 50 V or 100 V
- Specific functions: measurement of resistance, capacitance, leakage current and AC voltage.
- Measurement of the difference in resistance between 2 wires in a pair by using the ΔREL function.
- Display of the length of the line being tested, thanks to programming of the linear capacitance in nF/km.



## **Insulation and Continuity Testers**

	C.A 6522	C.A 6524	C.A 6526	C.A 6532	C.A 6534	C.A 6536	
Voltage							
Measurement range / Resolution	0.3 V-399.9 V / 0.1 V: 400 V-700 V / 1 V						
Accuracy / Input impedance	± (3 % + 2 cts) / 400 kΩ						
Operating frequency	DC; 15.3 - 800 Hz						
Frequency			50, 10	7.0 000 112			
Measurement range / Resolution / Accuracy		15 3 Hz-300 0 Hz / 0 1 H	lz / + (1 % + 2 etc): 400-80	00 Hz / 1 Hz / ± (1 % + 1 ct)			
Insulation		10.0112-000.0112/0.11	12/ ± (1 /0 + 2 013), 400-00	10 112 / 1 112 / ± (1 /0 + 1 UL)			
Test voltage	250-500-1.000 V	EO 100 2EO	- 500 - 1.000 V	50 - 100 V	10 - 25 - 100 - 250 - 500 V	10 V to 100 V in 1 V ste	
Range at maximum test voltage	40 GΩ			20 GΩ	50 GΩ	20 GΩ	
Compliance with IEC 61557-2 standard	40 612	200 GΩ 2 GΩ		20 GΩ 50 GΩ 2		20 GΩ 2 GΩ	
		2 01/2					
Measurement range: 10 V					2 kΩ - 1 GΩ	2 kΩ - 2 GΩ	
25 V					5 kΩ-2 GΩ	(U <sub>N</sub> /5) kΩ -	
50 V			- 10 GΩ	10 kΩ - 10 GΩ		(U <sub>N</sub> /5) GΩ	
100 V			-20 GΩ	20 kΩ - 20 GΩ	20 kΩ - 10 GΩ	20 kΩ-20 GΩ	
250 V	50 kΩ - 10 GΩ		-50 GΩ		50 kΩ - 25 GΩ		
500 V	100 kΩ-20 GΩ		-100 GΩ		100 kΩ - 50 GΩ		
1,000 V	200 kΩ - 40 GΩ	200 kΩ·	-200 GΩ				
Variable test voltage						10 V to 100 V	
		10(1)-999 kΩ and	1.000-3.999 MΩ / 1 kΩ; 4.	00 - 39.99 MΩ / 10 kΩ; 40.0	-399.9 MΩ / 100 kΩ;		
Measurement range / Resolution		400 - 3	999 MO / 1 MO: 4 00 - 39 9	99 GΩ / 10 MΩ; 40.0 - 200 G	O / 100 MO		
Accuracy		.00 0,	± (3 % + 2 cts)(2)	,	17, 100 11112	± (3 % + 2 cts)(3)	
Test voltage (I < 1 mA)		-0% + 20%				± 0.5 V	
Display of test voltage		± (3 % + 3 cts)				± (3 % + 3 cts)	
Display of test current / resolution	0.01 µA - 39.99 µA / 10 nA; 40.0 - 399.9 µA / 100 nA; 0.400 - 2.000 mA/ 1 µA						
Accuracy of test current	± (10 % + 3 cts)						
PI/DAR ratios		1	0 min / 1 min - 1 min / 3				
Timer (min:s)	0:00 - 39:59						
Discharge time (at 25V)	0.00 - 33.35 < 2 \$/uF						
Alarms	2 fixed thresholds + 1 programmable threshold						
Continuity			Z IIAGU	unosnolus + i programma	bic tiricsrioid		
Range for continuity measurement	0.00 Ω-10.00 Ω (200 mA)		0.00.0-1	10 00 0 (200 mA)· 0 0 - 10	0.0.0.(20 mA)		
Accuracy / Open-circuit voltage	0.00 Ω -10.00 Ω (200 mA) ± (2 % + 2 cts) / ≥ 6 V  0.00 Ω -10.00 Ω (200 mA)						
Measurement current	± (2 % + 2 cts) / ≥ 6 V 200 mA range: 200 mA (-0 mA +20 mA); 20 mA range: 20 mA ± 5 mA						
Continuity thresholds (quick beep)	200  mA range.  200  mA range.  20  mA						
Compensation of cables	$2\Omega$ fixed $2\Omega$ , i.e., programmable threshold up to $9.99\Omega$						
Resistance			up t	0 3.33 11			
			0-3 000 0 / 1	0.400 h0 = 30 00 h0 / 10	) () / + /2 % + 2 ctc)		
leasurement range / Resolution / Accuracy	0 - 3,999 Ω / 1 Ω; 4.00 kΩ - 39.99 kΩ / 10 Ω / ± (3 % + 2 cts) 40.0 kΩ - 399.9 kΩ / 100 Ω; 400 kΩ - 1,000 kΩ / 1 kΩ / ± (3 % + 2 cts)						
Capacitance			40.0 K12 - 399.9 K12	1/ 100 12, 400 K12-1,000 K1	1/ 1 K11/ ± (3 /6 + 2 Cl3)		
Сараспансе			0.1 nE 200	9.9 nF / 0.1 nF			
Massurament range / Desclution				9.9 nF / 1 nF			
Measurement range / Resolution							
				0.0 μF / 10 nF			
Accuracy			± (3 %	6 + 2 cts)			
Line length				0-100 km			
General specifications							
Display			2 x 4,000 cts + I	ogarithmic bargraph			
Storage		300 measurements		1,300 measurement	S		
Communication	Bluetooth® Class II						
	6 x LR6(AA) batteries / 5 min, deactivatable						
Power supply / Automatic shutdown				/ EE OFF: 0.000	it, manager and a /F a ON / FF	o OFF)	
Power supply / Automatic shutdown  Battery life	1,500/2,50	00/6,000 measurements (4	: $U_N \times 1 k\Omega @ U_N (5 s ON)$	/ 55 s OFF); 3,000 continu	ny measurements (5 s on / 55	S UFF)	
	1,500/2,50	00/6,000 measurements (4	: U <sub>N</sub> x 1 kΩ @ U <sub>N</sub> (5 s ON 211 x 108 x 60 mn	/ 55 s OFF); 3,000 continu n / 850 g / IP 54 / IK 04	nty measurements (5 s ON / 55	S UFF)	
Battery life	1,500/2,50		211 x 108 x 60 mn	/ 55 s OFF); 3,000 continu n / 850 g / IP 54 / IK 04 nd IEC 61010-2-030, 600		S OFF)	

(1):  $2 \text{ K}\Omega$  for C.A 6532 - C.A 6534 - C.A 6536 - (2): to be added: 10 V: 1 % per  $0.1 \text{ G}\Omega$ ; 25 V: 0.4 % par  $0.1 \text{ G}\Omega$ , 50 V: 2 % per  $G\Omega$ ; 100 V: 1 % per  $G\Omega$ ; 100 V:  $100 \text{ C}\Omega$ ;  $100 \text{ C}\Omega$ ; 1

## States at delivery

C.A 6522 and C.A 6524 delivered with a carrying bag for hands-free use, 2 elbowed-straight safety leads (red and black) 1.50 m long, one red crocodile clip, one black test probe,  $6 \times LR6$  or AA batteries, multilingual user's manual on CD, a quick start-up guide, multilingual safety datasheet.

C.A 6526, ditto + a CD containing the Megohmmeter Transfer software.

C.A 6532 and C.A 6534, same as C.A 6526 + 2 wire-grips (red and black).

Example for C.A 6532

C.A 6536, same as C.A 6524 + 2 wire-grips (red and black).



### References

C.A 6522 megohmmeter	P01140822
C.A 6524 megohmmeter	
C.A 6526 megohmmeter	
C.A 6532 megohmmeter	P01140832
C.A 6534 megohmmeter	
C.A 6536 megohmmeter	P01140836
Accessories Type-3 remote control probe Continuity rod Thermometer + K thermocouple, C.A 861 C.A 846 thermo-hygrometer USB-Bluetooth adapter. DataView® software.	P01102084A P01650101Z P01156301Z P01102112
Replacement parts	
2 elbowed-straight safety leads (red and black) 1.50 m long	P01295453Z
2 crocodile clips (red and black)	P01295457Z
2 test probes (red and black)	
2 wire-grips (red and black)	
Carrying bag for hands-free use	P01298049

#### FRANCE Chauvin Arnoux 190, rue Championnet 75876 PARIS Cedex 18 Tel: +33 1 44 85 44 38 Fax: +33 1 46 27 95 59

export@chauvin-arnoux.fr

www.chauvin-arnoux.com

Chauvin Arnoux Ltd
Unit 1 Nelson Ct, Flagship Sq, Shaw Cross Business Pk
Dewsbury, West Yorkshire - WF12 7TH
Tel: +44 1924 460 494
Fax: +44 1924 455 328
info@chauvin-arnoux.co.uk

UNITED KINGDOM

www.chauvin-arnoux.com

MIDDLE EAST Chauvin Arnoux Middle East P.O. BOX 60-154 1241 2020 JAL EL DIB - LEBANON Tel: +961 1 890 425 Fax: +961 1 890 424 camie@chauvin-arnoux.com www.chauvin-arnoux.com

