


CF1 - CF6



These open former common mode suppression chokes are specifically designed to attenuate mains borne RF interference.

Constructed using a double wound ferrite ring mounted vertically onto a flame retardant plastic carrier.

High attenuation to unwanted RFI can be achieved by the addition of X2 and Y capacitors.

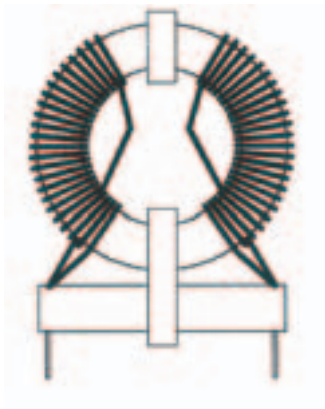


Characteristics

Voltage Range	250 VAC
Live Frequency	50/60Hz
Induction Tolerance	±20%
Test Voltage (winding to winding)	2.5K VAC
Temperature Range	-25°C to +85°C
Temperature Rise@ rated current	30°C

Part No.	Amp	Inductance	DC Resistance (mΩ)
CF1	1	18mH	640
CF2	2	7.5mH	160
CF3	3	3.2mH	71
CF4	4	2.4mH	40
CF5	6	1.4mH	19
CF6	8	0.9mH	9.6

PCB Drilling Detail

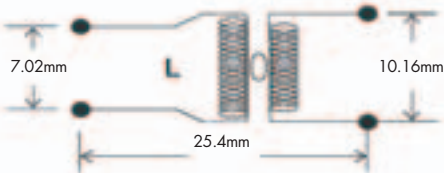

All dimensions in mm