

## Product information

# 97 53 08

## Self-Adjusting Crimping Pliers for wire ferrules

With front loading



- Compression from 0.08 - 10.0 mm<sup>2</sup> in one profile
- Wire ferrules up to 2.5 mm<sup>2</sup> can also be loaded parallelly from the side
- Suitable in particular for all twin wire ferrules up to 2 x 4 mm<sup>2</sup> or 2 x AWG 12
- For crimping wire ferrules according to DIN 46228 parts 1 + 4
- Self-adjusting adaptation to the desired wire ferrule size: no wrong crimps caused by using the wrong die
- Frontal insertion of the wire ferrules into the pliers
- Repetitive, high crimping quality due to integral lock (self-releasing mechanism)
- Crimping pressure has been set precisely (calibrated) in the factory, re-adjustable
- Optimum transmission of force thanks to toggle lever for fatigue-reduced operation
- Handy shape and low weight provide high operation comfort
- Chrome vanadium electric steel in special quality, oil-hardened

### General

Article No.	97 53 08
EAN	4003773040187
Pliers	burnished
Handles	with multi-component grips
weight	477 g
Dimensions	190 x 75 x 20 mm
Reach	yes
RohS	no

### Technical details



Applications	Wire ferrules
Capacity in square millimetres	0.8 — 10 mm <sup>2</sup>
Number of crimping positions	1
AWG	28 — 8


### Classification

eCl@ss 5.1.4	21040301
ETIM 5.0	EC000168
ETIM 6.0	EC000168
proficl@ss 6.0	AAA946c003
UNSPSC 13.1	27112147

technical change and errors excepted



97 53 08: lateral loading of wire ferrules up to 2.5 mm<sup>2</sup> parallelly from the side e.g. in confined areas

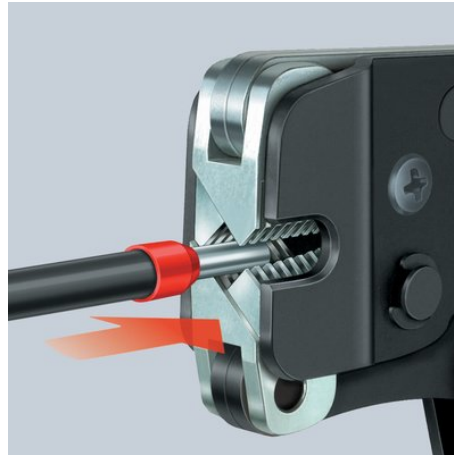

Front loading of wire ferrules e.g. in switchboards



Square-Crimp