


Data sheet | Item number: 787-2861/600-000

Electronic circuit breaker; 1-channel; 24 VDC input voltage; 6 A; Signal contact






[www.wago.com/787-2861/600-000](http://www.wago.com/787-2861/600-000)

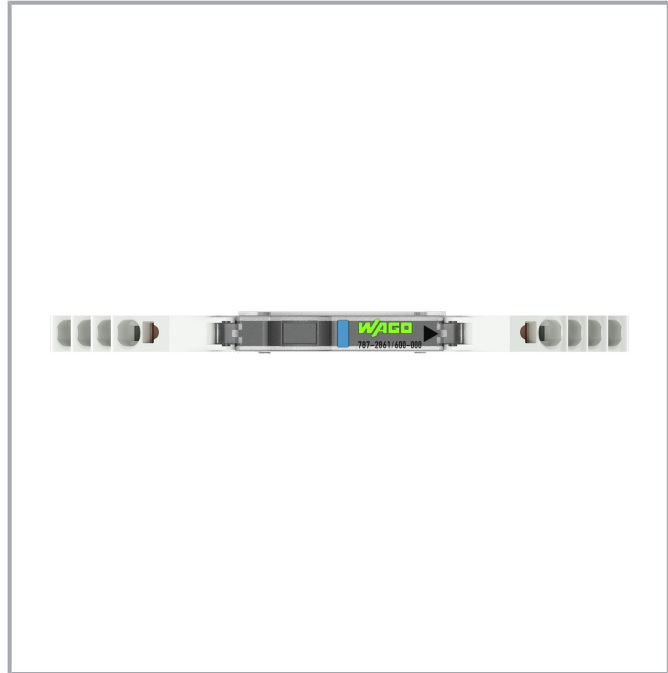

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG  
Hansastr. 27  
32423 Minden  
Phone: +49571 887-0 | Fax: +49571 887-169  
Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)


Do you have any questions about our products?  
We are always happy to take your call at +49 (571) 887-44222.

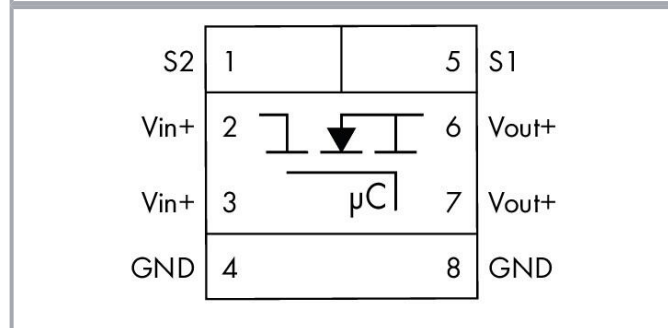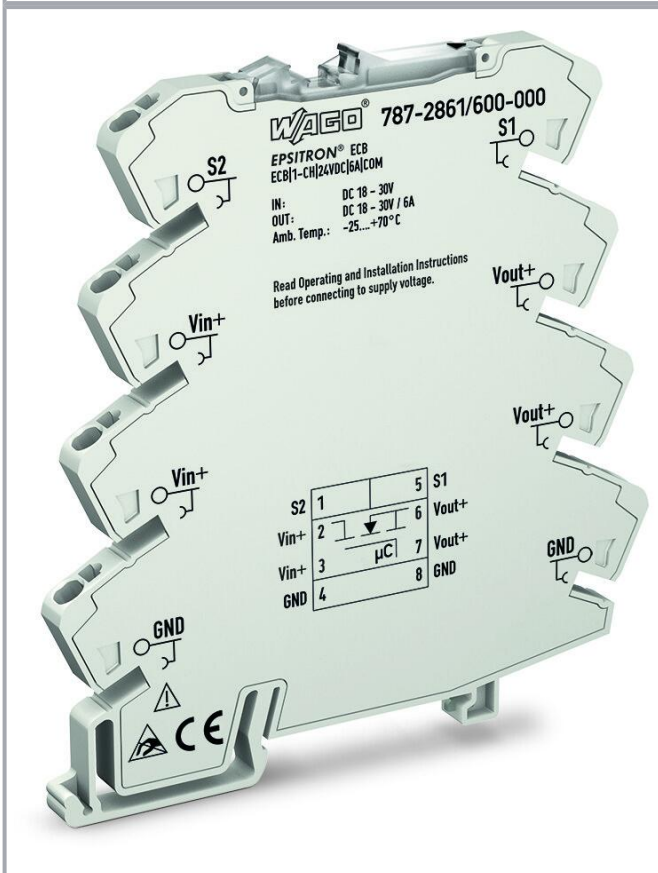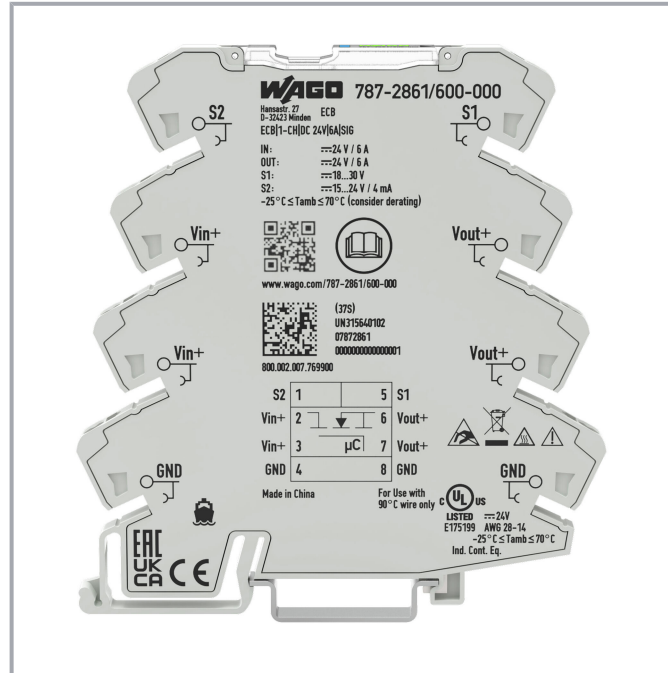

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG  
 Hansastr. 27  
 32423 Minden  
 Phone: +49571 887-0 | Fax: +49571 887-169  
 Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?  
 We are always happy to take your call at +49 (571) 887-44222.

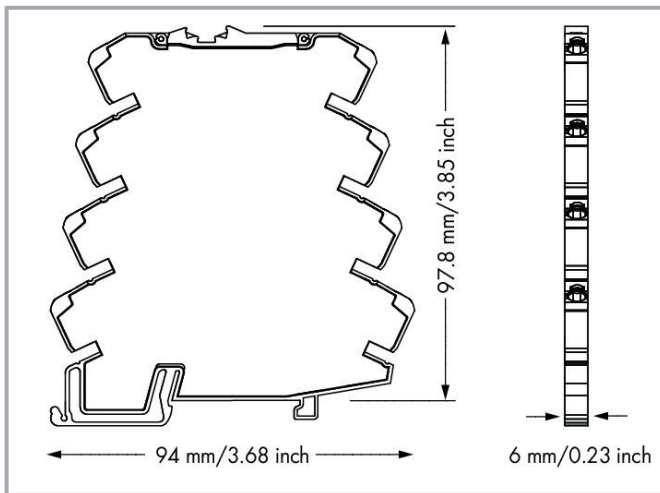

## Item description

### Features:

- Space-saving ECB with one channel
- Reliably and safely trips in the event of an overload and short circuit on the secondary side
- Switch-on capacity > 50,000  $\mu$ F
- Enables the use of an economical, standard power supply
- Minimizes wiring via two voltage outputs and maximizes commoning options on both input and output sides (e.g., commoning of the output voltage on 857 and 2857 Series devices)
- Status signal – adjustable as single or group message
- Reset, switch on/off via remote input or local switch
- Prevents power supply overload due to total inrush current thanks to time-delayed switching on during interconnected operation

## Data

### Technical data

#### Input

Nominal input voltage $U_{i \text{ nom}}$	DC 24 V
Input voltage range	DC 18 ... 30 V

#### Output

Total number of channels (module)	1
Nominal output voltage $U_{o \text{ nom}}$	1 x DC 24 V
Output voltage range	DC 18 ... 30 V ( $U_e$ – voltage drop)

Subject to changes. Please also observe the further product documentation!



Voltage drop	≤ 25 mV (6 A)
Nominal output current $I_{o\text{ nom}}$	1 x 6 A (fixed setting)
Trip time	4 ms ... 100 s (Load-dependent)
Switch-on capacity	> 50000 $\mu$ F per channel
Switch-on behavior	Time-delayed channel switching (load-dependent, min. 170 ms/max. 500 ms)
Active current limitation	no

## Signaling and Communication

Signaling	1 x Status LED (green/yellow/red/blue) 1 x Control input 1 x Active signal output ( $U_i$ , max. 4 mA)
Operation status indicator	Green LED (channel OK) Red LED (tripped channel)
Remote input	18 ... 30 VDC signal, switches on/off and resets the channel

## Efficiency/power losses

Power loss $P_l$	≤ 0.36 W
Efficiency (typ.)	96 %

## Circuit protection

Internal fuse	T 15 A
---------------	--------

## Safety and protection

Protection class	III
Protection type	IP20; per EN 60529
Reverse voltage protection	No
Pollution degree	2
Transient suppression (primary)	Suppressor diode (33 V)
Parallel operation of single channels	Not permitted
Series operation	No
MTBF	1,253,313 h (per MIL-HDBK-217F2)

## Connection data

Number of jumper slots	8
Connection technology	Push-in CAGE CLAMP®

Subject to changes. Please also observe the further product documentation!



WAGO connector	WAGO 857 Series
Solid conductor	0.08 ... 2.5 mm <sup>2</sup> / 28 ... 14 AWG
Fine-stranded conductor	0.34 ... 2.5 mm <sup>2</sup> / 22 ... 14 AWG
Strip length	9 ... 10 mm / 0.35 ... 0.39 inches

### Physical data

Width	6 mm / 0.236 inches
Height from upper-edge of DIN-rail	97.8 mm / 3.85 inches
Depth	94 mm / 3.701 inches

### Mechanical Data

Mounting type	DIN-35 rail
---------------	-------------

### Material Data

Weight	34 g
--------	------

### Environmental requirements

Ambient temperature (operation at U <sub>N</sub> )	-25 ... +70 °C (Device starts at -40 °C (type-tested); derating must be observed)
Surrounding air temperature (storage)	-40 ... +85 °C
Relative humidity	10 ... 95 % (no condensation permissible)
Derating	See instruction manual

### Standards and specifications

Conformity marking	CE
Standards/specifications	EN 61000-6-2 EN 61000-6-3 UL 61010-2-201 DNV

### Commercial data

eCl@ss 10.0	27-37-18-02
eCl@ss 9.0	27-37-18-02
ETIM 8.0	EC001440
ETIM 7.0	EC001440
PU (SPU)	1 pcs

Subject to changes. Please also observe the further product documentation!



WAGO GmbH & Co. KG  
Hansastr. 27  
32423 Minden  
Phone: +49571 887-0 | Fax: +49571 887-169  
Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?  
We are always happy to take your call at +49 (571) 887-44222.


Packaging type	bag
Country of origin	CN
GTIN	4066966241754
Customs tariff number	85363010900

## Approvals / Certificates

### General approvals





Logo	Approval	Additional Approval Text	Certificate name
	EAC Brjansker Zertifizierungsstelle	TP TC 020/2011	EAC_Certificate_RU_C-DE.AM02.B.00115_19
	UL Underwriters Laboratories Inc. (ORDINARY LOCATIONS)	UL 2367,UL 61010-2-201	E175199 Vol.3 Sec.2 Series 0787 ECB

### Approvals for marine applications

Logo	Approval	Additional Approval Text	Certificate name
	DNV DNV Germany GmbH	DNV-CG-0339,Aug.2021	TAA00001D1

## Optional accessories

### Ferrule

Ferrule		
	<b>Item no.: 216-241</b> Ferrule; Sleeve for 0.5 mm <sup>2</sup> / 20 AWG; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; white	<a href="http://www.wago.com/216-241">www.wago.com/216-241</a>
	<b>Item no.: 216-242</b> Ferrule; Sleeve for 0.75 mm <sup>2</sup> / 18 AWG; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; gray	<a href="http://www.wago.com/216-242">www.wago.com/216-242</a>
	<b>Item no.: 216-243</b> Ferrule; Sleeve for 1 mm <sup>2</sup> / AWG 18; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; red	<a href="http://www.wago.com/216-243">www.wago.com/216-243</a>
	<b>Item no.: 216-244</b> Ferrule; Sleeve for 1.5 mm <sup>2</sup> / AWG 16; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; black	<a href="http://www.wago.com/216-244">www.wago.com/216-244</a>

### Marking accessories

Marking strip
---------------

Subject to changes. Please also observe the further product documentation!

**Item no.: 2009-110**

Marking strips; for Smart Printer; on reel; not stretchable; plain; snap-on type; white

[www.wago.com/2009-110](http://www.wago.com/2009-110)

## Marker

**Item no.: 2009-115**

WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; white

[www.wago.com/2009-115](http://www.wago.com/2009-115)**Item no.: 793-501**

WMB marking card; as card; not stretchable; plain; snap-on type; white

[www.wago.com/793-501](http://www.wago.com/793-501)**Item no.: 793-502**

WMB marking card; as card; MARKED; 1 ... 10 (10x); not stretchable; Horizontal marking; snap-on type; white

[www.wago.com/793-502](http://www.wago.com/793-502)**Item no.: 793-503**

WMB marking card; as card; MARKED; 11 ... 20 (10x); not stretchable; Horizontal marking; snap-on type; white

[www.wago.com/793-503](http://www.wago.com/793-503)**Item no.: 793-504**

WMB marking card; as card; MARKED; 21 ... 30 (10x); not stretchable; Horizontal marking; snap-on type; white

[www.wago.com/793-504](http://www.wago.com/793-504)**Item no.: 793-505**

WMB marking card; as card; MARKED; 31 ... 40 (10x); not stretchable; Horizontal marking; snap-on type; white

[www.wago.com/793-505](http://www.wago.com/793-505)**Item no.: 793-506**

WMB marking card; as card; MARKED; 41 ... 50 (10x); not stretchable; Horizontal marking; snap-on type; white

[www.wago.com/793-506](http://www.wago.com/793-506)**Item no.: 793-566**

WMB marking card; as card; MARKED; 1 ... 50 (2x); not stretchable; Horizontal marking; snap-on type; white

[www.wago.com/793-566](http://www.wago.com/793-566)**Item no.: 793-5501**

WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; white

[www.wago.com/793-5501](http://www.wago.com/793-5501)

## Tool

## Operating tool

**Item no.: 210-720**

Operating tool; Blade: 3.5 x 0.5 mm; with a partially insulated shaft; multicoloured

[www.wago.com/210-720](http://www.wago.com/210-720)

## Jumpers

## Jumper

**Item no.: 859-408**

Jumper; for jumper slot; 8-way; insulated; light gray

[www.wago.com/859-408](http://www.wago.com/859-408)**Item no.: 859-404/000-005**

Jumper; for jumper slot; 4-way; insulated; red

[www.wago.com/859-404/000-005](http://www.wago.com/859-404/000-005)

Subject to changes. Please also observe the further product documentation!

WAGO GmbH &amp; Co. KG

Hansastr. 27

32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169

Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?

We are always happy to take your call at +49 (571) 887-44222.



**Item no.: 859-404/000-006**  
Jumper; for jumper slot; 4-way; insulated; blue

[www.wago.com/859-404/000-006](http://www.wago.com/859-404/000-006)



**Item no.: 859-405/000-005**  
Jumper; for jumper slot; 5-way; insulated; red

[www.wago.com/859-405/000-005](http://www.wago.com/859-405/000-005)



**Item no.: 859-405/000-029**  
Jumper; for jumper slot; 5-way; insulated; yellow

[www.wago.com/859-405/000-029](http://www.wago.com/859-405/000-029)



**Item no.: 859-405**  
Jumper; for jumper slot; 5-way; insulated; light gray

[www.wago.com/859-405](http://www.wago.com/859-405)



**Item no.: 859-404/000-029**  
Jumper; for jumper slot; 4-way; insulated; yellow

[www.wago.com/859-404/000-029](http://www.wago.com/859-404/000-029)



**Item no.: 859-406**  
Jumper; for jumper slot; 6-way; insulated; light gray

[www.wago.com/859-406](http://www.wago.com/859-406)



**Item no.: 859-405/000-006**  
Jumper; for jumper slot; 5-way; insulated; blue

[www.wago.com/859-405/000-006](http://www.wago.com/859-405/000-006)



**Item no.: 859-406/000-005**  
Jumper; for jumper slot; 6-way; insulated; red

[www.wago.com/859-406/000-005](http://www.wago.com/859-406/000-005)



**Item no.: 859-409/000-029**  
Jumper; for jumper slot; 9-way; insulated; yellow

[www.wago.com/859-409/000-029](http://www.wago.com/859-409/000-029)



**Item no.: 859-410/000-005**  
Jumper; for jumper slot; 10-way; insulated; red

[www.wago.com/859-410/000-005](http://www.wago.com/859-410/000-005)




**Item no.: 859-410/000-029**  
Jumper; for jumper slot; 10-way; insulated; yellow

[www.wago.com/859-410/000-029](http://www.wago.com/859-410/000-029)



**Item no.: 859-410**  
Jumper; for jumper slot; 10-way; insulated; light gray

[www.wago.com/859-410](http://www.wago.com/859-410)
















**Item no.: 859-410/000-006**  
Jumper; for jumper slot; 10-way; insulated; blue

[www.wago.com/859-410/000-006](http://www.wago.com/859-410/000-006)










Subject to changes. Please also observe the further product documentation!



	<p><b>Item no.: 859-403/000-005</b>                  Jumper; for jumper slot; 3-way; insulated; red</p>	<p><a href="http://www.wago.com/859-403/000-005">www.wago.com/859-403/000-005</a></p>
	<p><b>Item no.: 859-402/000-029</b>                  Jumper; for jumper slot; 2-way; insulated; yellow</p>	<p><a href="http://www.wago.com/859-402/000-029">www.wago.com/859-402/000-029</a></p>
	<p><b>Item no.: 859-403/000-029</b>                  Jumper; for jumper slot; 3-way; insulated; yellow</p>	<p><a href="http://www.wago.com/859-403/000-029">www.wago.com/859-403/000-029</a></p>
	<p><b>Item no.: 859-403/000-006</b>                  Jumper; for jumper slot; 3-way; insulated; blue</p>	<p><a href="http://www.wago.com/859-403/000-006">www.wago.com/859-403/000-006</a></p>
	<p><b>Item no.: 859-408/000-005</b>                  Jumper; for jumper slot; 8-way; insulated; red</p>	<p><a href="http://www.wago.com/859-408/000-005">www.wago.com/859-408/000-005</a></p>
	<p><b>Item no.: 859-408/000-029</b>                  Jumper; for jumper slot; 8-way; insulated; yellow</p>	<p><a href="http://www.wago.com/859-408/000-029">www.wago.com/859-408/000-029</a></p>
	<p><b>Item no.: 859-409</b>                  Jumper; for jumper slot; 9-way; insulated; light gray</p>	<p><a href="http://www.wago.com/859-409">www.wago.com/859-409</a></p>
	<p><b>Item no.: 859-408/000-006</b>                  Jumper; for jumper slot; 8-way; insulated; blue</p>	<p><a href="http://www.wago.com/859-408/000-006">www.wago.com/859-408/000-006</a></p>
	<p><b>Item no.: 859-403</b>                  Jumper; for jumper slot; 3-way; insulated; light gray</p>	<p><a href="http://www.wago.com/859-403">www.wago.com/859-403</a></p>
	<p><b>Item no.: 859-409/000-005</b>                  Jumper; for jumper slot; 9-way; insulated; red</p>	<p><a href="http://www.wago.com/859-409/000-005">www.wago.com/859-409/000-005</a></p>
	<p><b>Item no.: 859-404</b>                  Jumper; for jumper slot; 4-way; insulated; light gray</p>	<p><a href="http://www.wago.com/859-404">www.wago.com/859-404</a></p>
	<p><b>Item no.: 859-409/000-006</b>                  Jumper; for jumper slot; 9-way; insulated; blue</p>	<p><a href="http://www.wago.com/859-409/000-006">www.wago.com/859-409/000-006</a></p>
	<p><b>Item no.: 859-402/000-006</b>                  Jumper; for jumper slot; 2-way; insulated; blue</p>	<p><a href="http://www.wago.com/859-402/000-006">www.wago.com/859-402/000-006</a></p>
	<p><b>Item no.: 859-402</b>                  Jumper; for jumper slot; 2-way; insulated; light gray</p>	<p><a href="http://www.wago.com/859-402">www.wago.com/859-402</a></p>

Subject to changes. Please also observe the further product documentation!

	<b>Item no.: 859-402/000-005</b> Jumper; for jumper slot; 2-way; insulated; red	<a href="http://www.wago.com/859-402/000-005">www.wago.com/859-402/000-005</a>
	<b>Item no.: 859-406/000-006</b> Jumper; for jumper slot; 6-way; insulated; blue	<a href="http://www.wago.com/859-406/000-006">www.wago.com/859-406/000-006</a>
	<b>Item no.: 859-406/000-029</b> Jumper; for jumper slot; 6-way; insulated; signal yellow	<a href="http://www.wago.com/859-406/000-029">www.wago.com/859-406/000-029</a>
	<b>Item no.: 859-407/000-006</b> Jumper; for jumper slot; 7-way; insulated; blue	<a href="http://www.wago.com/859-407/000-006">www.wago.com/859-407/000-006</a>
	<b>Item no.: 859-407/000-005</b> Jumper; for jumper slot; 7-way; insulated; red	<a href="http://www.wago.com/859-407/000-005">www.wago.com/859-407/000-005</a>
	<b>Item no.: 859-407/000-029</b> Jumper; for jumper slot; 7-way; insulated; yellow	<a href="http://www.wago.com/859-407/000-029">www.wago.com/859-407/000-029</a>
	<b>Item no.: 859-407</b> Jumper; for jumper slot; 7-way; insulated; light gray	<a href="http://www.wago.com/859-407">www.wago.com/859-407</a>

## Downloads

### Documentation

#### Manual

Product Manual Electronic Circuit Breaker 24 VDC / 0.5...8 A	V 1.3.1 Dec 16, 2019	pdf 3.0 MB	Download
---	-------------------------	---------------	----------

#### Bid Text

787-2861/600-000 X81 - Datei	Jul 3, 2019	xml 7.1 kB	Download
787-2861/600-000 docx - Datei	Jul 2, 2019	docx 34.6 kB	Download

#### Instruction Leaflet

Electronic Circuit Breaker	V 1.5.0 May 25, 2020	pdf 3.8 MB	Download
----------------------------	-------------------------	---------------	----------

#### Additional Information

Subject to changes. Please also observe the further product documentation!



Disposal and Recycling  
Electrical and electronic equipment, Batteries, Packaging

V 1.1.0  
Aug 18, 2022

pdf  
2.2 MB

[Download](#)

## CAD/CAE-Data

### CAD data

2D/3D Models 787-2861/600-000	<a href="#">URL</a>	<a href="#">Download</a>
-------------------------------	---------------------	--------------------------

### CAE data

EPLAN Data Portal 787-2861/600-000	<a href="#">URL</a>	<a href="#">Download</a>
------------------------------------	---------------------	--------------------------

ZUKEN Portal 787-2861/600-000	<a href="#">URL</a>	<a href="#">Download</a>
-------------------------------	---------------------	--------------------------

EPLAN Data Portal 787-2861/600-000	<a href="#">URL</a>	<a href="#">Download</a>
------------------------------------	---------------------	--------------------------

## Environmental Product Compliance

### Compliance Search

Environmental Product Compliance 787-2861/600-000 Electronic circuit breaker; 1-channel; 24 VDC input voltage; 6 A; Signal contact	<a href="#">URL</a>	<a href="#">Download</a>
---	---------------------	--------------------------

## Installation Notes

Subject to changes. Please also observe the further product documentation!