


| Art.-No. | Bemessungswerte/Ratings/Valeurs assignées | | | Spannungsfall Voltage drop Chute de tension max [mV] | Verlustleistung Sustained dissip. Valeur de dissip. max [W] | Schmelzintegral Melting integral Intégral de fusion [A ² s] |
|----------|---|--------------------------------|--|---|--|---|
| | Strom Current Courant | Spannung Voltage Tension | Ausschaltvermögen Breaking capacity Pouvoir de coupure | | | |
| 520.602 | 32 mA | 250 V | 35 A | 10.000 | 1,6 | 0,000205 |
| 520.603 | 40 mA | | | 0,000380 | | |
| 520.604 | 50 mA | | | 0,000500 | | |
| 520.605 | 63 mA | | | 0,000794 | | |
| 520.606 | 80 mA | | | 0,001920 | | |
| 520.607 | 100 mA | | | 0,004000 | | |
| 520.608 | 125 mA | | | 0,008750 | | |
| 520.609 | 160 mA | | | 0,015360 | | |
| 520.610 | 200 mA | | | 0,028000 | | |
| 520.611 | 250 mA | | | 0,080000 | | |
| 520.612 | 315 mA | | | 0,150000 | | |
| 520.613 | 400 mA | | | 0,260000 | | |
| 520.614 | 500 mA | | | 0,330000 | | |
| 520.615 | 630 mA | | | 0,480000 | | |
| 520.616 | 800 mA | | | 0,580000 | | |
| 520.617 | 1 A | | | 1,360000 | | |
| 520.618 | 1,25 A | | | 2,190000 | | |
| 520.619 | 1,6 A | | | 3,330000 | | |
| 520.620 | 2 A | | | 10,240000 | | |
| 520.621 | 2,5 A | | | 12,500000 | | |
| 520.622 | 3,15 A | 19,850000 | | | | |
| 520.623 | 4 A | 40,000000 | | | | |
| 520.624 | 5 A | 50,000000 | | | | |
| 520.625 | 6,3 A | 79,380000 | | | | |
| 520.626 | 8A | 125 V | 80A | 130 | 4 | auf Anfrage/ on request/ à demande |
| 520.627 | 10A | 100A | 130 | | | |

Aufbau: Glasrohr, durchsichtig
Kontaktkappen: Messing, vernickelt
Verpackung: 100 St. = 10 x 10 Faltschachteln
1000 St. = Industrieverpackung

Construction: Glasstube, transparent
Contact caps: Brass, nickel plated
Packing: 100 pcs. = 10 boxes of 10 pieces
1000 pcs. = Industrial boxes

Construction: Tube verre, transparent
Cabocons de contact: Laiton, nickelé
Emballage: 100 pcs. = en 10 boîtes de 10 pièces
1000 pcs. = en emballage industriel

Strom-Zeit-Kennlinien
Current Time Characteristics
Caractéristique courant/temps

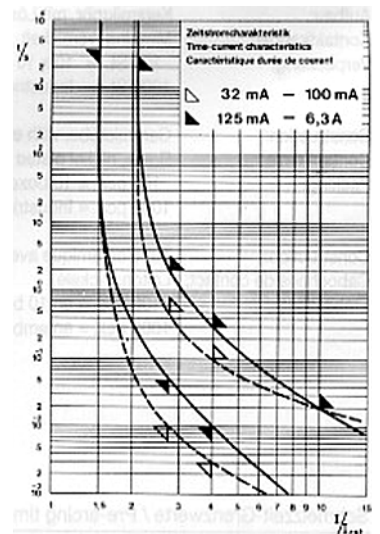

Schmelzzeit-Grenzwerte / Pre-arcing time limits / Temps de fusion limité

| Bemessungsstrom Rated current Couvant assigné | 2,1 I _{rat} | | 2,75 I _{rat} | | 4 I _{rat} | | 10 I _{rat} |
|---|----------------------|-------|-----------------------|-------|--------------------|-------|---------------------|
| | max. | min. | max. | min. | max. | | |
| 32 - 100 mA | 30 min | 10 ms | 500 ms | 3 ms | 100 ms | 20 ms | |
| 125 mA - 6,3 A | 30 min | 50 ms | 2 s | 10 ms | 300 ms | 20 ms | |
| 8 A + 10 A | 30 min | 50 ms | 2 s | 10 ms | 400 ms | 40 ms | |

¹⁾ auf Anfrage / on request / à demande